



11-Aug-21

PRE-Sales Selection Sheet

CHECKLIST

7 of 43

CU

LOT 002-5 * REUSED * 20-2329 ELEV B THE HAMPTON

PURCHASERS: NAVEEDA NOREEN RANA CONTACT NO: 647-273-7603

KUKENDRA ROMESH RAJADURAI

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

BEDROOM BALCONY

☒ FINISHED BASEMENT

☐ COLD CELLAR

UPGRADED / MODIFIED ELEVATION

☐ CORNER UPGRADE

☐ SIDE UPGRADE

☐ REAR UPGRADE

CEILING UPGRADE - SMOOTH

☒ MAIN FLOOR *

☐ SECOND FLOOR

ADDITIONAL ROUGH-INS

☒ 200 AMP SERVICE

☐ WET BAR ROUGH IN

GAS ROUGH-IN

☐ STOVE

☐ BBQ

HOODFAN VENTING

☒ 6" ROUND DUCT *

☐ 7" ROUND DUCT

☐ WALK OUT DECK

☐ WALK OUT BASEMENT

☐ BASEMENT

☐ HUMIDIFIER

☒ AIRCON

☐ DRYER

☐ ADDITIONAL FIREPLACE

FULL BASEMENT STAIRS:

PAINT GRADE

UPPER BASEMENT STAIRS:

N/A

LOWER BASEMENT STAIRS:

N/A

STAIRS TO LOWER LEVEL:

ALL OAK

STAIRS TO UPPER LEVEL:

N/A

MAIN STAIRS:

ALL OAK

MEDIA STAIRS (if applicable):

N/A

Aug 12/21

Date

Sonia Sharif

Purchaser

Aug 12/21

Date

Sonia Sharif

Décor Consultant

Aug 12/21

Date

Sonia Sharif

Purchaser

APPROVED -

Sonia Sharif

Date

-08-12-2021

Date Approved

HEATHWOOD HOMES
(UPCOUNTRY) LIMITED

LOT 002-5

20-2329 ELEV B THE HAMPTON

PURCHASERS: NAVEEDA NOREEN RANA

CONTACT NO: 647-273-7603

KUKENDRA ROMESH RAJADURAI

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Appliances

6-9117 Kitchen HoodFan

- ☒ CYCLONE 30" STAINLESS CHIMNEY/CANOPY HOODFAN
STAINLESS STEEL SCB51930 UPG 30"
Pages 27-28

Cabinetry

1-6823 Kitchen Cabinet Colour/Style

- ☒ BOSTON MACADEMIA Classic Plus PAINT

3-2092 Kitchen Cabinet Hardware

- ☐ HARDWARE 9661 STD

211-9111 Laundry Room Cabinet

- ☒ SIMCOE ORCHID VIKING III STD 3DL

25-9111 Main Bathroom Cabinet Colour/Style

- ☐ SIMCOE ORCHID VIKING III STD 3DL

29-7672 Main Bathroom Cabinet Hardware

- ☐ HARDWARE 135 STD

28-8806 Main Bathroom Countertop

- ☐ Countertop LECHE VESTA 4987K-07 Wilsonart

20-9111 Master Ensuite Cabinet Colour/Style

- ☐ SIMCOE ORCHID VIKING III STD 3DL

22-7672 Master Ensuite Cabinet Hardware

- ☐ HARDWARE 135 STD

21-8806 Master Ensuite Countertop

- ☐ Countertop LECHE VESTA 4987K-07 Wilsonart

Carpet

116-9252 Basement Stairs Type

- ☐ Dynasty Tex 40 oz Poly MYSTIC BEIGE DY 16787 STD

121-9252 Basement Stairs Landing(s) Flooring

- ☐ Dynasty Tex 40 oz Poly MYSTIC BEIGE DY 16787 STD

37-9252 Bedroom 2 Flooring

- ☐ Dynasty Tex 40 oz Poly MYSTIC BEIGE DY 16787 STD

38-9252 Bedroom 3 Flooring

- ☐ Dynasty Tex 40 oz Poly MYSTIC BEIGE DY 16787 STD

14-9252 Family Room Flooring

- ☐ Dynasty Tex 40 oz Poly MYSTIC BEIGE DY 16787 STD

36-9252 Master Bedroom Flooring

- ☐ Dynasty Tex 40 oz Poly MYSTIC BEIGE DY 16787 STD

52-1078 Throughout Underpad

- ☐ Underpad STD

Ceramics

16-8913 Foyer Flooring

- ☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 SIDE TO SIDE SKETCH # 7 PAGE 18

17-2225 Foyer Grout

- ☐ Grout (27) Silver STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 12/21

Signatures

Date

Purchaser on file

Aug 12/21

Date APPROVED

Décor Consultant

Sonia Sitarif

11

-08-12-2021

Date

Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)

LIMITED

LOT 002-5

20-2329 ELEV B THE HAMPTON

PURCHASERS: NAVEEDA NOREEN RANA

CONTACT NO: 647-273-7603

KUKENDRA ROMESH RAJADURAI

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Ceramics

UPG

4-8103 Kitchen Backsplash

☒ ONTARIO HEXAGON MATTE SNOW WHITE
OD.ON.SWT.02.HEX.MT UPG_2

5-2226 Kitchen Backsplash Grout

☐ Grout (00) White STD

33-8913 Kitchen Flooring

☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 INSTALL
FRONT TO BACK SKETCH # 7 PAGE 18

33-2225 Kitchen Grout

☐ Grout (27) Silver STD

66-9257 Laundry Room Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

67-2225 Laundry Room Grout

☐ Grout (27) Silver STD

30-9257 Main Bathroom Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

31-2225 Main Bathroom Grout

☐ Grout (27) Silver STD

112-5411 Main Bathroom Wall Tile

☐ Splendour White QT.SP.WHT.0810 Std 8" x 10" INSTALL
VERTICALLY

113-2226 Main Bathroom Wall Tile Grout

☐ Grout (00) White STD

23-9257 Master Ensuite Floor Tile

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

24-2225 Master Ensuite Floor Tile Grout

☐ Grout (27) Silver STD

73-8661 Master Ensuite Shower Floor Tile

☐ Ontario Series Mosaic Snow White Matte
OD.ON.SWT.0202.MT.N STD 2 x 2

74-2226 Master Ensuite Shower Floor Tile Grout

☐ Grout (00) White STD

147-8923 Master Ensuite Shower Jamb(s) and Sill(s)

☐ Shower Jamb / Sill Thassos White STD

104-5411 Master Ensuite Shower Wall Tile

☒ Splendour White QT.SP.WHT.0810 Std 8" x 10" INSTALL
VERTICALLY-ADD A LINE OF 2 X 6 VITRO SLIM GLOSSY-DARK
GREY TILE INSTALL 1 ROW VERTICALLY THE CENTRE OF
SHOWER WALL SKETCH # 8 PAGE 19

105-2226 Master Ensuite Shower Wall Tile Grout

☐ Grout (00) White STD

32-8913 Powder Room Flooring

☒ Biel Bianco (White) UN.BL.BIA.1224 UPG_2 12 x 24 INSTALL
FRONT TO BACK SKETCH # 7 PAGE 18

33-2225 Powder Room Grout

☐ Grout (27) Silver STD

369-9257 Powder Room Lower Level Flooring

☐ CARRARA White / Grey GE.CR.WHIT.1313.MT STD 13 x 13

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Ana 12/21

Signatures on

Ana 12/21

SOLIA SHARIF

Date

Purchaser

Date

D cor Consultant

Date

Purchaser

Date Approved

HEATHWOOD HOMES (UPCOUNTRY)
LIMITED

LOT 002-5

20-2329 ELEV B THE HAMPTON

PURCHASERS: NAVEEDA NOREEN RANA

CONTACT NO: 647-273-7603

KUKENDRA ROMESH RAJADURAI

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

UPG

Ceramics

370-2225 Powder Room Lower Level Grout

☐ Grout (27) Silver STD

53-2232 Throughout Thresholds

☐ Metal Thresholds STD

Electrical

90-5796 Throughout Switches and Plug

☐ Decora White Switches and Plugs STD

Fireplace

136-8891 Great Room Fireplace Mantle

☐ Paint Grade Mantle- Cabinet (Per Plan) WHITE NF-17 STD
PAGE 20

135-8865 Great Room Fireplace Type

☐ Dimplex FP3033HL Electric Fireplace

Granite

2-7888 Kitchen Countertop

☒ Quartz- Caesarstone ALPINE MIST # 5110 Group 6 UPG 3/4" with Mitered Edge

Hardwood

99-7498 Dining Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

419-7498 Foyer Landing Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

11-7498 Great Room Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

77-7498 Stair Landing to Upper Level Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

35-7498 Upper Hall Flooring

☐ Vintage Northern Solid Sawn Engineered Select V : Red Oak Pearl GRYPHON Red Oak Pearl 3/4" x 3 1/4"

Interior Railings

49-8148 Stairs to Lower Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

43-8148 Stairs to Upper Level Handrail/Pickets/Posts Type

☐ Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s) BLACK METAL STD

Interior Stairs

116-1713 Basement Stairs Type

☐ Paint Grade Stairs STD

45-1712 Stairs to Lower Level Type

☐ Oak Stairs UPG_1

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 12/21

Signature on file

Date

Purchaser

Aug 12/21

Sowia Sharif

Date

Décor Consultant

APPROVED

my Rosen

-03-17-2021

Date

Purchaser

Date Approved HEATHWOOD HOMES (UPCOUNTRY)

LIMITED



12-Aug-21

Interior Finishing Selection Sheet

LOT 002-5

20-2329 ELEV B THE HAMPTON

PURCHASERS: NAVEEDA NOREEN RANA

CONTACT NO: 647-273-7603

KUKENDRA ROMESH RAJADURAI

VENDOR: HEATHWOOD HOMES (UPCOUNTRY) LIMITED

Interior Stairs

39-1712 Stairs to Upper Level Type

Interior Trim

91-9374 Throughout Trim Size

Painting

46-7761 Stairs to Lower Level Colour

40-7761 Stairs to Upper Level Colour

240-1716 Throughout Trim - Paint Colour

51-1717 Throughout Walls - Paint Colour

Plumbing

266-1737 Main Bathroom Plumbing Fixture (Colour)

149-1737 Master Ensuite Plumbing Fixture (colour)

34-1737 Powder Room Plumbing Fixture (Colour)

371-1737 Powder Room Lower Level Plumbing Fixture (Colour)

UPG

☐ Oak Stairs UPG_1

☐ 4 1/4" Baseboards and 2 3/4" Integrated Backbend Casings
STD-Towns

☐ Stain handrail, stringers, treads,risers, nosing & posts. (Metal pickets) STAIN TO COMPLIMENT GRYPHON HARDWOOD - STAIRS WILL VARY FROM HARDWOOD FLOORING

☐ Stain handrail, stringers, treads,risers, nosing & posts. (Metal pickets) STAIN TO COMPLIMENT GRYPHON HARDWOOD FLOORING SHADE WILL VARY FROM HARDWOOD

☐ Trim WHITE STD

☐ Wall WARM GREY 22 STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

☐ Plumbing Fixtures WHITE STD

1. The Purchaser acknowledges these selections are subject to the terms and conditions of the applicable Agreement of Purchase and Sale.
2. The Purchaser acknowledges that the Vendor accepts no responsibility in the event the Vendor is unable to supply a selection. The Purchaser agrees to reselect from the currently available selections immediately upon request.
3. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
4. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
5. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
6. Selections will not be processed unless signed by Heathwood Homes Head Office.
7. The colour selections made on the Colour Chart are final and cannot be changed once submitted.
8. The Purchaser has checked and acknowledges the accuracy of this Colour Chart.

Aug 12/21

Signatures

Aug 12/21

Sonia Sharif

Date

Purchaser

on file

Date APPROVED

Décor Consultant

on file

Date

Purchaser

Date Approved

HEATHWOOD HOMES (UPCOUNTRY)

LIMITED



11-Aug-21

Sales Selection Sheet
For

LOT	002-5	20-2329 ELEV B THE HAMPTON
PURCHASERS:	NAVEEDA NOREEN RANA KUKENDRA ROMESH RAJADURAI	CONTACT NO: 647-273-7603
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

Appliances

792	Cyclone 30" Wall Mount Chimney Hood SS SCB51930	PAGES 27-28	Qty: 1
476	Optional Extras OSH- 66cm deep fridge enclosure (counter depth)includes [1] 66cm deep cabinet and [2] 66cm deep gables (note: this is not a zero clearance enclosure. Standard heights and widths will be used)	SKETCH # 7 PAGE 18	Qty: 1
586	Optional Upgrade CLASSIC PLUS	Kitchen	Qty: 1
591	Optional Upgrade Optional Upgrade VIKING I/II/III	LAUNDRY ROOM SKETCH # 6 PAGE 17	Qty: 1

Ceramics

491	Optional Extras Listello (per lin ft) Upgrade 4 SEE SKETCH # 8 PAGE 19	ENSUITE BATHROOM INSTALL 1 ROW VERTICALLY IN CENTER OF SHOWER WALL	Qty: 7
613	Upgrade 2 Tile	Foyer Floor	Qty: 1
618	Upgrade 2 Tile	Kit/Brk Floor	Qty: 1

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date	Aug 12/21	Purchaser	Uddalaw	Date	Aug 12/21	Décor Consultant	Sonia Sharif
Date	Aug 12/21	Purchaser	Amritha Logan	Date	02-12-2021		W/Lans

Date Approved: HEATHWOOD HOMES (UPCOUNTRY)
LIMITED

LOT		002-5	20-2329 ELEV B THE HAMPTON	
PURCHASERS:		NAVEEDA NOREEN RANA	CONTACT NO: 647-273-7603	
		KUKENDRA ROMESH RAJADURAI		
VENDOR:		HEATHWOOD HOMES (UPCOUNTRY) LIMITED		
				HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein. It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

493	Optional Extras	KITCHEN	Qty: 1
Supply and install additional backplash due to chimney hoodfan installation Upgrade 2			
622		Kitchen Optional Backsplash	Qty: 1
614		M.Flr.Pow Floor	Qty: 1

Drywall

522	Ceiling Upgrades	MAIN FLOOR	Qty: 1
Smooth Ceilings Main Floor			

Electrical

286	Optional Extras	GREAT ROOM	Qty: 1
Ceiling rough-in (Capped)			
IN THE CENTRE OF GREAT ROOM ON EXISTING SWITCH. SKETCH # 7 PAGE# 18			
284	Optional Extras	GREAT ROOM	Qty: 1
Extra wall interior outlet on Existing Circuit (does not include kitchen outlets)			
ABOVE FIRE PLACE +/- 70" FROM FLOOR SKETCH # 7 PAGE 18			
286	Optional Extras	KITCHEN	Qty: 1
Ceiling rough-in (Capped)			
ABOVE THE ISLAND IN THE CENTRE +/- SKETCH # 7 PAGE 18			

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug 12/21		Aug 12/21	SONIA SHARIF
Date	Purchaser	Date	APPROVED - Décor Consultant
Aug 12/21		20-12-2021	
Date	Purchaser	Date	

Date Approved: HEATHWOOD HOMES (UPCOUNTRY) LIMITED



12-Aug-21

Sales Selection Sheet
OF 13

LOT	002-5	20-2329 ELEV B THE HAMPTON
PURCHASERS:	NAVEEDA NOREEN RANA KUKENDRA ROMESH RAJADURAI	CONTACT NO: 647-273-7603
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED	HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein. It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

314	Optional Extras	20A - see Rev-SSS pg 48	KITCHEN	Qty: 1
		Extra wall interior outlet (120V/15A) on a Separate Circuit (on arcfault)		
	SEE SKETCH # 7	PAGE 18	STANDARD COUNTER HEIGHT	
287	Optional Extras		KITCHEN	Qty: 1
	Additional switch			
		EXTRA SWITCH FOR CAPPED LIGHT ABOVE THE ISLAND		

Granite

546	Optional Upgrade		Kitchen	Qty: 1
	Countertop 3/4" GROUP 6 with double edge			

Plumbing

226	STANDARD Kitchen Sink Option		KITCHEN	Qty: 1
	KINDRED Kitchen Sink Collection - Reginox NS1930U/9 Stainless Kitchen Single Bowl Undermount Sink (or equivalent)	PAGE 21		
	PAGE			

Structured Wiring

321	Optional Extra		FAMILY ROOM	Qty: 1
	Conduit Pipe Rough-in (S)			
	+/- 70" FROM FLOOR	PAGE # 17	SKETCH # 6	
320	Optional Extra		GREAT ROOM	Qty: 1
	Conduit Pipe to above fireplace Rough-in			
	ABOVE FIREPLACE -70"+/- FROM FLOOR	SKETCH # 7	PAGE # 18	

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Aug 12/21	Signature on	Aug 12/21	Sonia Sharif
Date	Purchaser file	Date APPROVED	Décor Consultant
		-08-12-2021	<i>mpf</i>
Date	Purchaser	Date Approved	HEATHWOOD HOMES (UPCOUNTRY) LIMITED



11-Aug-21

Sales Selection Sheet
of

LOT	002-5	20-2329 ELEV B THE HAMPTON	
PURCHASERS:	NAVEEDA NOREEN RANA KUKENDRA ROMESH RAJADURAI	CONTACT NO:	647-273-7603
VENDOR:	HEATHWOOD HOMES (UPCOUNTRY) LIMITED		HST #

It is herein understood and agreed between the undersigned parties hereto that the following changes shall be made to the above mentioned Agreement of Purchase and Sale in accordance with the agreement and except for such changes noted below, all other terms and conditions in the Agreement of Purchase and Sale shall remain as stated herein: It is further understood that and agreed that all changes and additions shall be installed as per builder's specifications, location and available selections. The Purchaser hereby agrees to purchase the following extras:

AMOUNT:

1. This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
7. Selections will not be processed unless signed by Heathwood Homes Head Office.
8. The selections made on this schedule are final and cannot be changed once submitted.
9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Date	Aug 12/21	Purchaser		Date	Aug 12/21	Décor Consultant	Sowin Sharif
Date	Aug 12/21	Purchaser		Date	09-12-2021		
Date		Purchaser					

Date Approved: HEATHWOOD HOMES (UPCOUNTRY)
LIMITED


CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

16 of 43
The Hampton

20-2329 ELEV. B

ELEVATION B: 2,339 SQ FT

Sketch #5

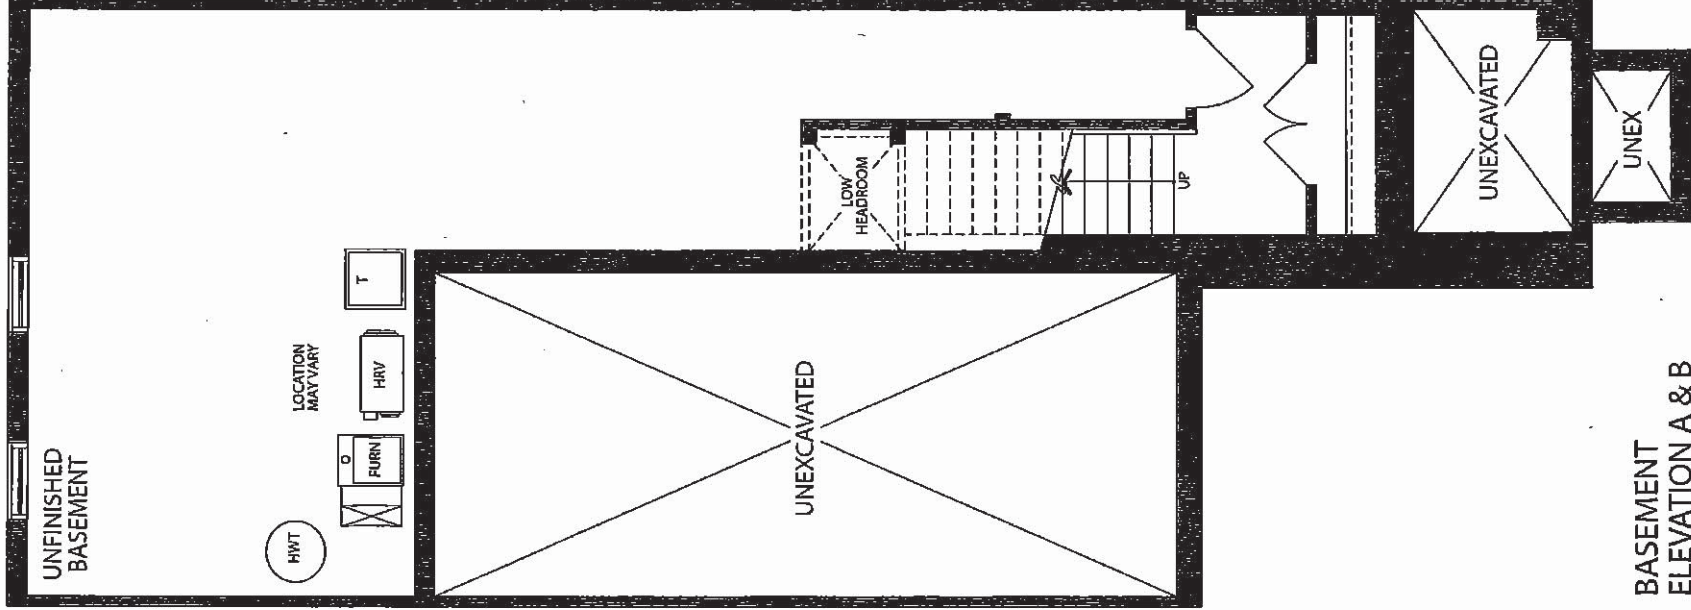

17 of 43


CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

The Hampton

20-2329 ELEV. B

ELEVATION B: 2,339 SQ FT

Sketch #6

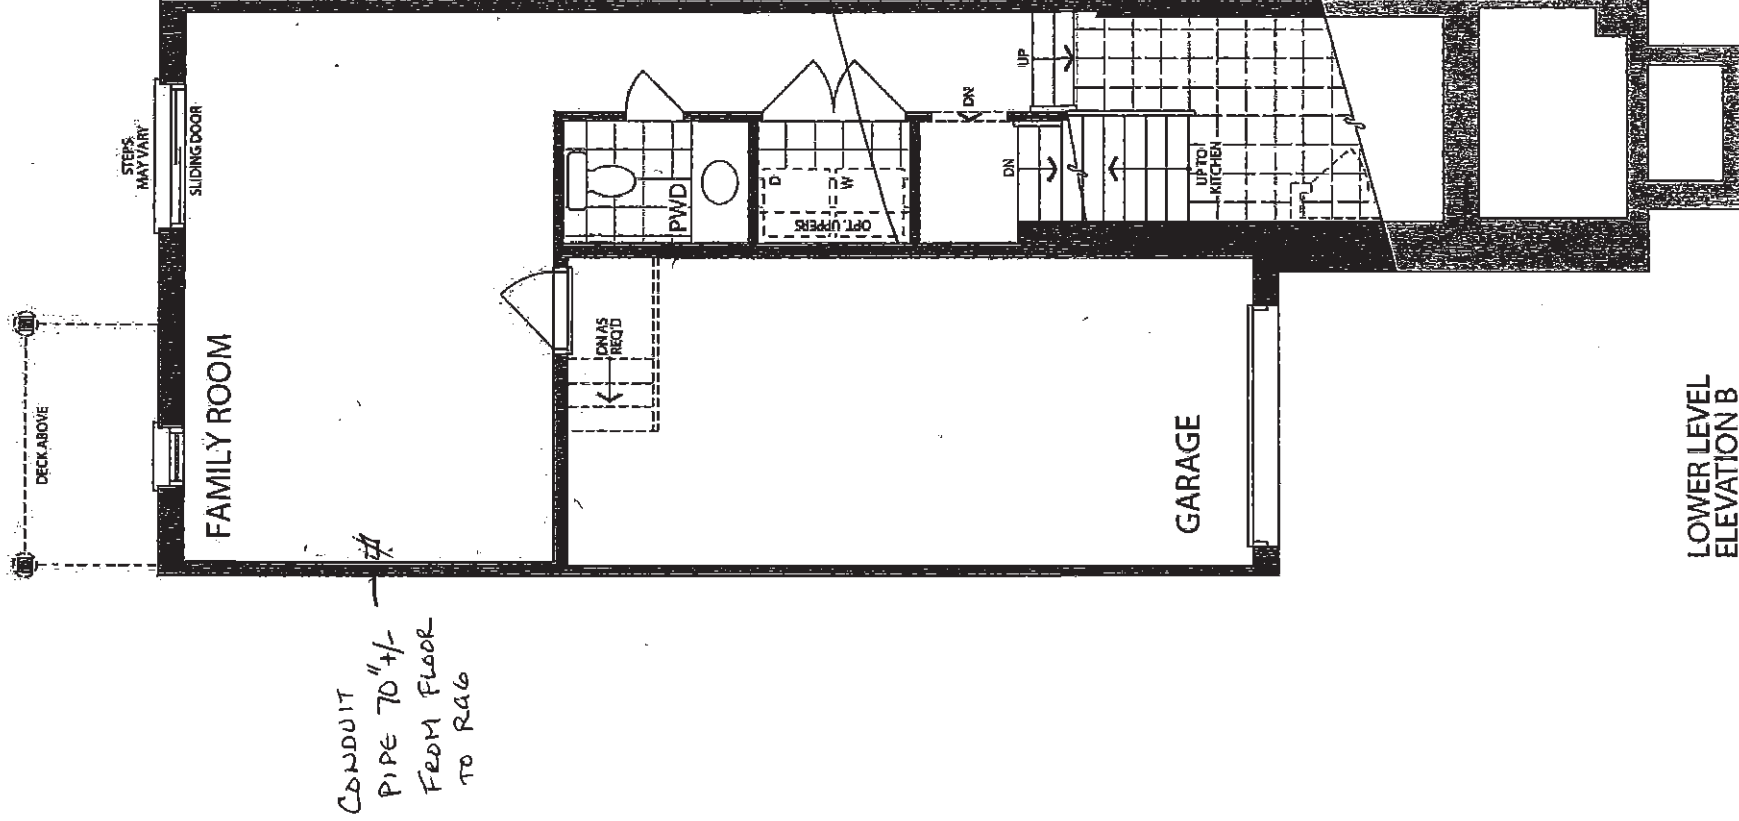


CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

18 of 43
The Hampton

20-2329 ELEV. B

ELEVATION B: 2,339 SQ FT

Sketch # 7

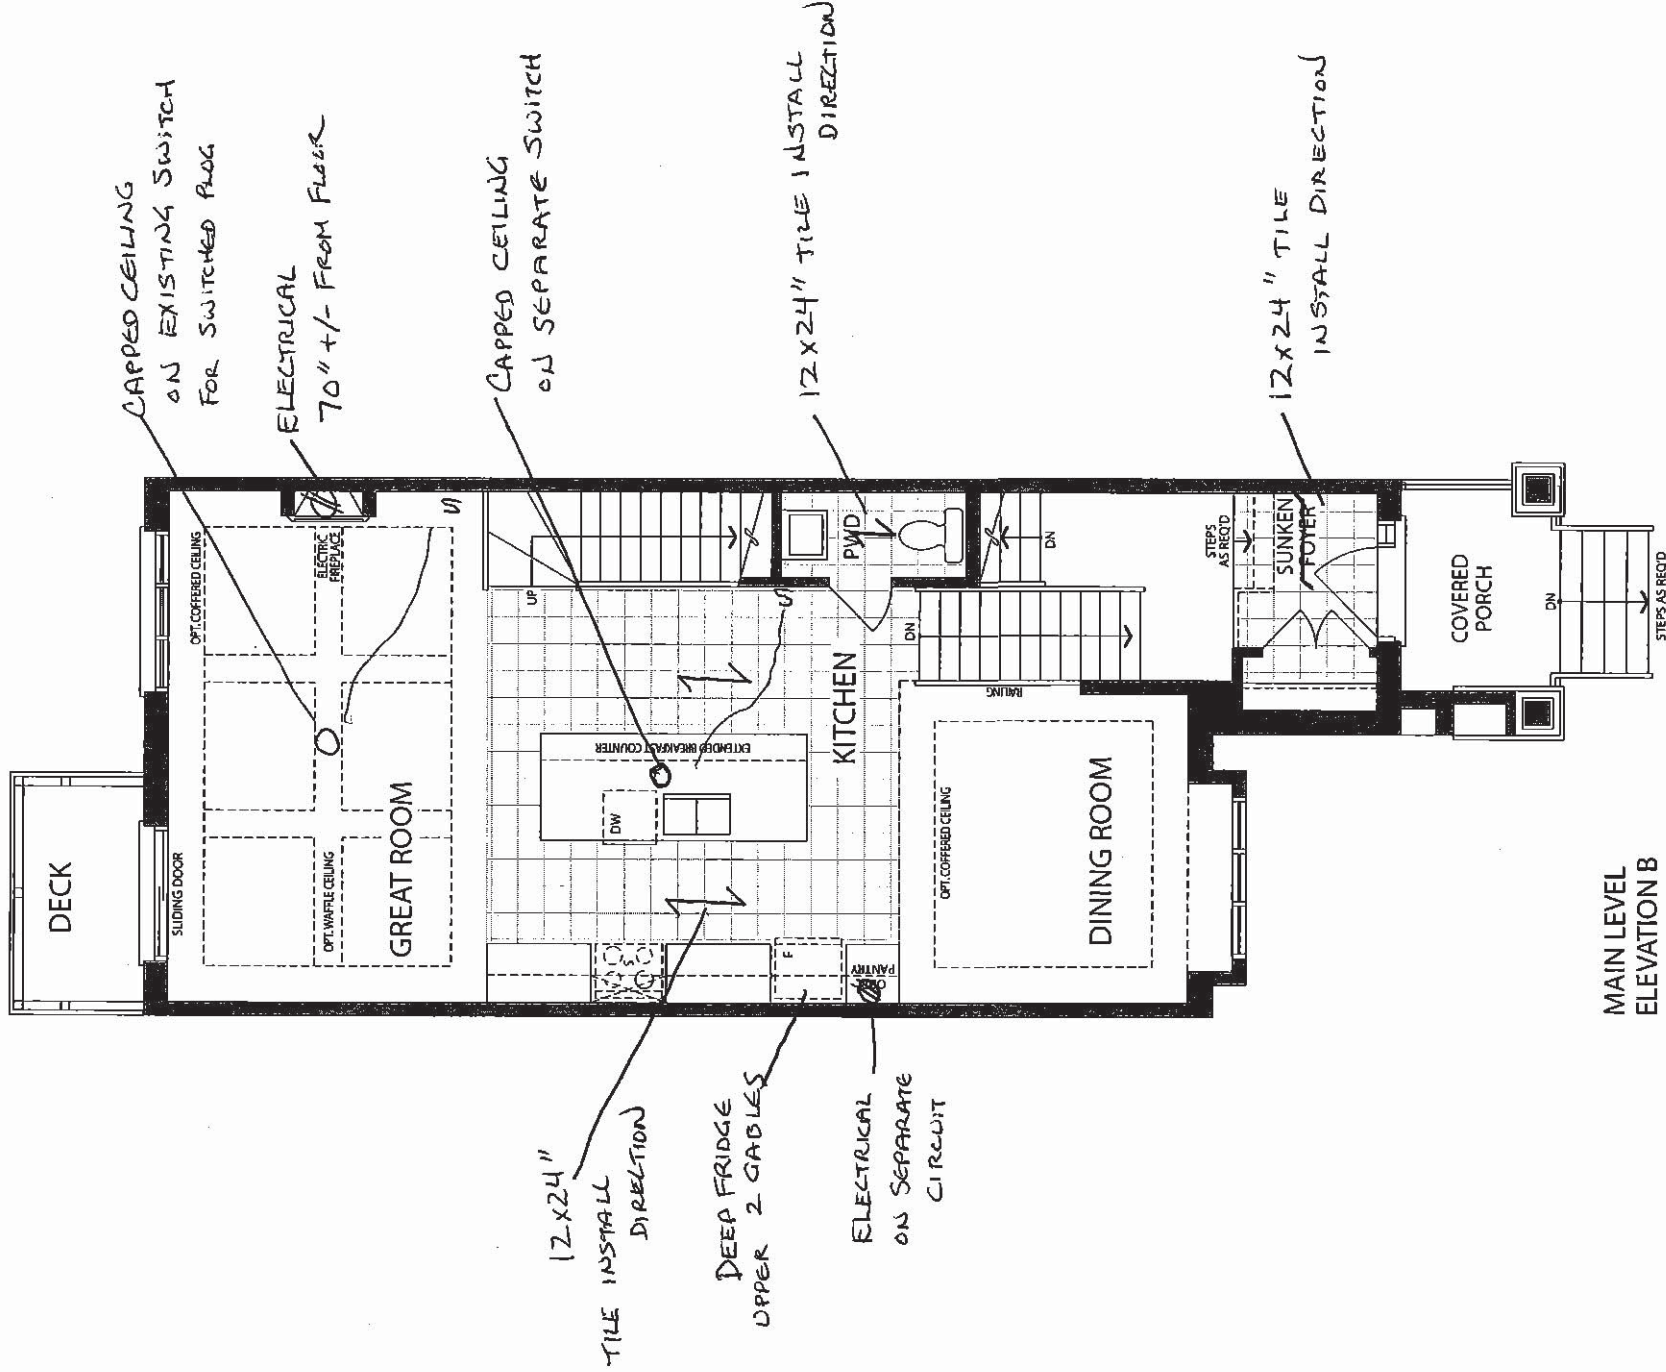

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON


19 of 43

The Hampton

20-2329 ELEV. B

ELEVATION B: 2,339 SQ FT


Sketch #8

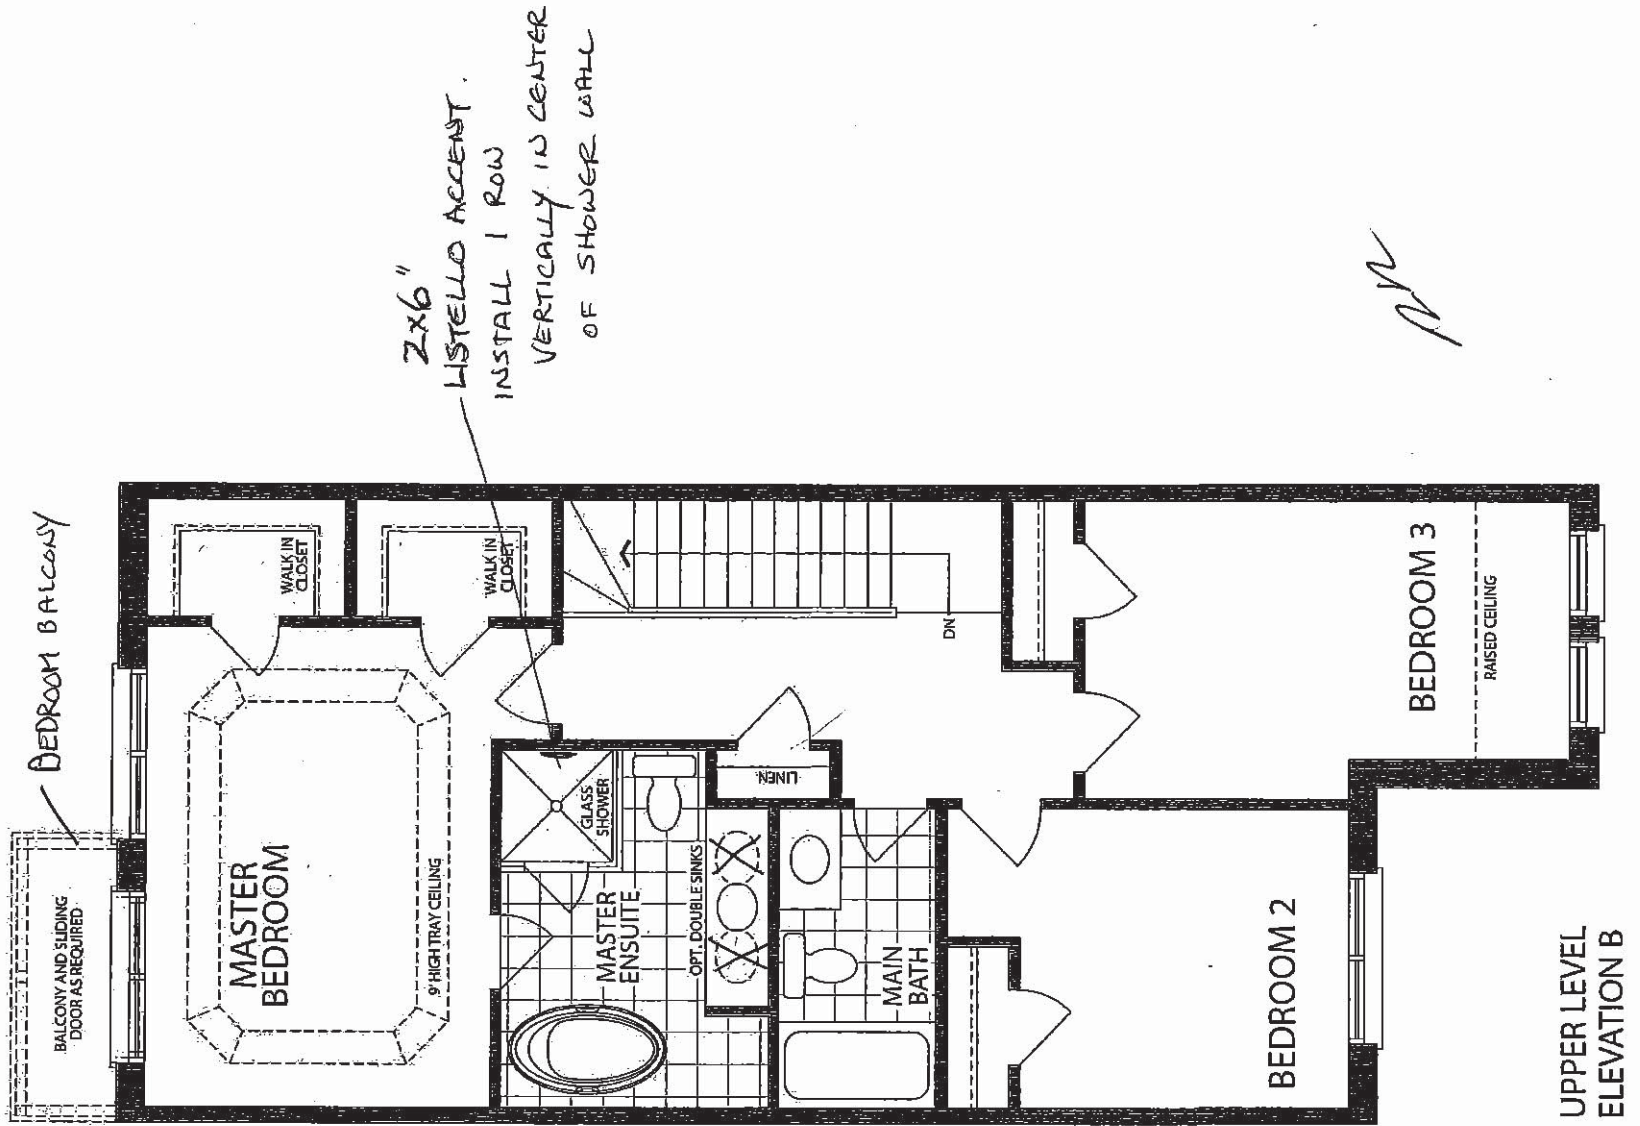

UPPER LEVEL
ELEVATION B

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

20 of 43

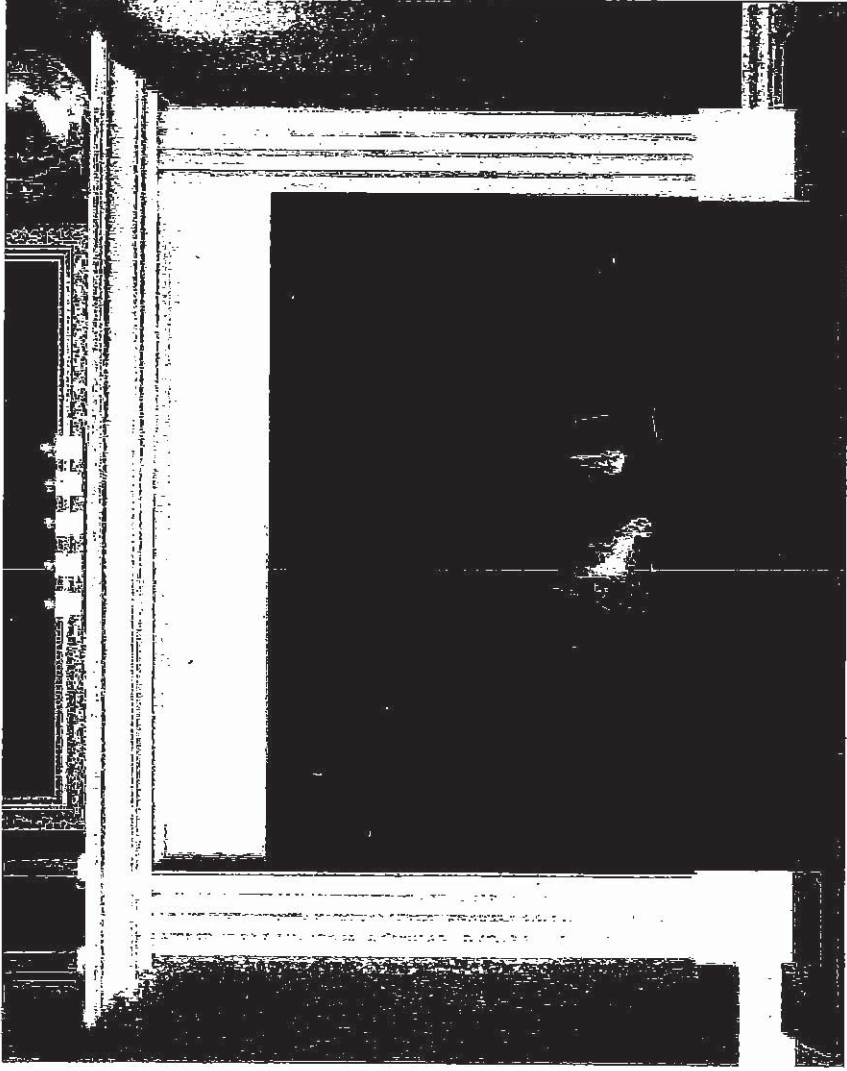


STANDARD NF 15 Mantel

Clean apron finish with fluted legs

WHITE PAINT GRADE FINISH

(PICTURE SHOWN WITH UPGRADE SURROUND AND HEARTH --PRICED SEPARATELY)

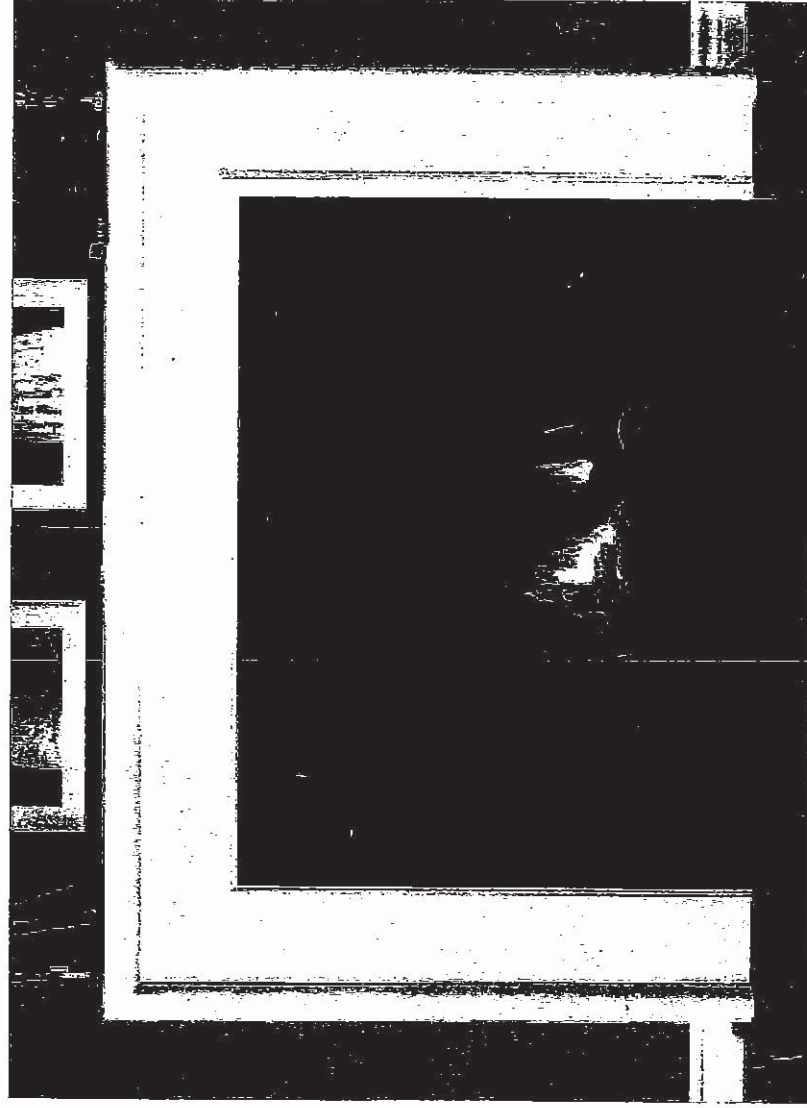

'CABINET'

STANDARD NF 17 Mantel


WHITE PAINT GRADE FINISH

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

21 of 43


Stainless Steel | 122.0264.716

FAMILY : Sinks | SERIES : Reginox | MODEL : NS1930U/9 | FINISH : Stainless Steel | INSTALLATION TYPE : Undermount

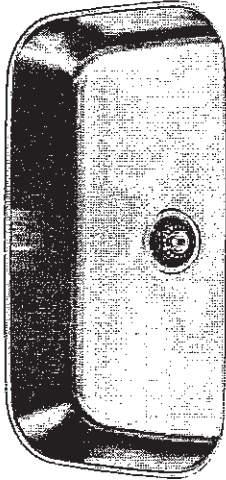

NR

NR

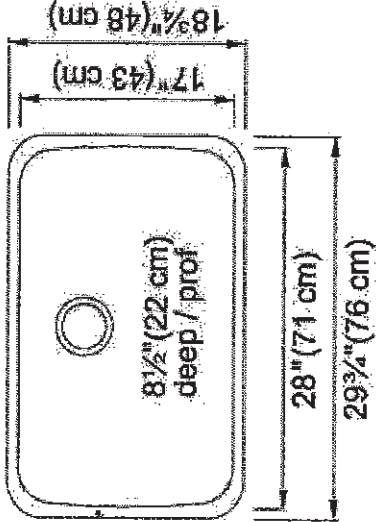

TECHNICAL DATA	
Width overall	18 3/4"
Length overall	29 3/4"
Width of large bowl	17"
Length of large bowl	28"
Depth of large bowl	8 1/2"
Cabinet Size	36"
Number of Bowls	1
Waste Outlet Diameter	3 1/2"
Cut-Out Template	Yes
Faucet Hole	None
Type of Material	18 Gauge Stainless Steel
Surface Finish	SILK
Special feature	Rear Drain Waste Hole Location
Waste Kit Included	YES


CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

22 of 43

STANDARD KITCHEN FAUCET

Align

Modern

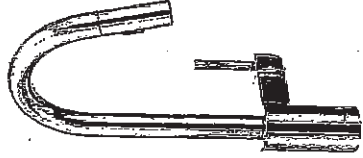

Single Handle Pull-Down Kitchen
Faucet[±]

Model 7565+

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

23 of 43

*American
Standard*

**BOULEVARD®
PEDESTAL SINK**
VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (illustrated)
- * ☐ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - **Design coordinates with Boulevard® Toilet**
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2"
(610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide,
12-1/2" (318mm) front to back,
5" (127mm) deep

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

* See faucet section for additional models available

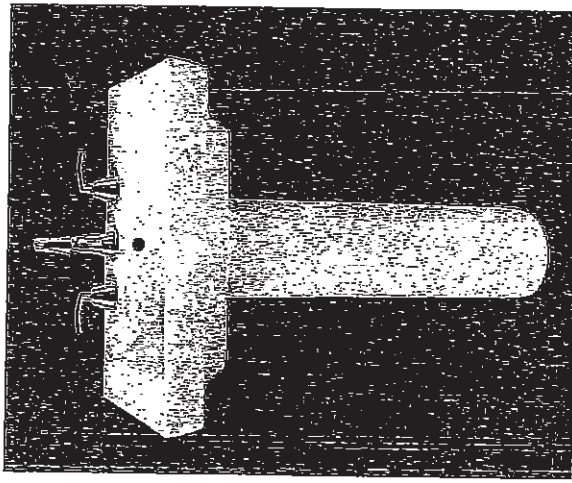

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

- Vitreous china
 - Self-rimming
 - Front overflow
 - Supplied with template
 - Faucet deck
- (Faucet shown not included)

☒ 0346 803

Faucet holes on 203mm (8") centres

☐ 0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

☐ 0346 001

Centre hole only

Nominal Dimensions:

521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS –

- Meets or exceeds the following Specifications:
- ASME A112.19.2M for Vitreous China Fixtures.
 - CAN/CSA B45 Series.

To Be Specified

☐ Colour: ☒ White ☐ Bone ☐ Silver Gray

☐ Linen

☐ Faucet*:

☐ Faucet Finish:

☐ Supplies & Stops:

☐ Trap 1-1/4" (32 mm):




* See faucet section for additional models available

BAS-198

© 2000 American Standard Inc.

01/07


24 COLONY™
COUNTERTOP SINK
VITREOUS CHINA

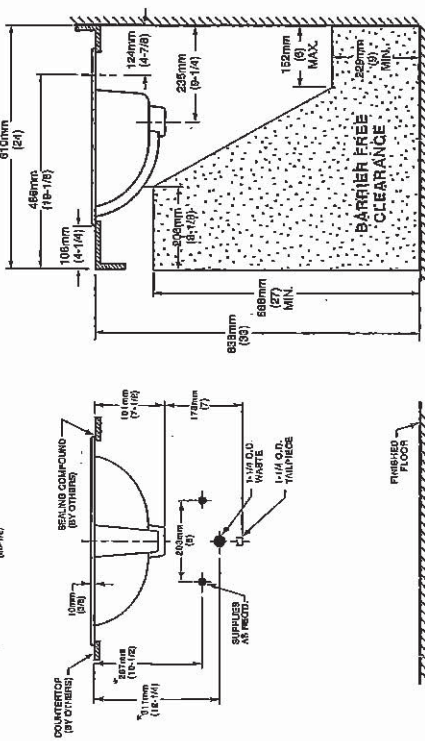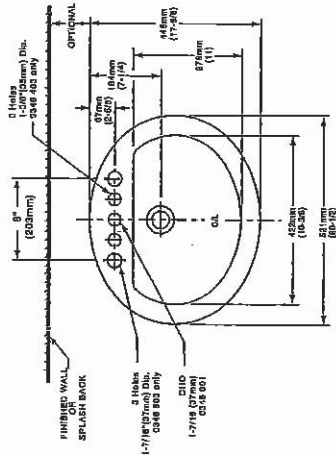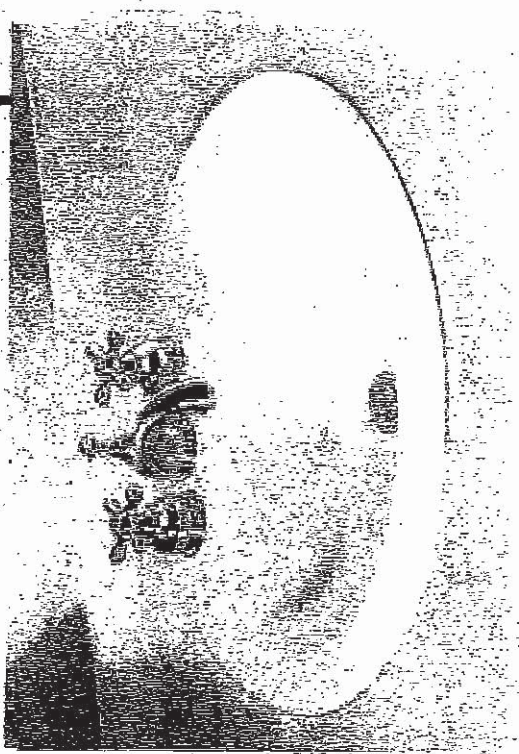

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

25 of 43

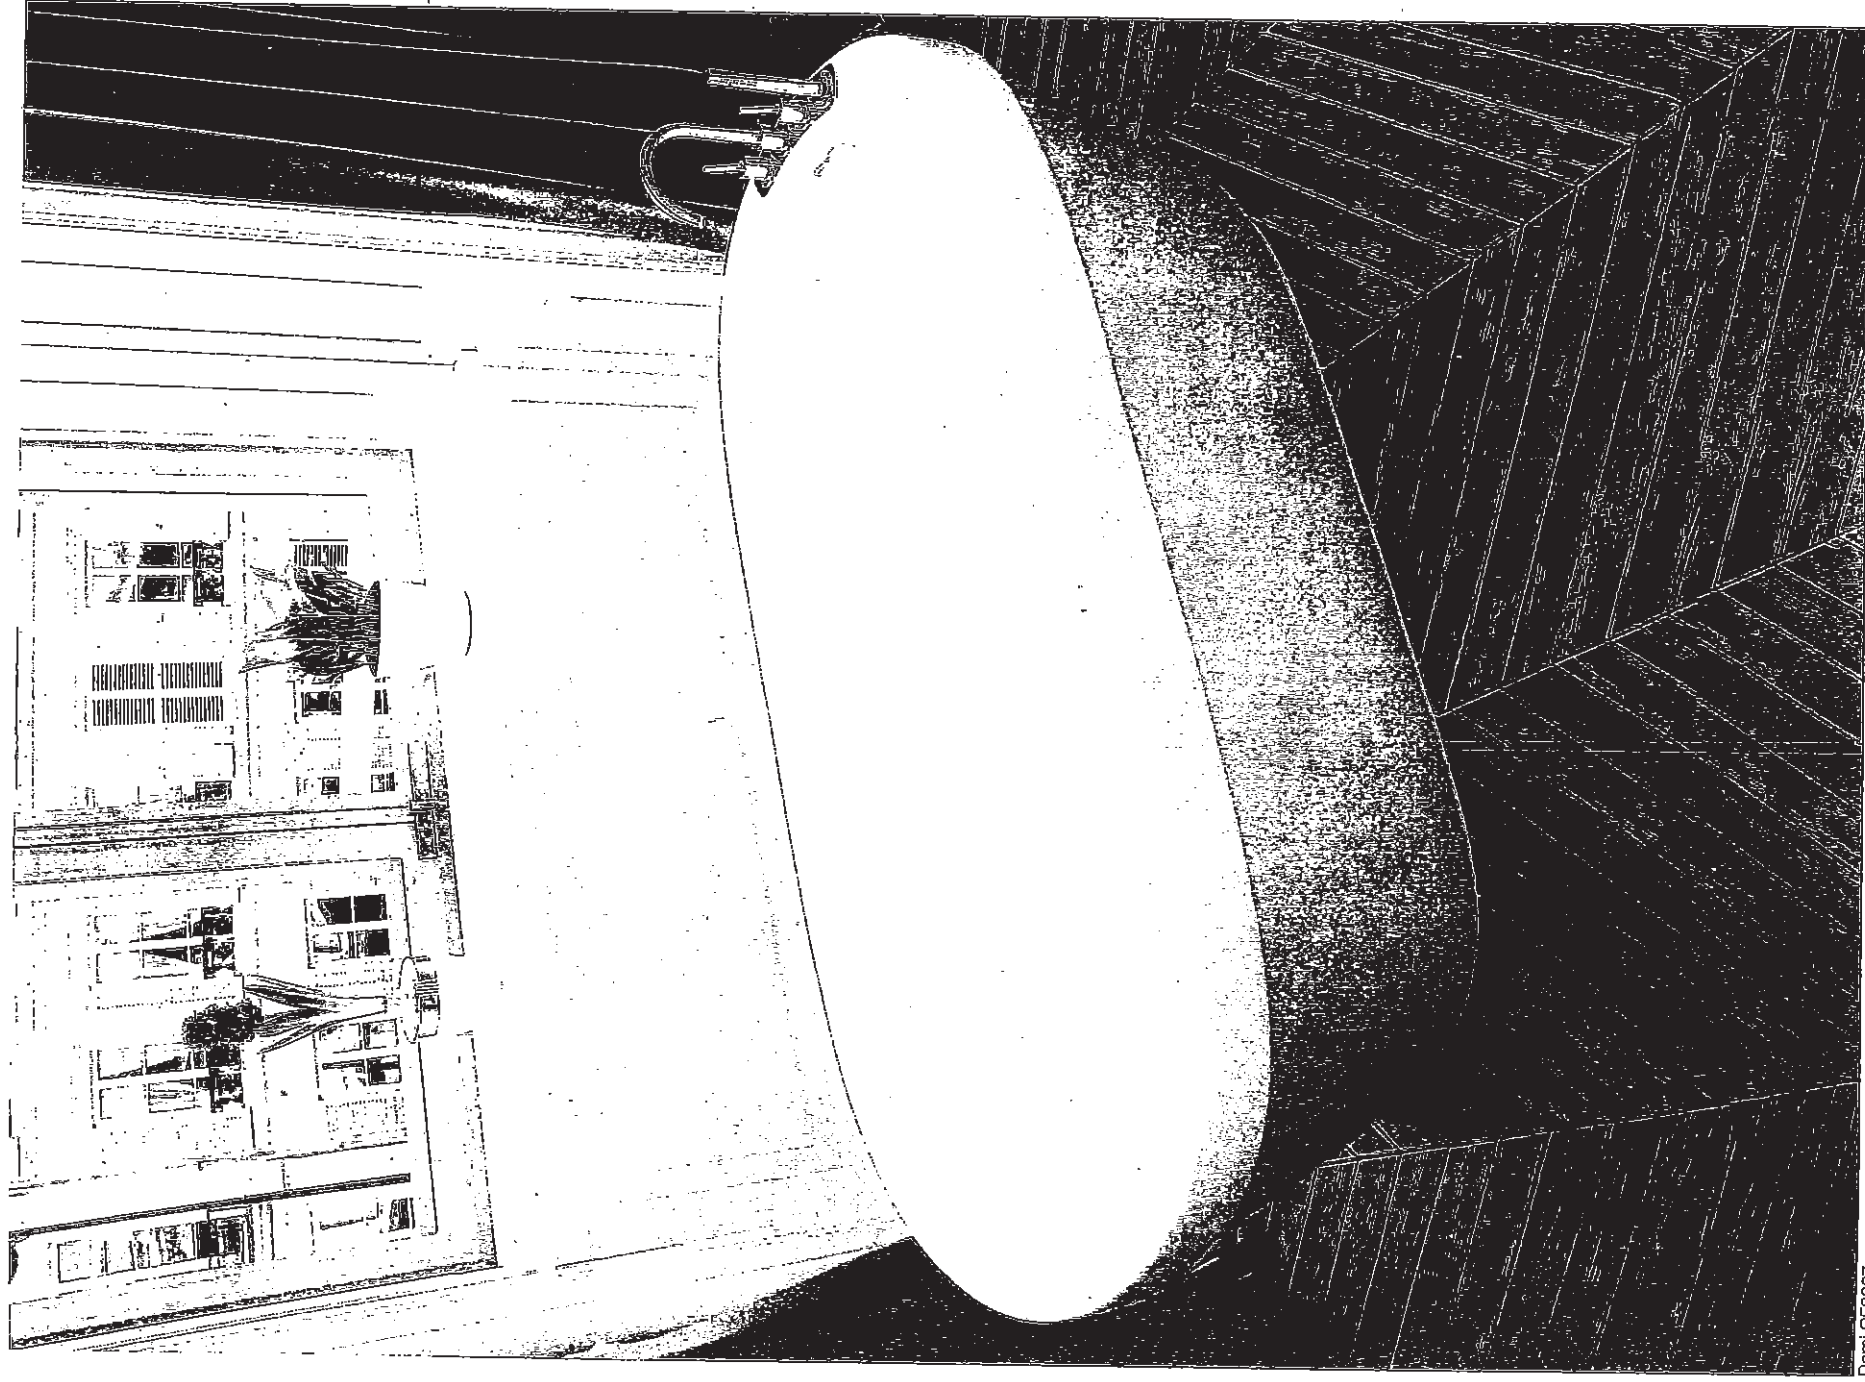


Dani CF-2007

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

26x43


Chateau

Transitional



Lavatory Faucet with Pop-Up Drain
Model L4621+

VANITY SINKS AND PEDESTAL



Posi-Temp® Pressure Balancing Tub/Shower
Model 62320 / TL183+

OR

Posi-Temp Valve and Tub/Shower Trim
with Eco-Performance Easy Clean® XL

Model 62320 / TL183EP+

(TL183EP not available in BC)

SHOWER AND 5" TUB FAUCETS



2 Handle Roman Tub with 9" Spout
Model 4796 / T990+


FREESTANDING TUB FAUCETS

CU UPCOUNTRY
 LOT 2-5
 20-2329 ELEV B
 THE HAMPTON


27 of 43

SC(B)519 | ALITO Collection

Cyclone®
 Breathe Better

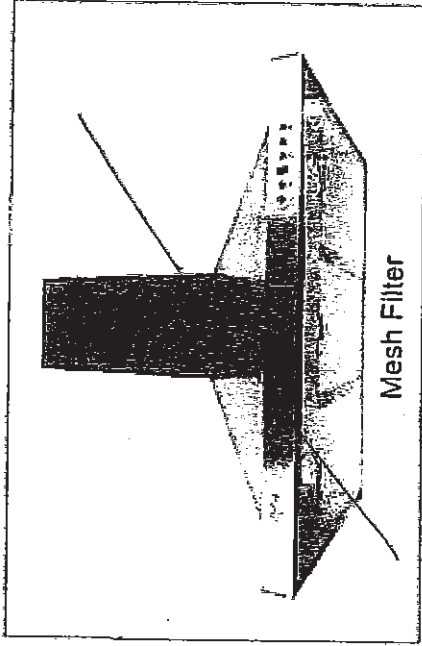

Mesh Filter

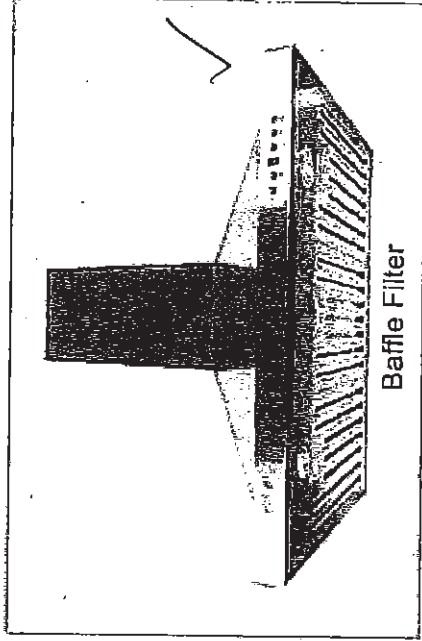

Baffle Filter

Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button
 Control Panel




Long-Lasting
 LED Lights



Time-Delay
 OFF Feature



Grease Cup

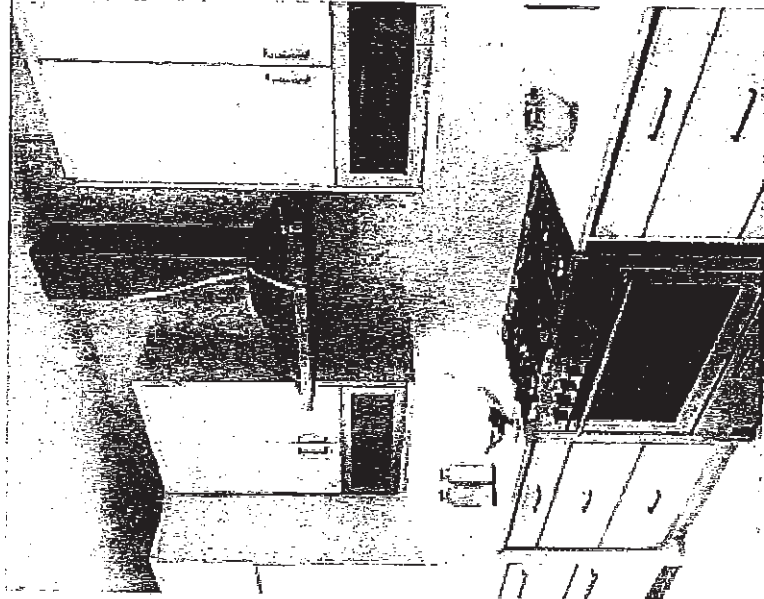

Model	Colour	Ducting	Filters	Size	CFM
EG51924	Stainless Steel	6"	Mesh	24"	550
SC51930	Stainless Steel	6"	Mesh	30"	550
SC51936	Stainless Steel	6"	Mesh	36"	550
SCB51924	Stainless Steel	6"	Baffle	24"	550
SCB51930	Stainless Steel	6"	Baffle	30"	550
SCB51936	Stainless Steel	6"	Baffle	36"	550

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16, Toronto, ON, M1S 3J1, Canada.

Toll Free. 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON


28 of 43

SC(B)519 | ALITO Collection

Cyclone[®]
Breathe Better


Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- Up to 9 minutes time-delay OFF feature
- Plug-in connection

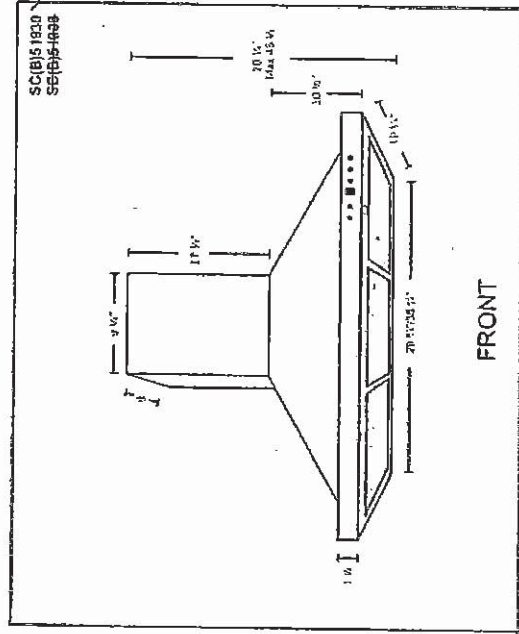

Options

- Filters:
 - SC519 - Quick Release Aluminum Mesh Filters
 - SCB519 - Quick Release Stainless Steel Baffle Filters**
- Chimney Flues:
 - A1.CH10 - short (7'-8' ceilings)
 - A1.CH18 - standard (8'-9' ceilings)
 - A1.CH30 - extended (9'-11' ceilings)
- Widths: 24" (30") 36"

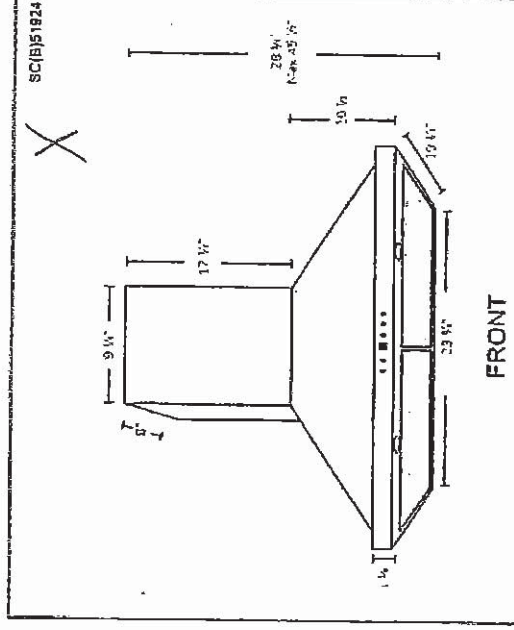

Specifications

- Air Flow Volume: 550 CFM
- Electrical Connection: 120 V/60 Hz
- Power Consumption: 300 Watts

- Current: 2.5 Amps
- Fan Speed: 1599 RPM
- Fan Type: Centrifugal Blower

- Finishes: Stainless Steel
- Ducting: 6" Round
- Noise Level: Min. 2 Sones
Max. 6 Sones



Toronto • Vancouver • Boston
www.CycloneRangeHoods.com

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

29 of 43

Whirlpool® Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD
WRT611SZD

WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

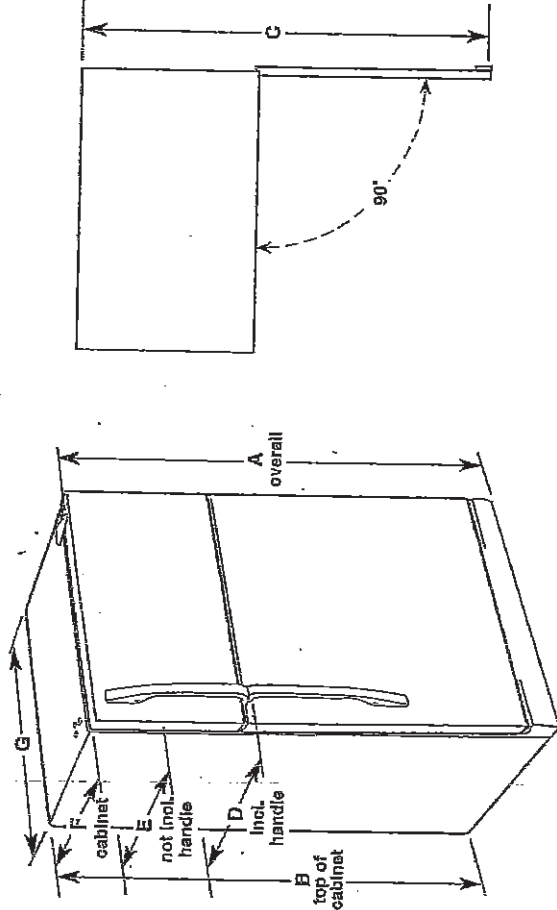

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	32 1/8" (83.5 cm)	30 3/4" (77.8 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)
WRT611SZD WRT541SZD	21.3 cu. ft.	Yes	66 1/4" (168.3 cm)	65 1/2" (166.4 cm)	62 1/4" (158.1 cm)	34" (86.4 cm)	32 1/8" (82.3 cm)	28 1/2" (72.4 cm)	32 3/4" (83.2 cm)

LOCATION REQUIREMENTS

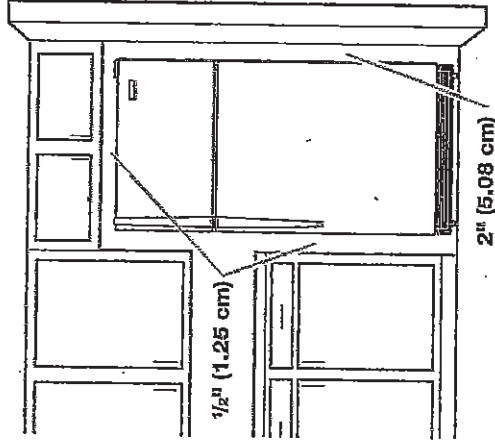

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.





Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10674106
10/25/14

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

30 of 43

Refrigerator Door Swing Verification

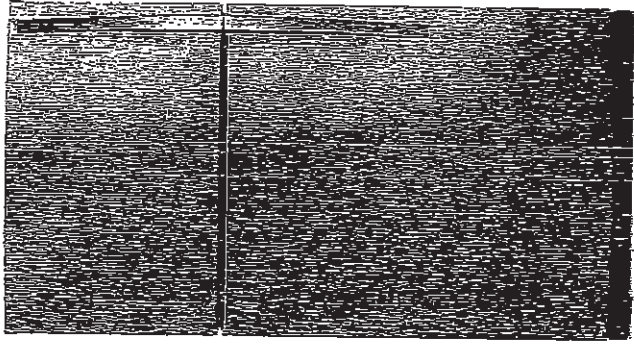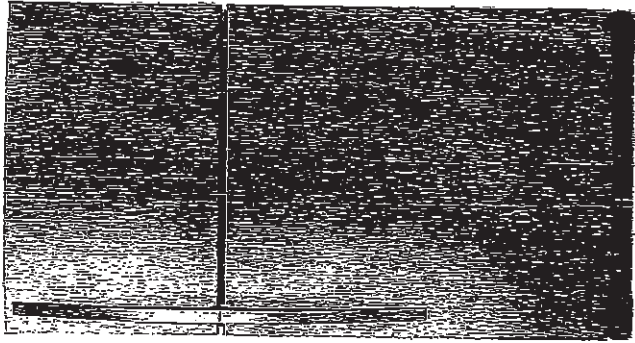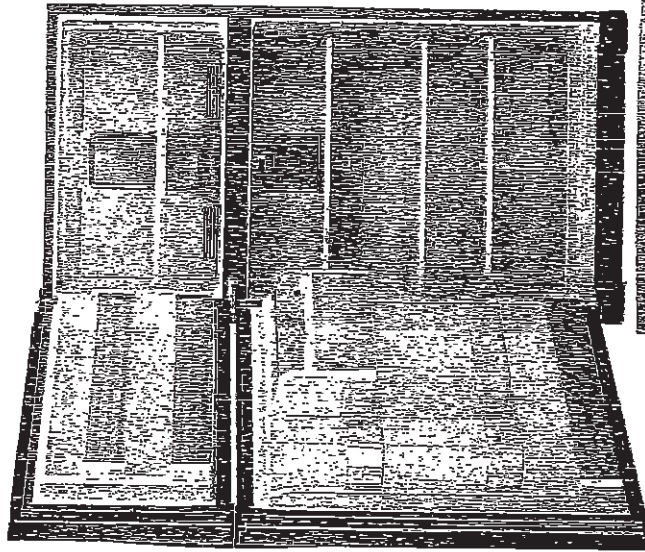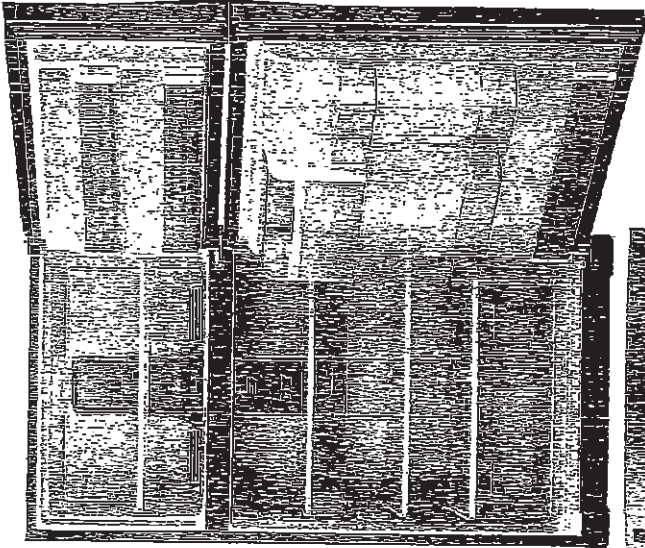

When facing the refrigerator

☒

RIGHT HAND

DOOR OPENING

- Hinges on right
- Handle on left

INITIAL

mk

☐

LEFT HAND

DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

Please check and INITIAL your door swing selection.

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON



31 of 43

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

5.3 cu. ft. Whirlpool® electric range with Frozen
Bake™ technology
YWFE515S0JS

Whirlpool®

[Home](#) > [Kitchen Appliances](#) > [Cooking Appliances](#) > [Ranges](#) > [Single Oven Ranges](#) > YWFE515S0JS

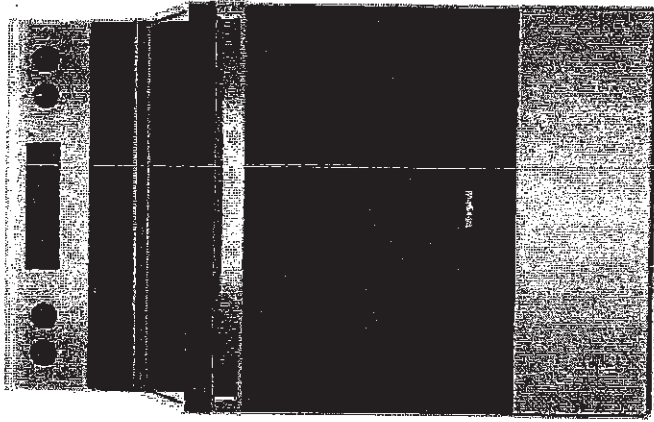


CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

32 of 43

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Product Dimensions

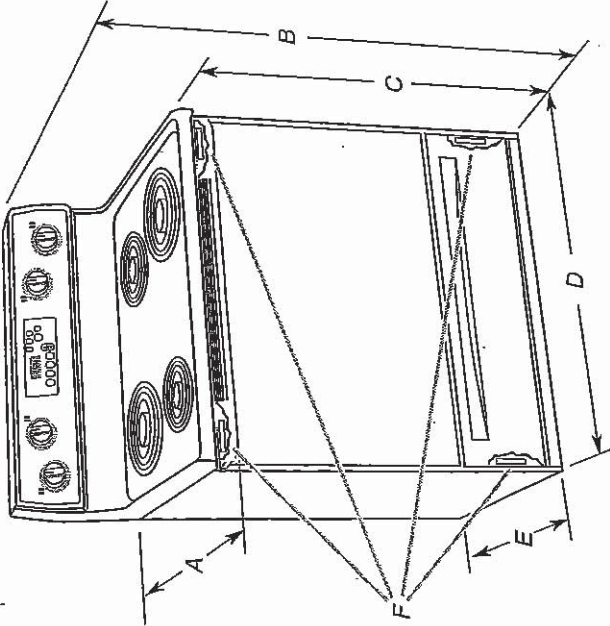

- A. 27³/₁₆" (70.5 cm) max. depth with handle
- B. 46⁷/₁₆" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₁₆" (75.9 cm) width
- E. 25⁷/₁₆" (64.9 cm) depth - back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


**Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

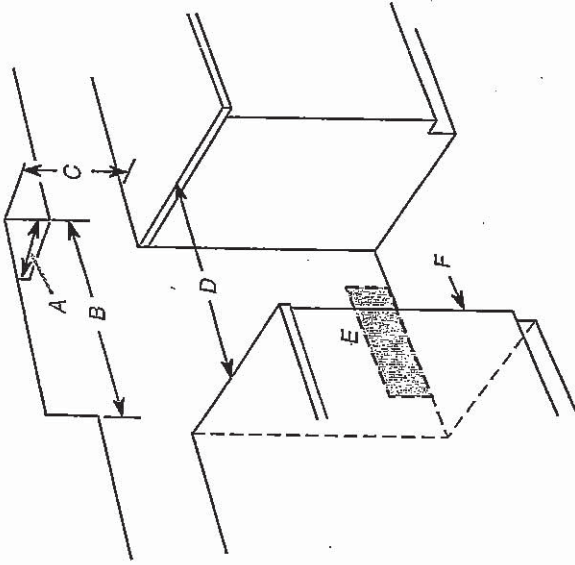

- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Jan 28/20

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

33 of 43

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES
Model YWFE515S0JS

Install Anti-Tip Bracket


! WARNING



Tip Over Hazard

A child or adult can tip the range and be killed.
Install anti-tip bracket to floor or wall per installation instructions.
Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.
Re-engage anti-tip bracket if range is moved.
Do not operate range without anti-tip bracket installed and engaged.
Failure to follow these instructions can result in death or serious burns to children and adults.


1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warning drawer.
2. Determine which mounting method to use: floor or wall.
If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/₁₆" (31.9 cm) from centerline as shown.

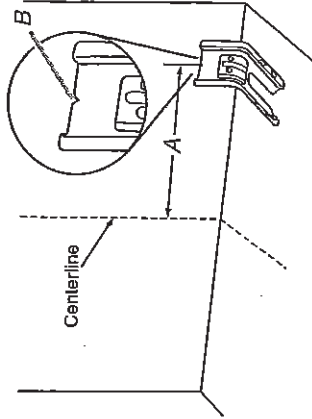


A. 12⁹/₁₆" (31.9 cm)
B. Bracket V-notch

4. Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.


Floor Mounting



Rear position




Front position




Diagonal (2 options)

Wall Mounting



5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1⁵/₈" (4.1 cm) screws provided.
6. Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

34 of 43



OTHER AVAILABLE COLORS

Blasuit-on-Bisquit
Model: WDF310PAAT

Universal Silver
Model: WDF310FAAD

DIMENSIONS		KEY FEATURES
Maximum Height	34 1/2 Inches	ENERGY STAR® Qualified
Minimum Height	33 1/2 Inches	No One Has Fewer Repairs 17 Years In A Row
Height	34 1/2 Inches	Resource - Efficient Wash System
Depth	24 1/2 Inches	CEE Tier 1 qualified
Width	23 7/8 Inches	Tall Tub Design
Dimensions shown are for planning purposes only. For complete information, see Installation Instructions packaged with product.		White Plastic Interior
		Quiet Partner(TM) Sound Package
		Auto Soil Sensor
		Electronic Controls
ELECTRICAL 15 Amps Amps, 60 Hz, 120 V. 15, Before purchasing the appliance, read important information about its estimated energy consumption or energy efficiency rating that is available from your dealer.		3 Automatic Cycles
		1-Hour Wash Cycle
		Heavy Wash Cycle
		Normal Cycle
		4 Options
		High Temperature Wash System
		Heated Dry Option
		4 Hour Delay Wash Option
		4-Tier SheerClean Direct Feed Wash System
		Control Lock
		Vinyl Racks
		In-Rack Silverware Basket

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

35 of 43



Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDFI10PAB
WDFI11PAB
WDFI20PAF
WDFI21PAF
WDFI30PAA
WDFI30PCA



WDFE30PSY
WDFE30PLA
WDFE30PAD
WDFE30PAY
WDFE30PFA
WDFE30PFA
WDFE30PFA
WDFE30PFA

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp, fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored, or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit instructions for installing the power supply cord.

Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.

Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4"N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3985556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.


Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended

that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.



PRODUCT DIMENSIONS

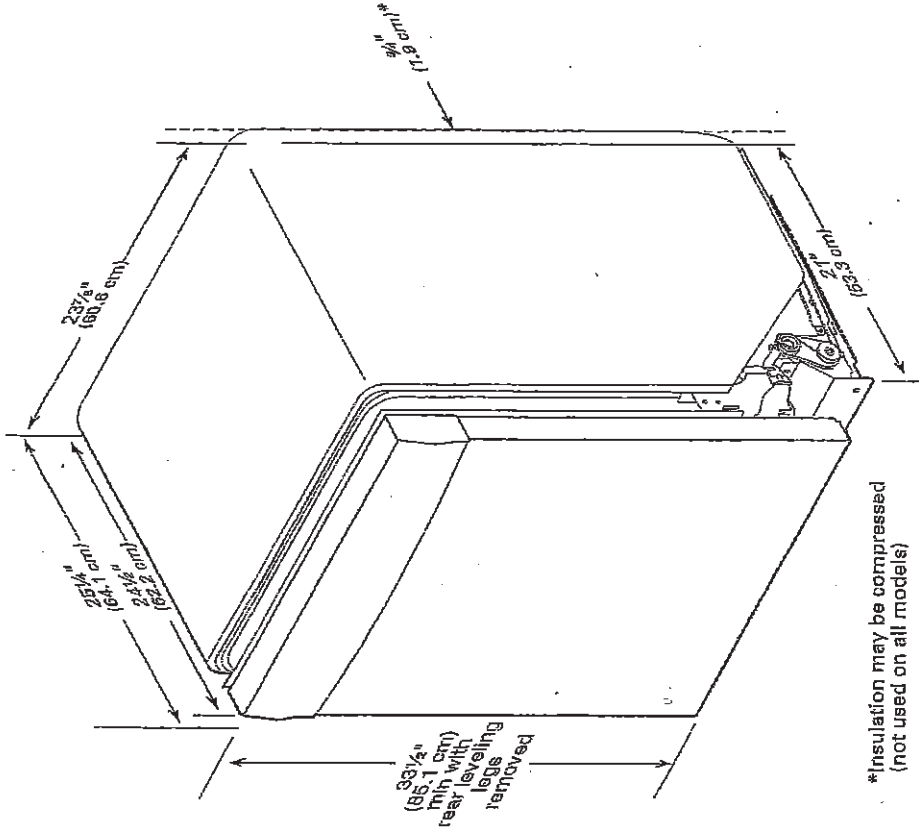

*Insulation may be compressed (not used on all models)

36 of 43

WDE 378 DAY

*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear levelling legs from dishwasher.

Technical drawing of a kitchen layout showing a sink, stove, and dishwasher with dimensions in inches and centimeters.

Sink Dimensions:


- Overall width: 24" (61 cm)
- Overall depth: 10 1/2" (26.7 cm)
- Stove cutout width: 10 1/2" (26.7 cm)
- Stove cutout depth: 8 1/2" (21.5 cm)
- Stove cutout depth (alternative): 8 1/4" (21.3 cm)
- Stove cutout depth (alternative): 8 1/8" (20.6 cm)
- Stove cutout depth (alternative): 8 1/16" (20.3 cm)
- Stove cutout depth (alternative): 8 1/32" (20.1 cm)
- Stove cutout depth (alternative): 8 1/64" (19.9 cm)
- Stove cutout depth (alternative): 8 1/128" (19.7 cm)
- Stove cutout depth (alternative): 8 1/256" (19.5 cm)
- Stove cutout depth (alternative): 8 1/512" (19.3 cm)
- Stove cutout depth (alternative): 8 1/1024" (19.1 cm)
- Stove cutout depth (alternative): 8 1/2048" (18.9 cm)
- Stove cutout depth (alternative): 8 1/4096" (18.7 cm)
- Stove cutout depth (alternative): 8 1/8192" (18.5 cm)
- Stove cutout depth (alternative): 8 1/16384" (18.3 cm)
- Stove cutout depth (alternative): 8 1/32768" (18.1 cm)
- Stove cutout depth (alternative): 8 1/65536" (17.9 cm)
- Stove cutout depth (alternative): 8 1/131072" (17.7 cm)
- Stove cutout depth (alternative): 8 1/262144" (17.5 cm)
- Stove cutout depth (alternative): 8 1/524288" (17.3 cm)
- Stove cutout depth (alternative): 8 1/1048576" (17.1 cm)
- Stove cutout depth (alternative): 8 1/2097152" (16.9 cm)
- Stove cutout depth (alternative): 8 1/4194304" (16.7 cm)
- Stove cutout depth (alternative): 8 1/8388608" (16.5 cm)
- Stove cutout depth (alternative): 8 1/16777216" (16.3 cm)
- Stove cutout depth (alternative): 8 1/33554432" (16.1 cm)
- Stove cutout depth (alternative): 8 1/67108864" (15.9 cm)
- Stove cutout depth (alternative): 8 1/134217728" (15.7 cm)
- Stove cutout depth (alternative): 8 1/268435456" (15.5 cm)
- Stove cutout depth (alternative): 8 1/536870912" (15.3 cm)
- Stove cutout depth (alternative): 8 1/1073741824" (15.1 cm)
- Stove cutout depth (alternative): 8 1/2147483648" (14.9 cm)
- Stove cutout depth (alternative): 8 1/4294967296" (14.7 cm)
- Stove cutout depth (alternative): 8 1/8589934592" (14.5 cm)
- Stove cutout depth (alternative): 8 1/17179869184" (14.3 cm)
- Stove cutout depth (alternative): 8 1/34359738368" (14.1 cm)
- Stove cutout depth (alternative): 8 1/68719476736" (13.9 cm)
- Stove cutout depth (alternative): 8 1/137438953472" (13.7 cm)
- Stove cutout depth (alternative): 8 1/274877907344" (13.5 cm)
- Stove cutout depth (alternative): 8 1/549755814688" (13.3 cm)
- Stove cutout depth (alternative): 8 1/1099511629376" (13.1 cm)
- Stove cutout depth (alternative): 8 1/2199023258752" (12.9 cm)
- Stove cutout depth (alternative): 8 1/4398046517504" (12.7 cm)
- Stove cutout depth (alternative): 8 1/8796093035008" (12.5 cm)
- Stove cutout depth (alternative): 8 1/17592186070016" (12.3 cm)
- Stove cutout depth (alternative): 8 1/35184372140032" (12.1 cm)
- Stove cutout depth (alternative): 8 1/70368744280064" (11.9 cm)
- Stove cutout depth (alternative): 8 1/140737488560128" (11.7 cm)
- Stove cutout depth (alternative): 8 1/281474977120256" (11.5 cm)
- Stove cutout depth (alternative): 8 1/562949954240512" (11.3 cm)
- Stove cutout depth (alternative): 8 1/1125899908481024" (11.1 cm)
- Stove cutout depth (alternative): 8 1/2251799816962048" (10.9 cm)
- Stove cutout depth (alternative): 8 1/4503599633924096" (10.7 cm)
- Stove cutout depth (alternative): 8 1/9007199267848192" (10.5 cm)
- Stove cutout depth (alternative): 8 1/18014398535696384" (10.3 cm)
- Stove cutout depth (alternative): 8 1/36028797071392768" (10.1 cm)
- Stove cutout depth (alternative): 8 1/72057594142785536" (9.9 cm)
- Stove cutout depth (alternative): 8 1/144115188285571072" (9.7 cm)
- Stove cutout depth (alternative): 8 1/288230376571142144" (9.5 cm)
- Stove cutout depth (alternative): 8 1/576460753142284288" (9.3 cm)
- Stove cutout depth (alternative): 8 1/1152921506284568576" (9.1 cm)
- Stove cutout depth (alternative): 8 1/2305843012569137152" (8.9 cm)
- Stove cutout depth (alternative): 8 1/4611686025138274304" (8.7 cm)
- Stove cutout depth (alternative): 8 1/9223372050276548608" (8.5 cm)
- Stove cutout depth (alternative): 8 1/18446744100553097216" (8.3 cm)
- Stove cutout depth (alternative): 8 1/36893488201106194432" (8.1 cm)
- Stove cutout depth (alternative): 8 1/73786976402212388864" (7.9 cm)
- Stove cutout depth (alternative): 8 1/147573952804424777728" (7.7 cm)
- Stove cutout depth (alternative): 8 1/295147905608849555456" (7.5 cm)
- Stove cutout depth (alternative): 8 1/590295811217699110912" (7.3 cm)
- Stove cutout depth (alternative): 8 1/1180591622435398221824" (7.1 cm)
- Stove cutout depth (alternative): 8 1/2361183244870796443648" (6.9 cm)
- Stove cutout depth (alternative): 8 1/4722366489741592887296" (6.7 cm)
- Stove cutout depth (alternative): 8 1/9444732979483185774592" (6.5 cm)
- Stove cutout depth (alternative): 8 1/18889465958966371549184" (6.3 cm)
- Stove cutout depth (alternative): 8 1/37778931917932743098368" (6.1 cm)
- Stove cutout depth (alternative): 8 1/75557863835865486196736" (5.9 cm)
- Stove cutout depth (alternative): 8 1/151115727671730972393472" (5.7 cm)
- Stove cutout depth (alternative): 8 1/302231455343461944786944" (5.5 cm)
- Stove cutout depth (alternative): 8 1/604462910686923889573888" (5.3 cm)
- Stove cutout depth (alternative): 8 1/1208925821373847779147776" (5.1 cm)
- Stove cutout depth (alternative): 8 1/2417851642747695558295552" (4.9 cm)
- Stove cutout depth (alternative): 8 1/4835703285495391116591104" (4.7 cm)
- Stove cutout depth (alternative): 8 1/9671406570990782233182208" (4.5 cm)
- Stove cutout depth (alternative): 8 1/19342813141981564466364416" (4.3 cm)
- Stove cutout depth (alternative): 8 1/38685626283963128932728832" (4.1 cm)
- Stove cutout depth (alternative): 8 1/77371252567926257865457664" (3.9 cm)
- Stove cutout depth (alternative): 8 1/154742505135852515730915328" (3.7 cm)
- Stove cutout depth (alternative): 8 1/309485010271705031461830656" (3.5 cm)
- Stove cutout depth (alternative): 8 1/618970020543410062923661312" (3.3 cm)
- Stove cutout depth (alternative): 8 1/1237940041086820125847322624" (3.1 cm)
- Stove cutout depth (alternative): 8 1/2475880082173640251694645248" (2.9 cm)
- Stove cutout depth (alternative): 8 1/4951760164347280503389290496" (2.7 cm)
- Stove cutout depth (alternative): 8 1/9903520328694561006778580992" (2.5 cm)
- Stove cutout depth (alternative): 8 1/19807040657389122013557161984" (2.3 cm)
- Stove cutout depth (alternative): 8 1/39614081314778244027114323968" (2.1 cm)
- Stove cutout depth (alternative): 8 1/79228162629556488054228647936" (1.9 cm)
- Stove cutout depth (alternative): 8 1/158456325259112976108457295872" (1.7 cm)
- Stove

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

37⁰¹43

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brasil, Canada, English, Washer and Dryer, Washers | Front Load Washers | WFW5620HW

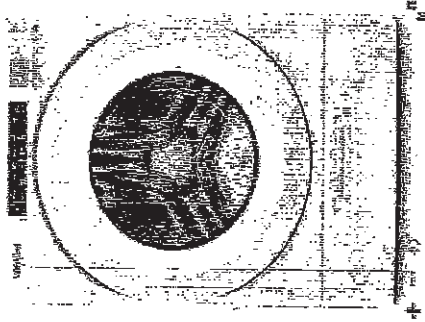

5.2 cu. ft. I.E.C. Closet-Depth
Front Load Washer with
Load & Go™ Dispenser



Whirlpool 5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™
Dispenser

Model #: WFW5620HW

Dimensions

Depth	90.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in

Appearance

LCD Touch Screen	No
Window	Yes

Details

Drum Material	Stainless Steel
---------------	-----------------

Cycles and Options

Number of Wash Cycles	37
-----------------------	----

Electrical

Hz	60
Power Cord Included	Yes

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

38 of 43

WHIRLPOOL WASHER Model #: WFW5620HW

LOCATION REQUIREMENTS



Proper installation is your responsibility.

You will need:



- A water heater set to 120°F (49°C).
- A grounded electrical outlet located within 6 ft (1.8 m) of power cord on back of washer.
- Hot and cold water faucets located within 4 ft (1.2 m) of hot and cold water fill valves on washer, and water pressure of 20–100 psi (137.9–689.6 kPa).
- A level floor with maximum slope of 1" (25 mm) under entire washer. Installing on carpet or surfaces with foam backing is not recommended.
- Floor must support washer's total weight (with water and load) of 315 lbs (143 kgs).

IMPORTANT: Do not install, store, or operate washer where it will be exposed to weather or in temperatures below 32°F (0°C). Water remaining in washer after use may cause damage in low temperatures. See "Washer Care" in your Use and Care Guide for winterizing information.

Whirlpool Models*

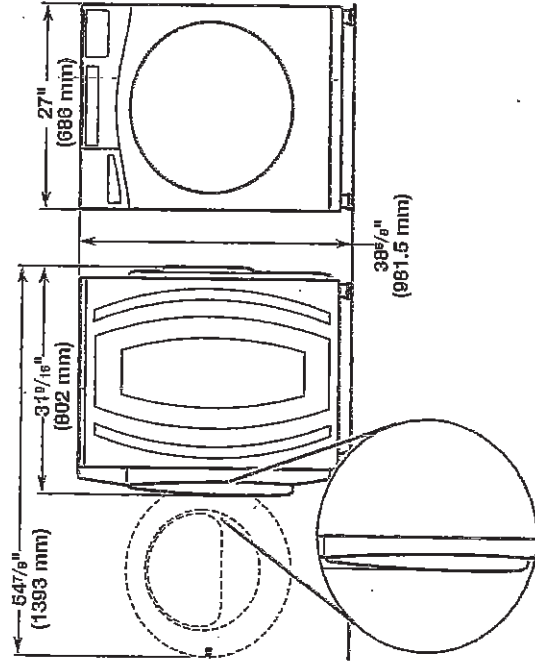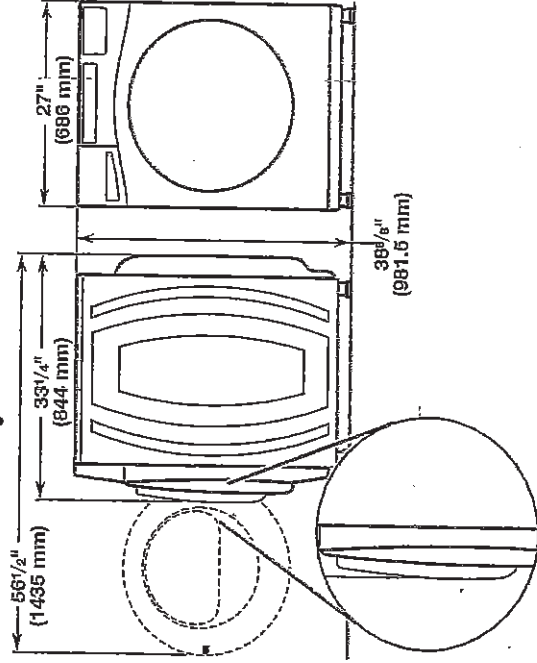


Maytag Models

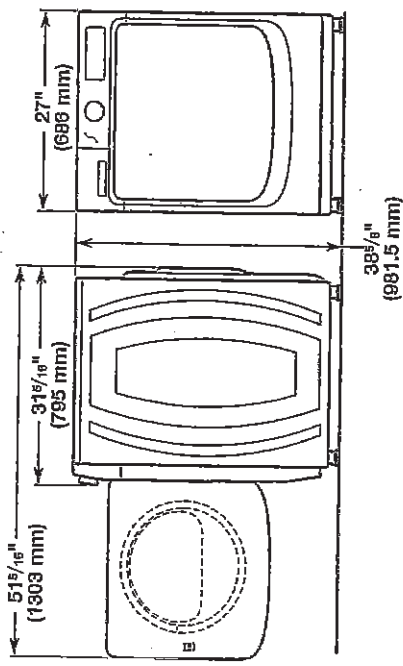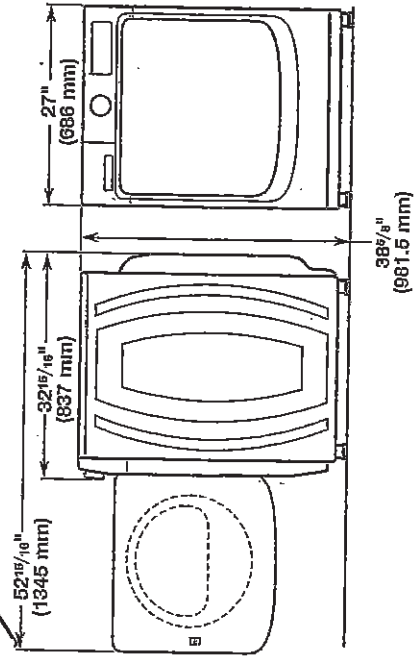

All dimensions show minimum spacing allowed. For each arrangement, consider allowing more space for ease of installation and servicing, and spacing for companion appliances and clearances for walls, doors, and floor moldings.

Space must be large enough to allow door to fully open. Add spacing of 1" (25 mm) on all sides of washer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Recessed area or closet installation
(stacked washer and dryer):

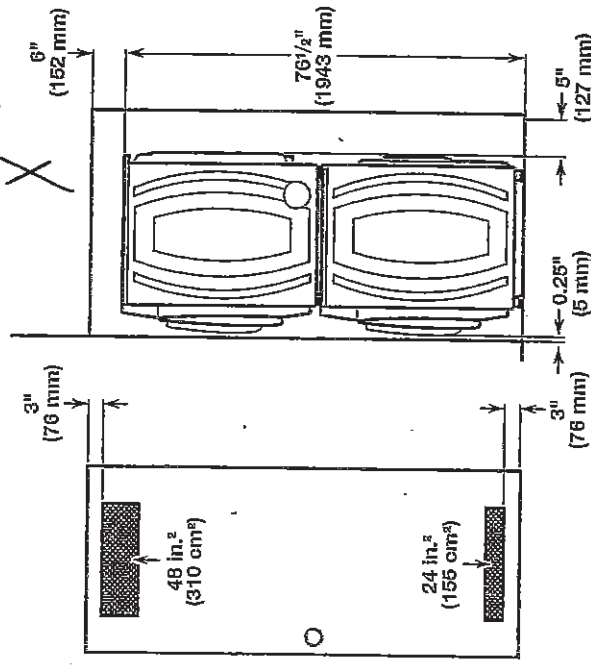


*For additional details (or information) specific to your model, refer to the 'Dimensions' listed for your model at www.whirlpool.com.

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON


39 of 43

WHIRLPOOL WASHER Model #: WFW5620HW


Custom under-counter installation:

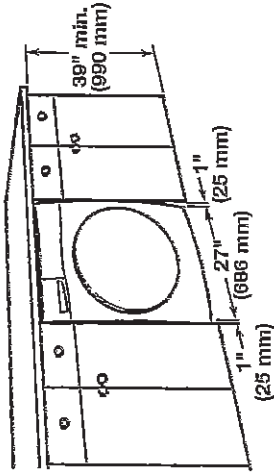

Recessed area or closet installation:

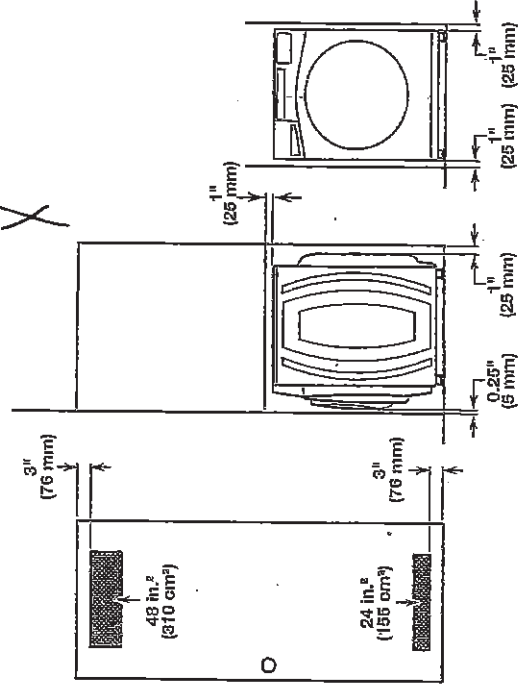

Custom cabinet installation:

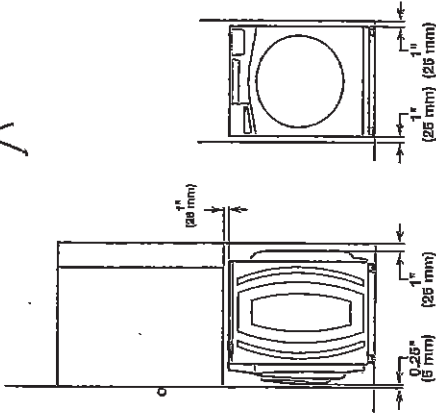


DRAIN SYSTEM

The drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.


IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

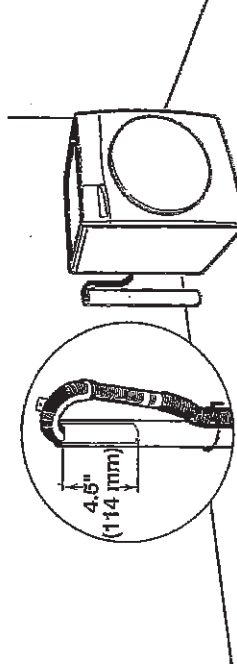


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gal. (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available (Part Number 3363920). Top of standpipe must be at least 30" (762 mm) high; install no higher than 96" (2.44 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.44 m), a sump pump and associated hardware are needed. See "Alternate parts."

Wall standpipe drain system

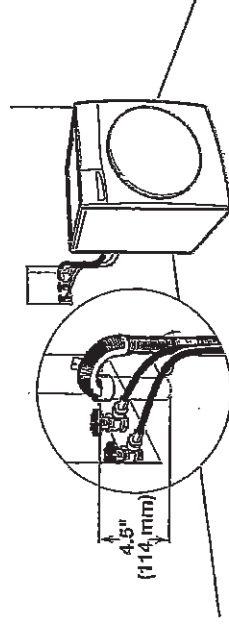

See requirements for floor standpipe drain system.

Laundry tub drain system

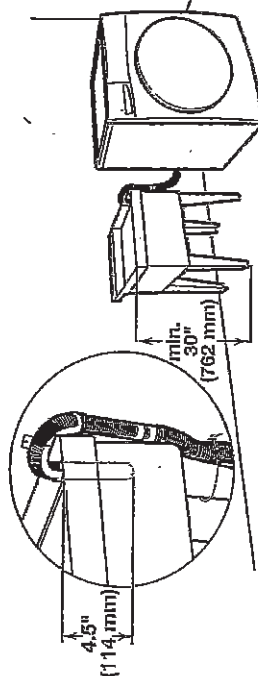


Minimum capacity: 20 gal. (76 L). Top of laundry tub must be at least 30" (762 mm) above floor; install no higher than 96" (2.44 m) from bottom of washer.

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

40^{ir} 43

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryer | Dryer | Electric Dryer | YWED5620HW

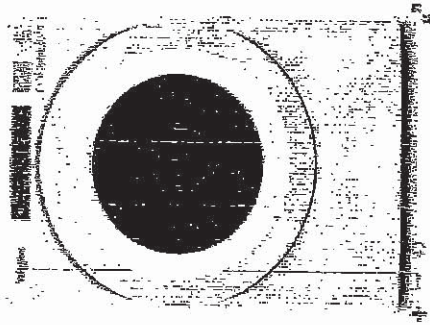

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-9/16 in
Width	68.58 cm, 27.0 in

Configuration and Overview

Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical


Hz	60
Power Cord Included	Yes

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

42 of 43

WHIRLPOOL DRYER Model #: YWED5620HW

Back view:

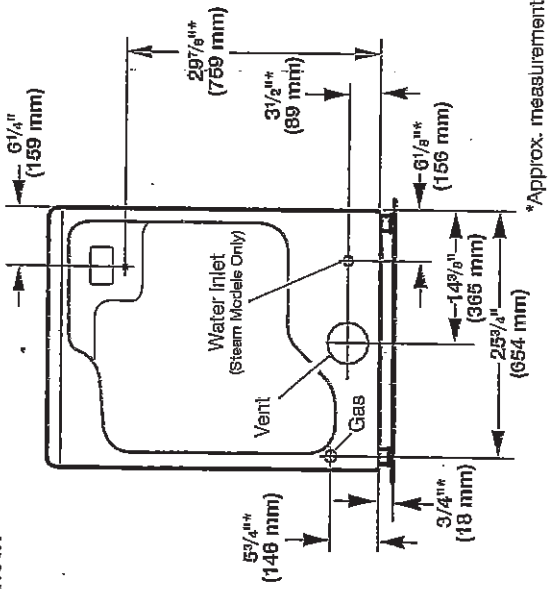

NOTE: Most installations require a minimum of 5" (127 mm) clearance behind dryer for exhaust vent with elbow. See "Venting Requirements."

Installation Clearances

For each arrangement, consider allowing more space for ease of installation and servicing, spacing for companion appliances, and clearances for walls, doors, and floor moldings. Space must be large enough to allow door to fully open. Add spacing on all sides of dryer to reduce noise transfer. If a closet door or louvered door is installed, top and bottom air openings in door are required.

Check code requirements. Some codes limit, or do not permit, installation of the dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.


NOTE: No other fuel-burning appliance can be installed in the same closet as a dryer.

Installation spacing for recessed area or closet installation

All dimensions show recommended and minimum spacing allowed.


- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, floor moldings, dryer venting, and gas line.
- Additional spacing should be considered on all sides of the dryer to reduce noise transfer.
- For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.
- Companion appliance spacing should also be considered.

Recommended installation clearances (dryer only):

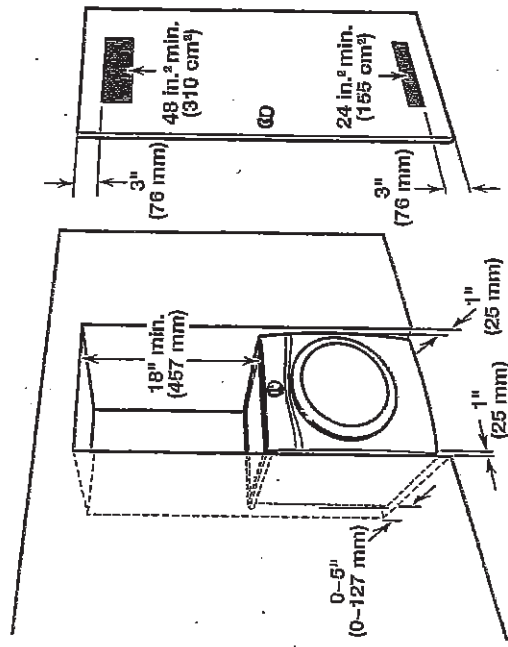

0" (0 mm) rear spacing is allowed for straight back venting only. For steam models only, inlet hose must not be kinked.

Custom under-counter installation:

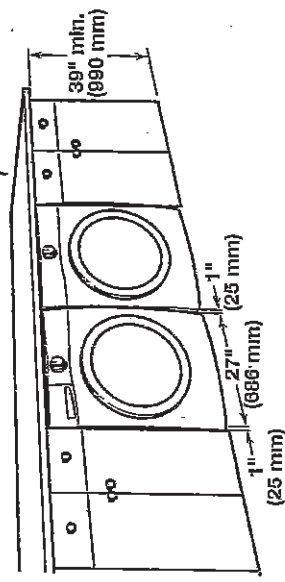

Mobile home - Additional installation requirements:

This dryer is suitable for mobile home installations. The installation must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile home construction and Safety, Title 24, HUD Part 280) or Standard CAN/CSA-Z240 MH.

Mobile home installations require:

- Metal exhaust system hardware, available for purchase from your dealer. For further information, see "Assistance or Service" in your Use and Care Guide.
- Special provisions must be made in mobile homes to introduce outside air into dryer. Openings (such as a nearby window) should be at least twice as large as dryer exhaust opening.

For mobile home installation of gas dryers:

- Mobile Home Installation Hold-down Kit Part Number 346764 is available to order. For further information, see "Assistance or Service" in your Use and Care Guide.

CU UPCOUNTRY
LOT 2-5
20-2329 ELEV B
THE HAMPTON

43 of 43

WHIRLPOOL DRYER Model #: YWED5620HW

Additional parts may be required, depending on your installation. Check local codes. Check existing electrical supply and venting. Read "Electrical Requirements" and "Venting Requirements" before purchasing parts.

If using a power supply cord:

Use a UL Listed power supply cord kit marked for use with clothes dryers. The kit should contain:

- A UL Listed 30 amp power supply cord, rated 120/240 volt minimum. The cord should be type SRD or SRDT and be at least 4 ft. (1.22 m) long. The wires that connect to the dryer must end in ring terminals or spade terminals with upturned ends.
- A UL Listed strain relief.

Optional Equipment (not supplied with dryer):

Refer to your Use and Care Guide for information about accessories available for your dryer.

LOCATION REQUIREMENTS

Check code requirements. Some codes limit, or do not permit, installing dryer in garages, closets, mobile homes, or sleeping quarters. Contact your local building inspector.

WARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from dryer.

Place dryer at least 18 inches (460 mm) above the floor for a garage installation.

Failure to do so can result in death, explosion, or fire.


You will need:

- A location allowing for proper exhaust installation. See "Venting Requirements."
- A separate 15 or 20 amp circuit for a gas dryer or 30 amp circuit for an electric dryer.
- If using power supply cord, a grounded electrical outlet located within 2 ft. (610 mm) of either side of dryer. See "Electrical Requirements."
- Floor must support dryer weight of 200 lbs. (90.7 kg). Also consider weight of companion appliance.
- Cold water faucets located within 4 ft. (1.2 m) of the water fill valves, and water pressure of 20-120 psi (138-827 kPa). You may use your washer's water supply by purchasing the necessary parts noted in "Parts needed."
- Level floor with maximum slope of 1" (25 mm) under entire dryer. If slope is greater than 1" (25 mm), install Extended Dryer Feet Kit, Part Number 279810. If not level, clothes may not tumble properly and automatic sensor cycles may not operate correctly.
- For garage installation, place dryer at least 18" (460 mm) above floor. If using a pedestal, you will need 18" (460 mm) to bottom of dryer.
- The dryer must not be installed or stored in an area where it will be exposed to water and/or weather.

IMPORTANT: Do not operate, install, or store dryer where it will be exposed to water, weather, or at temperatures below 40°F (4°C). Lower temperatures may cause dryer not to shut off at end of automatic sensor cycles, resulting in longer drying times.


DRYER DIMENSIONS

Front view:

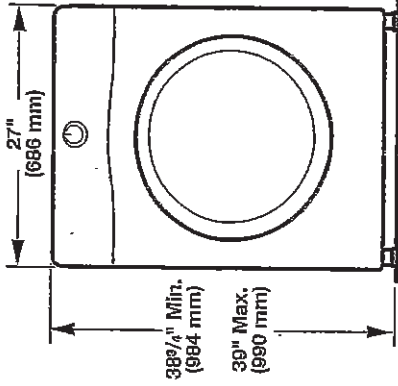


Side view:

Whirlpool Models

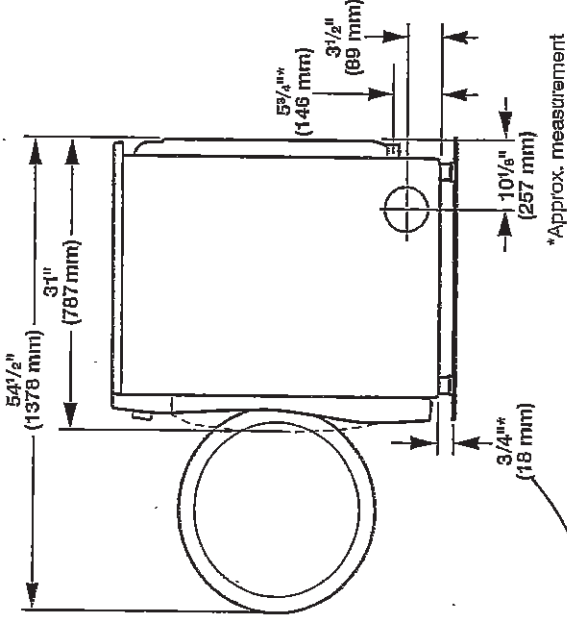

Maytag Models

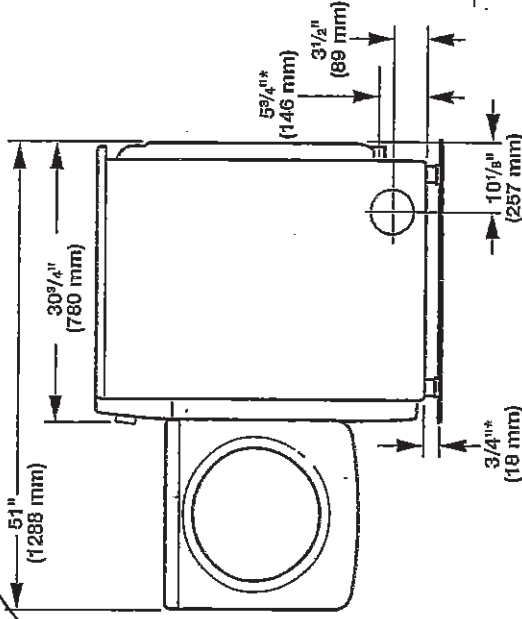

*Approx. measurement.