Sales Selection Sheet Checklist

1 of 43

Heathwood Homes (Huron) Limited

LOT 3185A-6 Model: 20-1790 B The Dunmore

PURCHASERS: PORUS R DAVER/

Heathwood Homes (Huron) Limited VENDOR:

WALK OUT BASEMENT WITH JULIETTE RAILING ACROSS MAIN FLOOR PATIO DOOR OPTIONAL COFFERED CEILINGS IN GREAT ROOM AND DINING ROOM OPTIONAL DOUBLE SINKS IN MASTER ENSUITE AND MAIN BATHROOMS FINISHED BASEMENT **COLD CELLAR UPGRADED / MODIFIED ELEVATION CORNER UPGRADE REAR UPGRADE CEILING UPGRADE - SMOOTH** MAIN FLOOR SECOND FLOOR **BASEMENT** ADDITIONAL ROUGH-INS 200 AMP SERVICE WET BAR ROUGH-IN **HUMIDIFIER** AIR CONDITIONING GAS ROUGH-IN **STOVE DRYER BBQ** ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE **6 IN ROUND DUCT** 7 IN ROUND DUCT **FULL BASEMENT STAIRS:** N/A All Oak **UPPER BASEMENT STAIRS:** LOWER BASEMENT STAIRS: Carpet Grade MAIN STAIRS: All Oak MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A Nov 24, 2021 TINA LEFUR Nov 24, 2021 Signature on file **Date Decor Consultant: Date** Purchaser: Nov 24, 2021 MARILYN ROSEN **Date** Purchaser:

> **Date Approved**

Locked Date:

Y

PORUS R DAVER/ Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore



Kitchen		
Cabinet Colour/Style	9157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD***
Cabinet Hardware	7667	12881-HARDWARE ***STD***
Island Cabinet Colour/Style	9157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Backsplash	8108	OD.ON.DGR.02.HEX.MT-ONTARIO HEXAGON MATTE-DARK GREY ***2***
Backsplash Grout	2226	Grout-(00) White ***STD***
Backsplash Tile Pattern	3110	HORIZONTAL HEX ***STD***
HoodFan	9393	SCB51930-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS
Appliance	9393	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
Appliance	9393	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliance	9393	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment		
Kitchen/Breakfast		
Flooring	9393	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

PORUS R DAVER/ Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore 338 4 3 3ed: 1032(21 10:42 34

		Olosea.
Comment		
Foyer		
Flooring	3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern Comment	3000	STANDARD SQUARE ***STD***
Laundry Room Flooring	3000	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern Comment	3000	STANDARD SQUARE ***STD***
Comment		
Laundry Room Opt.		
Cabinet - Uppers	9111	VIKING III SIMCOE ORCHID 3DL ***1***
Cabinet Hardware	7672	135-HARDWARE ***STD***
Comment		
Mud Room		
Flooring	7672	GE.MD.WHT.1818.MT Madison Series White Matte 18
Page 2 of 9		

PORUS R DAVER/ Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore



Floor Tile Gr	rout	2225	Grout-(27) Silver ***STD***
Floor Tile Pa	attern	3000	STANDARD SQUARE ***STD***
Comment			
Powder Room		_,	
rowder Room		_	
Flooring		3000	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Gr	rout	2225	Grout-(27) Silver ***STD***
Floor Tile Pa	attern	3000	STANDARD SQUARE ***STD***
Plumbing Fix	xture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment			
Hall			
Flooring		1737	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***STD***
Comment			
Dining Room			
Flooring		1737	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***STD***
Comment			
Great Room			
Flooring		1737	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***STD***
Comment			
Page 3 of 9			

PORUS R DAVER/ Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore

Upper Hall		
Flooring	1737	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***3***
Comment		
Finished Basement (Ro	ec) Room/Hall	
	00.10	
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Commont		
Comment		
Master Bedroom		
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
riooning	3240	BT 00410 -Byllasty lox-benon loc-40 021 diy 01B
Comment		
Bedroom 2		
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment		
Bedroom 3		
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
. looming	0240	
Comment		
Master Ensuite		
Cabinet Colour/Sty	le 9158	Viking III-SIMCOE-NAVY BLUE-3DL ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Page 4 of 9		. II II OTT TOTTING

PORUS R DAVER/ Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore



Countertop Edge	1111	N/A *****
Countertop Lage	1111	
	7070	405 HARRIMARE ***OTR***
Cabinet Hardware	7672	135-HARDWARE ***STD***
Floor Tile	7672	GE.MD.WHT.1818.MT Madison Series White Matte 18
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow
		White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Chaver Well Tile	0000	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile	9020	Q1.WV.WH1.0810-Weave-White-8 x 10 *****S1D*****
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
lain Bathroom		
Cabinet Colour/Style	9156	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS
Countertop	0790	FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****

PORUS R DAVER/ Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore Created: 10.22/2021 10:42/34

Cabinet Hardware	7672	135-HARDWARE ***STD***
Flooring	7672	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***
Wall Tile Grout	2226	Grout-(00) White ***STD***
Main Bathroom Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
inished Basement Bathroom		
Cabinet Colour/Style	9157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	7672	135-HARDWARE ***STD***
Flooring	7672	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2226	Grout-(00) White ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***

PORUS R DAVER/ Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore



Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Great Room Fireplace		
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***
Surround Opt.	1111	N/A *****
Disclaimer	1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.
Disclaimer	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.
Comment		
Basement Stairs		
Туре	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per
7 (0		

PORUS R DAVER/ Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore 9 **4** 338 **4** 3

Locked: Closed:

		building code) OTD
Handrail/Pickets/Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing _pos
2	0040	DV 00440 D 4 T. DI 401/105 40 D I ****OTD***
Carpet	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Custom Stain/Paint	1111	N/A *****
Comment		
Basement Stairs Landings (Upper a	nd Lo	
Flooring	1111	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3
1 looring	1111	1/4 inch ***3***
Comment		
Comment		
Main Stairs		
Туре	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD
		AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD***
		33.(0) 7.22 37.11 3.12
Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,riser
Custom Stain/Paint	1111	N/A *****
Comment		
-		
Main Stairs Landing(s)		
3(-)		
Flooring	1111	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3
		1/4 inch ***STD***
Comment]
2 2		

Throughout

PORUS R DAVER/ Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore 10 **5** 338 **4** 3 CO ed: 10 20 21 10:42 34

Purchaser:			Date		Date Approved
PO	RUS R DAVER	I	Date	Decor Consultant	Date
Purchaser:					
Comment					
Trim - Paint	Colour	1716	Trim-WHITE	E ***STD***	
Trim Size		8705	4 ¼ Basebo	ard and 2 ¾ Casings ***STD	***
Switches an	d Plug	5796	Decora Whi	te Switches and Plugs ***ST	D***
Thresholds		2232	Metal Thres	holds ***STD***	
Underpad		1079	500 Series-	Underpad ***STD***	
Walls - Pain	t Colour	1717	22-Wall-WA	RM GREY ***STD***	

construction summary of 43



Lot: 3185A-6 Model: 20-1790 B The Dunmore Project/Phase: Wallaceton / 3

Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes
Worksheet	Note:
	Upgraded Appliances see pages 35-43

DisciplineMS.rpt 13dec21 Page 1 of 7

construction summary of 43



Lot: 3185A-6 Model: 20-1790 B The Dunmore Project/Phase: Wallaceton / 3

ALUMINUM

Invoice	Qty.	Description
888	1	- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER AMENDMENT DATED OCTOBER 4, 2021
23Mar22 ** NoCat		

APPLIANCES

Invoice	Qty.	Description
888	1	KITCHEN - APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
313,484		
23Mar22		SPEC PAGES 33-34
		Cabinetry - delete stove upper; Electric - delete std range hood; Heating / Air - duct Size 6"
888	1	KITCHEN - UPGRADED APPLIANCES SEE SPECS
23Mar22 NoCat		SPEC PAGES 35-43

CABINETRY

Invoice	Qty.	Description		
888 313,484 23Mar22 **	1	KITCHEN - APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930 SPEC PAGES 33-34 Cabinetry - delete stove upper; Electric - delete std range hood; Heating / Air - duct Size 6"		
888 313,624 23Mar22	1	TCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is a zero clearance enclosure. Standard heights and widths will be used.) Viking ETCH # 3		
888 313,768 23Mar22	1	KITCHEN - 11A-Upper angle corner per unit Viking SKETCH # 3		
888 313,796 23Mar22	2	KITCHEN - 12B-Pots and pans drawers (width min. 60cm/max. 90cm) (size subject to floor plan) Viking SEE SKETCH # 3 FOR LOCATION		
888 334,723 23Mar22 **	2	- PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING MASTER ENSUITE AND MAIN BATH SKETCH # 3 AND 4 Cabinetry - 2D Convert single sink vanity to double sink vanity; Electric - Additional Vanity Light;		
888 306,641 23Mar22	1	LAUNDRY ROOM - CABINETRY - VIKING I/II/III - OPT. LAUNDRY ROOM UPPERS - UPG		

CARPET

CAMI			
Invoice	Qty.	Description	
888	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG	
311,613			
23Mar22			
**		Carpet - delete std carpet; Drywall - install quarter round; Painting - paint quarter round	

DisciplineMS.rpt 13dec21 Page 2 of 7



Lot: 3185A-6 Model: 20-1790 B The Dunmore Project/Phase: Wallaceton / 3

CERAMICS

Invoice	Qty.	Description
888 308,592 23Mar22	1	KITCHEN - CERAMICS - BACKSPLASH - KITCHEN - UPGRADE 2
888 314,179 23Mar22	1	KITCHEN - CERAMICS - ADDITIONAL BACKSPLASH DUE TO INSTALL CHIMENEY HOODFAN IN KITCHEN - KITCHEN - UPGRADE 2
888 308,628 23Mar22	1	KITCHEN/BREAKFAST - CERAMICS - FLOOR - KITCHEN - UPGRADE 1
888 308,613 23Mar22	1	FOYER - CERAMICS - FLOOR - FOYER - UPGRADE 1
888 308,656 23Mar22	1	POWDER ROOM - CERAMICS - FLOOR - POWDER ROOM - UPGRADE 1
888 308,649 23Mar22	1	MUD ROOM - CERAMICS - FLOOR - MUD ROOM - UPGRADE 1
888 308,606 23Mar22	1	MASTER ENSUITE - CERAMICS - FLOOR - ENSUITE MASTER - UPGRADE 1

COFFERED CEILING

Invoice	Qty.	Description		
888	1	INING ROOM/HALL - COFFERED CEILING - OPT. COFFERED CEILING - DINING ROOM		
310,660				
23Mar22		KETCH # 2		
		DRYWALL - notification; PAINTING- notification		
888	1	GREAT ROOM - COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM		
310,661				
23Mar22		SKETCH # 2		
		DRYWALL - notification; PAINTING- notification		

CONCRETE AND DRAIN

Invoice	Qty.	Description
888	1	- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER AMENDMENT DATED OCTOBER 4, 2021
23Mar22 ** NoCat		

DisciplineMS.rpt 13dec21 Page 3 of 7



CONSTRUCTION SUMMARŸ

Lot: 3185A-6 Model: 20-1790 B The Dunmore Project/Phase: Wallaceton / 3

DECK

Invoice	Qty.	Description
888	1	- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER AMENDMENT DATED OCTOBER 4, 2021
23Mar22 ** NoCat		

DRYWALL

Invoice	Qty.	Description			
888 310,660	1	NING ROOM/HALL - COFFERED CEILING - OPT. COFFERED CEILING - DINING ROOM			
23Mar22 **		ETCH # 2 RYWALL - notification; PAINTING- notification			
888 310,661	1	GREAT ROOM - COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM			
23Mar22 **		SKETCH # 2 DRYWALL - notification; PAINTING- notification			
888 314,238	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHESMAIN FLOOR (SEE SLIM LINE FOR BASEMENT)			
23Mar22 **		SKETCH # 2 Drywall: Ceiling cutouts to accommodate potlights			

ELECTRICAL

ELEC I		Description			
888 313,484 23Mar22 **	1	KITCHEN - APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930 SPEC PAGES 33-34 Cabinetry - delete stove upper; Electric - delete std range hood; Heating / Air - duct Size 6"			
888 314,340 23Mar22 **	1	ITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT NCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * STANDARD 220V/ILL STAY LECTRICAL - notification			
888 314,238 23Mar22	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHESMAIN FLOOR (SEE SLIM LINE FOR BASEMENT) SKETCH # 2 Drywall: Ceiling cutouts to accommodate potlights			
888 314,224 23Mar22	1	KITCHEN - ELECTRICAL - CEILING ROUGH-IN (CAPPED) TO BE CENTERED +/- ON ISLAND ON SEPERATE SWITCH. SKETCH # 2			
888 314,223 23Mar22	1	KITCHEN - ELECTRICAL - ADDITIONAL SWITCH TO GO WITH CAPPED ELECTRICAL OVER ISLAND SKETCH # 2			
888 334,723 23Mar22 **	2	- PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING MASTER ENSUITE AND MAIN BATH SKETCH # 3 AND 4 Cabinetry - 2D Convert single sink vanity to double sink vanity; Electric - Additional Vanity Light;			

DisciplineMS.rpt 13dec21 Page 4 of 7



Lot: 3185A-6

Model: 20-1790 B The Dunmore Project/Phase: Wallaceton / 3

EXTERIOR BRICK

Invoice

Qty. Description

888

- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER AMENDMENT DATED OCTOBER 4, 2021

23Mar22

NoCat

EXTERIOR CAULKING Qty. Description

Invoice

- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER AMENDMENT DATED OCTOBER 4, 2021

23Mar22 NoCat

888

EXTERIOR RAILINGS

Invoice

Qty. Description

888

- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER AMENDMENT DATED OCTOBER 4, 2021

23Mar22 NoCat

FORMING

Invoice

Qty. Description

888

- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER AMENDMENT DATED OCTOBER 4, 2021

23Mar22 ** NoCat

FRAMING

888 314,238 23Mar22

- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHESMAIN FLOOR (SEE SLIM LINE FOR BASEMENT)

SKETCH# 2

Drywall: Ceiling cutouts to accommodate potlights

888

- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER

23Mar22 NoCat AMENDMENT DATED OCTOBER 4, 2021

GLASS PRODUCTS / MIRRORS

Invoice

Qty. Description

888 310.745

23Mar22

MASTER ENSUITE - MIRRORS/GLASS PRODUCTS - UPGRADE TO FRAMELESS CLEAR GLASS WITH D-RING HANDLE IN CHROME - ENSUITE MASTER

SKETCH# 4

HARDWOOD

DisciplineMS.rpt 13dec21

Invoice Qty. Description

888 UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG 311,613 23Mar22

Carpet - delete std carpet; Drywall - install quarter round; Painting - paint quarter round

Printed and Sent: 23-Mar-22

Page 5 of 7

16 of 43 construction summary



Lot: 3185A-6

Model: 20-1790 B The Dunmore Project/Phase: Wallaceton / 3

HEATING / AIR CONDITIONING

Invoice	Qty.	Description
888 313,484	1	KITCHEN - APPLIANCES - CYCLONE 30 INCH WALL MOUNT CHIMNEY HOOD SS - SCB51930
23Mar22		SPEC PAGES 33-34
**		Cabinetry - delete stove upper; Electric - delete std range hood; Heating / Air - duct Size 6"
888 314,340 23Mar22	1	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * STANDARD 220V WILL STAY
		ELECTRICAL - notification
888	1	- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER AMENDMENT DATED OCTOBER 4, 2021
23Mar22 ** NoCat		

INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
888	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG
311,613		
23Mar22 **		Carpet - delete std carpet; Drywall - install quarter round; Painting - paint quarter round
888	1	- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER AMENDMENT DATED OCTOBER 4, 2021
23Mar22 ** NoCat		

LUMBER

Invoice	Otv.	Description

888	1	- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER AMENDMENT DATED OCTOBER 4, 2021
23Mar22 ** NoCat		

PAINTING

Invoice	Qty.	Description
---------	------	-------------

888 310,660	1	DINING ROOM/HALL - COFFERED CEILING - OPT. COFFERED CEILING - DINING ROOM
23Mar22 **		SKETCH # 2 DRYWALL - notification; PAINTING- notification
888 310,661	1	GREAT ROOM - COFFERED CEILING - OPT. COFFERED CEILING - GREAT ROOM
23Mar22 **		SKETCH# 2 DRYWALL - notification; PAINTING- notification
888 311,613	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG
23Mar22 **		Carpet - delete std carpet; Drywall - install quarter round; Painting - paint quarter round

PLUMBING

Invoice	Otv.	Description
Invoice	Qıj.	Description

888	2	- PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT
334,723		COLONY
1,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING
23Mar22		MASTER ENSUITE AND MAIN BATH SKETCH # 3 AND 4
		Cabinetry - 2D Convert single sink vanity to double sink vanity; Electric - Additional Vanity Light;

DisciplineMS.rpt 13dec21 Page 6 of 7



Lot: 3185A-6 Model: 20-1790 B The Dunmore

Project/Phase: Wallaceton / 3

STEEL

I	nvoice	Qty. Description	
	888	1	- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER AMENDMENT DATED OCTOBER 4, 2021
- 1	23Mar22 ** NoCat		

WINDOWS

Invoice	Qty.	Description
888	1	- WALK OUT BASEMENT WITH A JULIETTE RAILING ACROSS MAIN FLOOR SLIDING PATIO DOOR AS PER AMENDMENT DATED OCTOBER 4, 2021
23Mar22 ** NoCat		

DisciplineMS.rpt 13dec21 Page 7 of 7

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

18 of 43

SKETCH #1

20-1790 ELEV. B


WOB

THE DUNMORE

ELEVATION B | 2,272 SQ. FT.

Includes 452 sq. ft. of Finished Lower Level

WALLACETON

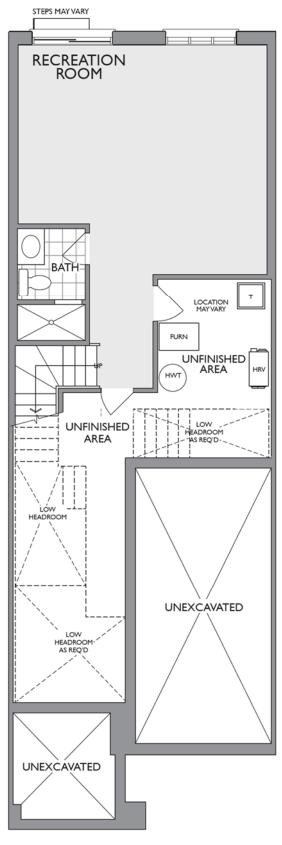

LOWER LEVEL ELEVATION B

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

19 of 43

SKETCH #2

20-1790 ELEV. B


WOB

THE DUNMORE


ELEVATION B | 2,272 SQ. FT.

Includes 452 sq. ft. of Finished Lower Level

WALLACETON

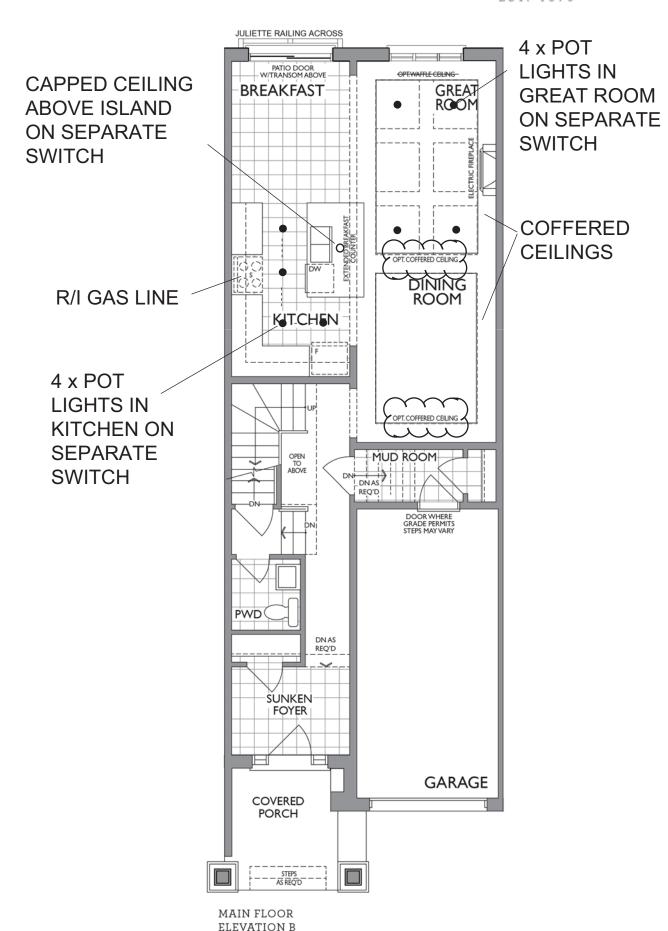

Legal Plan Dec. 3, 2020 WOB Revised Dec. 14, 2021

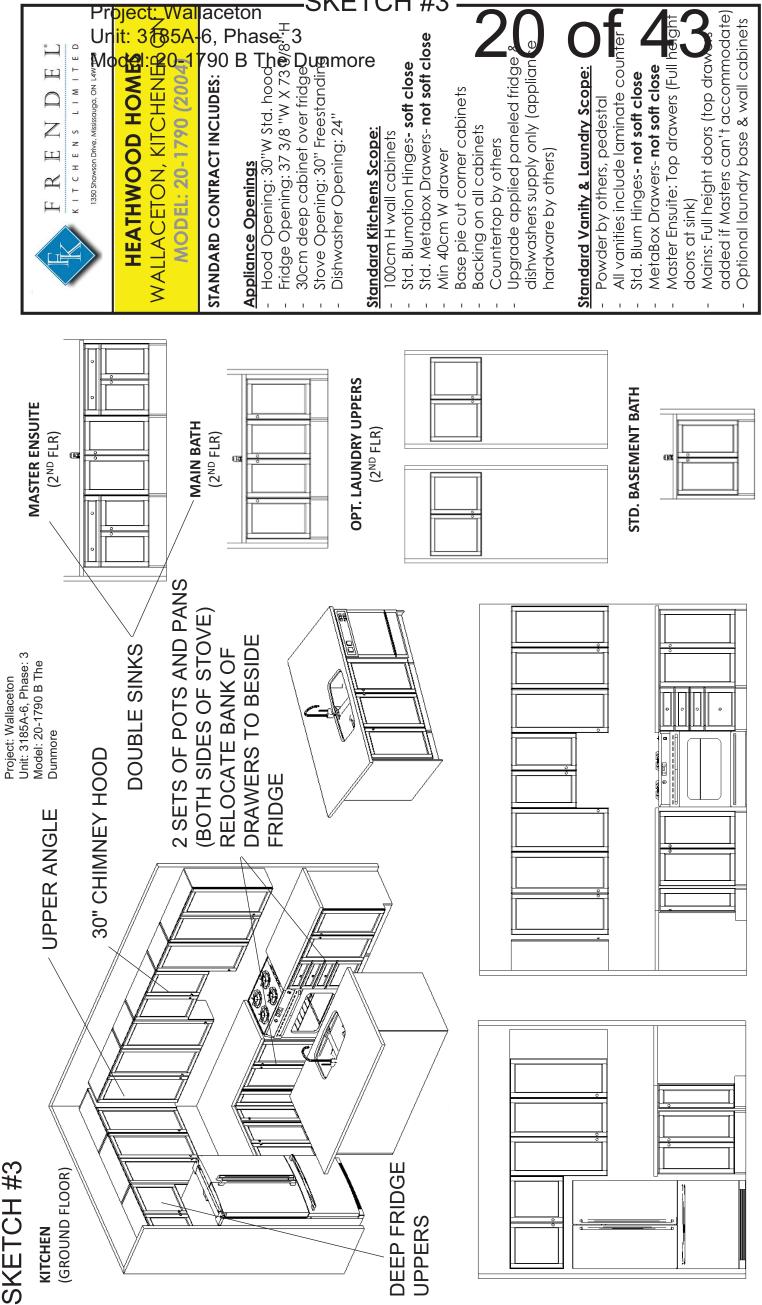

THIS DRAWING IS FOR DESIGN PURPOSES ONLY IT IS NOT AN EXACT RENDITION.

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

21 of 43

SKETCH #4

20-1790 ELEV. B


WOB

THE DUNMORE

ELEVATION B | 2,272 SQ. FT.

Includes 452 sq. ft. of Finished Lower Level

WALLACETON

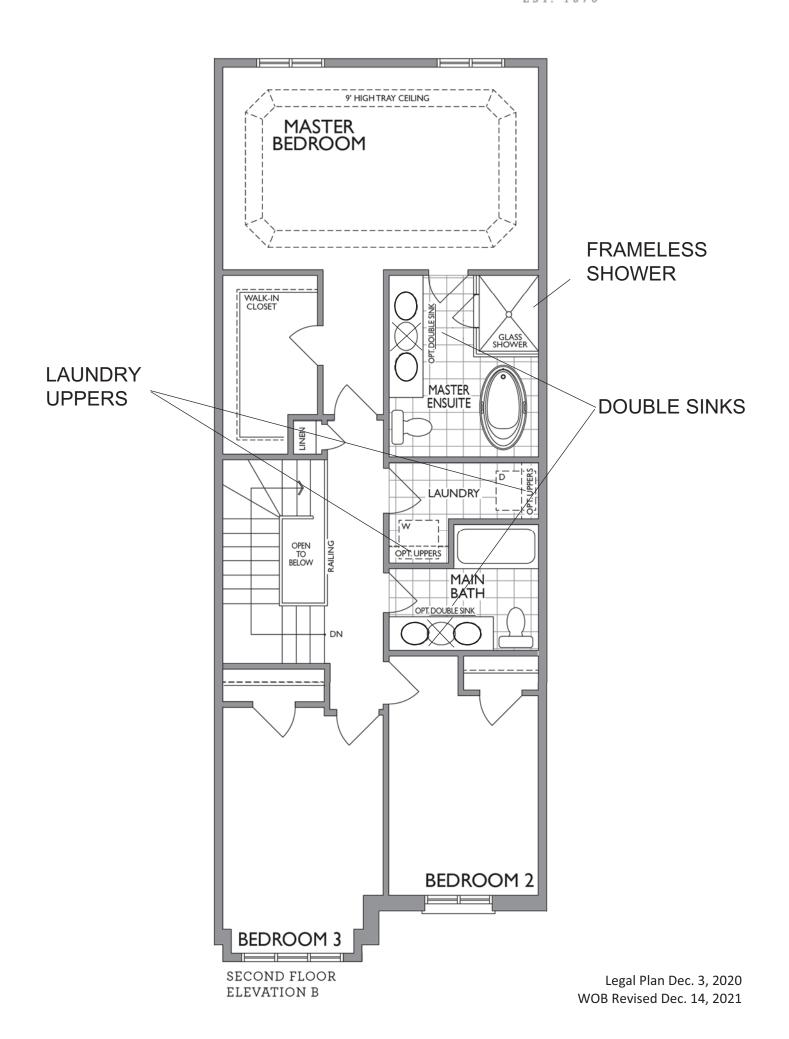

Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore

22 of 43





NFAS NF17 Mantel

Plumbing Fixture / Kitchen Sinks 15410


Project: Wallaceton Unit: 3185A-6, Phase: 3


23 of 43 Model: 20-1790 B The Dunmore



ND1831UA/9







ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

24 of 43

MOEN

FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking Power Clean™ spray technology Metal construction with various finishes identified by suffix

Quick connect installation

Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings

High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout

Faucet designed for handle to be mounted on right side only

OPERATION

Lever style handle

Temperature controlled by 100° arc of handle travel

Operates with less than 5 lbs. of force

• Operates in stream or spray mode in the pullout or retracted position **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

STANDARDS


Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



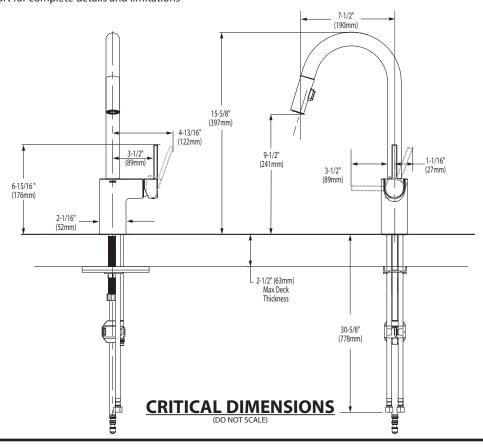

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20



BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD • 0641.400 Faucet holes on 4" (102mm) centers

☐ 0641.100 Center hole only

- Classic styled rectangular pedestal lavatory
- · Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an **above counter** sink or a **drop-in** sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

^{*} See faucet section for additional models available


Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore 26 of 43

4merican tandard

BOULEVARD® PEDESTAL SINK VITREOUS CHINA

FINISHED WALL

6" (152mm)

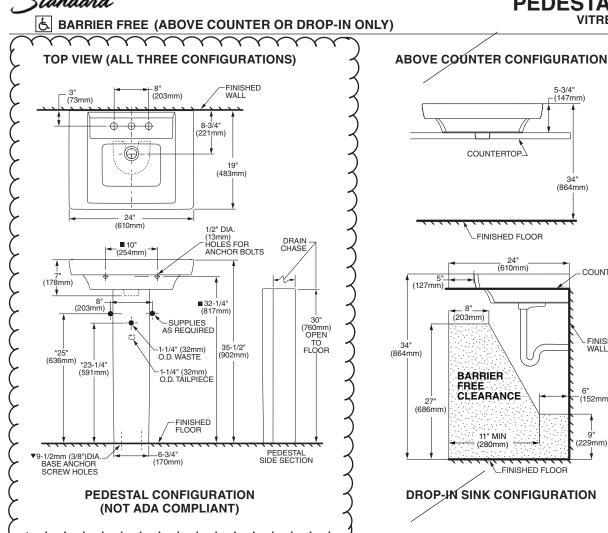

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

27 of 43

American Standard



BARRIER FREE

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

COLONY COUNTERTOP SINK

- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)




Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep



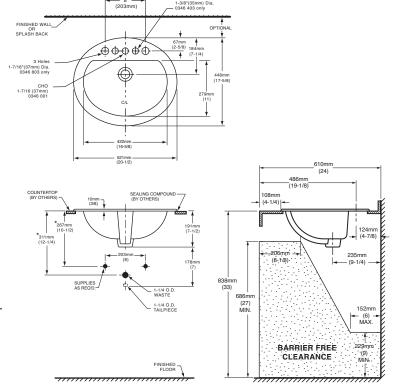

COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

To Be Specified ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen □ Faucet*: □ Faucet Finish: Supplies & Stops: ☐ Trap 1-1/4" (32 mm):

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198

^{*} See faucet section for additional models available

Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore 28 of 43

MOEN[®]

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted **OPERATION**
- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel

FLOW

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations


- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly Model: L4625 series


L4631BC **Bulk Packed (12 per carton):** L64624 series

with 50/50 Waste Assembly **Bulk Packed (12 per carton):** L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



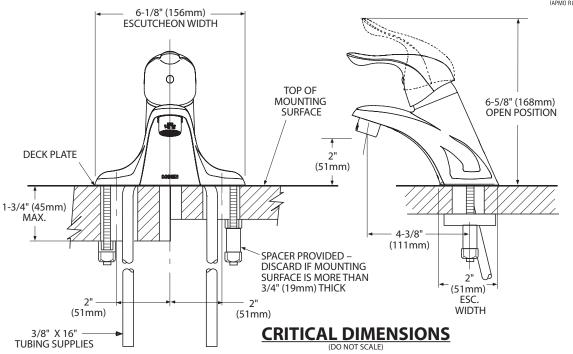

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore

29 of 43



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- ADA (for lever handle

6.5" (165mm) ESC. DIAM.

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

4-1/2" (114mm)

WALL OPENING

7-1/2" (190mm)

to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications






CHATEAU° POSI-TEMP° **Single-Handle Tub/Shower Trim Kit**

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim

(Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

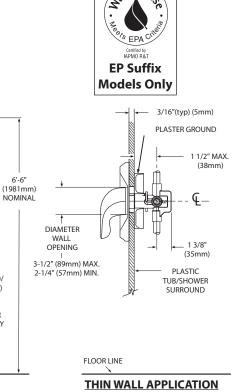

THICK WALL APPLICATION CRITICAL DIMENSIONS

FLOOR LINE

2 1/2" MAX. (63mm)

SHOWER

48" (1219mm) 32" (813mm) AND TUB ONLY

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

30 of 43

MOEN[®]

DESCRIPTION

• Metal construction with various finishes identified by suffix

OPERATION

- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


Specifications




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

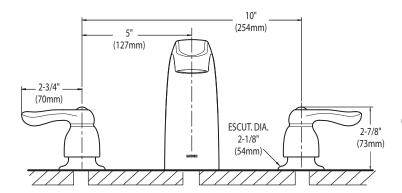

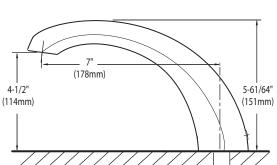

CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

02282019 SPC12693 50000112075 Released 00

Rev. 3/19

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

31 of 43



DEMI™ **Product Specification Sheet**

Two Piece Freestanding Collection

CF2007 Two Piece Freestanding Soaker


Size: 60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


TWO PIECE ASSEMBLY

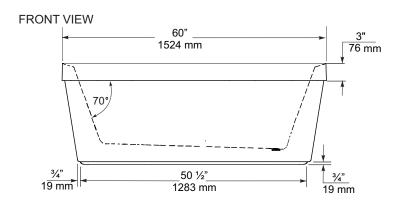

TOP VIEW

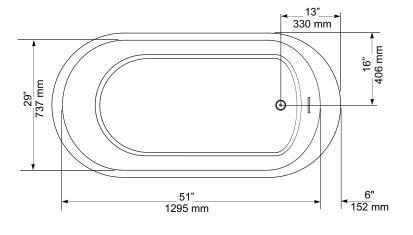

END VIEW



GENERAL SPECIFICATIONS

Average Weight	90 lb	41 kg
Bathing Well at bottom	43"x 20"	1092 x 508 mm
Capacity Drain to Overflow		195 litres
Water Depth Drain to Overflow	16"	406 mm
Drain Opening (dia.)	2"	51 mm
Overflow Opening	2 ¼"x ½"	57 x 13 mm
Drain to Floor Clearance	3 1/4"	83 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm %" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1 Telephone: 416.231.9030 Fax: 416.231.0929 Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 Canada, U.S.A.: 800.**MIROLIN**(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018 Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

32 of 43

American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank



- **☐** 3067 316 Elongated Bowl
- **4035 516** Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are peripaid and may use within the prepare of the present IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by Anki Graindau A 112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284

© 2008 American Standard

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

33 of 43

SC(B)519 | ALITO Collection





Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button Control Panel



Time-Delay OFF Feature



Long-Lasting LED Lights



Grease Cup



IVI	odel	Colour	Ducting	Filters	Size	СЕМ

SCB51930	Stainless Steel	6"	Baffle	30"	550
SCB51936	Stainless Steel	6"	Baffle	36"	550

Cyclone Range Hoods Inc.

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore


34 of 43


SC(B)519 | ALITO Collection



Features

- · Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- · Quick release aluminum mesh filters
- · Standard chimney fits up to 9 ft. ceiling
- · Up to 9 minutes time-delay OFF feature
- · Plug-in connection





Options

• Filters:

SCB519 - Quick Release Stainless Steel Baffle Filters

· Chimney Flues:

A1.CH10 - short (7'-8' ceilings)

A1.CH18 - standard (8'-9' ceilings)

A1.CH30 - extended (9'-11' ceilings)

• Widths: 24", 30", 36"

Specifications

Air Flow Volume: 550 CFM

Electrical Connection: 120 V/60 Hz

Power Consumption: 300 Watts

Current: 2.5 Amps

• Fan Speed: 1599 RPM

Fan Type: Centrifugal Blower

· Finishes: Stainless Steel

Ducting: 6" Round

Noise Level: Min. 2 Sones
 Max. 6 Sones



Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

35 of 43



Whiripool® 20 cu. ft. French Door Refrigerator WRF540CWH



Fingerprint-Resistant Stainless WRF540CWHZ

Also available in:

White	WRF540CWHW
Black	WRF540CWHB
Fingerprint-	

Fingerprint-	
Resistant Black	١
Stainless	

WRF540CWHV

Capacity		
Total Capacity	20 cu. ft.	
Refrigerator Capacity	14 cu. ft.	
Freezer Capacity	6 cu. ft.	
General Features & Properti	es	
Interior Water Dispenser with EveryDrop® Water Filtration		
Full-Width, Temperature-Controlled Drawer		
Frameless Glass Shelves		
Gallon Door Bins		
Accu-Chill™ Temperature Management System		
Adaptive Defrost		
FreshFlow [™] Produce Preserver		
LED Interior Lighting		
Designed, Engineered and Assembled in the U.S.A.		
Electrical Details		
Amps	20	
Volts	115	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details	
Refrigerator Type	French Door
Number of Doors	3
Number of Interior Refrigerator Shelves	5
Number of Refrigerator Door Bins	2 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1 Wire, 1 Plastic
Lighting Type	LED
Ice Maker	Factory Installed
Ice Maker Location	Freezer
Dispenser Type	Interior Water
Dimensions	
Product Dimensions (H x W x D)	70-1/8" x 35-5/8" x 29 3/8"

מווופווטוטווט	
Product Dimensions (H x W x D)	70-1/8" x 35-5/8" x 29 3/8"
Depth with Door Open 90°	43"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear
D. C Malarial	

Reference Material

Dimension Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

Fingerprint Resistant


Resists fingerprints and smudges with an easy-to-clean finish.

Counter Depth Design

Add additional kitchen space with styling that fits virtually flush with the countertop.

Humidity-Controlled Crispers

Store fruits and veggies in their ideal environment.



NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRF540CWHSPECSHEETV01.

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore


36 of 43




French Door Bottom Mount Refrigerator

WRF532SMH, WRF540CWH, WRF535SMH

PRODUCT DIMENSIONS



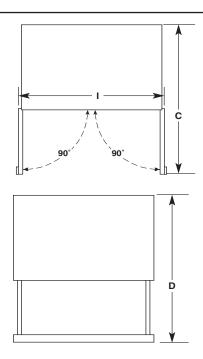

Model Number	WRF532SMH	WRF535SMH	WRF540CWH
Model Size	22.1 cu. ft.	25.2 cu. ft.	20.0 cu. ft.
Height - Overall "A"	701/8"	701/8"	701/8"
	(178.1 cm)	(178.1 cm)	(178.1 cm)
Height - Top of	68 ⁷ / ₈ "	68%"	68%"
Cabinet "B"	(174.9 cm)	(174.9 cm)	(174.9 cm)
Depth - Doors Open	471/8"	481/8"	43"
90° "C"	(119.7 cm)	(122.2 cm)	(109.2 cm)
Depth - Drawer	521/8"	52½"	45¾"
Open "D"	(132.4 cm)	(132.4 cm)	(115.3 cm)
Depth - With	34 ¹ / ₂ "	35 ¹ / ₂ "	30 ¹ / ₂ "
Handles "E"	(87.4 cm)	(89.9 cm)	(77.5 cm)
Depth - Without	32"	33"	26 ⁷ / ₈ "
Handles "F"	(81.3 cm)	(83.8 cm)	(68.3 cm)
Depth - Cabinet	28 ¹ / ₈ "	29 ¹ / ₈ "	24 ¹ / ₈ "
Only "G"	(71.3 cm)	(73.9 cm)	(61.2 cm)
Width - Cabinet "H"	325/8"	35½"	35½"
	(82.9 cm)	(90.5 cm)	(90.5 cm)
Width - Door Open	40%"	43%"	43%"
90° "I"	(102.6 cm)	(110.2 cm)	(110.2 cm)

AWARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

Electrical: A 115 V, 60 Hz, AC only 15 A or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 35 psi and 120 psi (241 kPa and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 psi and 120 psi (241 kPa and 827 kPa).

Reverse Osmosis Water Supply:

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 psi to 60 psi (276 kPa to 414 kPa).

Model: 20-1790 B The Dunmore



French Door Bottom Mount Refrigerator

LOCATION REQUIREMENTS


AWARNING



Explosion Hazard

Keep flammable materials and vapors, such as gasoline, away from refrigerator.

Failure to do so can result in death, explosion, or fire.



IMPORTANT: This refrigerator is designed only for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave $2\frac{1}{2}$ " (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore

38 of 43



Whirtpool® 5.0 cu. ft. Front Control Gas Range WEG515S0F



Stainless Steel WEG515S0FS

Also available in:

White	WEG515S0FW
Black	WEG515S0FB
Fingerprint-Resistant Black Stainless	WEG515S0FV

Capacity		
Oven	5.0 cu. ft.	
General Features & Propert	ties	
Adjustable Self-Cleaning		
Temperature Sensor		
5.0 cu. ft. Capacity		
AccuSimmer® Burner		
Keep Warm		
Closed Door Broiling		
Delay Cook		
Sabbath Mode		
Star-K Certified		
Electrical Details		
Amps	15	
Volts	120	
Certifications		
ADA Compliant	Yes	
Star-K Certified/Kosher	Yes	

Technical Details	
Fuel Type	Gas
Range Type	Slide-In Single Oven
Oven Cooking System	Thermal
Number of Oven Racks	2
Cleaning Type	Adjustable Self-Cleaning
Number of Burners	4
Burner Type	Sealed Burners
Burner Power	(1) 5000 BTU (1) 9500 BTU (2) 15,000 BTU
Dimensions	
Product Dimensions (H x W x D)	37" x 29-7/8" x 28-15/16"
Depth with Door Open 90°	47-3/8"
Cutout Width	30-1/8"
Reference Material	
5	

Dimension Guide

Install Guide

Use & Care Guide

Warranty

Key Features & Benefits

Frozen Bake[™] Technology


Cook frozen favorites faster with preprogrammed settings that automatically adjust cooking times.

SpeedHeat™ Burners

Sear and boil quickly with the high temperatures of two 15,000-BTU burners.

Edge-to-Edge Cast-Iron Grates

Maximize space with cast-iron grates that extend across the entire cooktop, providing flexibility to place pots and pans anywhere.



NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXB. WEG515S0FSPECSHEETV01.

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

39 of 43



Whirlpool 53 dBA* Front Control Dishwasher WDF540PAD



Monochromatic Stainless Steel WDF540PADM

Also available in:

White	WDF540PADW
Black	WDF540PADB

Capacity		
Total Place Settings	15	
General Features & Properties		
Soil Sensor		
In-Door Silverware Basket		
Sani Rinse Option		
Normal Cycle		
Heavy Cycle		
High Temperature Wash Option		
Heated Dry Option		
ENERGY STAR® Certified		
Industry's Best Selling Dishwasher Brand [†]		
Electrical Details		
Amps	15	
Volts	120	
Hz	60	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Electronic
Number of Wash Cycles	5
Number of Options	5
dBA	53
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	3
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
Reference Material	

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

Sensor Cycle


Automatically get the right wash and dry settings for each load with two sensors that measure temperature, soil level and load size during prewash and the wash cycle.

1-Hour Wash Cycle

Clean the dishes you need fast with a cycle that thoroughly takes care of plates, pans and glasses in just an hour."

Cycle Memory

Quickly start your dishwasher with one button. It automatically remembers the last cycle you picked so it's stored and ready to go.

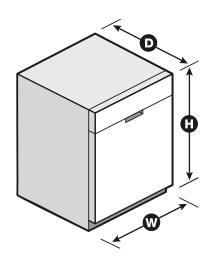

^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of unit sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.
®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF540PADSPECSHEETV01.

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

40 of 43



PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.


If direct wiring dishwasher: Use flexible, armored,

or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for

your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit



instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90°elbow with ¾"N.P.T. external pipe threads on one end. Do not solderwithin 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use ½" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

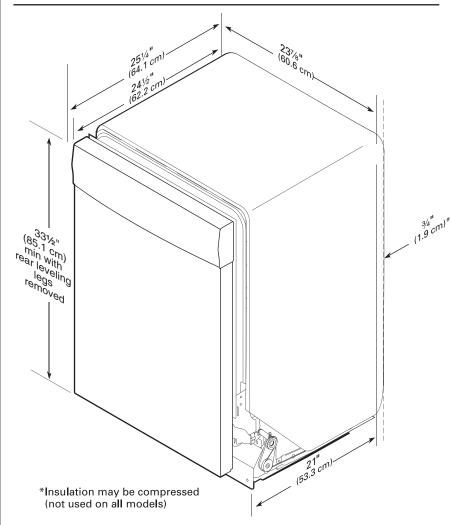


Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

- *Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.
- **Minimum, measured from narrowest point of opening.

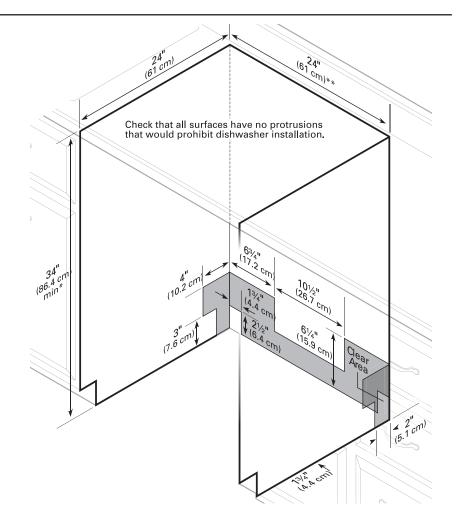

Project: Wallaceton Unit: 3185A-6, Phase: 3

Model: 20-1790 B The Dunmore

42 of 43

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser

Model #: WFW5620HW

Dimensions

Depth	80.17 cm, 31-9/16 in
Depth With Door Open 90 Degree	143.51 cm, 56-1/2 in
Minimum Height	98.11 cm, 38-5/8 in
Width	68.58 cm, 27.0 in
Appearance	
LCD Touch Screen	No
Window	Yes
Details	

Details

Drum Material	Stainless Steel	

Cycles and Options

Number of Wash Cycles	37

Electrical

Hz	60
Power Cord Included	Yes

Project: Wallaceton Unit: 3185A-6, Phase: 3 Model: 20-1790 B The Dunmore

43 of 43

WHIRLPOOL DRYER Model #: YWED5620HW



7.4 cu. ft. Front Load Electric **Dryer with Intuitive Touch Controls**



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Fuel Type

Width	68.58 cm, 27.0 in
Height	98.42 cm, 38-3/4 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Depth	78.74 cm, 31.0 in

Configuration and Overview

Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Ventilation System	

Electric

Long vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

	Hz	6	60
--	----	---	----

Power Cord Included Yes