



LORMEL DEVELOPMENTS (BRADFORD) LTD.
PURCHASER EXTRAS

PART # 018 P.E #008 — Model - HONEYWOOD - 2480

Attention Trades...

The following items below are Purchaser Extras, please make sure that they are done on time and properly complete. Any outstanding items will be Back Charged. If you have any questions please call Roberto Ruiz. Make sure that you review ALL of the items on the Purchaser Extras.

Please be advised that Purchase Orders will come at a later date.

*****Also, it is very important to speak to Roberto Ruiz before starting on site ****

TRADE:		ITEMS TO BE COMPLETED	
Liberty		#1, #2	
Select		#2	

Date: Jun.-18-2021
From: Lormel Homes
Site Clerk: Jai Fitzgerald
Site Tel: 905-775-3633
Site Fax: 905-775-9083

NOTE: If more information is needed please call Roberto Ruiz cell-416-688-9324
If more information needed on quotes or changes, please call Zachary 905-832-2023 ext. 224

Schedule B-3 – Purchaser's Extras

forming part of the Agreement of Purchase and Sale

LORMEL DÉVELOPPEMENTS (BRADFORD) LTD.

VENDOR:



PURCHASER(S): Michael and Alexandria McGurk
LOT NUMBER: PART 018 **PHASE:** 3
MODEL: Honeywood 2480
P.E.#: 008

It is understood and agreed that no requests for changes, additions or deletions will be accepted by the Vendor for the above extras after the date of acceptance of this order.

[illegible]

The above extras and upgrades are to be included during the construction of the above house for the above named purchaser or subject to the following terms and conditions:

- The Vendor will undertake to install the above extras but will not be liable to the purchaser if for any reason the work covered by the extras is not carried out. In that event, the price of the extra shall be refunded to the purchaser without any interest.
- It is understood and agreed that if the transaction of Purchase and Sale is not completed for any reason whatsoever, the total cost of this extra is not refundable.

PAID:

M. Mc Guck
PURCHASER

M. Mc Guck
PURCHASER

TERMS: CASH OR CHECK IN ADVANCE

File Copy for

LORMEL DEVELOPMENTS (BRADFORD) LTD.

Construction

Per: _____

VENDOR: **CCF**

VENDOR


Office

**(original verified at
Head Office)**

AVG

30" Wall mounted hood - MSRP: \$859.00

AVH-308CS

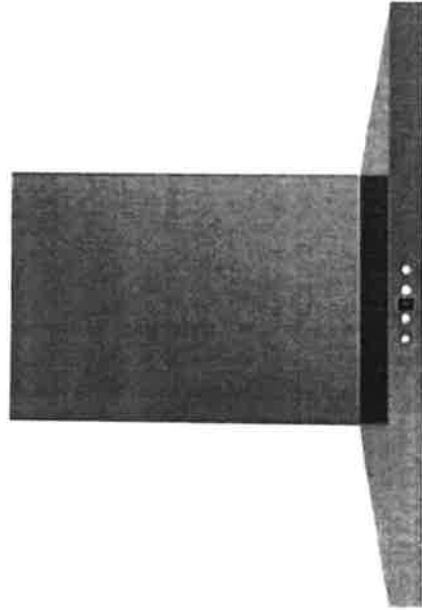


Selected Model	AVH-308CS
Model number	
Dimensions	
Dimensions	29 1/2" (W) x 19 3/4" (D) x 3 1/4" (H)
Exterior Appearance	
Stainless steel grade	201
Features	
Control	Soft touch with LED display
Lighting	2 bulbs, 3W LED (bulbs included)
Blower type	900 CFM, 6-Speed
Blower performance	Speed 1, 2.4 sones
	Speed 6, 8.2 sones
Filter type	2 aluminum micro hole filters (included)
	2 Stainless steel baffle filters (included)
Duct transition	6" Round (Top)
Ducting	Ducted
Chimney (ducted out)	For ceiling heights up to 90"
Electrical Requirements	
Electrical requirements	120V / 60Hz / 2.7 Amps
Accessories (optional)	
Optional duct covers	AD-884S (884mm, AVN-AVH compatible)
Warranty	
1-year Warranty	Parts and labour, in-home service

Part 018, Ph 3, Bradford


The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete or may change without notice

Part 018 Ph 3, Bradford
AVH-308CS/368CS

Dimensions

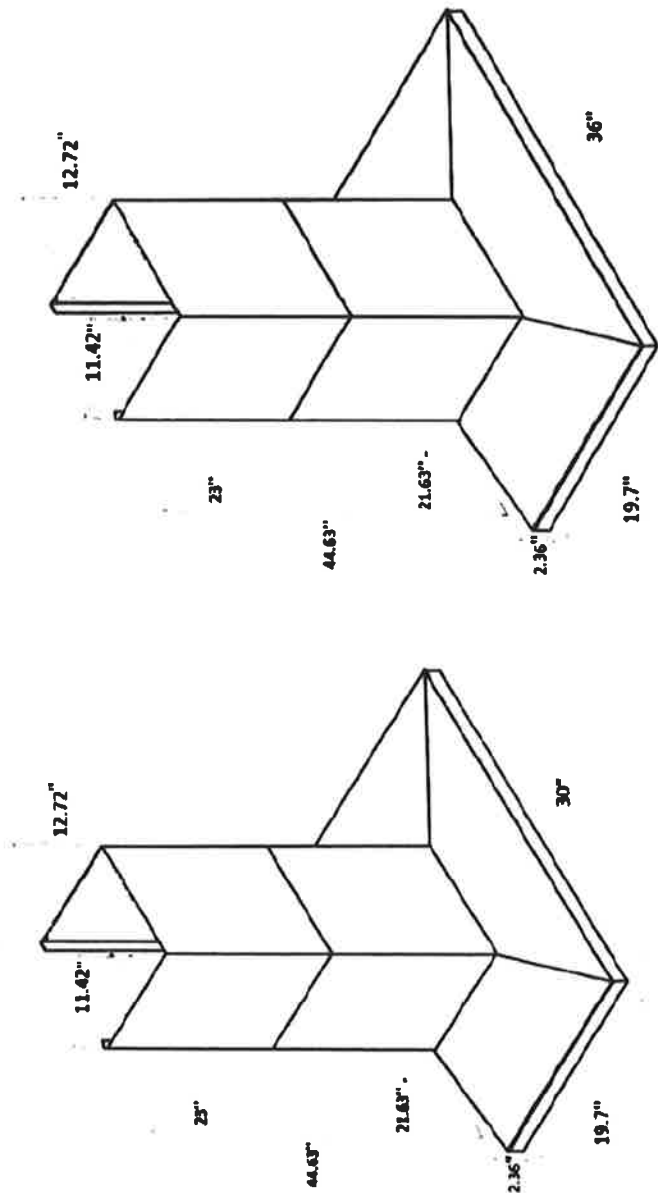

Installation

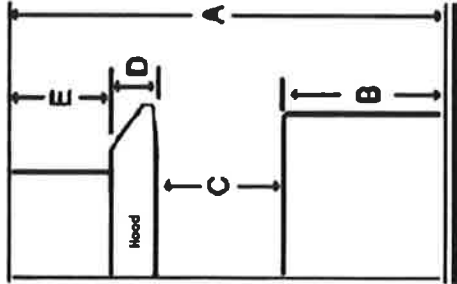

A	Floor to ceiling height	variable
B	Floor to counter top height (standard)	36"
C	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	2.36"
E	Chimney height	Max 44.63"

Duct transition


6" round top



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.

Part 018, Ph 3, Bridge.

DIMENSIONS AND CLEARANCES (CONT.)

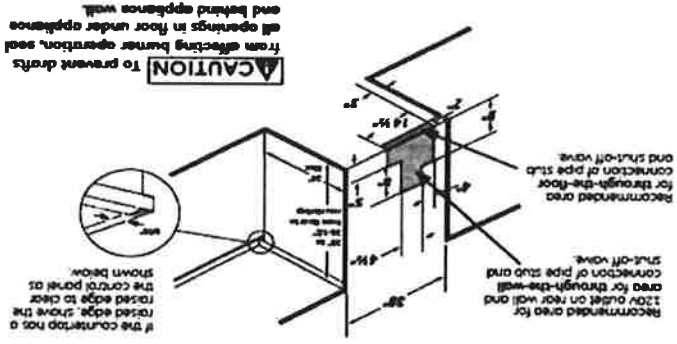


CAUTION To prevent drafts from affecting burner operation, seal all openings in floor under appliance and behind appliance wall.

CONVERTING TO LP GAS
(OR CONVERTING BACK TO
NATURAL GAS FROM LP)

This range leaves the factory set for use with natural gas. If you want to convert to LP gas, the conversion must be performed by a qualified LP gas installer.

The conversion orifices and instructions can be found on back of the range.

Keep these instructions and all orifices in case you want to convert back to natural gas.



Rear of Range

DIMENSIONS AND CLEARANCES

[illegible]