Sales Selection Sheet Checklist

1 of 43

LOT 3184A-3 Model: 20-1456 B The H	-lampton
PURCHASERS: Manjinder Singh Mult	ani/
VENDOR: Heathwood Homes (H	
en karanteri eta erro erro erro erro erro erro erro err	
x	
DECK LOT	
OPTIONAL DOUBLE SINKS IN MASTER EN	SUITE BATHROOM
FINISHED BASEMENT	
COLD CELLAR	
UPGRADED / MODIFIED ELEVATION	
CORNER UPGRADE	
REAR UPGRADE	
CEILING UPGRADE - SMOOTH	
MAIN FLOOR SECOND FLOOR	e e
BASEMENT	
BACEMENT	
ADDITIONAL ROUGH-INS	
200 AMP SERVICE	
WET BAR ROUGH-IN	
HUMIDIFIER AIR CONDITIONING	
✓ AIR CONDITIONING	
GAS ROUGH-IN	
STOVE	
DRYER	
BBQ	
ADDITIONAL FIREPLACE	
KITCHEN: HOODFAN VENTING SIZE	
6 IN ROUND DUCT	and the spirit and the second of
7 IN ROUND DUCT	
FULL BASEMENT STAIRS: N/A	
UPPER BASEMENT STAIRS: All Oak	*
LOWER BASEMENT STAIRS: Carpet Grade MAIN STAIRS: All Oak	
MEDIA STAIRS (if applicable): N/A	
LOFT STAIRS (if applicable): N/A	
/ •	
FEB 16/22 Juanaturan	FEB 16/22 IRIT SALEM
Date Purchaser:	Date Decor Consultant:
on file	CONTROL OF THE PARTY OF THE PAR
U	100
Date Purchaser:	02- 16 2022 / March
	Date Heathwood Homes (Huron) Limited
Locked Date:	Approved

Manjinder Singh Multani/ Project: Wallaceton Unit: 3184A-3, Phase: 3 Model: 20-1456 B The Hampton

Floor Tile Grout

Floor Tile Pattern

2 of 43

chen		
Cabinet Colour/Style	8373	Viking III-CAMDEN-POPPY SEED-MAPLE ***STD***
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD**
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Island Cabinet Colour/Style	8373	Viking III-CAMDEN-POPPY SEED-MAPLE ***STD***
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Backsplash	1111	N/A *****
Backsplash Grout	1111	N/A *****
Backsplash Tile Pattern	1111	N/A *****
HoodFan	9904	YWMH31017HZ-Whirlpool Over-The-Range Microwave Hood Combination-SS-30 inch PAGES 29-32
Appliances	9904	Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
Appliances	9904	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliances	9904	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment		
chen/Breakfast		
Flooring	9904	GE.BY.AZR.1313 New Byzantine Azzuro 13

7705

3000

Grout-(01) Alabaster ***UPG***

STANDARD SQUARE ***STD***

Manjinder Singh Multani/ Project: Wallaceton Unit: 3184A-3, Phase: 3 Model: 20-1456 B The Hampton 3 of 43

Commont	
Comment	
Hall	
Flooring	Red Oak Pearl-Vintage Engineered-CAROB/AURORA-3/4 inch x 3 1/4 inch ***STD***
Comment	
Foyer	
Flooring	7497 GE.BY.AZR.1313 New Byzantine Azzuro 13
Flooring	OL.Bi.relt.10101000 Byzantine rezulo 10
Floor Tile Grout	7705 Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000 STANDARD SQUARE ***STD***
T_{ij}	
Comment	
Mud Room	
Flooring	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	STANDARD SQUARE ***STD***
Comment	
Powder Room	
Flooring	GE.BY.AZR.1313 New Byzantine Azzuro 13

Grout-(01) Alabaster *** IPC***

4 of 43

Manjinder Singh Multani/ Project: Wallaceton Unit: 3184A-3, Phase: 3 Model: 20-1456 B The Hampton

HOW THE O	Var		CIOUI-(VI) Alavastéi C. C
Floor Tile Pa	ttern	3000	STANDARD SQUARE ***STD***
Plumbing Fix	cture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment			
Great Room			
Flooring		7497	Red Oak Pearl-Vintage Engineered-CAROB/AURORA-3/4 inch x 3 1/4 inch ***STD***
Comment			
Upper Hall			
Flooring		7497	Red Oak Pearl-Vintage Engineered-CAROB/AURORA-3/4 inch x 3 1/4 inch ***3***
Comment			
Finished Baseme	ent (Rec) Room/Hall		
Flooring		9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
Comment			
Master Bedroom			
Flooring	and the state of t	9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
Comment			
Bedroom 2			
Flooring		9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***

5 of 43

Manjinder Singh Multani/ Project: Wallaceton Unit: 3184A-3, Phase: 3 Model: 20-1456 B The Hampton

F:66 460 U

oom 3		
Flooring	9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
Comment		
er Ensuite		
Cabinet Colour/Style	8373	Viking III-CAMDEN-POPPY SEED-MAPLE ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Floor Tile	2086	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***

Manjinder Singh Multani/ Project: Wallaceton Unit: 3184A-3, Phase: 3 Model: 20-1456 B The Hampton

Finished Basement Bathroom

Cabinet Colour/Style

6 of 43

and the second s			
Showe	r Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumb	ing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comm	ent	en annex	
		<u> </u>	
Main Bathr	oom	, in the second	
Cabine	et Colour/Style	8373	Viking III-CAMDEN-POPPY SEED-MAPLE ***STD***
Counte	ertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Counte	ertop Edge	1111	N/A *****
Cabine	et Hardware	2086	9677-HARDWARE ***STD***
Floorin	g	2086	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor T	ile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor T	ile Pattern	3000	STANDARD SQUARE ***STD***
Tub W	all Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Tub W	all Tile Grout	2226	Grout-(00) White ***STD***
Tub W	all Tile Pattern	3090	VERTICAL STACKED ***STD***
Plumbi	ng Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comm	ent		

	*	
Countarion	0022 4024 28 Countation MUITE CAPPARA Mileanort	

Viking III-CAMDEN-POPPY SEED-MAPLE ***STD***

8373

Manjinder Singh Multani/ Project: Wallaceton Unit: 3184A-3, Phase: 3 Model: 20-1456 B The Hampton -7 of 43

	A Company of the Comp	***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Flooring	2086	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Wall Tile Grout	2226	Grout-(00) White ***STD***
Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		· · · · · · · · · · · · · · · · · · ·
eat Room Fireplace		
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD*** PAGE 19
Surround Opt.	1111	N/A *****

Manjinder Singh Multani/ Project: Wallaceton Unit: 3184A-3, Phase: 3 Model: 20-1456 B The Hampton

Fage 7 of 8 ...

8 of 43

Disclaimer	[1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.
Disclaimer	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.
Comment		· · · · · · · · · · · · · · · · · · ·
Basement Stairs		
Туре	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***
Colour	7920	Aurora (Carob) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap
	-	Post(s)-ALL OAK ***STD***
Handrail/Pickets/Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing _pos
Carpet	9252	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
Custom Stain/Paint	1111	N/A *****
Comment		6
Basement Stairs Landing(s)		3 a
Flooring	7497	Red Oak Pearl-Vintage Engineered-CAROB/AURORA -3/4 inch x 3 1/4 inch ***3***
Comment		
Comment		
Main Stairs		
Туре	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7920	Aurora (Carob) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD***
•		Post(s)-ALL OAK ***STD***

Manjinder Singh Multani/ Project: Wallaceton Unit: 3184A-3, Phase: 3 Model: 20-1456 B The Hampton 9 of 43

Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,rise
Custom Stain/Paint	1111	N/A *****
Comment		
n Stairs Landing(s)		
Flooring	7497	Red Oak Pearl-Vintage Engineered-CAROB/AURORA-3/4 inch x 3 1/4 inch ***STD***
Comment	d databa	
oughout		
Walls - Paint Colour	1717	22-Wall-WARM GREY ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Thresholds	2232	Metal Thresholds ***STD***
Switches and Plug	5796	Decora White Switches and Plugs ***STD***
Trim Size	8705	4 1/4 Baseboard and 2 3/4 Casings ***STD***
Trim - Paint Colour	1716	Trim-WHITE ***STD***
Comment		
chaser: Mayindu b M Manjinder Singh Multa	<u>-</u> <i>F</i>	Date Decor Consultant Date
chaser:		-02- 1 6 2022



Lot: 3184A-3

Model: 20-1456 B The Hampton Project/Phase: Wallaceton / 3

Offer	THIS IS A DECK LOT COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE AMENDMENT DATED
	FEB. 14, 2022
Worksheet	Note:
Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes

Worksheet	
Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes
Worksheet	Note:

Printed and Sent: 27-Sep-22

construction summary of 43



Lot: 3184A-3 Model: 20-1456 B The Hampton Project/Phase: Wallaceton / 3

ALUMINUM

Invoice	Qty.	Description
1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE.
27Sep22 ** NoCat		

APPLIANCES

Invoice	Qty.	Description
1009	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
313,492		
27Sep22		
		CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size
		to 6"

CABINETRY

Invoice	Qty.	Description			
1009 313,492					
27Sep22 ** CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONIN to 6"					
1009 313,624 27Sep22	1	KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking SKETCH # 2 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify			
1009 334,723 27Sep22 **	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 3 CABINETRY-2D Convert Cabinetry Viking; Eletrical-Additional Vanity Light			

CADDET

CARPI	CARPLI				
Invoice	Qty.	Description			
1009 311,441	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG			
27Sep22 **		CARPET - delete std CARPET; INTERIOR TRIM - supply and install quarter rounds; PAINTING - paint quarter			

DisciplineMS.rpt 13dec21 Page 2 of 6

Printed and Sent: 27-Sep-22

construction summary of 43



Lot: 3184A-3 Model: 20-1456 B The Hampton

Project/Phase: Wallaceton / 3

CER	A	1/1	
CRK	\mathbf{A}	V	

Invoice	Qty.	Description
1009 308,051 27Sep22	1	Foyer - CERAMICS - FLOOR GROUT - FOYER - GROUT
1009 308,052 27Sep22	1	Main Bathroom - CERAMICS - FLOOR GROUT - MAIN BATHROOM - GROUT
1009 308,053 27Sep22	1	Mud Room - CERAMICS - FLOOR GROUT - MUD ROOM - GROUT
1009 308,055 27Sep22	1	Powder Room - CERAMICS - FLOOR GROUT - POWDER ROOM - GROUT
1009 308,049 27Sep22	1	Ensuite Master - CERAMICS - FLOOR GROUT - ENSUITE MASTER - GROUT
1009 308,050 27Sep22	1	Finished Basement Bathroom - CERAMICS - FLOOR GROUT - FINISHED BASEMENT BATHROOM - GROUT
1009 307,984 27Sep22	1	Kitchen - CERAMICS - KITCHEN - GROUT

CONCRETE AND DRAIN

Invoice	Qty. Description					
1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE.				
27Sep22 ** NoCat						

DECK

Invoice	Qty.	Description
1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE.
27Sep22 NoCat		

DRYWALL

Invoice	Qty.	Description
1009 313,624		KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
27Sep22 **		SKETCH # 2 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify

DisciplineMS.rpt 13dec21 Page 3 of 6 Printed and Sent: 27-Sep-22

13 of 43



Lot: 3184A-3 Model: 20-1456 B The Hampton Project/Phase: Wallaceton / 3

ELECTRICAL

Invoice	Qty.	Description
1009 313,492 27Sep22 **	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size to 6"
1009 334,723 27Sep22 **	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 3 CABINETRY-2D Convert Cabinetry Viking; Eletrical-Additional Vanity Light
1009 314,224 27Sep22	2	- ELECTRICAL - CEILING ROUGH-IN (CAPPED) 1 X KITCHEN ABOVE THE BREAKFAST BAR- USE SEPARATE SWITCH 1 X GREAT ROOM - USE EXISTING SWITCH PLUG SEE SEKTCH # 2
1009 314,223 27Sep22	1	KITCHEN - ELECTRICAL - ADDITIONAL SWITCH TO BE USED FOR THE R/I CAP LIGHT ABOVE ISLAND SEE SKETCH # 2
1009 314,232 27Sep22	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS) TO BE INSTALLED ABOVE THE CENTRE OF THE FIRE PLACE 70"+- FROM FLOOR SEE SKETCH # 2

EXTERIOR BRICK

1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE.
27Sep22 ** NoCat		

EXTERIOR CAULKING

Investos	Otro	Description
Invoice	Qty.	Description

		The state of the s
1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE.
27Sep22 ** NoCat		

EXTERIOR RAILINGS

Invoice	Qty.	Description
1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT, DEEP DECK WITH STAIRS TO GRADE.

FORM	MING	

27Sep22

Invoice Qty. Description

1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE.
27Sep22 ** NoCat		

DisciplineMS.rpt 13dec21 Page 4 of 6

14 of 43



Lot: 3184A-3 Model: 20-1456 B The Hampton Project/Phase: Wallaceton / 3

FRAMING

Invoice	Qty.	Description
1009 313,624	1	KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
27Sep22 **		SKETCH # 2 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE.
27Sep22 ** NoCat		

HARDWOOD

Invoice	Qty.	Description
1009	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG
311,441		
27Sep22		
		CARPET - delete std CARPET; INTERIOR TRIM - supply and install quarter rounds; PAINTING - paint quarter

HEATING / AIR CONDITIONING

Invoice	Qty.	Description
1009 313,492	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
27Sep22 **		CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size to 6"
1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE.
27Sep22 ** NoCat		

INTERIOR TRIM AND DOORS

Invoice	Qty.	Description
1009	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG
311,441		
27Sep22 **		CARPET - delete std CARPET; INTERIOR TRIM - supply and install quarter rounds; PAINTING - paint quarter
1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE.
27Sep22 ** NoCat		

LUMBER

LUMID		
Invoice	Qty.	Description
1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE.
27Sep22 ** NoCat		

DisciplineMS.rpt 13dec21 Page 5 of 6

Printed and Sent: 27-Sep-22

15 of 43 construction summary



Lot: 3184A-3 Model: 20-1456 B The Hampton Project/Phase: Wallaceton / 3

PAINTING

Invoice	Qty.	Description
1009 313,624		KITCHEN - 04H-66cm deep fridge enclosure (counter depth) with (1) wall ([1] 66cm deep gable and [1] 66cm deep cabinet) (This is not a zero clearance enclosure. Standard heights and widths will be used.) Viking
27Sep22		SKETCH # 2
**		DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1009	1	UPPER HALL - HARDWOOD - VINTAGE - 3-1/4 INCH RED OAK ENGINEERED - UPPER HALL - UPG
311,441		
27Sep22		
**		CARPET - delete std CARPET; INTERIOR TRIM - supply and install quarter rounds; PAINTING - paint quarter

PLUMBING

Invoice	Qty.	Description
1009 334,723		MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING
27Sep22		SKETCH # 3 CARINETRY-2D Convert Cabinetry Viking: Fletrical-Additional Vanity Light
27Sep22		SKETCH # 3 CABINETRY-2D Convert Cabinetry Viking; Eletrical-Additional Vanity Light

STEEL

SILL		
Invoice	Qty.	Description
1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE.
27Sep22 ** NoCat		

WINDOWS

Invoice	Qty.	Description
1009	1	- THIS IS A DECK LOT, COMPLETE WITH A 4 FT. DEEP DECK WITH STAIRS TO GRADE.
27Sep22 ** NoCat		

DisciplineMS.rpt 13dec21 Page 6 of 6

Printed and Sent: 27-Sep-22

20-1456 ELEV. B

Model: 20-1456 B The Hampton

16 of 43


THE HAMPTON

Sketch#1

ELEVATION B | 1,800 SQ. FT.

Includes 329 sq. ft. of Finished Lower Level

WALLACETON

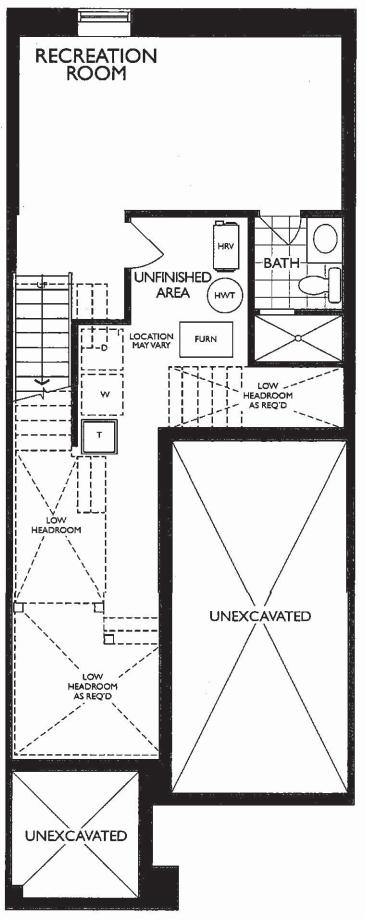

MS

Legal Plan Dec. 3, 2020

LOWER LEVEL ELEVATION B

Model: 20-1456 B The Hampton

17 of 43

Sketch #2

THE HAMPTON

ELEVATION B | 1,800 SQ. FT.


Includes 329 sq. ft. of Finished Lower Level

WALLACETON

20-1456 ELEV. B

PLUG

70"+/-

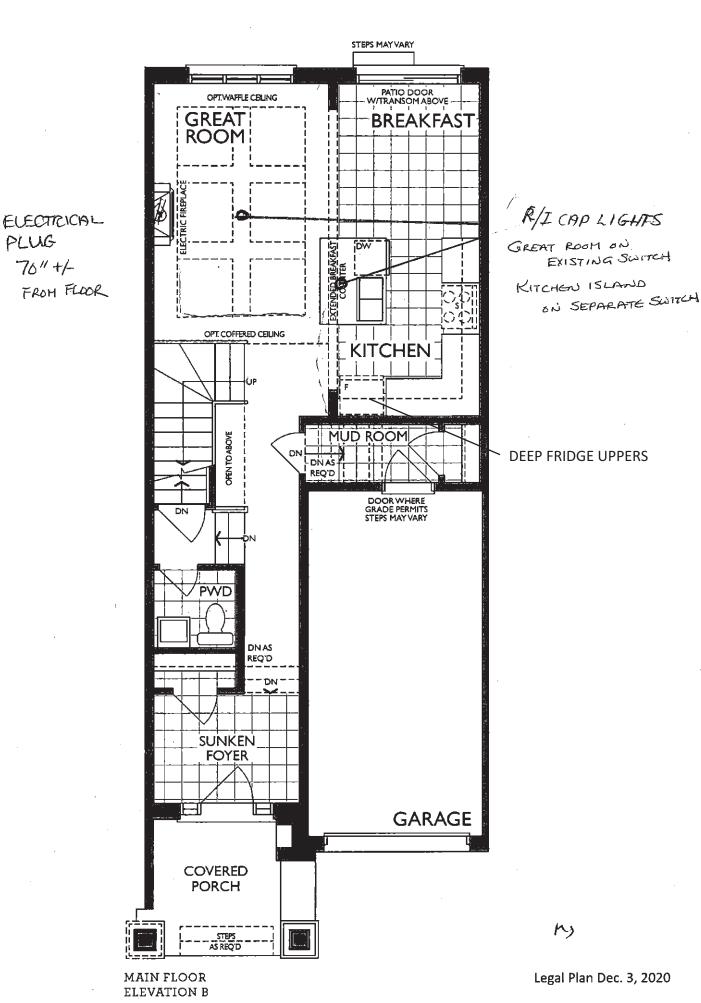

Project: Wallaceton

Unit: 3184A-3, Phase: 3

Model: 20-1456 B The Hampton

18 of 43

Sketch#3


THE HAMPTON

ELEVATION B | 1,800 SQ. FT.

Includes 329 sq. ft. of Finished Lower Level


WALLACETON

20-1456 ELEV. B

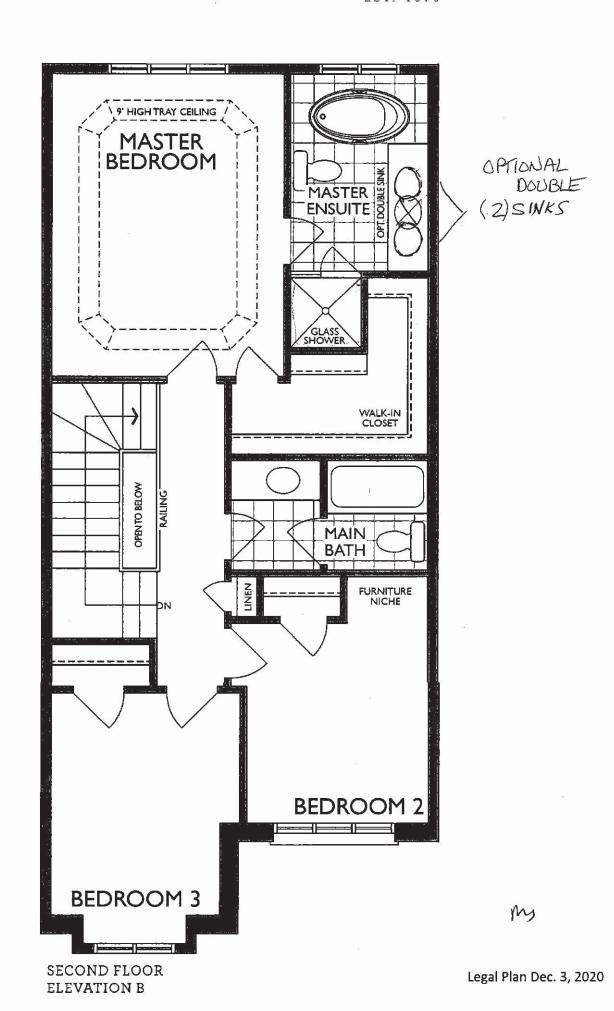

Project: Wallaceton Unit: 3184A-3, Phase: 3 Model: 20-1456 B The Hampton

19 of 43

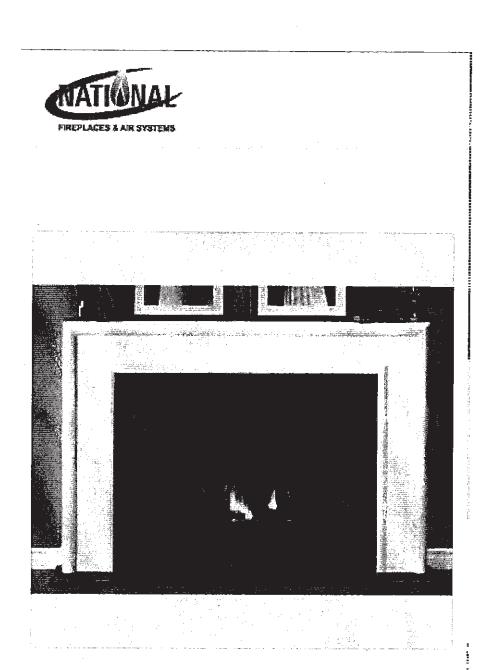


NFAS NF17 Mantel - CABINET


1


Plumbing Fixture / Kitchen Sinks 15410

Model: 20-1456 B The Hampton

20 of 43

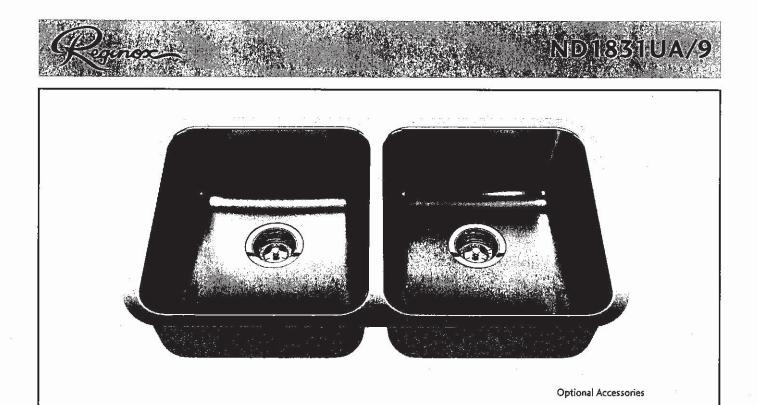





ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Ms

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

CONTROL OF THE

DBR10S

MB100

There is more than 1 version of this model. Page down to identify the version you have.

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
 Power Clean™ spray technology
 Metal construction with various finishes identified by suffix
 Duralock™ connect installation

- Pulldown spray with 68" braided hose
 Flexible supply lines with 3/8" compression fittings
 High arc spout provides height and reach to fill or clean large
 pots while pulldown wand provides the maneuverability for cleaning or rinsing
 360" rotating spout
 Faucet designed for handle to be mounted on right side only
 FRATION

OPERATION

- Lever style handle
 Temperature controlled by 100° arc of handle travel
 Operates with less than 5 lbs. of force
 Operates in stream or spray mode in the pullout or retracted position FLOW

- Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi CARTRIDGE
- 1255™ Duralast™ cartridge

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372


 Meets CalGreen and Georgia SB370 requirements


 Complies with California Proposition 65 and with the Federal Safe Drinking

- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow


ADA (for lever handle

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation



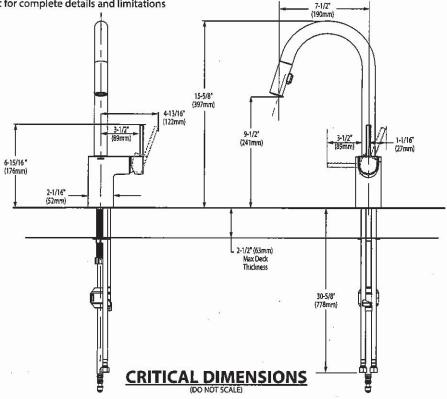

Specifications



ALIGN™ Single Handle High Arc **Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



Unit: 3184A-3, Phase: 3 Model: 20-1456 B The Hampton 22 of 43



BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- Of41.800 Faucet holes on 8" (203mm) centers (Illustrated) STD (0641.400 Faucet holes on 4" (102mm) centers
 - ☐ 0641.100 Center hole only
 - · Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- □ Color: □ White □ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap: ☐ Nipple:
- T Mppio.

*	See	faucet	section	for	additlonal	l model	s avail	able



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

MS

Model: 20-1456 B The Hampton

23 of 43

American Standard

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

BARRIER FREE

COLONY COUNTERTOP SINK

- · Vitreous china
- · Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)



Faucet holes on 203mm (8") centres

0346 403 (Illustrated)


Faucet holes on 102mm (4") centres

0346 001

Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep



COMPLIANCE CERTIFICATIONS -Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

To Be Specified

- □ Colour: □ White □ Bone □ Silver Gray
 - □ Linen
- ☐ Faucet*:
- ☐ Faucet Finish:
- Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.

BAS-198 _

See faucet section for additional models available

Model: 20-1456 B The Hampton


24 of 43



DEMI[™] Fiche de spécifications du produit

Collection de baignoires autoportantes en deux pièces

Taille:

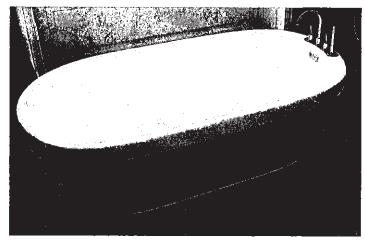

CF2007 Baignoire de détente autoportante


en deux pièces


60 po x 32 po x 22 po 1524 mm x 813 mm x 559 mm

CARACTÉRISTIQUES ET AVANTAGES DES PRODUITS


- Acrylique formé sous vide et renforcé de fibre de
- Fini très lustré résistant aux rayures, aux taches et à la décoloration
- Conception en deux parties d'installation facile
- Peuvent recevoir des robinets montés sur le tablier
- Comprend un vidage automatique intégré et un trop-plein rectangulaire
- Comprend les pieds réglables

ENSEMBLE DE DEUX PIÈCES

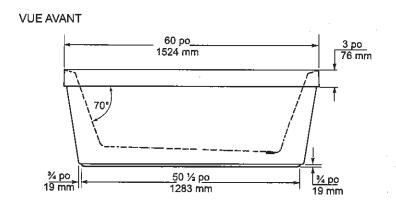

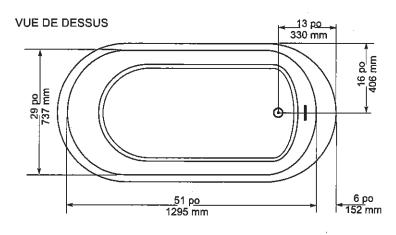

VUE EN BOUT



SPÉCIFICATIONS GÉNÉRALES		
Poids moyen	90 lb	41 kg
Partie baignoire au bas	43 po x 20) po
1	1092 mm >	508 mm
Capacité jusqu'au niveau du trop-plein		195 litres
Profondeur d'eau entre l'orifice		
d'évacuation et le trop-plein	16 po	406 mm
Diamétre du drain	2 po	51 mm
Ouverture du trop-plein	2 ½ x ½ pc	57 x 13 mm
Dégagement du drain au plancher	3 ¼ po	83 mm
1	•	

NOTES: S'il vous plaît confirmer les dimensions actuels de votre produit pour garantir une identification correct. La baignoire doit être installée sur le plancher soutenue par les 5 pattes autonivelants. Ajuster si requis pour que la baignoire solt à niveau et obtenir un drainage approprié. Consulter les directives d'installations pour obtenir plus de renseignements.

IMPORTANT: Les dimensions des appareils sont nominales et peuvent varier de \pm ½ po (6 mm), Le poids varie de +/- 5 b (2.3 kg). Le dessin n'est pas à l'échelle. Ces dimensions peuvent être changées à la discrétion du fabricant.

Attestations de conformité - Se conforme aux spécifications suivantes ou les dépasse : CAN/CSA - Série B45





60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1 Téléphone: 416.231.9030 Télécopieur: 416.231.0929

Service à la clientèle: 416.231.5790 Canada, É.-U.: 800.MIROLIN(647-6546) Télécopieur Canada: 800.463.2236

R0084162 25 Sep. 2018 Model: 20-1456 B The Hampton

American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA

FIoWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- · Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- · Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- □ 3067 316 Elongated Bowl with Slow Close Seat
- 4035 216 Unlined Tank
- 2476 516 Same as above with Lined tank
 - ☐ 3067 316 Elongated Bowl
 - 4035 516 Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:






08/08

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED. IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

MJ TOI-284 © 2008 American Standard



MOEN[®]

DESCRIPTION

- Metal construction with various finishes identified by suffix
 16" long 3/8" tubing connections
 Includes metal or 50/50 pop-up type waste assembly where noted
 OPERATION

- Pivot action lever style handle
- Temperature controlled through 180° degree arc of handle travel
- Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations **STANDARDS**


- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9 Complies with California Proposition 65 and with the Federal Safe
- Drinking Water Act

 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly

Model: L4625 series L4631BC **Bulk Packed (12 per carton):**


L64624 series

with 50/50 Waste Assembly Bulk Packed (12 per carton): L64625 series

<u>Less Waste</u> **Bulk Packed (12 per carton):** L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



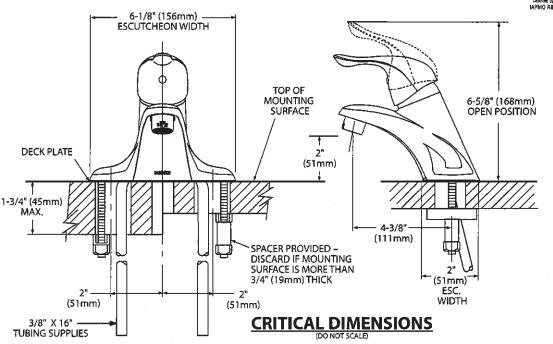

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

W >

Rev 8/15

Model: 20-1456 B The Hampton

27 of 43



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water
- temperature limit stop to control maximum hot w temperature Pressure balancing mechanism maintains selected discharge temperature to \pm 3°

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi
- EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all
- applicable requirements referenced therein EP suffix models are third party certified to WaterSense*
- ADA (for lever handle

6.5* (165mm) ESC. DIAM.

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser

2"CC (51mm) 1 7/8" JPS (48mm) MAX WALL

7-1/2" (190mm)

5 year warranty if used in commercial installations

Specifications






CHATEAU' POSI-TEMP' Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

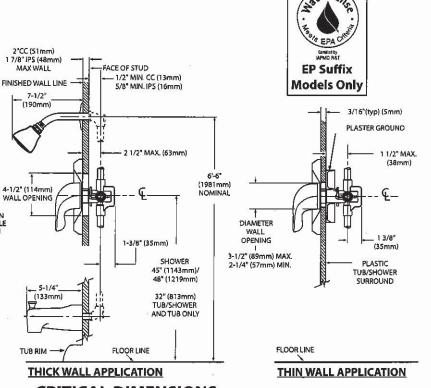

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp; Rev. 5/13

MOEN[®]

DESCRIPTION

Metal construction with various finishes identified by suffix

OPERATION

- Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


Specifications




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

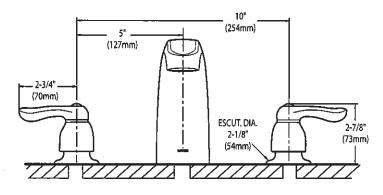




CRITICAL DIMENSIONS

m/


Model: 20-1456 B The Hampton

29 of 43

WMHENDAM. Overheitebranceivicrow/av/e



envagienementumuservenemenamie



Clean up spills on the turntable by simply putting it in the dishwasher.

SALSHING WINESON GEERERS



Match the right amount of ventilation to the dish being prepared and quickly get rid of cooking odors with two different fan speed settings.


VIKSTE (DAY/AVIETETETE SEEKS



Get just the right amount of heat and time, whether you're cooking or defrosting, with specific preset options.

OTHER FEATURES

- Add 30 seconds option
- Electronic touch controls
- Adjustable cooktop lighting

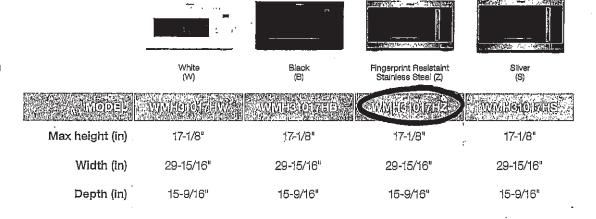

*Performance varies based on installation.

®/™ ©2018 Whiripool. All rights reserved. 1/18, WC170107A



Model: 20-1456 B The Hampton

30 of 43

Whirlpool MICROWAVE HOOD INSTALLATION INSTRUCTIONS


PRODUCT MODEL NUMBERS

WMH31017H

LOCATION REQUIREMENTS

Installation Dimensions


NOTE: The grounded 3 prong outlet must be inside the upper cabinet. See the "Electrical Requirements" section.

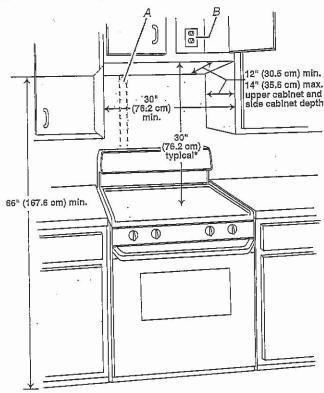

A. 2" x 4" wall stud B. Grounded 3 prong outlet

*30" (76.2 cm) is typical for 66" (167.6 cm) installation height. Exact dimensions may vary depending on type of range/ cooktop below.

PRODUCT DIMENSIONS

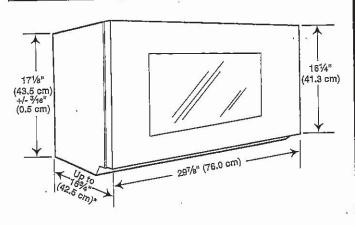

*Overall depth of product will vary slightly depending on door design.

PRODUCT DIMENSIONS

ELECTRICAL REQUIREMENTS

AWARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

Observe all governing codes and ordinances.

Required

■ A 120-volt, 60 Hz, AC-only, 15- or 20-amp electrical supply with a fuse or circuit breaker

Recommended:

- A time-delay fuse or time-delay circuit breaker
- A separate circuit serving only this microwave oven

WS

Page 1 of 3

Model: 20-1456 B The Hampton

31 of 43

VENTING DESIGN SPECIFICATIONS

This section is intended for architectural designer and builder/ contractor


NOTES:

- Vent materials needed for installation are not provided with microwave hood combination.
- We do not recommend using a flexible metal vent.
- To avoid possible product damage, be sure to vent air outside, unless using recirculation installation. Do not vent exhaust air into concealed spaces, such as spaces within walls or ceilings, attics, crawl spaces,

For optimal venting installation, we recommend:


- Using roof or wall caps that have back draft dampers
- Using a rigid metal vent
- Using the most direct route by minimizing the length of the vent and number of elbows to provide efficient performance
- Using uniformly sized vents
- Using duct tape to seal all joints in the vent system
- Using caulking compound to seal exterior wall or roof opening around cap
- Not installing 2 eibows together for optimal hood performance If venting through the wall, be sure that there is proper clearance within the wall for the damper to open fully.

If venting through the roof, and rectangular-to-round transition is used, be sure there are at least 3° (7.6 cm) of clearance between the top of the microwave oven and the transition piece. See "Rectangular-to-Round Transition" illustration.



Rectangular-to-Round Transition


NOTE: The minimum 3" (7.6 cm) clearance must exist between the top of the microwave oven and the rectangular to round transition piece so that the damper can open freely and fully.



- A. Roof cap
- B. 6" (15.2 cm) min. dlameter round vent
- C. Elbow (for wall venting only)
- D. Wall cap
- E. 3¼" x 10" to 6" (8.3 x 25.4 cm to 15.2 cm) rectangular to round transition piece
- F. Vent extension piece, at least 3" (7.6 cm) high

Recommended Standard Fittings

The following length equivalents are for use when figuring vent length. See the examples in "Recommended Vent Length."



- A. Rectangular-to-round transition piece: 31/4" x 10" to 6" = 5 ft (8.3 x 25.4 cm to 15.2 cm = 1.5 m)

 B. Roof cap: 31/4" x 10" = 24 ft (8.3 x 25.4 cm = 7.3 m)
- C. 90° elbow: 31/4" x 10" = 25 ft (8.3 x 25.4 cm = 7.6 m)
- D. 90° elbow: 6" = 10 ft (15.2 cm = 3 m)
- E. Wall cap: 31/4" x 10" = 40 ft (8.3 x 25.4 cm = 12.2 m)
- F. 45° elbow: 6" = 5 ft (15.2 cm = 1.5 m) G. 90° flat elbow: 3¼" x 10" = 10 ft (8.3 x 25.4 cm = 3 m)

MS

Project: Wallaceton

Unit: 3184A-3, Phase: 3

Model: 20-1456 B The Hampton

Recommended Vent Length


A 31/4" \times 10" (8.3 \times 25.4 cm) rectangular or 6" (15.2 cm) round vent should be used.

The total length of the vent system including straight vent, elbow(s), transitions, and wall or roof caps must not exceed the equivalent of 140 ft (42.7 m) for either type of vent. See the "Recommended Standard Fittings" section for equivalent lengths.

For best performance, use no more than three 90° elbows.


To calculate the length of the system you need, add the equivalent lengths of each vent piece used in the system. See the following examples:

 $3\frac{1}{4}$ " x 10" (8.3 x 25.4 cm) vent system = 73 ft (22.2 m) total



- A. One $3\frac{1}{4}$ " x 10" (8.3 x 25.4 cm) 90° elbow = 25 ft (7.6 m) B. 1 wall cap = 40 ft (12.2 m)
- C. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

6" (15.2 cm) vent system = 73 ft (22.2 m) total




- A. Two 90° elbows = 20 ft (6.1 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 1 rectangular-to-round transition piece = 5 ft (1.5 m)
- D. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

If the existing vent is round, a rectangular-to-round transition piece must be used. In addition, a rectangular 3" (7.6 cm) extension vent between the damper assembly and rectangular-to-round transition piece must be installed to keep the damper from sticking.

Model: 20-1456 B The Hampton

33 of 43

Whirlpool 21 cu. ft. Top-Freezer Refrigerator



Fingerprint-Resistant Stainless WRT541SZDZ

Also available in:

Section 1	
()	White
	AALIIFE
"County"	

WRT541SZDW



WRT541SZDB



WRT541SZDM

Capacity		. zest <u>)</u> . zest (
Total Capacity	21 cu. ft.	
Refrigerator Capacity	15 cu, ft.	2.0
Freezer Capacity	6 cu. ft.	")
General Features & Prope	erties	14 12
EZ Connect Icemaker Ki	t	
LED Interior Lighting		
ENERGY STAR® Certified	1	
Electronic Temperature C	Controls	**
Freezer Temperature Cor	ntrols	50 25 10
Clear Door Bins		
Adjustable Door Bins	8	8
Quiet Cooling		
Fingerprint Resistant	6.1 5.55.7	
Electrical Details		e a
Amps	6.5	
Volts ·	115	
Certifications		
ADA Compliant	Yes	5
ENERGY STAR® Certified	Yes	ju j

Technical Details	
Refrigerator Type	Top-Freezer
Number of Doors	. 2
Number of Interior Refrigerator Shelves	3
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1
Number of Freezer Door Bins	2 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location .	Freezer
Dispenser Type	N/A
Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear

Reference Material

Dimension Guide Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

Humidity-Controlled Crispers

Store fruits and vegetables in their ideal environment,



NOTE: Dimensions are for planning purposes only. For complete details, see installation instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC, WRT541SZDSPECSHEETV01.

Model: 20-1456 B The Hampton

34 of 43



Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water Inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

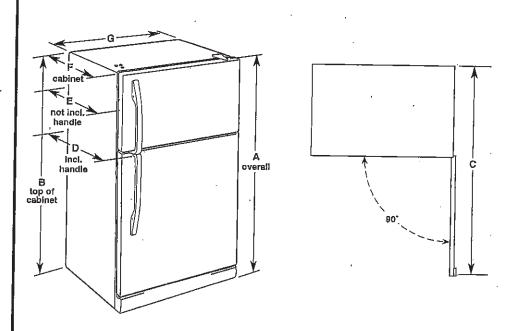

Model Number	Model Size	Reversible Door	Height - Overali "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft,	Yes	66¼" (168.3 cm)	65½" (166.4 cm)	621/4" (158.1 cm)	·32%* (83.5 cm)	30%" (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66¼" (168,3 cm)	65½" (166,4 cm)	621/4" (158,1 cm)	34" (86,4 cm)	32½" (82.3 cm)	28½* (72,4 cm)	32¾" (83,2 cm)

LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a $\frac{1}{2}$ (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1° (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

M.

Because Whiripool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation instructions packed with product. Specifications subject to change without notice.


10/29/14


Model: 20-1456 B The Hampton


35 of 43

Refrigerator Door Swing Verification









When facing the refrigerator



RIGHT HAND DOOR OPENING

- Hinges on right
- Handle on left

LEFT HAND DOOR OPENING

- Hinges on left
- Handle on right

INITIAL

GARAGE RIGHT

Prease check and INITIAL your door swing selection.

Project: Wallaceton


Unit: 3184A-3, Phase: 3

Model: 20-1456 B The Hampton

36 of 43

WHIRLPOOL 30" (76,0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 297/a" (75.9 cm) width
- E. 255/16" (64.3 cm) depth back of range to front of cooktop**
- Model/serial/rating plate (located on the frame behind a top comer of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


*Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width

 E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet,
 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Project: Wallaceton

Unit: 3184A-3, Phase: 3

Model: 20-1456 B The Hampton

37 of 43

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only

AWARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

Check with a qualified electrical installer if you are not sure the range is properly grounded.

	Specified Rating of Power Supply Cord Kit and Circuit Protection		
120/208 V	Amps		
7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50		
	120/208 V 7.8 - 12.5 KW		

*The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

**If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/6" (3.5 cm) diameter connection opening.

- A time-delay fuse or circuit breaker is recommended
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



■ Do not use an extension cord.

INSTALLATION INSTRUCTIONS


Unpack Range

AWARNING

Excessive Weight Hazard

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- Remove shipping materials, tape and film from range.
- Remove oven racks and parts package from inside oven.
- Do not remove the shipping base at this time.



A. Shipping base

4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

Model: 20-1456 B The Hampton

38 of 43

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- Determine which mounting method to use: floor or wall.
 If you have a stone or masonry floor, you can use the wall
 mounting method. If you are Installing the range in a mobile
 home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12⁹/16" (31.9 cm) from centerline as shown.




A. 12º/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting



Wall Mounting



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 \times 15/6" (4.1 cm) screws provided.
- Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- 7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



 Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions. Project: Wallaceton Unit: 3184A-3, Phase: 3 Model: 20-1456 B The Hampton

39 of 43





Stainless Steel

Also available in:

White	WDF330PAHW
Black	WDF330PAHR

Capacity					
Total Place Settings	13				
General Features & Properti	es				
Heavy Cycle					
High Temperature Wash Op	tion				
Heated Dry Option	Heated Dry Option				
ENERGY STAR® Certified	ENERGY STAR® Certified				
Industry's Best Selling Dish	Industry's Best Selling Dishwasher Brand†				
Designed, Engineered and U.S.A. with American Pride	Designed, Engineered and Assembled in the U.S.A. with American Pride				
Electrical Details					
Amps	10				
Volts	120				
Hz	60				
Certifications					
ENERGY STAR® Certified	Yes				

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Button
Number of Wash Cycles	3
Number of Options	4
dBA [*]	55
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
Defeces Material	

Reference Material

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.*

Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

Normal Cycle

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.

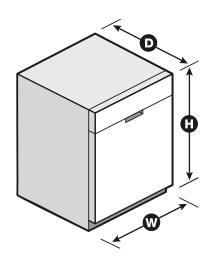

^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

Model: 20-1456 B The Hampton

40 of 43




Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDF131PAH	WDF545PAF	

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

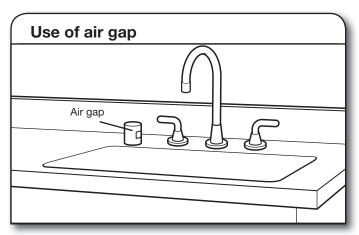

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- ³/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with ³/₄" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.

Model: 20-1456 B The Hampton

41 of 43

PRODUCT AND CABINET OPENING DIMENSIONS — 23⁷/8" -(606 mm) — 25¹/₄" -(641 mm) — ³/₄" (19 mm) 30" (762 mm) 331/2" 301 (851 mm) min. with (762 mm) leveling legs removed **4**−3³/₄" (94 mm) 31/2" - 41/2" (88 mm - 106 mm) (533 mm) For 4" (100 mm) toe kick, height of cabinet opening is 341/2" (863 mm). A. Insulation may be compressed (not used on all models). B. Door handles may protrude forward of the face of the dishwasher, (varies by model). Check that all surfaces have no protrusions that would prohibit dishwasher installation. 101/2" NOTE: Shaded areas (864 mm) of cabinet walls show where utility -6³/₄" (102 mm) (172 mm) connections may be installed. (76 mm (159 mm) 2¹/₄" (64 mm) 24" / (620 mm) (44 mm) 2" (51 mm) 24' (620 mm) D C. Measured from the lowest point on the underside of the countertop. May be reduced to 33¹/₂" (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.

D. Minimum, measured from narrowest point of opening.


Project: Wallaceton

Unit: 3184A-3, Phase: 3

Model: 20-1456 B The Hampton

42 of 43

WHIRLPOOL WASHER Model #: WFW5620HW



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser



5.2 cu. ft. l.E.C. Gloset-Depth Front Load Washer with Load & $\text{Go}^{\text{\tiny{MM}}}$ Dispenser

Model #: WFW5620HW

Dimensions

Depth 80.17 cm, 31-9/16 in Depth With Door Open 90 Degree 143.51 cm, 56-1/2 in Minimum Height 98.11 cm, 38-5/8 in

Wisth 68.56 cm, 27.0 in

Appearance

LCD Touch Screen No

Window Yes

Details

Drum Material Stainless Steel

Cycles and Options

Number of Wash Cycles

37

Electrical

Hz 60

Power Cord Included

Project: Wallaceton

Unit: 3184A-3, Phase: 3 Model: 20-1456 B The Hampton 43 of 43

WHIRLPOOL DRYER Model #: YWED5620HW

Whitipool Brand Canada English | Washer and Drysrs | Dryers | Electric Dryers | YWED5820HV





7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HV

Dimensions

A 25 2.1 E	£ £
Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	139.43 cm, 64-1/2 in
Fleight	98.42 cm, 38-3/4 in
Width	69.59 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
List Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Vestilation System	
Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear
Electrical	
Hz	60
Power Cord Included	Yes

رم