Sales Selection Sheet Checklist

Model: 20-1456 B The Hampton

LOT 3183A-5

PURCHASERS: NISHANT MALIK/

1 of 42

VENDOR: Heathwood Homes (Huron) Limited FINISHED BASEMENT COLD CELLAR **UPGRADED / MODIFIED ELEVATION CORNER UPGRADE REAR UPGRADE CEILING UPGRADE - SMOOTH** MAIN FLOOR SECOND FLOOR **BASEMENT** ADDITIONAL ROUGH-INS 200 AMP SERVICE WET BAR ROUGH-IN **HUMIDIFIER** AIR CONDITIONING GAS ROUGH-IN STOVE **DRYER** BBQ ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE **6 IN ROUND DUCT** 7 IN ROUND DUCT **FULL BASEMENT STAIRS:** N/A **UPPER BASEMENT STAIRS:** All Oak LOWER BASEMENT STAIRS: Carpet Grade MAIN STAIRS: All Oak MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A -02- 2 2 2022 Purchaser: Date Date Heathwood Homes (Huron) Limited **Approved Locked Date:**

NISHANT MALIK/ Project: Wallaceton Unit: 3183A-5, Phase: 3 Model: 20-1456 B The Hampton

Created: 11/1/2021 11:44:19

Locked: Closed:

itchen		is a second of the second of t
Cabinet Colour/Style	9120	VIKING III-GEORGIAN-ORCHID 3DL***STD***
Countertop	9121	MSI Quartz GROUP 1 ICED WHITE 3/4 inch with double mitre edge ***1***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***
Cabinet Hardware	7667	12881-HARDWARE ***STD***
Island Cabinet Colour/Style	9120	VIKING III-GEORGIAN-ORCHID 3DL***STD***
Island Countertop	9121	MSI Quartz GROUP 1 ICED WHITE 3/4 inch with double mitre edge ***1***
Backsplash	8103	OD.ON.SWT.02.HEX.MT-ONTARIO HEXAGON MATTE-SNOW WHITE ***2***
Backsplash Grout	7704	Grout-(19) Pearl Gray ***STD***
Backsplash Tile Pattern	3110	HORIZONTAL HEX ***STD***
HoodFan	9904	YWMH31017HZ-Whirlpool Over-The-Range Microwave Hood Combination-SS-30 inch
Appliance	9904	Purchasers have been advised: standard fridge opening i a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included.
Appliance	9904	Standard stove opening is 30" and standard dishwasher opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
Appliance	9904	Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after
Comment		
tchen/Breakfast		·
Flooring	9904	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SOLIARE ***STD***

VISHANT MALIK/ Project: Wallaceton Jnit: 3183A-5, Phase: 3 Model: 20-1456 B The Hampton	4	Created: 11/1/2021 11:44:19 Locked: Closed:
Comment		
Hall	v styr plan	
Flooring	3000	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***STD***
Comment		*
Foyer		
Flooring	3000	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Mud Room	で - 10 - 10 - 10 - 10 - 10 - 10 - 10 - 10	
Flooring	3000	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Powder Room		
Flooring	3000	TR.SP.WHITE 1313 SEMPRE White Matte 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***

NISHANT MALIK/ Project: Wallaceton Unit: 3183A-5, Phase: 3 Model: 20-1456 B The Hampton	gar y y ayak may per r ya	Created: 11/1/2021 11:44:19 Locked: Closed:
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Great Room	*	
Flooring	1737	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***STD***
Comment	5 3	
Upper Hall		
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment		,
Finished Basement (Rec) Room/Hall		
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Comment		
Master Bedroom		
The state of the s	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Flooring	9246	DY 65416 -Dynasty Tex-BLACK ICE-40 62 Foly 310
Comment	8	
Bedroom 2		
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***

NISHANT MALIK/ Project: Wallaceton		Created: 11/1/2021 11:44:19
Unit: 3183A-5, Phase: 3 Model: 20-1456 B The Hampton		Locked: Closed:
		Closed:
Comment		e mande en la
Bedroom 3		
Flooring	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment		
		*
		5 1.N 2.11
Master Ensuite		
Cabinet Colour/Style	9120	VIKING III-GEORGIAN-ORCHID 3DL***STD***
Countertop		MSI Quartz GROUP 1 ICED WHITE 3/4 inch with double mitre edge ***2***
Countertop Edge	4006	GROUP 1 - DOUBLE MITRE 1 1/2 INCH ***2***
	l i	
Cabinet Hardware	7672	135-HARDWARE ***STD***
Floor Tile	7672	TR.SP.WHITE.1313 SEMPRE White Matte 13
	L	
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
5	-	
Shower Floor Tile		OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
	-	
Shower Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern		HORIZONTAL STACKED ***STD***

NISHANT MALIK/ Project: Wallaceton Unit: 3183A-5, Phase: 3 Model: 20-1456 B The Hampton	Created: 11/1/2021 11:44:19 Locked: Closed:
Shower Jamb(s) and Sill(s)	8923 Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737 Plumbing Fixtures-WHITE ***STD***
Comment	
Main Bathroom	
Cabinet Colour/Style	9120 VIKING III-GEORGIAN-ORCHID 3DL***STD***
Countertop	MSI Quartz GROUP 1 ICED WHITE 3/4 inch with double mitre edge ***2***
Countertop Edge	4006 GROUP 1 - DOUBLE MITRE 1 1/2 INCH ***2***
Cabinet Hardware	7672 135-HARDWARE ***STD***
Flooring	7672 TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	2225 Grout-(27) Silver ***STD***
Floor Tile Pattern	STANDARD SQUARE ***STD***
Tub Wall Tile	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***
Tub Wall Tile Grout	2226 Grout-(00) White ***STD***
Tub Wall Tile Pattern	HORIZONTAL STACKED ***STD***
Plumbing Fixture (Colour)	Plumbing Fixtures-WHITE ***STD***
Comment	
Finished Basement Bathroom	
Cabinet Colour/Style	9120 VIKING III-GEORGIAN-ORCHID 3DL***STD***
Countertop	8806 4987K-07-Countertop-LECHE VESTA-Wilsonart ***STD***

NISHANT MALIK/ Project: Wallaceton Unit: 3183A-5, Phase: 3 Model: 20-1456 B The Hampton		Created: 11/1/2021 11:44:19 Locked: Closed:
	19 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
Countertop Edge	1111	N/A *****
Cabinet Hardware	7672	135-HARDWARE ***STD***
Flooring	7672	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***
Wall Tile Grout	2226	Grout-(00) White ***STD***
Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
	*	
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (Colour) Comment	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Great Room Fireplace		
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD*** PAGE 17
Surround Opt.	1111	N/A *****

IISHANT MALIK/ Project: Wallaceton Jnit: 3183A-5, Phase: 3 Model: 20-1456 B The Hampton		Created: 11/1/2021 11:44:19 Locked: Closed:
Disclaimer	1111	Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle.
Disclaimer	1111	Heathwood and its contractors will not be liable for any damage on items placed/installed above a FP after closing.
Comment		<u> </u>
Basement Stairs	The state of the s	
Туре	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pickets/Post Colours	1111	N/A *****
Carpet	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Custom Stain/Paint	1111	N/A *****
Comment		
Basement Stairs Landing(s)		
Flooring	1111	Red Oak Pearl-Vintage Engineered-ECLIPSE-3/4 inch x 3 1/4 inch ***3***
Comment		
Main Stairs		
Туре	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD***

NISHANT MALIK/ Project: Wallaceton Unit: 3183A-5, Phase: 3 Model: 20-1456 B The Hampton			Created: 11 Locked: Closed:	/1/2021 11:44:19
Handrail/Pickets/Posts Co	lour 1728	Oak Grade-	Stain handrail,oak pickets,	stringers,treads,risers
Custom Stain/Paint	1111	N/A *****		
Comment				
Main Stairs Landing(s)				
Flooring	7502	Red Oak Pe	arl-Vintage Engineered-E0	CLIPSE-3/4 inch x 3
Comment				
Throughout				
Walls - Paint Colour	1717	22-Wall-WA	RM GREY ***STD***	
Underpad	1079	500 Series-	Underpad ***STD***	
Thresholds	2232	Metal Thres	holds ***STD***	
Switches and Plug	5796	Decora Whi	te Switches and Plugs ***	STD***
Trim Size	8705	4 ¼ Basebo	ard and 2 ¾ Casings ***S	TD***
Trim - Paint Colour	1716	Trim-WHITI	E ***STD***	
Comment				
Purchaser: NISHANT MALI		ວນ 2 ₁ 2⊚2 <u>1</u> Date	Sowia SHARII Decor Consultant	= Nou 2/21 Date
Purchaser:		Date	Mozen. Wallaceton	-02- 2 2 2022 Date Approved

10 of 42



CONSTRUCTION SUMMARY

Lot: 3183A-5

Model: 20-1456 B The Hampton Project/Phase: Wallaceton / 3

Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes
Worksheet	Note:

DisciplineMS.rpt 13dec21

Page 1 of 4

Printed and Sent: 29-Sep-22

APPLIANCES	API	PLIA	ANC	CES
------------	-----	------	-----	-----

invoice	Qıy.	Description
896	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
313,492		
29Sep22		SPECS PAGE 28-30
		CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size
		to 6"

CABINETRY

Invoice	Qty.	Description
896 313,768 29Sep22	Ĭ	KITCHEN - 11A-Upper angle corner per unit Viking SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
896 310,815 29Sep22 **	1	- GRANITE - COUNTERTOP WITH 4 INCH BACKSPLASH - 3/4 INCH GROUP I WITH MITRE EDGE - MAIN BATHROOM - UPG CABINETRY - delete std countertop
896 310,814 29Sep22 **	Í	- GRANITE - COUNTERTOP WITH 4 INCH BACKSPLASH - 3/4 INCH GROUP 1 WITH MITRE EDGE - ENSUITE MASTER - UPG CABINETRY - delete std countertop
896 313,492 29Sep22 **	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ SPECS PAGE 28-30 CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size to 6"

CERAMICS

Qty.	Description
1	- CERAMICS - BACKSPLASH - KITCHEN - UPGRADE 2
_	1

DRYWALL

DKIW	AL	L
Invoice	Qty.	Description
896 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking
29Sep22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
896 314,238	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHES MAIN FLOOR (SEE SLIM LINE FOR BASEMENT)
29Sep22 **		6X GREAT ROOM ON ONE SWITCH AND 2 X KITCHEN ON ONE SWITCH SKETCH # 2 DRYWALL-Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate potlights

Page 2 of 4

Printed and Sent: 29-Sep-22

11 of 42



CONSTRUCTION SUMMARY

Lot: 3183A-5 Model: 20-1456 B The Hampton Project/Phase: Wallaceton / 3

ELECTRICAL

Invoice	Qty.	Description
896 314,242	1	KITCHEN - ELECTRICAL - RELOCATION OF SWITCHES/LIGHTS (MUST SPECIFY LOCATION) - NOTE: PLUGS CANNOT BE RELOCATED- MUST PURCHASE ADDITIONAL OUTLET.
29Sep22		RELOCATE KITCHEN LIGHT +/- CENTERED ABOVE THE ISLAND ON SAME SWITCH SEE SKETCH # 2
896 313,492	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
29Sep22 **		SPECS PAGE 28-30 CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size to 6"
896 314,232 29Sep22	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS) INSTALL CENTERED ABOVE FIREPLACE 70" +/- FROM FLOOR SKETCH # 2
896 314,238	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHES MAIN FLOOR (SEE SLIM LINE FOR BASEMENT)
29Sep22		6X GREAT ROOM ON ONE SWITCH AND 2 X KITCHEN ON ONE SWITCH SKETCH # 2 DRYWALL-Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate potlights

FRAMING

Invoice	Qty.	Description
896 313,768	1	KITCHEN - 11A-Upper angle corner per unit Viking
29Sep22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
896 314,238	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHES MAIN FLOOR (SEE SLIM LINE FOR BASEMENT)
29Sep22 **		6X GREAT ROOM ON ONE SWITCH AND 2 X KITCHEN ON ONE SWITCH SKETCH # 2 DRYWALL-Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate potlights

GRANITE

GILLI		
Invoice	Qty.	Description
896 310,801 29Sep22	1	- GRANITE - COUNTERTOP - 3/4 INCH GROUP 1 WITH MITRE EDGE - KITCHEN / ISLAND - UPG
896 310,815 29Sep22	1	- GRANITE - COUNTERTOP WITH 4 INCH BACKSPLASH - 3/4 INCH GROUP 1 WITH MITRE EDGE - MAIN BATHROOM - UPG CABINETRY - delete std countertop
896 310,814 29Sep22	1	- GRANITE - COUNTERTOP WITH 4 INCH BACKSPLASH - 3/4 INCH GROUP 1 WITH MITRE EDGE - ENSUITE MASTER - UPG CABINETRY - delete std countertop

HEATING / AIR CONDITIONING

Invoice	Qty.	Description
896	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
313,492		
29Sep22 **		SPECS PAGE 28-30 CABINETRY - notification; ELECTRICAL - delete std range hood; HEATING/AIR CONDITIONING - Duct Size to 6"

12 of 42



CONSTRUCTION SUMMARY

Lot: 3183A-5 Model: 20-1456 B The Hampton Project/Phase: Wallaceton / 3

PAINTING

Invoice	Otv.	Description

896	1	KITCHEN - 11A-Upper angle corner per unit Viking
313,768		
29Sep22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify

Printed and Sent: 29-Sep-22

13 of 42

THE HAMPTON


Sketch#1

ELEVATION B | 1,800 SQ. FT.

Includes 329 sq. ft. of Finished Lower Level

WALLACETON

20-1456 ELEV. B

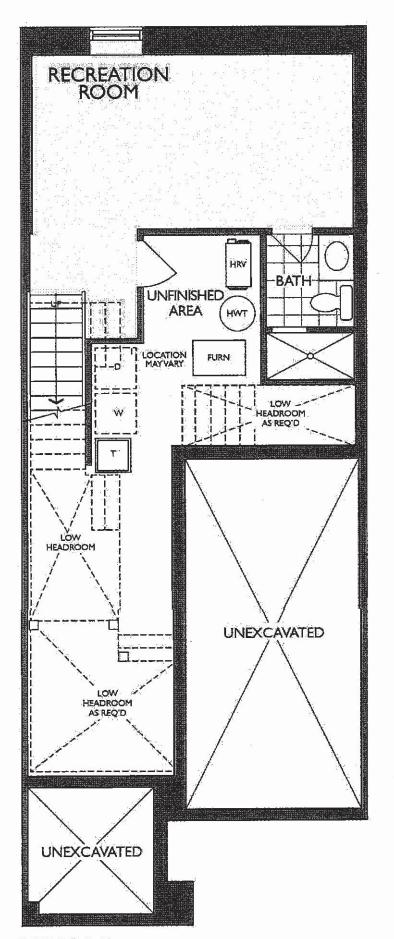

LOWER LEVEL ELEVATION B

Legal Plan Dec. 3, 2020

H.+42

THE HAMPTON


Sketch #2


ELEVATION B | 1,800 SQ. FT.

Includes 329 sq. ft. of Finished Lower Level

WALLACETON

20-1456 ELEV. B

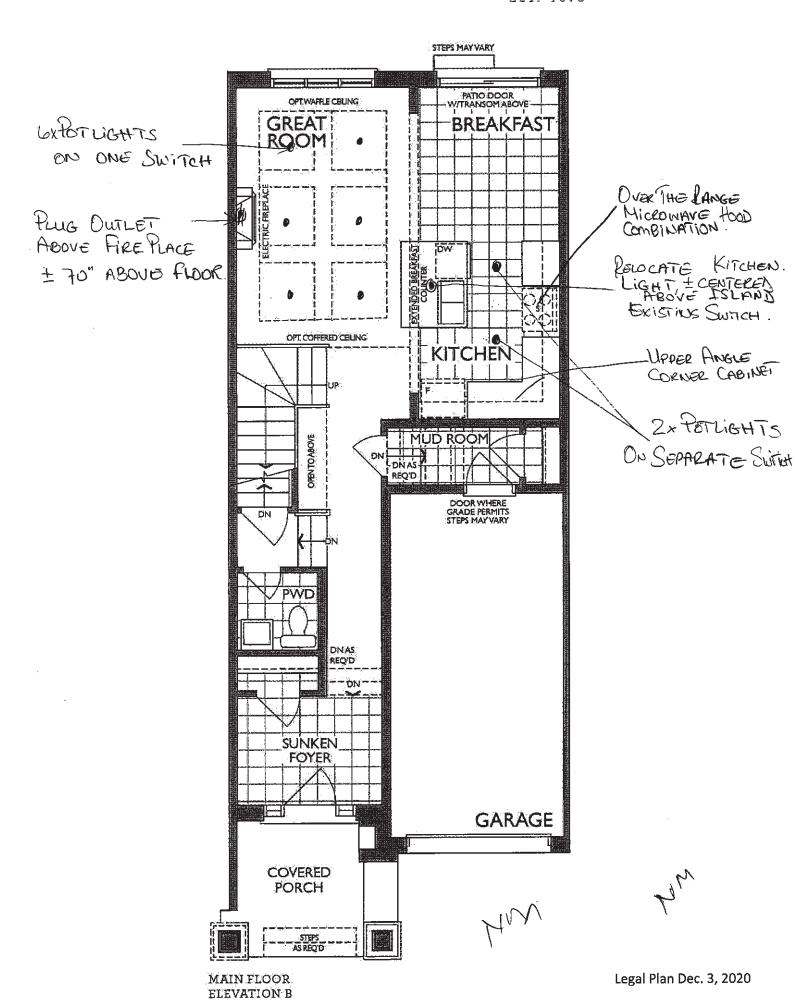

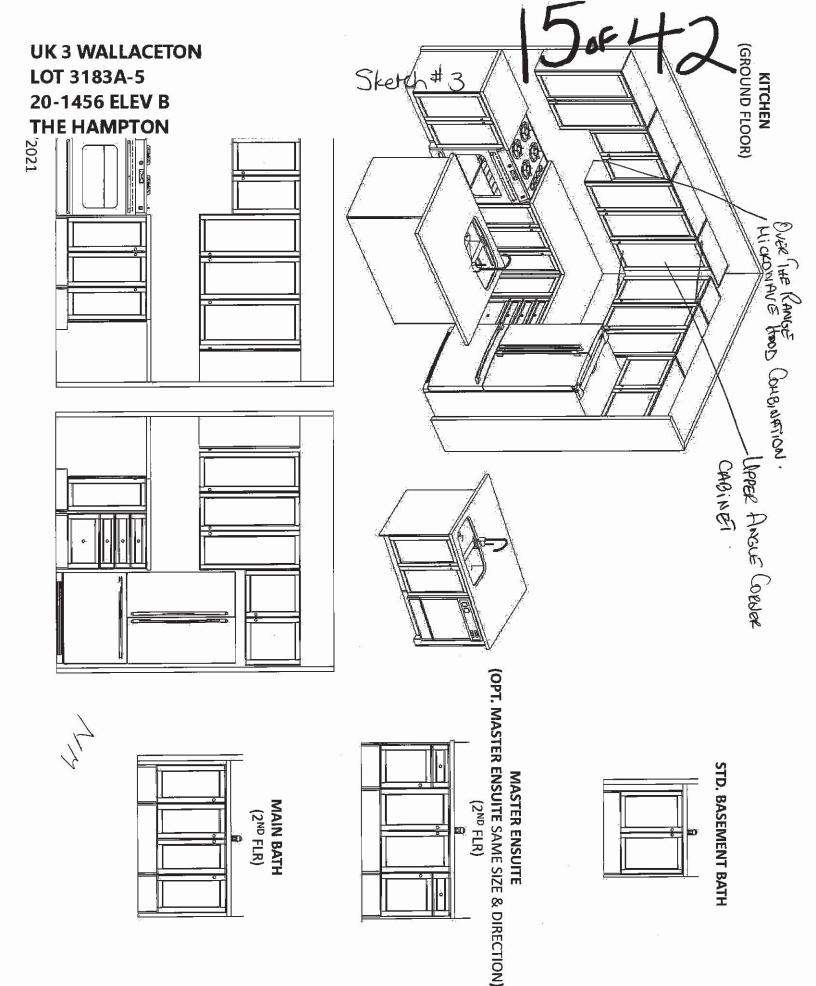



WALLACETON, KITCHENER ON **HEATHWOOD HOMES** MODEL: 20-1456 (2002)

STANDARD CONTRACT INCLUDES:

<u>Appliance Openings</u>

- Hood Opening: 30"W Std. hood
- Fridge Opening: 37 3/8 "W X 73 3/8" H
- 30cm deep cabinet over tridge Stove Opening: 30" Freestanding
- Dishwasher Opening: 24"

Standard Kitchens Scope

- 100cm H wall cabinets
- Std. Blumotion Hinges-soft close doors
- Std. Metabox Drawers- not soft close
- Min 40cm W drawer
- Base pie cut corner cabinets
- Backing on all cabinets
- Upgrade applied paneled fridge & Countertop by others hardware by others) dishwashers supply only (appliance

Standard Vanity & Laundry Scope:

- Powder by others, pedestal
- All vanities include laminate counter
- Std. Blumotion Hinges- not soft close
- Master Ensuite: Top drawers (Full height Tandem Box Drawers-soft close
- doors at sink) Mains: Full height doors (top drawers Optional laundry base & wall cabinets added if Masters can't accommodate

THIS DRAWING IS FOR DESIGN PURPOSES ONLY IT IS NOT AN EXACT RENDITION.

20-1456 ELEV. B

16.442


THE HAMPTON

Sketch # H

ELEVATION B | 1,800 SQ. FT.

Includes 329 sq. ft. of Finished Lower Level

WALLACETON

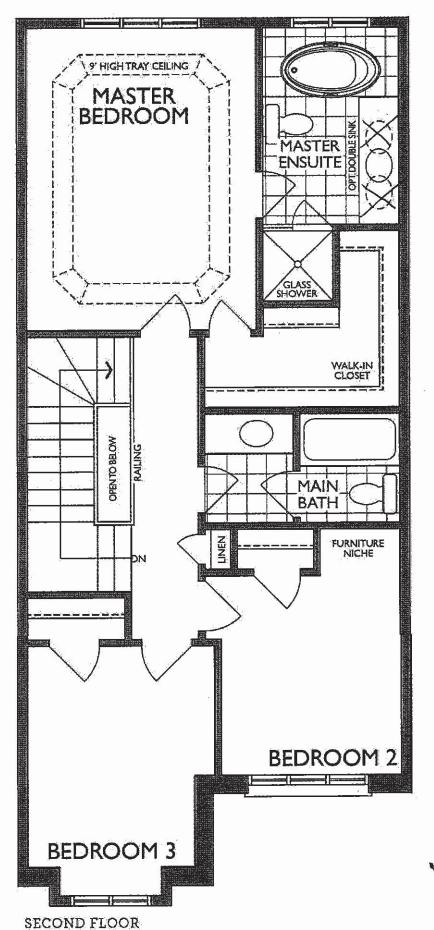


ELEVATION B

Legal Plan Dec. 3, 2020





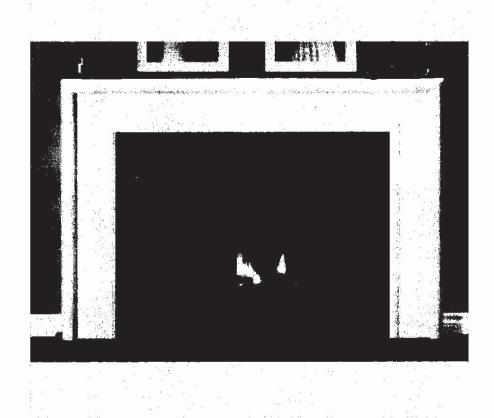

NFAS NF17 Mantel - Cabinet

Printed in Canada

Franke Kindred Canada Limited


DBR10S


MB100


BG10S

CA1W

UK 3 WALLACETON LOT 3183A-5 20-1456 ELEV B THE HAMPTON 18 of 42

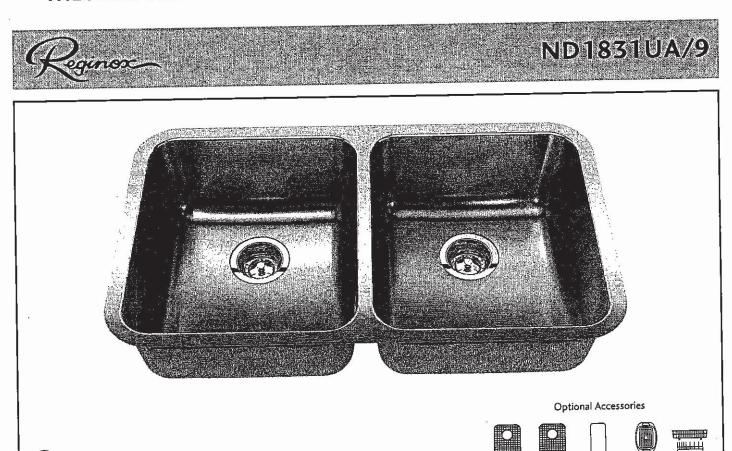





ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited
P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

MM

There is more than 1 version of this model. Page down to identify the version you have.

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
 Power Clean™ spray technology
 Metal construction with various finishes identified by suffix
 Duralock™ connect installation

- Duratock connect installation
 Pulldown spray with 68" braided hose
 Flexible supply lines with 3/8" compression fittings
 High arc spout provides height and reach to fill or clean large
 pots while pulldown wand provides the maneuverability for cleaning or rinsing
 360" rotating spout
- Faucet designed for handle to be mounted on right side only

OPERATION

- Lever style handle
 Temperature controlled by 100° arc of handle travel
 Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position
 FLOW

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

• 1255™ Duralast™ cartridge

STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372
 Meets CalGreen and Georgia SB370 requirements
 Complies with California Proposition 65 and with the Federal Safe Drinking


- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow

ADA (5) for lever handle

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation

5 year limited warranty when used in a commercial installation
 Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ Single Handle High Arc **Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



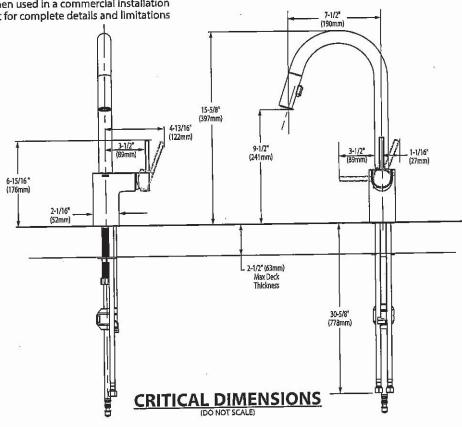

Rev. 6/20

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com





BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

- 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)
 0641.400 Faucet holes on 4" (102mm) centers
- ☐ 0641.100 Center hole only
 - · Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - · Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- □ 0641.008 Pedestal top-8" (203mm) centers
 □ 0641.004 Pedestal top-4" (102mm) centers
 □ 0641.001 Pedestal top-center hole only
- □ 0010.000 Pedestal only


Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

- To Be Specified:
 ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

© 2018 AS America Inc.

spec_0641_BoulevardPedSink Rev 2/18

MIM

^{*} See faucet section for additional models available







BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK

TOP VIEW (ALL THREE CONFIGURATIONS)

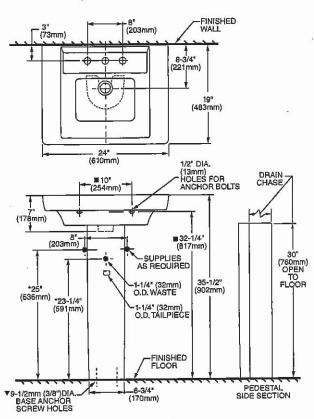

PEDESTAL CONFIGURATION (NOT ADA COMPLIANT)

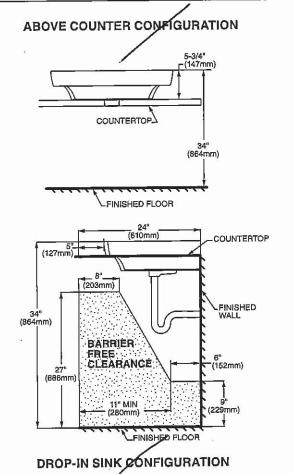

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES. Top of sink installed at 34" (864mm) height from finished floor.

Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

* PEDESTAL ANCHORING SCREWS NOT INCLUDED.

* SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.


INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

spec_0641_BoulevardPedSink Rev 2/18

J8



American Standard

COLONY™ COUNTERTOP SINK

VITREOUS CHINA



COLONY COUNTERTOP SINK

- · Vitreous china
- · Self-rimming
- · Front overflow
- Supplied with template
- Faucet deck (Faucet shown not included)

u	0346 803
	, Faucet ho

oles on 203mm (8") centres

0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

0346 001

Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep



CAN/CSA B45 Series.


To Be Specified


- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray
 - ☐ Linen
- ☐ Faucet*:

BAS-198 _

- ☐ Faucet Finish:
- □ Supplies & Stops:
- Trap 1-1/4" (32 mm):

* See faucet section for additional models available

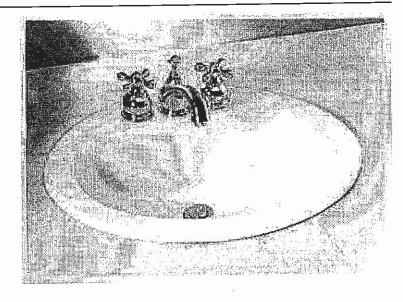

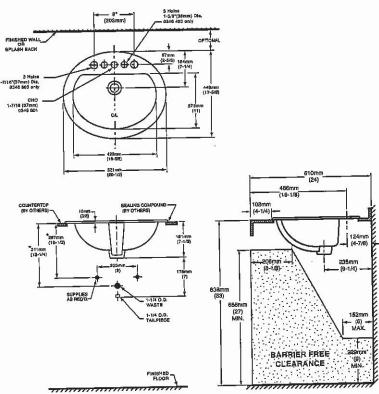

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTDUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or volded pages.





DEMI[™] Product Specification Sheet

Two Piece Freestanding Collection

CF2007

Two Piece Freestanding Soaker


60" x 32" x 22"

1524 mm x 813 mm x 559 mm


PRODUCT FEATURES & BENEFITS

- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular
- Includes levelling feet


TWO PIECE ASSEMBLY

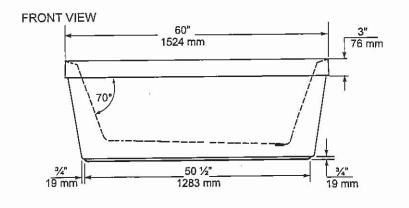

TOP VIEW

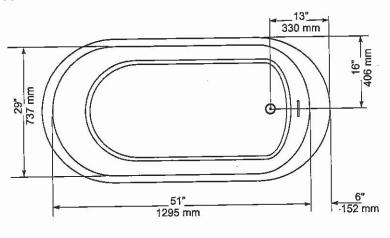

END VIEW



Average Weight	90 lb	41 kg
Bathing Well at bottom	43"x 20"	1092 x 508 mm
Capacity Drain to Overflow		195 litres
Water Depth Drain to Overflow	16"	406 mm
Drain Opening (dia.)	2"	51 mm
Overflow Opening	2 1/4"x 1/4"	$57 \times 13 \text{ mm}$
Drain to Floor Clearance	3 1/4"	83 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm ¼" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -Meets or Exceeds the following Specifications: CAN/CSA - B45 Series





mirolin. 60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1 Telephone: 416.231.9030 Fax: 416.231.0929 www.mirolin.com

© 2018 Mirolin Industries Corp.

Customer Service: 416.231.5790 Canada, U.S.A.: 800.MIROLIN(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018





American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA

FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- · Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- · 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- 3067 316 Elongated Bowl with Slow Close Seat
- 4035 216 Unlined Tank
- 2476 516 Same as above with Lined tank
 - 3067 316 Elongated Bowl
 - 4035 516 Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

© 2008 American Standard

TOI-284

08/08

Specifications

5.4



There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

- Metal construction with various finishes identified by suffix
- Flexible supplies with 3/8" compression fittings
- Includes metal or 50/50 pop-up type waste assembly where noted

OPERATION

- Pivot action lever style handle
- Temperature controlled through 100° degree arc of handle travel FLOW

- · Water usage is limited to these maximum flow rates as indicated by the corresponding product markings ° 1.2 gpm max (4.5L/min) at 60 psi
- .5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act


 ADA

 for lever handle

WARRANTY

Rev. 8/15

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



CHATEAU® Single-Handle Lavatory Faucet


with Metal Waste Assembly Model: L4625 series

L4631BC Bulk Packed (12 per carton): L64624 series

with 50/50 Waste Assembly Bulk Packed (12 per carton): L64625 series

Less Waste Bulk Packed (12 per carton): L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

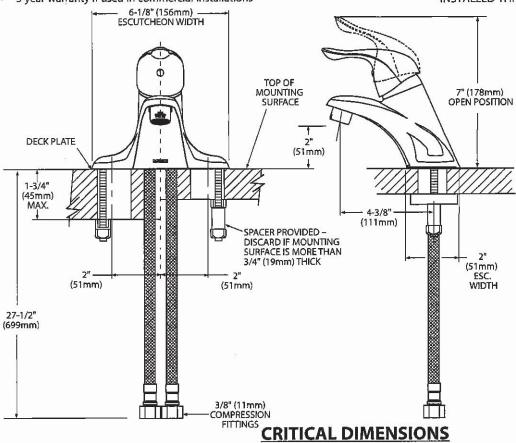

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com





Buy it for looks. Buy it for life.®

DESCRIPTION

Metal construction with various finishes identified by suffix

Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

Handle operates counterclockwise through a 270° arc with off at 6 oʻclock and maximum hot at the 9 oʻclock position. Shut off in clockwise direction

Adjustable temperature limit stop to control maximum hot water

Pressure balancing mechanism maintains selected discharge temperature to \pm 3°

Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi NH suffix models contain no showerhead

CARTRIDGE

1222 cartridge design Accommodates back to back installations

Nonmetallic/nonferrous and stainless steel material

STANDARDS

Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein

EP suffix models are third party certified to WaterSense®

ADA 🕒 for lever handle

WARRANTY

TL183sp: Rev. 5/13

Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser

5 year warranty if used in commercial installations

Specifications






CHATEAU' POSI-TEMP' Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton)

TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

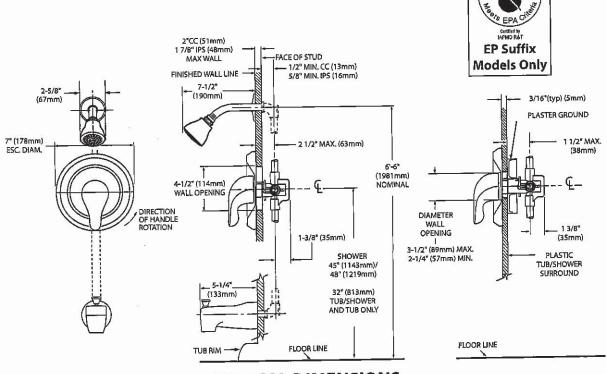

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

MOEN

17.00

Specifications



Metal construction with various finishes identified by suffix

OPERATION

Lever style handles with hot and cold color indicator

Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

STANDARDS

Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein


• ADA 🕭 for lever handles

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original homeowner

10 year limited warranty when used in a multi-family installation


5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

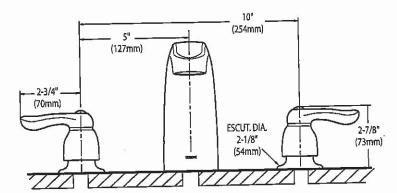



CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Rev. 3/19

28.442

WMH31017H OVER-THE-RANGE MICEOWAVE



rdisewaster-safe jurnizabler plates



Clean up spills on the turntable by simply putting it in the dishwasher.





Match the right amount of ventilation to the dish being prepared and quickly get rid of cooking odors with two different fan speed settings.

a decimatate



Get just the right amount of heat and time, whether you're cooking or defrosting, with specific preset options.

OTHER FEATURES

- Add 30 seconds option
- Electronic touch controls
- Adjustable cooktop lighting

	_	hari		
	White (W)	Black (B)	Fingerprint Resistaint Stainless Steel (Z)	Silver (S)
MODEL	WMHEROTTHW	WMH31017HE	WWH31017HZ	www.sici7HS
Max height (in)	17-1/8"	17-1/8"	17-1/8"	17-1/8"
Width (in)	29-15/16"	29-15/16"	29-15/16"	29-15/16"
Depth (in)	15-9/16"	15-9/16"	15-9/16"	15-9/16"



^{*}Performance varies based on installation. ®/™ ©2018 Whirlpool. All rights reserved. 1/18. WC170107A



VENTING DESIGN SPECIFICATIONS

This section is intended for architectural designer and builder/contractor reference only.

NOTES:


- Vent materials needed for installation are not provided with microwave hood combination.
- We do not recommend using a flexible metal vent.
- To avoid possible product damage, be sure to vent air outside, unless using recirculation installation. Do not vent exhaust air into concealed spaces, such as spaces within walls or ceilings, attics, crawl spaces, or garages.

For optimal venting installation, we recommend:

- Using roof or wall caps that have backdraft dampers
- Using a rigid metal vent
- Using the most direct route by minimizing the length of the vent and number of elbows to provide efficient performance
- Using uniformly sized vents
- Using duct tape to seal all joints in the vent system
- Using caulking compound to seal exterior wall or roof opening around cap
- Not installing 2 elbows together for optimal hood performance


If venting through the wall, be sure that there is proper clearance within the wall for the damper to open fully.

If venting through the roof, and rectangular-to-round transition is used, be sure there are at least 3" (7.6 cm) of clearance between the top of the microwave oven and the transition piece. See "Rectangular-to-Round Transition" illustration.



Rectangular-to-Round Transition


NOTE: The minimum 3" (7.6 cm) clearance must exist between the top of the microwave oven and the rectangular to round transition piece so that the damper can open freely and fully.



- A. Roof cap
- B. 6" (15.2 cm) min. diameter round vent
- C. Elbow (for wall venting only)
- D. Wall cap
- E. 31/4" x 10" to 6" (8.3 x 25.4 cm to 15.2 cm) rectangular to round transition piece
- F. Vent extension piece, at least 3" (7.6 cm) high

Recommended Standard Fittings

The following length equivalents are for use when figuring vent length. See the examples in "Recommended Vent Length".



- A. Rectangular-to-round transition piece: 31/4" x 10" to 6" = 5 ft (8.3 x 25.4 cm to 15.2 cm = 1.5 m)
- B. Roof cap: $3\frac{1}{4}$ " x 10" = 24 ft (8.3 x 25.4 cm = 7.3 m)
- C. 90° elbow: $3\frac{1}{4}$ " x 10° = 25 ft $(8.3 \times 25.4 \text{ cm} = 7.6 \text{ m})$
- D. 90° elbow: 6" = 10 ft (15.2 cm = 3 m)
- E. Wall cap: 31/4" x 10" = 40 ft $(8.3 \times 25.4 \text{ cm} = 12.2 \text{ m})$
- F. 45° elbow: 6" = 5 ft (15.2 cm = 1.5 m)
- G. 90° flat elbow: 31/4" x 10" = 10 ft (8.3 x 25.4 cm = 3 m)



Recommended Vent Length


A 3% x 10" (8.3 x 25.4 cm) rectangular or 6" (15.2 cm) round vent should be used.

The total length of the vent system including straight vent, elbow(s), transitions, and wall or roof caps must not exceed the equivalent of 140 ft (42.7 m) for either type of vent. See the "Recommended Standard Fittings" section for equivalent lengths.

For best performance, use no more than three 90° elbows.


To calculate the length of the system you need, add the equivalent lengths of each vent piece used in the system. See the following examples:

31/4" x 10" (8.3 x 25.4 cm) vent system = 73 ft (22.2 m) total



- A. One 31/4" x 10" (8.3 x 25.4 cm) 90° elbow = 25 ft (7.6 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

6" (15.2 cm) vent system = 73 ft (22.2 m) total




- A. Two 90° elbows = 20 ft (6.1 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 1 rectangular-to-round transition piece = 5 ft (1.5 m)
- D. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

If the existing vent is round, a rectangular-to-round transition piece must be used. In addition, a rectangular 3" (7.6 cm) extension vent between the damper assembly and rectangular-to-round transition piece must be installed to keep the damper from sticking.





Whirtpool 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless

Also available in:

-	
1	White
	VVIIICE

WRT541SZDW



WRT541SZDB



WRT541SZDM

Capacity	
Total Capacity	21 cu. ft.
Refrigerator Capacity	15 cu. ft.
Freezer Capacity	6 cu. ft.
General Features & Propert	ies
EZ Connect Icemaker Kit	
LED Interior Lighting	
ENERGY STAR® Certified	
Electronic Temperature Co	ntrols
Freezer Temperature Conti	rols
Clear Door Bins	
Adjustable Door Bins	
Quiet Cooling	
Fingerprint Resistant	
Electrical Details	
Amps	6.5
Volts	115
Certifications	
ADA Compliant	Yes
ENERGY STAR® Certified	Yes

Technical Details	
Refrigerator Type	Top-Freezer
Number of Doors	2
Number of Interior Refrigerator Shelves	3
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1
Number of Freezer Door Bins	2 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location	Freezer
Dispenser Type	N/A
Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top
	4-12-12-18-20-09-01-11-12

Allow extra 1" on rear

Reference Material

Dimension Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

Humidity-Controlled Crispers

Store fruits and vegetables in their ideal environment.



NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to Change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.





Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

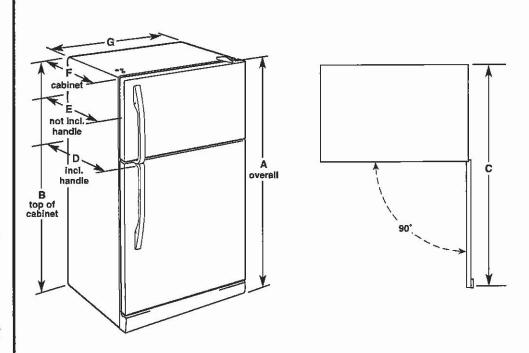

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66¼" (168.3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	32%" (83.5 cm)	305%" (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu, ft,	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	621/4" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

LOCATION REQUIREMENTS




To ensure proper ventilation for your refrigerator, allow for a %" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.


If you are installing your refrigerator next to a fixed wall, leave 2* (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.


NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.


330442

Refrigerator Door Swing Verification









When facing the refrigerator



RIGHT HAND DOOR OPENING

- Hinges on right
- · Handle on left

LEFT HAND DOOR OPENING


- Hinges on left
- · Handle on right

INITIAL

GARAGE RIGHT

Prease check and INITIAL your door swing selection.





Available Finishes/Colours



YWFE515S0JB Black




YWFE515S0JS Stainless Steel

YWFE515S0JW White

Manuals & Literature:







Warranty

5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

alignate and the state of the s

FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake^{ne} technology. Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Closed Door Broiling

Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

olanejnie			o. Historija, La	
Depth	NUMBER OF STREET	27 3/4	Handle Type	Reach-Through Handle
Height	ligasipegrak Ligazasztak	36		
Width	e)	29 7/8	depuise 2	

Handle Type
digius e a
Hot Surface Indicator Light
Heating Element On

Range Type	Freestanding
Fuel Type	Electric
Size (IN,Inches)	30

13 (2 A)	\mathcal{A}_{i}
in H'+ Mt	
Door Removable	Yes
Drawer Type	Storage Drawer
Oven Door	Glass Window
Oven Window Size	Extra Large
Handle Color	Stainless Steel
Handle Material	Metal


nuolesion Eldin	
Power On Indicator Light	No
Griddle	NA
Automatic Convection Conversion Temperature Adjust	No
Power Outage Compatible	No

Yes



WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions



- A. 273/4" (70.5 cm) max. depth with handle
- B. 467/s* (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 297/a" (75.9 cm) width
- E. 255/16" (64.3 cm) depth back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- *Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- **Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30° (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.



WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only

AWARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection	
120/240 V	120/208 V	Amps	
8.8 - 16.5 KW 16.6 - 22.5 KW	7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50	

- *The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.
- **If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.
- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

INSTALLATION INSTRUCTIONS


Unpack Range

AWARNING

Excessive Weight Hazard

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- 1. Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg



WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed

Failure to follow these instructions can result in death or serious burns to children and adults.


- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- 2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.




A. 129/16" (31.9 cm) B. Bracket V-notch

Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting








Diagonal (2 options)

Wall Mounting



- Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 15/8" (4.1 cm) screws provided.
- Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- 7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

Project: Wallaceton Unit: 3183A-5, Phase: 3

Model: 20-1456 B The Hampton

38 of 42





Stainless Steel

Also available in:

White	WDF330PAHW
Black	WDF330PAHB

Capacity	
Total Place Settings	13
General Features & Propertion	es
Heavy Cycle	
High Temperature Wash Op	tion
Heated Dry Option	
ENERGY STAR® Certified	
Industry's Best Selling Dish	washer Brand [†]
Designed, Engineered and Assembled in the U.S.A. with American Pride	
Electrical Details	
Amps	10
Volts	120
Hz	60
Certifications	
ENERGY STAR® Certified	Yes

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Button
Number of Wash Cycles	3
Number of Options	4
dBA [*]	55
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
Poforonco Matorial	

Reference Material

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.*

Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

Normal Cycle

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.



^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/TM © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

Project: Wallaceton Unit: 3183A-5, Phase: 3

Model: 20-1456 B The Hampton

39 of 42




Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDE121DAL	WDESASDAE	

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

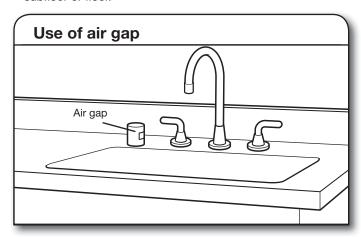

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- ³/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with ³/₄" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.

Project: Wallaceton Unit: 3183A-5, Phase: 3

Model: 20-1456 B The Hampton


40 of 42

PRODUCT AND CABINET OPENING DIMENSIONS — 23⁷/8" -(606 mm) — 25¹/₄" -(641 mm) — ³/₄" (19 mm) 33¹/₂" (851 mm) min. with 30" (762 mm) 301 (762 mm) leveling legs removed **4**−3³/₄" (94 mm) 31/2" - 41/2" (88 mm - 106 mm) (533 mm) For 4" (100 mm) toe kick, height of cabinet opening is 341/2" (863 mm). A. Insulation may be compressed (not used on all models). B. Door handles may protrude forward of the face of the dishwasher, (varies by model). Check that all surfaces have no protrusions that would prohibit dishwasher installation. 101/2" NOTE: Shaded areas (864 mm) of cabinet walls show where utility -6³/₄" (102 mm) (172 mm) connections may be installed. (76 mm (159 mm) 2¹/₄" (64 mm) 24" / (620 mm) (44 mm) 2" (51 mm) 24' (620 mm) D C. Measured from the lowest point on the underside of the countertop. May be reduced to 33¹/₂" (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher. D. Minimum, measured from narrowest point of opening.



WHIRLPOOL WASHER Model #: WFW5620HW

Whitpool Brand Carinda English | Washer and Dryers | Washers | Front Load Washers | WFW5R20HW



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser





Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & $\text{Go}^{\,\text{TM}}$ Dispenser Model #: WFW5620HW


Dimensions

Depth		80.17 cm, 31-9/16 in
Depth With Door	Open 90 Degre	ee 143.51 cm, 56-1/2 in
Minimum Height	jari og Kar	98.11 cm, 38-5/8 in
Width	20	68,58 cm, 27.0 in
Appearance		
LCD Touch Scree	913	No
Window		Yes
Details		
Drum Material		Stainless Steel
Cycles and Opti	ons	
Number of Wash		37.
Electrical		
Hz		60
Power Cord Inch	ıded	Yes

42.42

WHIRLPOOL DRYER Model #: YWED5620HW

Whirippool Brand Caneda English | Washer and Dryers | Dryers | Electric Oryers | YWED5620HW





7.4 cu. ft. Front Load Electric **Dryer with Intuitive Touch Controls**









Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWE05620HW

Dimensions

Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Foel Type	Bectric
Cycles and Options	3
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Lint Filter Indicator Number of Dryer Cycles	No 36
Number of Dryer Cycles	36
Number of Dryer Cycles Number of Dryness Levels	36
Number of Dryer Cycles Number of Dryness Levels	36
Number of Dryer Cycles Number of Dryness Levels Ventilation System	36 3 No 64
Number of Dryer Cycles Number of Dryness Levels Ventilation System Long Vent	36 3
Number of Dryer Cycles Number of Dryness Levels Ventilation System Long Vent Maximum Vent Length Venting Direction	36 3 No 64 Left, Right, Bottom, Rear
Number of Dryer Cycles Number of Dryness Levels Ventilation System Long Vent Maximum Vent Length	36 3 No 64 Left, Right, Bottom, Rear