


LOT 5-45

LOT 5-45, PH5, INNISFIL, APPLIANCES

https://www.whirlpool.ca/en_ca/kitchen/cooking/cooktops/5-burner-elements/p.36-inch-electric-ceramic-glass-cooktop-with-two-dual-radiant-elements.wce77us6hb.html

model: WCE77US6HB

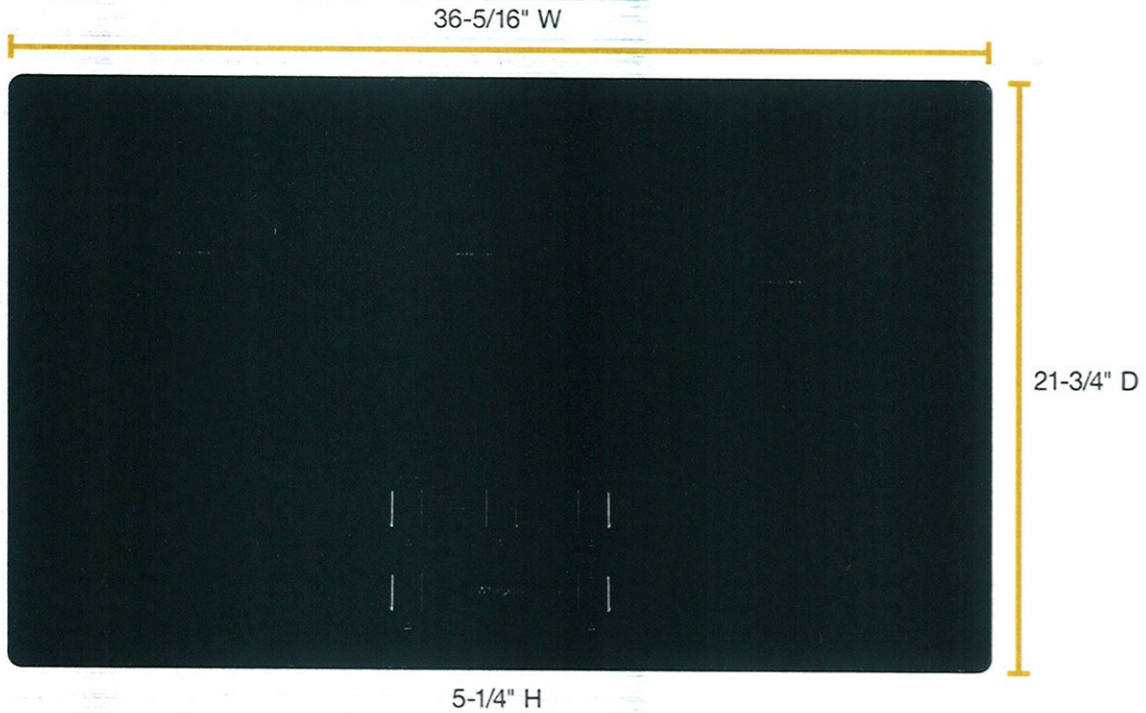

MAP Price [Info](#)

\$1,144.99 CAD

Multi-Offer Combo Deal!

Buy this item and make your picks during checkout!
Grab more than one offer, up to \$50 in savings!* [i](#) Go on -- don't be shy.

☐ Take Free Old Appliance Removal! (\$20) ☐ Take \$50 off another item!

Promo

LOT 5-45, PH5, INNISFIL, APPLIANCES

Save up to \$50 in multiple offers!

Air Miles®:

 Earn 53 AIR MILES® Reward Miles!* (<https://www.canadianappliance.ca/air-miles/>)

Current Region:

Ontario

Availability:

Delayed fulfillment.

When will I get this?

L4L 4S5

[Get Estimate](#)

Reserve & Pick Up

FREE

Distribution Centres

Woodbridge, ON

Laval, QC

Calgary, AB

Ottawa, ON

Burnaby, BC

Address

27 Director Crt.

1340 Boul. Dagenais Ouest

2777 23 Ave. NE

55 Banton St.

8010 Winston St.

Units Available

Reserve & Pick Up from Showroom » (<https://www.canadianappliance.ca/Showrooms>)

We install cooktops. Click here for more info.

[Add to Cart](#)

[Call Local Showroom](#)

[Visit a Showroom](#)
(/Showrooms)

Protect your purchase with an extended warranty.

Protect your purchase for 2 years: \$79.99 CAD [i](#)

Protect your purchase for 3 years: \$129.99 CAD [i](#)

[See More Coverage Options](#)

Ratings & Reviews

4.1 [✓](#) 81% recommend this

[Read Reviews](https://www.canadianappliance.ca/Reviews/Whirlpool_WCE77US6HB_Cooktop_Whirlpool_WCE77US6HB.html) (https://www.canadianappliance.ca/Reviews/Whirlpool_WCE77US6HB_Cooktop_Whirlpool_WCE77US6HB.html) (54 reviews)

Similar Colours and Options



(https://www.canadianappliance.ca/product/Whirlpool_WCE77US0HB_Cooktop_Whirlpool_WCE77US0HB.html)

WCE77US0HB

30" Width

\$1,044.99 CAD



WCE77US6HS

Stainless Steel

\$1,194.99 CAD



WCE97US6HB

(https://www.canadianappliance.ca/product/Whirlpool_WCE97US6HB_Cooktop_Whirlpool_WCE97US6HB.html)

\$1,239.00 CAD

[Description & Features](https://www.canadianappliance.ca/product/Whirlpool_WCE77US6HB_Cooktop_Whirlpool_WCE77US6HB.html#tab-f...)

[Specs](https://www.canadianappliance.ca/product/Whirlpool_WCE77US6HB_Cooktop_Whirlpool_WCE77US6HB.html#tab-specs)

~~\$1,144.99~~

[Manuals](https://www.canadianappliance.ca/product/Whirlpool_WCE77US6HB_Cooktop_Whirlpool_WCE77US6HB.html#tab-manuals)

[Description & Features](#)

[Specs](#)

[Manuals](#)

[Video](#)

[Reviews](#)

[Rebates](#)

[Warranty](#)

[Financing](#)

[Install](#)

[FAQ](#)

[Video](https://www.canadianappliance.ca/product/Whirlpool_WCE77US6HB_Cooktop_Whirlpool_WCE77US6HB.html#tab-video)

Reviews (https://www.canadianappliance.ca/product/Whirlpool_WCE77US6HB_Cooktop_Whirlpool_WCE77US6HB.html#tab-reviews)

Rebates (https://www.canadianappliance.ca/product/Whirlpool_WCE77US6HB_Cooktop_Whirlpool_WCE77US6HB.html#tab-rebates)

Warranty (https://www.canadianappliance.ca/product/Whirlpool_WCE77US6HB_Cooktop_Whirlpool_WCE77US6HB.html#tab-warranty)

Financing (https://www.canadianappliance.ca/product/Whirlpool_WCE77US6HB_Cooktop_Whirlpool_WCE77US6HB.html#tab-financing)

Install (https://www.canadianappliance.ca/product/Whirlpool_WCE77US6HB_Cooktop_Whirlpool_WCE77US6HB.html#tab-installation)

FAQ (https://www.canadianappliance.ca/product/Whirlpool_WCE77US6HB_Cooktop_Whirlpool_WCE77US6HB.html#tab-faq)

Dimensions

Cutout Depth Max	20-9/16 in
Cutout Depth Min	20-3/8 in
Cutout Width Max	35-9/16 in
Cutout Width Min	34-9/16 in
Depth	21-3/4 in
Height	5-1/4 in
Maximum Height	5-1/4 in
Width	36-5/16 in
Cooktop Type	Standard
Fuel Type	Electric
Installs Over Built-In Oven	Yes
LP Convertible	No
Power Boost	No
Size	36 in
Control Location	Front
Infinite Heat Controls	Yes
Knob Color	Black
Knob Type	Dishwasher-Safe Plastic
Automatic Pan Detection	No
Center Rear Element-Burner Size	6"
Cooktop Configuration	All Burners
Cooktop Element Style	Radiant
Cooktop Surface Color	Black
Downdraft Vent	No
Heating Element On Indicator Light	Yes
Hot Surface Indicator Light	Yes
Left Front Element-Burner Size	6"
Left Rear Element-Burner Size	10"/6"
Number of Cooking Element-Burners	5
Number of Open Bays	NA
Right Front Element-Burner Size	6"
Right Front Element-Burner Type	Standard
Right Rear Element-Burner Size	12"/9"
Digital Display	No
Prop 65	CALIFORNIA RESIDENTS ONLY - WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov
208V Compatible	Yes
Power Cord Included	No
Power Outage Compatible	No
ProductOutletCategories	Cooking
Annual Energy Usage [kWh]	258.0
Cooktop Surface Material	Glass

LOT 5-45, PH5, INNISFIL, APPLIANCES

Dimensions

Depth	21 3/4
Width	36 5/16
Height	5 1/4
Carton Depth	25
Carton Height	9 1/4
Carton Width	40 3/4
Cutout Depth	20 3/8
Cutout Width	34 9/16
Gross Weight	50
Maximum Height	5 1/4

\$2,000

Net Weight 44.0

Description & Features
Certifications

Specs

Manuals

Video

Reviews

Rebates
Warranty

Warranty

Financing

Install

FAQ

Prop 65
ADA Compliant

Standard
ADA Height and Operation Compliant

Description

Combinations with Oven WOS11EM4,WOS51EC0,WOS51EC7,WOS51ES4,WOS72EC0,WOS72EC7,WOS92EC0,WOS92EC7,WOS97EC0,WOS97ES0,WOSA2EC0

Configuration and Overview

Cooktop Type Standard
Fuel Type Electric
Size (IN, inches) 36
Installs Over Built-In Oven Yes
LP Convertible No
Power Boost No

Controls

Control Location Front
Control Type Knobs
Infinite Heat Controls Yes
Knob Color Black
Knob Type Dishwasher-Safe Plastic

Cooktop Details

Hot Surface Indicator Light Yes
Cooktop Element Style Radiant
Automatic Pan Detection No
Downdraft Vent No
Heating Element On Indicator Light Yes
Cooktop Surface Color Black
Number of Cooking Element-Burners 5
Left Front Element-Burner Size 6"
Center Rear Element-Burner Size 6"
Left Front Element-Burner Power 1200W
Cooktop Surface Material Glass
Number of Open Bays NA
Right Front Element-Burner Size 6"
Left Front Element-Burner Type Standard
Left Rear Element-Burner Power 3000/1900W
Left Rear Element-Burner Size 10"/6"
Right Front Element-Burner Power 1200W
Left Rear Element-Burner Type Standard
Right Rear Element-Burner Size 12"/9"
Right Front Element-Burner Type Standard
Right Rear Element-Burner Power 3000/1900W
Cooktop Configuration All Burners
Center Rear Element-Burner Power 100W
Center Rear Element-Burner Type Warming
Right Rear Element-Burner Type Dual

Appearance

Digital Display No

Features

Griddle NA
Power Outage Compatible No

Electrical

Amps 40
Power Cord Included No
Volts 240
208V Compatible Yes
Hz 60

Refinement

Style Cooktops

Energy

Annual Energy Usage [kWh] 258

Refinements

WHR Cooktop ADA Compliant

LOT 5-45, PH5, INNISFIL, APPLIANCES

\$2,880

Description & Features

Specs

Manuals

Video

Reviews

Rebates



Warranty

Financing

Install

FAQ

13TA1144

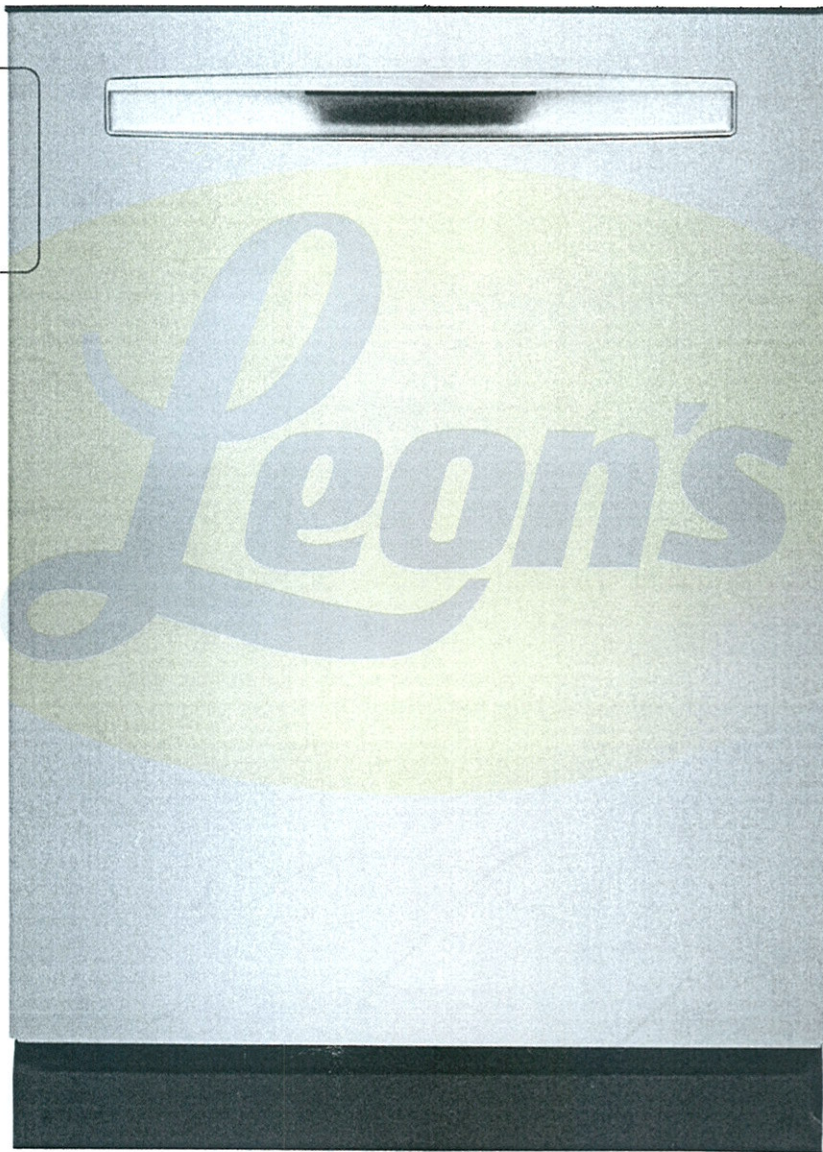

LOT 5-45

LOT 5-45, PH5, INNISFIL, APPLIANCES

(/img/xxlarge/frigidaire/built-in-dishwasher/FGIP2468UF_1.jpg)



!468UF_5.jpg)(/img/xxlarge/frigidaire/built-in-dishwasher/FGIP2468UF_6.jpg)(/img/xxlarge/frigidaire/built-in-dishwasher/FGIP246

Step up to Frigidaire GDPH4515AD for an extra \$105

(https://www.canadianappliance.ca/product/Frigidaire_GDPH4515AD_Built-In_Undercounter_Dishwashers_Frigidaire_GDPH4515AD.html)

Description & Features

Specs


Manuals

Video Reviews Warranty

Financing

Install

FAQ



LOT 5-45, PH5, INNISFIL, APPLIANCES

(https://www.canadianappliance.ca/product/Frigidaire_FGIP2468UD_Built-In_Undercounter_Dishwashers_Frigidaire_FGIP2468UD.html)

FGIP2468UD

Black Stainless Steel

(https://www.canadianappliance.ca/product/Frigidaire_FGIP2468UD_Built-In_Undercounter_Dishwashers_Frigidaire_FGIP2468UD.html)

~~\$694.00~~ CAD

Description & Features (https://www.canadianappliance.ca/product/Frigidaire_FGIP2468UF_Built-In_Underc...)

Specs (https://www.canadianappliance.ca/product/Frigidaire_FGIP2468UF_Built-In_Undercounter_Dishwash...)

Manuals (https://www.canadianappliance.ca/product/Frigidaire_FGIP2468UF_Built-In_Undercounter_Dishwa...)

Video (https://www.canadianappliance.ca/product/Frigidaire_FGIP2468UF_Built-In_Undercounter_Dishwash...)

Reviews (https://www.canadianappliance.ca/product/Frigidaire_FGIP2468UF_Built-In_Undercounter_Dishwa...)

Rebates (https://www.canadianappliance.ca/product/Frigidaire_FGIP2468UF_Built-In_Undercounter_Dishwa...)

Warranty (https://www.canadianappliance.ca/product/Frigidaire_FGIP2468UF_Built-In_Undercounter_Dishw...)

Financing (https://www.canadianappliance.ca/product/Frigidaire_FGIP2468UF_Built-In_Undercounter_Dishw...)

Install (https://www.canadianappliance.ca/product/Frigidaire_FGIP2468UF_Built-In_Undercounter_Dishwash...)

FAQ (https://www.canadianappliance.ca/product/Frigidaire_FGIP2468UF_Built-In_Undercounter_Dishwasher...)

Lower Rack

Minimum Height Clearance 11"

Maximum Height Clearance 13"

Number of Silverware Basket 1

Rack Coating Nylon

Dimensions and Volume

Minimum Height 33 1/2"

Maximum Height 35"

Width 24"

Depth 25"

Depth With Door Open 49 1/4"

Installation

5809

Water Inlet Location Left Bottom Front

Exterior

Description & Features

Specs

Manuals

Video

Rebates

Warranty

Financing

Install

FAQ

Door and Handle Design	Wide Pocket
Door Latch	Pull
Door Type	StayPut
Dishwasher Options	
Drying System	MaxBoost
Heated Dry	Yes
High Temperature	Yes
Dishwasher	
Automatic Temperature Control	Yes
Filter Material	Stainless Steel
Filter Trap	Removable
Filtered Water	100 %
Food Disposer	Yes
Hard Food Disposer	Yes
Motor Speeds	2
Place Setting Capacity	14
Rinse Aid Dispenser	Yes
Smart Soil Sensor	Yes
Spray Arm	Dual Orbit
Tub Design	Tall Tub
Tub Material	Plastic
Wash Levels	5
Wash System	Direct Feed
Water Pressure	120 psi
Water Usage	8.5 Gallons
Dishwasher Cycles	
China Crystal	Yes
Energy Saver	Yes
Favorite	Yes
Heavy	Yes
Normal	Yes
Number of Cycles	8
Quick	Yes
Rinse Only	Yes
Upper Rack	Yes
Upper Rack	
Cup Shelf	Yes
Fold-Down	Yes
Minimum Height Clearance	7 19/50"
Maximum Height Clearance	8"
General Specifications	
Product Weight	78.85 lbs
Prop 65 Label	Yes
Sound Level	49 dB
Warranty - Labor	1 Year
Warranty - Parts	1 Year
Third Level Rack	
Rack Handles	No
Controls	
Delay Start Hours	24
Digital Display	Yes
External Control Lock	Yes
Electrical Specifications	
Voltage Rating	120 V
Safety Certifications & Approvals	
UL Listed	Yes
NSF Certified	Yes

LOT 5-45, PH5, INNISFIL, APPLIANCES

\$609

Controls
Digital Display: Yes
Control Lock: Yes
Delay Start - hours: 1 - 24 Hours
Control Type: Fully-Integrated

Dishwasher: Cycles
Favorite: Yes
Normal: Yes
Upper Rack: Yes
Number of Cycles: 8
China Crystal: Yes
Rinse Only: Yes
Quick: Yes
Energy Saver: Yes
Heavy: Yes

Dishwasher: Options
Hi-Temp Wash: Yes
NSF® Certified: Yes
Heat/No Heat Dry: Yes

Dishwasher: Rack Upper
Cup Shelf: 2
Rack Handles: Yes
Height Clearance: 8" - 7-3/8"
Folding - NotElux: Yes

Dishwasher: Rack Lower
Rack Options: 2
Height Clearance: 11" - 13"
Silverware Basket: Ultra One

Dishwasher
Multi Speeds: 3
Satellite Spray Arm: OrbitClean®
Rinse Aid Dispenser: Adjustable with Indicator
Tub Design: Tall-Tub Design
Hard Food Disposer: Hard Food Disposer & Filtration
Filtered Water (%): 100
Filter: Stainless Steel
Wash Levels: 5
Automatic Temperature Ctl: Yes
Integral Air Gap on Supply: Yes
Filter Trap: Removable
Smart Soil Sensor: Yes
Water Usage (Gallons): 4.9 - 8.5 Normal Cycle
Place Settings Capacity: 14
Wash System: Direct Feed
Interior: Graystone
Water Pressure - PSI: 20 - 120
Food Disposer: Yes
Drying System: MaxBoost

LOT 5-45, PH5, INNISFIL, APPLIANCES

\$844

Exterior

Door Latch: Bull Latch
Door Type: Stay-Put
Description & Features

Specs

Manuals

Video Reviews Warranty

Financing

Install

FAQ

Exterior Finish: Smudge-Proof™ Stainless Steel

Certifications & Approvals

- NSF® Certified: Yes
- UL Listed: 1-UL Listed
- ENERGY STAR® Certified: Yes
- CSA Listed: Yes

Dimensions: Cut-Out
Width: 24"

Electrical Specifications
Voltage Rating: 120V 60Hz
Amps @ 120 Volts: 10.0

Dimensions: Exterior
Depth: 25"
Height: 33-1/2" – 35"
Height (Min): 33-1/2"
Width: 24"
Depth(w/ 90° Door Open): 49-1/4"

General Specifications
Leveling Legs: 4
Energy Efficiency Tier: Tier I
Sound Level (dBA): 49
Shipping Weight (lbs): 83
Sound Package: Silent Design 1

Dishwasher: Rack System
Rack Coating: Nylon TufRacks™

LOT 5-45, PH5, INNISFIL, APPLIANCES

13TA583 13HD644 13DX644 13CO644 13VI644

Complete Suite

FRIGIDAIRE

LOT 5-45




Glass Canopy Wall-Mount Hood


FHWC3660L S

36" Stainless Steel


LOT 5-45, PH5, INNISFIL, APPLIANCES

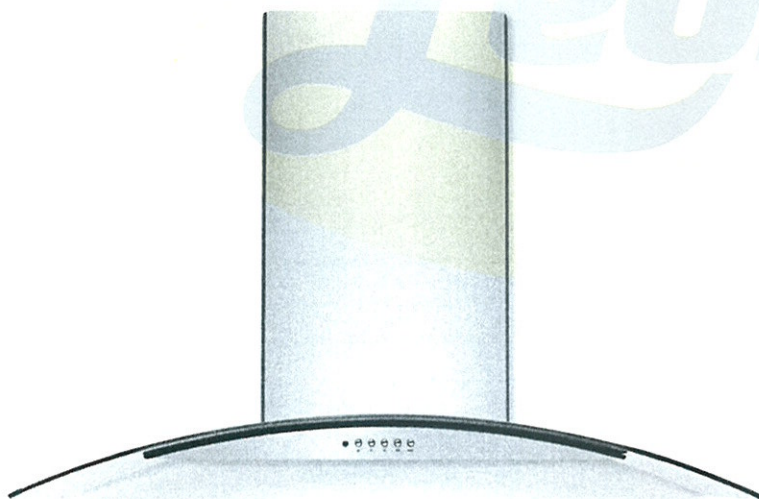


Signature Features



Glass Canopy Design
Glass and stainless steel construction is as attractive as it is functional.



Centrifugal Fan
Move air quietly and efficiently — up to 400 cu. ft. of air per minute.



Washable Filters
Dishwasher-safe for easy cleaning. The aluminum filter provides strength and durability not found in foam filters.



Halogen Lighting
For bright illumination of the cooktop surface.

Features

Nominal Width	36"
Installation Type	Wall Mount
Style	Stainless Steel/ Glass Canopy
Air Discharge	Vertical
Air Delivery (CFM)	400
Blower Type	Centrifugal
Controls	Electronic Push Button
Fan Speeds	3
Sound Level (dBA)	67.1
Dual Halogen Lights	Yes
Dishwasher-Safe Filter	Yes
Exhaust Duct	Convertible*
Duct Required	6" Round

Optional Accessories

Duct-Free Kit	PN# FHWRKT60LS
10' Flue Extension Kit	PN# FHWIOX60LS

Specifications

Product Dimensions -	
Height (With One Cover)	22-11/16" min.
(With Flue Extension)	26-1/2" min. 43-29/32" max
Width	35-11/32"
Depth	19-11/16"
Voltage Rating	120V/60Hz/15A
Amps @ 120 Volts	4.0
Connected Load (kW Rating) @ 120 Volts†	0.516
Shipping Weight (Approx.)	54 Lbs.
Sones Rating	6.5

*Ventilation is convertible to be either ducted outside, or recirculated inside requiring no ducting. (Recirculated option requires use of optional Duct-Free Kit.)

†For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.

NOTE: Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale. Refer to Product Installation Guide for detailed installation instructions on the web at frigidaire.com.


Specifications subject to change.

Available in:

Stainless
(S)

LOT 5-45

LOT 5-45, PH5, INNISFIL, APPLIANCES

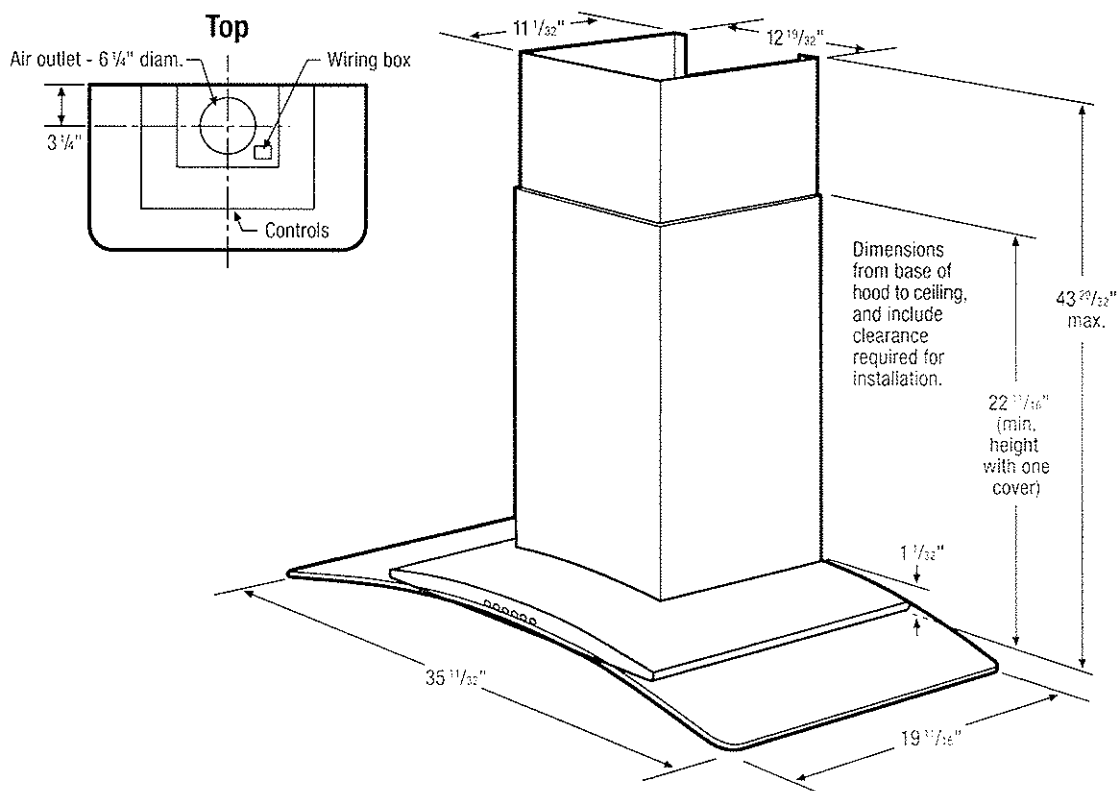

Glass Canopy Wall-Mount Hood Specifications

- Product Shipping Weight (approx.) - 54 Lbs
- Wall-Mount Installation
- Ventilation system is preset to exhaust air outside. If outside ducting is not possible, optional Duct-Free Recirculation Kit (PN# FHWRT60LS) is available to convert ventilation to allow air to recirculate inside. (Refer to Ducted Option Specifications for outside ventilation.)
- Sones Rating - 6.5
- Voltage Rating - 120V/60 Hz/15 Amps
- Connected Load (kW Rating) @ 120 Volts = 0.516 kW
(For use on adequately wired 120V, dedicated circuit having 2-wire service with a separate ground wire. Appliance must be grounded for safe operation.)
- Amps @ 120 Volts = 4 Amps
- Always consult local and national electric codes. Check local building codes for installation requirements, as they may vary per locale.
- Minimum installation height allowed from bottom of hood to standard 36"-high electric or gas cooking surface is 26" - 35". (NOT more than 32" recommended.) For detailed instructions regarding install heights in 8', 9' and 10' ceiling applications, refer to installation guide on web.
- To prepare mounting surface, adequate structure and support must be provided, capable of supporting 100 lbs.

Ducted Option Specifications

- For outside ventilation.
- Exhaust Duct Required - 6" round
- For most efficient airflow exhaust, use a straight run or as few elbows as possible.
- Use metallic flex ducting only to connect rigid duct directly to transitions (if allowed by code)
- Thermal breaks such as short section of nonmetallic duct, should be used in areas of extreme cold.
- Cold weather installations should have additional backdraft damper installed.
- Refer to installation instructions on web for detailed exhaust duct preparation and converting vent blower system for recirculating inside.

Note: For planning purposes only. Refer to Product Installation Guide on the web at frigidaire.com for detailed instructions.



Optional Accessories

- Duct-Free Recirculation Kit - (PN# FHWRT60LS)
- 10' Flue Extension Kit - (PN# FHW10X60LS)

LOT 5-45


LOT 5-45, PH5, INNISFIL, APPLIANCES

Use these dimensions and clearance instructions for planning purposes only. For detailed installation instructions, refer to installation guide, packed with product, or on the web at frigidaire.com.

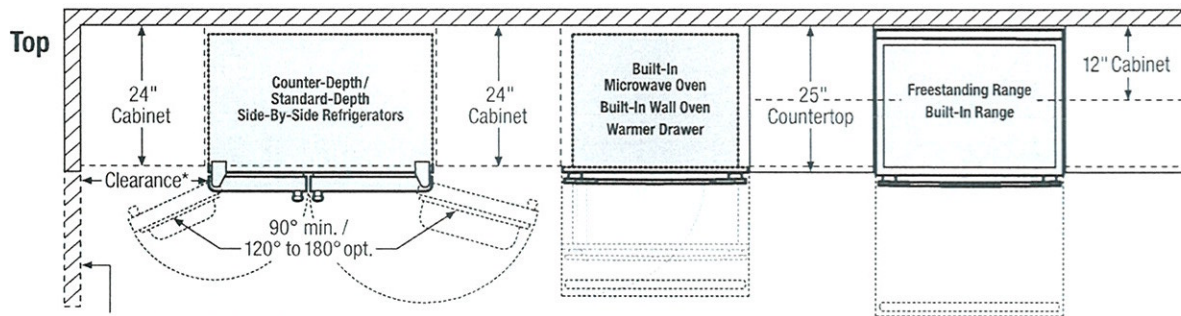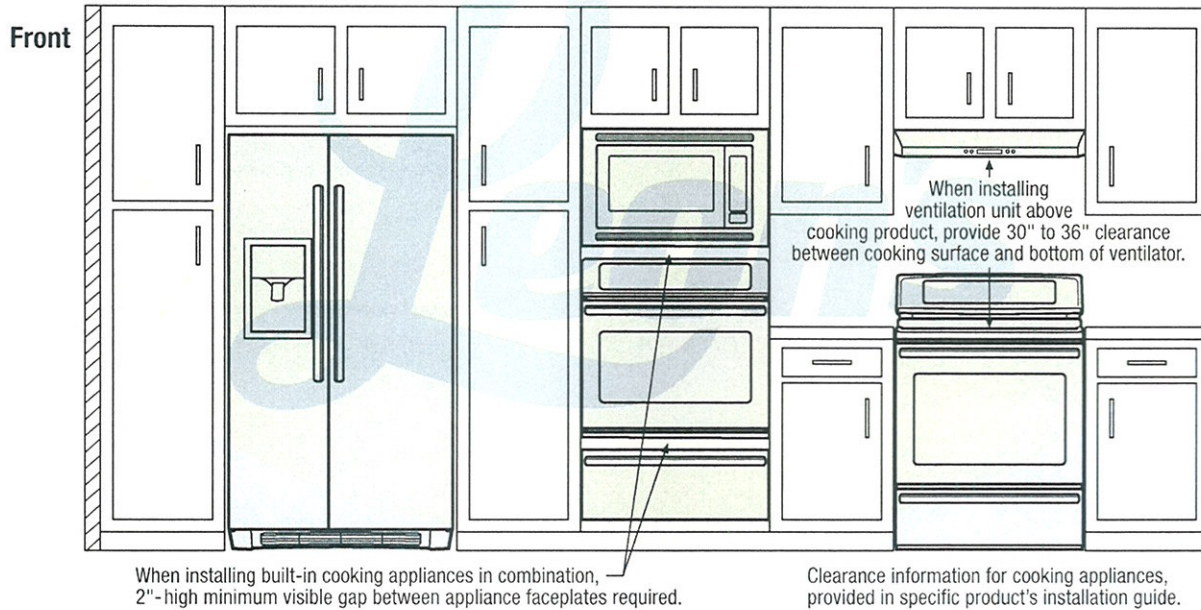

*When installing side-by-side refrigerator adjacent to wall, cabinet or another appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide limited drawer/crisper access with restricted removal.)



When installing appliance with sliding drawer, swinging or drop-down door directly across from obstructions, provide sufficient clearance for drawer extension or door swings.

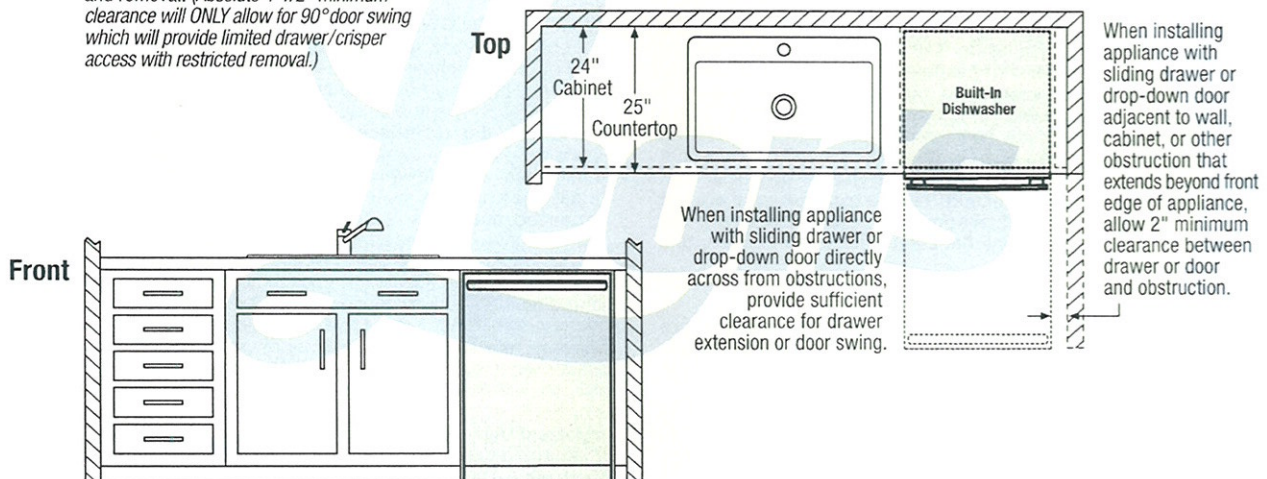


LOT 5-45

LOT 5-45, PH5, INNISFIL, APPLIANCES

Use these dimensions and clearance instructions for planning purposes only. For detailed installation instructions, refer to installation guide, packed with product, or on the web at frigidaire.com.

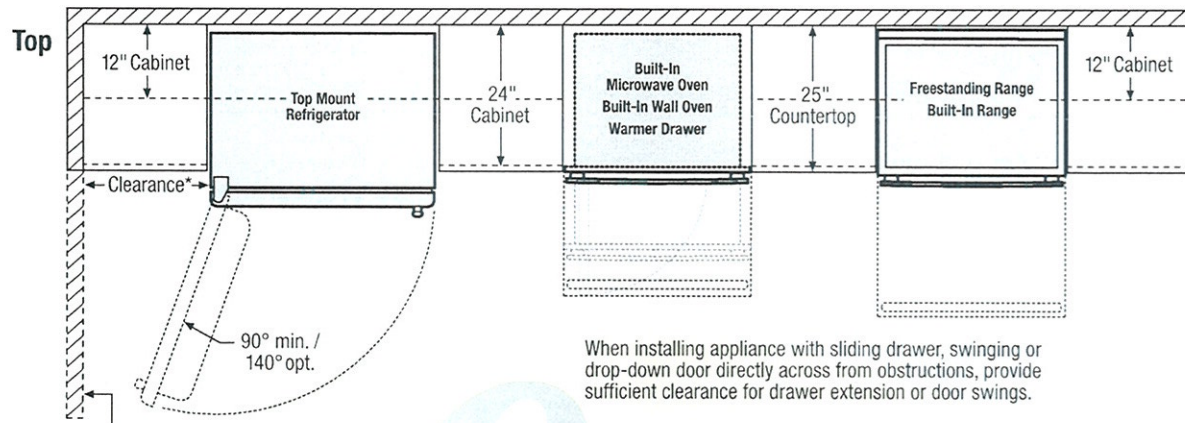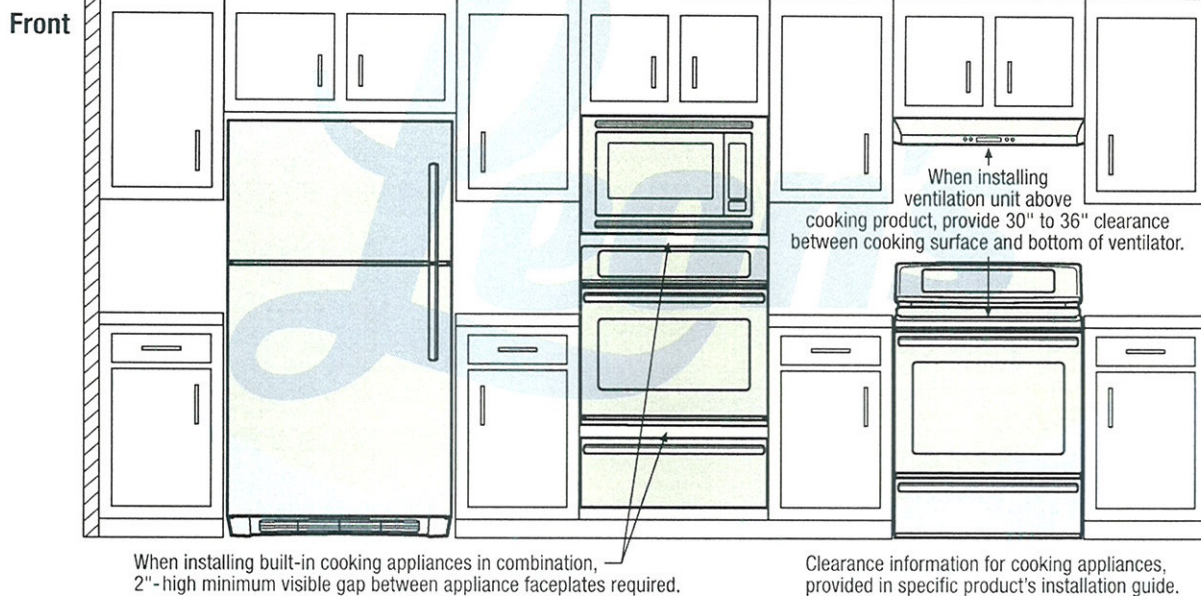

*When installing top mount refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 140° door swing, providing complete crisper access and removal. (Absolute 3" minimum clearance will ONLY allow for 90° door swing which will provide limited crisper access with restricted removal.)

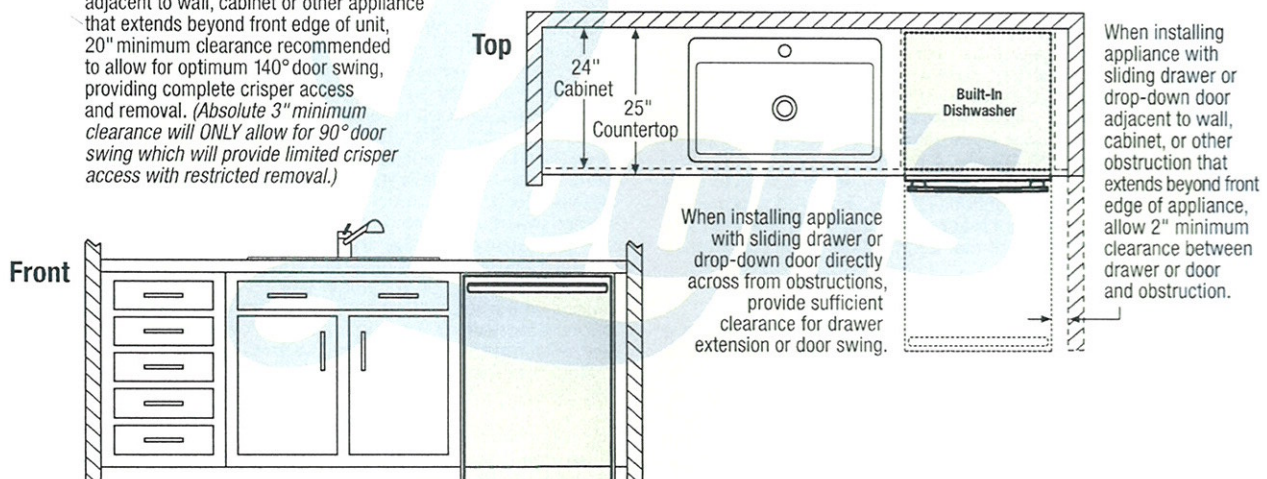


LOT 5-45


LOT 5-45, PH5, INNISFIL, APPLIANCES

Use these dimensions and clearance instructions for planning purposes only. For detailed installation instructions, refer to installation guide, packed with product, or on the web at frigidaire.com.

Front

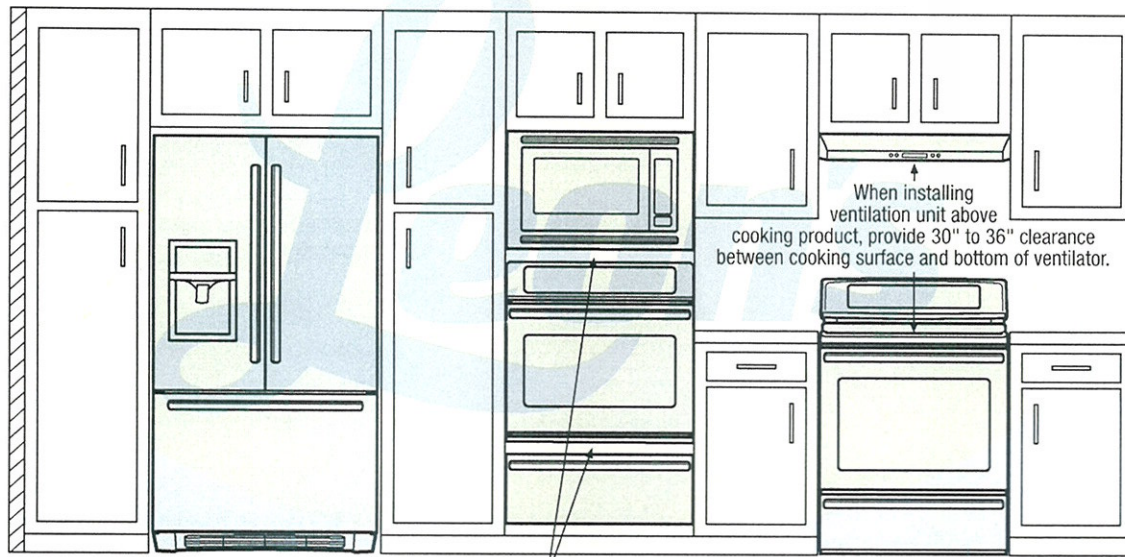


Top

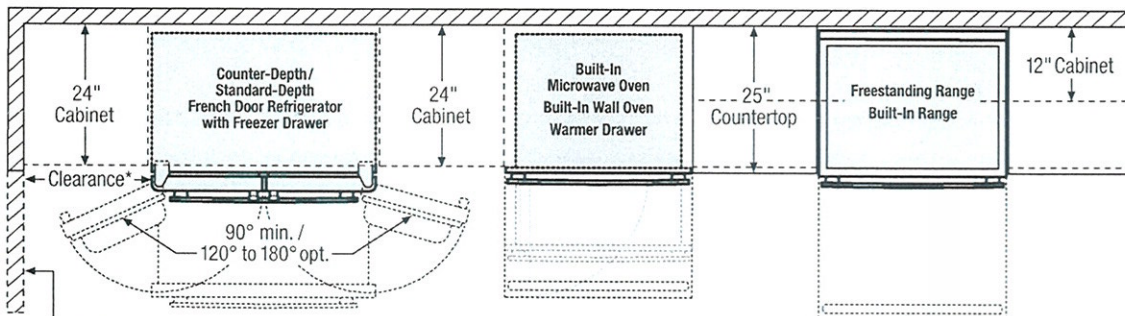

*When installing French door refrigerator adjacent to wall, cabinet or another appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide limited drawer/crisper access with restricted removal.)

When installing appliance with sliding drawer, swinging or drop-down door directly across from obstructions, provide sufficient clearance for drawer extension or door swings.


Top

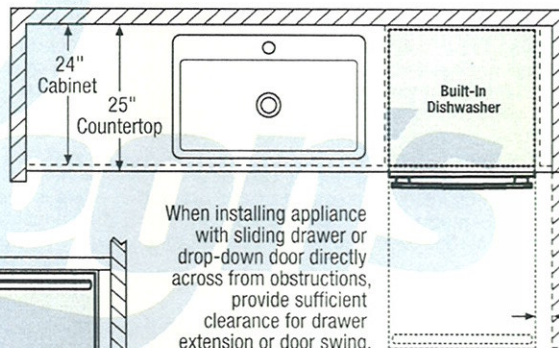

When installing appliance with sliding drawer or drop-down door adjacent to wall, cabinet, or other obstruction that extends beyond front edge of appliance, allow 2" minimum clearance between drawer or door and obstruction.

When installing appliance with sliding drawer or drop-down door directly across from obstructions, provide sufficient clearance for drawer extension or door swing.

Front

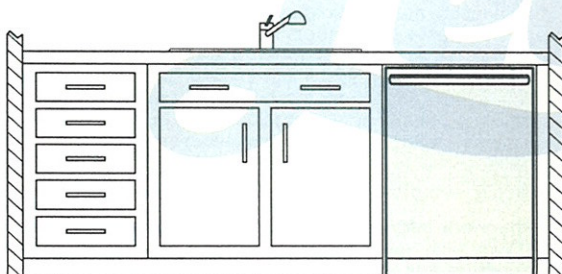

LG COOKING

LWC3063_

Combi Wall Oven

1.7 cu.ft. Microwave (Speed Oven)

Infrared Heating™

4.7 cu.ft. Oven

Crisp Convection

Self+EasyClean

SmartThinQ® Technology

LOT 5-45, PH5, INNISFIL, APPLIANCES



Enjoy new ways to control your home with LG smart appliances

- Start or stop your Oven remotely
- Set your Monitor Status from your smartphone
- Works with the LG SmartThinQ® app

SmartThinQ®

works with the Google Assistant

works with alexa

innit

sidechef

SUMMARY

Total Oven Capacity (cu. ft.)	6.4 (Upper & Lower)
Colors	Stainless Steel / Black Stainless Steel
UPPER OVEN FEATURES	
Capacity (cu.ft)	1.7
Interior(Cavity) - Upper MWO / Lower Oven	Stainless / Enamel Coating
Microwave Power output	950W
Microwave mode power consumption	1650W
Convection Bake mode power consumption	1550W
Broil mode power consumption	1650W
Convection Element (W)	1500W (Sheath heater)
Broil Upper Element (W)	1200W + 700W (Miracron heater) + 500W (Infrared Heating™)
Broil Lower Element (W)	375W (Miracron heater)
Microwave	Yes
Convection Bake	Yes
Broil	Yes
Speed cook	Yes (TurboCook™)
- # of Defrost (4 Menu)	Meat / Poultry / Fish / Bread
- # of Sensor cook (9 Menu)	Beverage / Casserole / Chicken / Pasta / Pizza / Plate of food / Rice / Soup / Vegetable
- # of Auto cook (28 Menu)	Bacon (regular sliced) / Bagels (frozen) / Baked potatoes (7-9oz/ea) / Brownie / Cod fillets (1 lb) / Corn dog (frozen) / Fresh vegetable / Frozen chicken wings / Frozen fries / Frozen chicken nuggets / Frozen pizza (regular crust) / Frozen soft pretzels / Frozen vegetable / Garlic bread (sliced, frozen) / Hamburger (1/2" thick) / Lamb chops (1/2" thick, 6-7oz) / Meat loaf (9" X 5") / Nachos / Oatmeal / Pork chops (1/2" thick, 6-7oz) / Quinoa / Rib eye steak (1" thick 14-15oz) / Rice / Salmon steak (1" thick) / Sausage / Sirloin steak (1" thick, 18-21 oz) / Tenderloin / Vegetable-canned
- # of Soften (4 Menu)	Butter & Margarine / Cream Cheese / Ice Cream / Frozen Juice
- # of Melt (5 Menu)	Butter / Caramel / Cheese / Chocolate / Marshmallow
LOWER OVEN FEATURES	
Capacity (cu.ft)	4.7
EasyClean®	Yes
Self Clean	Yes (3,4,5 hours)
Variable cleaning time	Yes (3,4,5 hours)
Variable broil	Yes (Full, Center / High, Med, Low)
Broil element	2,500 watts inner / 1,500 watts outer
Bake element	2,500 watts
Bake element type	Hidden (8 pass)
# of rack position	5
12 hrs. shut-off	Yes
- # of light	3 (Halogen Lamp - 3 dimension lighting)
Convection conversion	Yes
-Convection element	Yes (2,000 watts Sheath heater)
Convection System/Mode/Cooking System	Conventional
Convection Fan	Dual Speed (High/Low)
Oven Cooking mode	ConvBake / ConvRoast / Bake / Broil / Steam Bake / Steam Roast / Probe / more mode (Favorite/Warm/Proof)
Oven Control Features	Glass Touch (SmoothTouch™)
Door Lock	Yes

CONTROL

Oven Control Type	Glass Touch (SmoothTouch™)
Display	White VFD
Language	English / Spanish / French
Smart Function	Wi-Fi / Smart Buzzer
Clock	12 hr or 24 hr (option)
Kitchen Timer	Yes
Timed Cook	Yes
Temperature Unit of Measure	Fahrenheit / Celsius
Cooking Complete Reminder Volume	Beeper (1. Loud, 2. Low, 3. Mute)
APPEARANCE	
Available Colors	Stainless Steel / Black Stainless Steel
Handle/Knobs	Stainless Steel Finish (Aluminum) / Black Stainless Steel Finish (Aluminum)
Oven Door Feature	WideView™ Window
Scratch-Resistant	Yes
PrintProof™ Finish	Yes (Only Black Stainless Steel)

SmartThinQ® SMART FEATURES

SmartDiagnosis™	Yes
Wi-Fi Connectivity	Yes
Works with	Google Assistant and Amazon Alexa
SmartThinQ® with Innit and SideChef	Yes

DIMENSIONS/CLEARANCES/WEIGHT

Shipping Weight (lbs)	244 lbs
Product Weight (lbs)	194 lbs
Product (W x H x D)	29 3/4" x 43 13/16" x 24 1/2"
Cut-out (W x H x D)	28 1/2" x 43 8/19" x 23 1/2"
Overall Depth (in) - including handle	26 7/8"
Actual Depth with Door Open (Upper) (in)	37.1"
Actual Depth with Door Open (Lower) (in)	45.7"
Oven Interior Dimensions (Upper) (in) (W x H x D)	20 8/11" x 8 9/25" x 17 5/13"
Oven Interior Dimensions (Lower) (in) (W x H x D)	24 1/2" x 17 5/8" x 18 7/8"
Carton Dimensions (in) (W x H x D)	33" x 30" x 50"

POWER/RATINGS

Amp at 240V	32.5A
kW at 240V	7.8kW
Requirements	120 / 240 VAC, 120 / 208 VAC

ACCESSORIES

Glass Tray(Upper)	Yes
Metal Tray(Upper)	Yes
Rack(Upper)	Yes
Broiler pan & Grid	Yes
Gliding Rack	1
Heavy Duty Rack	2
Meat probe	Yes
Scouring Pad	Yes

WARRANTY

Parts & Labor	1 Year
---------------	--------

UPC CODES

LWC3063S1 (Stainless Steel)	048231339810
LWC3063BD (Black Stainless Steel)	048231339827

LG COOKING

LWC3063_

Combi Wall Oven

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS / CLEARANCES / WEIGHT

Product Dimensions (in) (W x H x D)	29 3/4" x 43 13/16" x 24 1/2"
Cut-out (W x H x D)	28 1/2" x 43 8/19" x 23 1/2"
Overall Depth (in) - including handle	25 7/8"
Actual Depth with Door Open (Upper) (in):	37.1"
Actual Depth with Door Open (Lower) (in):	45.7"
Oven Interior Dimensions (Upper) (in) (W x H x D)	20 8/11" x 8 9/25" x 17 5/13"
Oven Interior Dimensions (Lower) (in) (W x H x D)	24 1/2" x 17 5/8" x 18 7/8"
Carton Dimensions (in) (W x H x D)	33" x 30" x 50"

POWER RATINGS


Amp at 240V	32.5A
kW at 240V	7.8kW
Requirements	120 / 240 VAC, 120 / 208 VAC

INSTALLATION REQUIREMENTS


- The cabinet base platform must be able to support 202 lbs (91.65 kg) for a Microwave Combination Wall Oven. If the cabinet does not have a solid bottom, two braces or runners must be installed level with the bottom of the cutout to support the weight of the oven. Make sure the base is level and the front of the cabinet is square. If the cabinet base is not level, the oven racks will tend to slide out when opening the door.
- If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or opening are covered.
- If the cabinet does not have a front frame and the sides are less than 3/4" (1.9 cm) thick, shim both sides equally to establish the cutout width.
- The junction box must be flush with the rear wall of the cabinet as shown below.
- Allow at least a 23" clearance for the door depth when it is open.
- Kitchen cabinets in contact with the oven must be heat resistant up to 194°F (90°C), and fronts of nearby units up to at least 158°F (70°C).

CUTOUT DIMENSIONS

- Cabinet Width: 30" (762 mm)
- Recommended Minimum Cutout Location from Floor: 12" (304.8 mm)
- Cutout Depth: 23 1/2" Min. (596.9 mm)
- Cutout Width: 28 1/2" Min. (723.9 mm)
28 5/8" Max. (727 mm)
- Cutout Height: 43 7/16" Min. (1103 mm)
43 1/2" Max. (1106 mm)

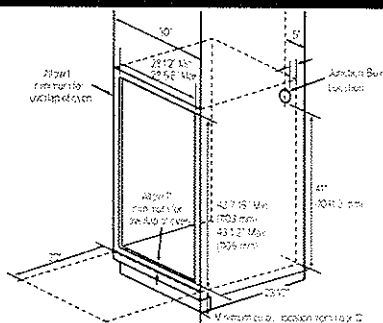


PRODUCT DIMENSIONS

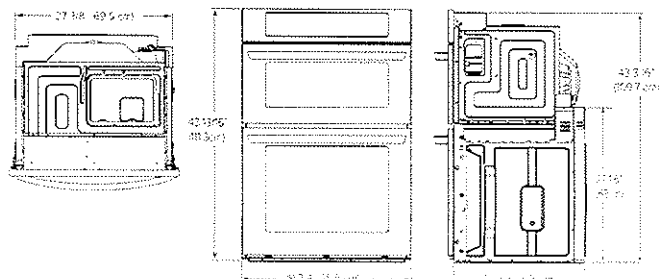


ELECTRICAL CONNECTIONS

- Be sure the wall oven is installed and grounded properly by a qualified installer or service technician.
- This wall oven must be electrically grounded in accordance with local codes or, in their absence, with the National Electrical Code ANSI/NFPA No.70- latest edition in United States, or with CSA Standard C22.1-1982 and C22.2 No.01982 (or latest edition), Canadian Electrical Code, Part 1, and all local codes and ordinances.
- This wall oven must be supplied with the proper voltage and frequency, and connected to an individual, properly grounded branch circuit, protected by a circuit breaker or fuse. For the circuit breaker or fuse required by this model, see the rating plate to find the wattage consumption and refer to the table below to get the circuit breaker or fuse amperage.
- A Microwave Combination Wall Oven can consume up to 7,800 W at 240 VAC. A 50 Amp circuit breaker with wire gauge #8 AWG must be used.
- Do Not ground to a gas pipe.
- Do Not have a fuse in the neutral or grounding circuit.
- A U.L.-listed conduit connector must be provided at the junction box.
- Prepare the electrical connection as follows:
 - Turn off the circuit breaker or remove fuses to the oven branch circuit.
 - With the oven positioned directly in front of the cabinet opening, connect the flexible conduit to the electrical junction box as shown below. Position the conduit in such a manner that it will lie on top of the oven in a natural loop when the oven is installed.
 - If local codes permit connection of the frame grounding conductor to the neutral(white) wire, follow the instructions for a 3-wire circuit connection.
 - If used in mobile homes or new construction, or a recreational vehicle, or local codes do not permit connection of the frame grounding conductor to the neutral(white) wire, follow the instructions for a 4-wire circuit connection.

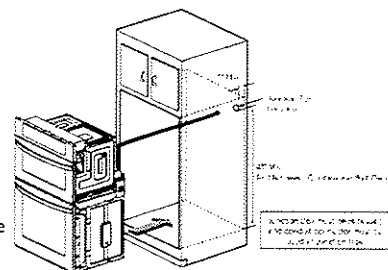

INSTALL THE OVEN

- Install the oven into the cabinet as follows:
 - Slide the oven into the opening.
 - Loop (do not tie) a 36" (91 cm) string around the conduit before the oven is slid into place. Lay the string over the top of the oven and use it to keep the conduit from falling behind the oven.
 - Lift oven into cabinet cutout using the oven opening as a grip. Carefully push against the oven front frame. Do not push against outside edges.
 - While sliding the oven back, pull the string so that the conduit lies on the top of the oven in a natural loop.
 - When you are sure the conduit is out of the way, slide the oven 3/4 way back into the opening. Remove the string by pulling on one end of the loop.
 - Secure the oven.
 - Using the mounting holes on the oven side trim as a guide, drill pilot holes for screws provided. (For securing the Combi Oven, use a minimum of 4 screws, one on each side in both the upper and lower ovens.)
 - Secure the oven to the cabinet with screws provided. If the cabinet is particle board, you must use 3/4" particle board screws. These may be purchased at any hardware store.
- Install the metal bottom trim.
 - Place the metal bottom trim centered over the pre-drilled mounting holes on the lower base.
 - Using 3 screws provided, secure the bottom trim to the bottom edge of the cabinet.
- Reinstall the oven door.



LG COOKING

LWC3063_

Combi Wall Oven

1.7 cu.ft. Microwave (Speed Oven)

Infrared Heating™

4.7 cu.ft. Oven

Crisp Convection

Self+EasyClean

SmartThinQ® Technology



Enjoy new ways to control your home with LG smart appliances

- Start or stop your Oven remotely
- Set your Monitor Status from your smartphone
- Works with the LG SmartThinQ® app

SmartThinQ®

works with the Google Assistant

WORKS WITH alexa

innit

SIDECHEF

SUMMARY

Total Oven Capacity (cu. ft.)	6.4 (Upper & Lower)
Colors	Stainless Steel / Black Stainless Steel

UPPER OVEN FEATURES

Capacity (cu.ft)	1.7
Interior(Cavity) - Upper MWO / Lower Oven	Stainless / Enamel Coating
Microwave Power output	950W
Microwave mode power consumption	1650W
Convection Bake mode power consumption	1550W
Broil mode power consumption	1650W
Convection Element (W)	1500W (Sheath heater)
Broil Upper Element (W)	1200W = 700W (Miraclon heater) + 500W (Infrared Heating™)
Broil Lower Element (W)	375W (Miraclon heater)
Microwave	Yes
Convection Bake	Yes
Broil	Yes
Speed cook	Yes (TurboCook™)
- # of Defrost (4 Menu)	Meat / Poultry / Fish / Bread
- # of Sensor cook (9 Menu)	Beverage / Casserole / Chicken / Pasta / Pizza / Plate of food / Rice / Soup / Vegetable

- # of Auto cook (28 Menu)	Bacon (regular sliced) / Bagels (frozen) / Baked potatoes (7-9oz/ea) / Brownie / Cod fillets (1 lb) / Corn dog (frozen) / Fresh vegetable / Frozen chicken wings / Frozen fries / Frozen chicken nuggets / Frozen pizza (regular crust) / Frozen soft pretzels / Frozen vegetable / Garlic bread (sliced, frozen) / Hamburger (1/2" thick) / Lamb chops (1/2" thick, 6-7oz) / Meat loaf (9" X 5") / Nachos / Oatmeal / Pork chops (1/2" thick, 6-7oz) / Quinoa / Rib eye steak (1" thick 14-15oz) / Rice / Salmon steak (1" thick) / Sausage / Sirloin steak (1" thick, 18-21oz) / Tenderloin / Vegetable-canned
----------------------------	--

- # of Soften (4 Menu)	Butter & Margarine / Cream Cheese / Ice Cream / Frozen Juice
------------------------	--

- # of Melt (5 Menu)	Butter / Caramel / Cheese / Chocolate / Marshmallow
----------------------	---

LOWER OVEN FEATURES

Capacity (cu.ft)	4.7
EasyClean®	Yes
Self Clean	Yes (3,4,5 hours)
Variable cleaning time	Yes (3,4,5 hours)
Variable broil	Yes (Full,Center / High,Med,Low)
Broil element	2,500 watts inner / 1,500 watts outer
Bake element	2,500 watts
Bake element type	Hidden (8 pass)
# of rack position	5
12 hrs. shut-off	Yes
- # of light	3 (Halogen Lamp - 3 dimension lighting)
Convection conversion	Yes
-Convection element	Yes (2,000 watts Sheath heater)
Convection System/Mode/Cooking System	Conventional
Convection Fan	Dual Speed (High/Low)
Oven Cooking mode	Conv.Bake / Conv.Roast / Bake / Broil / Steam Bake / Steam Roast / Probe / more mode (Favorite/Warm/Proof)
Oven Control Features	Glass Touch (SmoothTouch™)
Door Lock	Yes



CONTROL

Oven Control Type	Glass Touch (SmoothTouch™)
Display	White VFD
Language	English / Spanish / French
Smart Function	Wi-Fi / Smart Buzzer
Clock	12 hr or 24 hr (option)
Kitchen Timer	Yes
Timed Cook	Yes
Temperature Unit of Measure	Fahrenheit / Celsius
Cooking Complete Reminder Volume	Beeper (1. Loud, 2. Low, 3. Mute)

APPEARANCE

Available Colors	Stainless Steel / Black Stainless Steel
Handle/Knobs	Stainless Steel Finish (Aluminum) Black Stainless Steel Finish (Aluminum)
Oven Door Feature	WideView™ Window
Scratch-Resistant	Yes
PrintProof™ Finish	Yes (Only Black Stainless Steel)

SmartThinQ® SMART FEATURES

SmartDiagnosis™	Yes
Wi-Fi Connectivity	Yes
Works with	Google Assistant and Amazon Alexa
SmartThinQ® with Innit and SideChef	Yes

DIMENSIONS/CLEARANCES/WEIGHT

Shipping Weight (lbs)	244 lbs
Product Weight (lbs)	194 lbs
Product (W x H x D)	29 3/4" x 43 13/16" x 24 1/2"
Cut-out (W x H x D)	28 1/2" x 43 8/19" x 23 1/2"
Overall Depth (in) - including handle	26 7/8"
Actual Depth with Door Open (Upper) (in):	37.1"
Actual Depth with Door Open (Lower) (in):	45.7"
Oven Interior Dimensions (Upper) (in) (W x H x D)	20 8/11" x 8 9/25" x 17 5/13"
Oven Interior Dimensions (Lower) (in) (W x H x D)	24 1/2" x 17 5/8" x 18 7/8"
Carton Dimensions (in) (W x H x D)	33" x 30" x 50"

POWER/RATINGS

Amp at 240V	32.5A
kW at 240V	7.8kW
Requirements	120 / 240 VAC, 120 / 208 VAC

ACCESSORIES

Glass Tray(Upper)	Yes
Metal Tray(Upper)	Yes
Rack(Upper)	Yes
Broiler pan & Grid	Yes
Gliding Rack	1
Heavy Duty Rack	2
Meat probe	Yes
Scouring Pad	Yes

WARRANTY

Parts & Labor	1 Year
---------------	--------

UPC CODES

LWC3063ST (Stainless Steel)	048231339810
LWC3063BD (Black Stainless Steel)	048231339827

LWC3063_

Combi Wall Oven

QUICK INSTALL & CLEARANCES

For full installation directions/clearances please refer to the corresponding User Manual and Installation Guide.

DIMENSIONS / CLEARANCES / WEIGHT

Product Dimensions (in) (W x H x D)	29 3/4" x 43 13/16" x 24 1/2"
Cut-out (W x H x D)	28 1/2" x 43 8/19" x 23 1/2"
Overall Depth (in) - including handle	26 7/8"
Actual Depth with Door Open (Upper) (in):	37.1"
Actual Depth with Door Open (Lower) (in):	45.7"
Oven Interior Dimensions (Upper) (in) (W x H x D)	20 8/11" x 8 9/25" x 17 5/13"
Oven Interior Dimensions (Lower) (in) (W x H x D)	24 1/2" x 17 5/8" x 18 7/8"
Carton Dimensions (in) (W x H x D)	33" x 30" x 50"

POWER RATINGS


Amp at 240V	32.5A
kW at 240V	7.8kW
Requirements	120 / 240 VAC, 120 / 208 VAC

INSTALLATION REQUIREMENTS


- The cabinet base platform must be able to support 202 lbs (91.65 kg) for a Microwave Combination Wall Oven. If the cabinet does not have a solid bottom, two braces or runners must be installed level with the bottom of the cutout to support the weight of the oven. Make sure the base is level and the front of the cabinet is square. If the cabinet base is not level, the oven racks will tend to slide out when opening the door.
- If marks, blemishes or the cutout opening are visible above the installed oven, it may be necessary to add wood shims under the runners and front trim until the marks or opening are covered.
- If the cabinet does not have a front frame and the sides are less than 3/4" (1.9 cm) thick, shim both sides equally to establish the cutout width.
- The junction box must be flush with the rear wall of the cabinet as shown below.
- Allow at least a 23" clearance for the door depth when it is open.
- Kitchen cabinets in contact with the oven must be heat resistant up to 194°F (90°C), and fronts of nearby units up to at least 158°F (70°C).

CUTOUT DIMENSIONS

- Cabinet Width: 30" (762 mm)
- Recommended Minimum Cutout Location from Floor: 12" (304.8 mm)
- Cutout Depth: 23 1/2" Min. (596.9 mm)
- Cutout Width: 28 1/2" Min. (723.9 mm)
28 5/8" Max. (727 mm)
- Cutout Height: 43 7/16" Min. (1103 mm)
43 1/2" Max. (1106 mm)

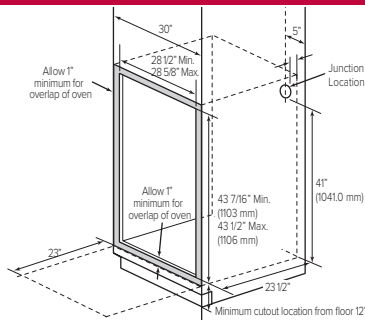


PRODUCT DIMENSIONS

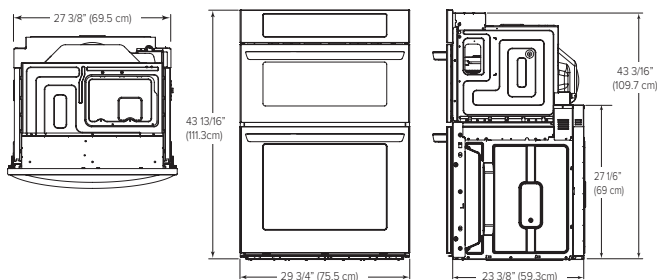


ELECTRICAL CONNECTIONS

- Be sure the wall oven is installed and grounded properly by a qualified installer or service technician.**
- This wall oven must be electrically grounded in accordance with local codes or, in their absence, with the National Electrical Code ANSI/NFPA No.70- latest edition in United States, or with CSA Standard C22.1-1982 and C22.2 No.01982 (or latest edition), Canadian Electrical Code, Part 1, and all local codes and ordinances.
- This wall oven must be supplied with the proper voltage and frequency, and connected to an individual, properly grounded branch circuit, protected by a circuit breaker or fuse. For the circuit breaker or fuse required by this model, see the rating plate to find the wattage consumption and refer to the table below to get the circuit breaker or fuse amperage.
- A Microwave Combination Wall Oven can consume up to 7,800 W at 240 VAC. A 50 Amp circuit breaker with wire gauge #8 AWG must be used.
- Do Not ground to a gas pipe.
- Do Not have a fuse in the neutral or grounding circuit.
- A U.L.-listed conduit connector must be provided at the junction box.
- Prepare the electrical connection as follows:**
- Turn off the circuit breaker or remove fuses to the oven branch circuit.
- With the oven positioned directly in front of the cabinet opening, connect the flexible conduit to the electrical junction box as shown below. Position the conduit in such a manner that it will lie on top of the oven in a natural loop when the oven is installed.
- If local codes permit connection of the frame grounding conductor to the neutral(white) wire, follow the instructions for a 3-wire circuit connection.
- If used in mobile homes or new construction, or a recreational vehicle, or local codes do not permit connection of the frame grounding conductor to the neutral(white) wire, follow the instructions for a 4-wire circuit connection.

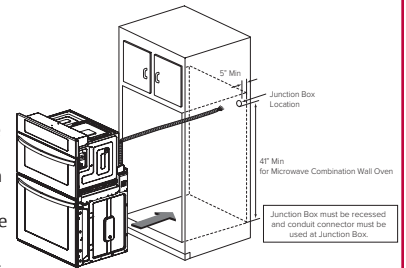

INSTALL THE OVEN

- Install the oven into the cabinet as follows:**
- Slide the oven into the opening.
 - Loop (do not tie) a 36" (91 cm) string around the conduit before the oven is slid into place. Lay the string over the top of the oven and use it to keep the conduit from falling behind the oven.
 - Lift oven into cabinet cutout using the oven opening as a grip. Carefully push against the oven front frame. Do not push against outside edges.
 - While sliding the oven back, pull the string so that the conduit lies on the top of the oven in a natural loop.
 - When you are sure the conduit is out of the way, slide the oven 3/4 way back into the opening. Remove the string by pulling on one end of the loop.
- Secure the oven.
 - Using the mounting holes on the oven side trim as a guide, drill pilot holes for screws provided. (For securing the Combi Oven, use a minimum of 4 screws, one on each side in both the upper and lower ovens.)
 - Secure the oven to the cabinet with screws provided. If the cabinet is particle board, you must use 3/4" particle board screws. These may be purchased at any hardware store.
- Install the metal bottom trim.
 - Place the metal bottom trim centered over the pre-drilled mounting holes on the lower base.
 - Using 3 screws provided, secure the bottom trim to the bottom edge of the cabinet.
- Reinstall the oven door.



LOT 5-45

LFCC23S96S

23 cu. ft. InstaView™ Door-in-Door® Counter-Depth Refrigerator



1/12

\$2,599.00

\$300.00 OFF
WAS \$2,899.00

Pay as low
as

In Stock Free In-Home Delivery

\$145/mo
with



STAINLESS STEEL

Enter ZIP for Estimated Delivery

ZIP Code

Submit

ADD TO CART

[Find a Retailer](#)

Add to Wishlist

☐ Add to Compare

KEY FEATURES

23 cu. ft. Capacity

InstaView™ Door-in-Door®

OVERVIEW

SPECS

REVIEWS


RELATED
PRODUCTS

SUPPORT

WHERE TO BUY

Space When You Need It

Get more space for groceries in a great feature-packed refrigerator. Nothing beats the convenience of having more food when you need it, and with a generous 23 cu. ft. of space, you'll have room and room to grow.

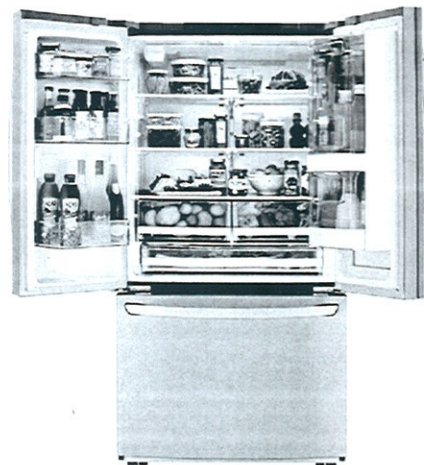

LOT 5-45, PH5, INNISFIL, APPLIANCES

SUMMARY

Series	LG
Type	French Door
Door Type	3-Door
InstaView™ Door-in-Door®	Yes
Counter Depth	Yes
Total Capacity (cu.ft.)	22.60
Color	PrintProof™ Stainless Steel

CAPACITY

Refrigerator (cu.ft.)	15.50
Freezer (cu.ft.)	7.30
Total Capacity (cu.ft.)	22.80

ENERGY

Energy Consumption (kWh/Year)	593
ENERGY STAR® Qualified	Yes

WATER & ICE SYSTEM

Daily Ice Production (lbs)	2.5 lbs
IcePlus™ Production (lbs)	2.7 lbs

LOT 5-45, PH5, INNISFIL, APPLIANCES

Ice Storage Capacity (lbs)	4.0 lbs
Ice System	Factory Installed Ice Maker
Water Filter	LT1000P

COOLING

Linear Compressor	Yes
Smart Cooling™ System	Yes
Door Cooling+	Yes
Multi-Air Flow™ System	Yes
Temperature Sensors	5
Evaporator	1
Refrigerant	R600a: Low Global Warming Potential, Zero Ozone Depletion Potential and More Energy Efficient Refrigerant than R134a

CONVENIENCE

Display Type	Membrane/White LED
Temperature Controls	Electronic/Digital
Auto Closing Door Hinge	Yes
LoDecibel™ Quiet Operation	Yes

REFRIGERATOR

No. of Shelves	4 Split
-----------------------	---------

- Cantilevered Shelves

Yes

Shelf Construction

Spill Protector™ Tempered Glass

Crisper Bins

2 Humidity Crisper

Glide N' Serve™ Drawer

Yes

Refrigerator Light

Ceiling LED (Frameless)

REFRIGERATOR DOOR

InstaView™ Door-in-Door®

Yes

No. of Bins

7 Total (Including Door-in-Door®)

Door Bin Construction

1 Piece (clear)

FREEZER

Door Type

Pull Drawer

Drawers

2-Tier Organization

DuraBase™ Solid Drawer Base

Yes

Drawer Divider

Yes

Ice Bin / In-Door Ice

Icemaker & Ice bin in the freezer

Freezer Handle

SmartPull™ Handle

THINQ® SMART FEATURES

SmartDiagnosis™

Yes

LOT 5-45, PH5, INNISFIL, APPLIANCES

MATERIALS AND FINISHES

Contour Door	Yes
Hidden Hinges	Yes
Surface	Smooth
Fingerprint & Smudge Resistant Exterior	Yes
Handles	Matching Commercial Handles
All Available Colors	PrintProof™ Stainless Steel
Blowing Agent	Cyclopentane - Low Global Warming Potential, and Zero Ozone Depletion Potential Blowing Agent

DIMENSIONS/CLEARANCES/WEIGHTS

Depth with Handles	31 1/4"
Depth without Handles	28 3/4"
Depth without Door	24 3/4"
Depth (Total with Door Open)	43 1/2"
Height to Top of Case	68 1/2"
Height to Top of Door Hinge	69 3/4"
Width	35 3/4"
Width (Door Open 90° with Handle)	44 1/4"
Width (Door Open 90° without Handle)	39 1/4"
Door Edge Clearance with Handle	4 1/2"

LOT 5-45, PH5, INNISFIL, APPLIANCES

Door Edge Clearance without Handle	1 1/3"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Weight (Unit/Carton)	280 lbs/304 lbs
Carton Dimensions (WxHxD)	38" x 73" x 37"

LIMITED WARRANTY

Parts & Labor	1 Year
Sealed System (Parts & Labor)	5 Years
Compressor (Parts & Labor)	5 Years
Linear Compressor (Parts Only)	6-10 Years

UPC CODES

UPC	048231804783
-----	--------------