

NX60T871SS

SAMSUNG

Samsung Front Control Slide-in Gas Range with Smart Dial & Air Fry

6.0 cu. ft. Capacity



Signature Features

Smart Dial

- The new Smart Dial simplifies oven settings in a single dial and intuitively learns based on your cooking preferences.

Air Fry

- Cooking just got healthier* with new Air Fry mode. Using little to no oil, you can quickly prepare your favorite fried foods right in your oven. Air Fry tray included.

*As compared to deep frying.

Convection

- Powerful convection saves you time by cooking food fast and more evenly. Perfect for baking and roasting.

Available Colors



Fingerprint Resistant
Stainless Steel (shown)



Fingerprint Resistant
Black Stainless Steel



Fingerprint Resistant
Tuscan Stainless Steel



Smart Dial



Air Fry

Features

- Smart Dial
- Air Fry, Tray Included
- Convection
- Illuminated Knobs
- Fingerprint Resistant Finish
- Reversible Cast-Iron Griddle
- Large Oven Capacity – 6.0 cu. ft.
- Ready2Fit™ Guarantee
- Temperature Probe
- Wok Ring

- Flexible Cooktop:
Five Burner Cooktop
 - Right Front: 22K BTU Dual Ring Brass Power Burner
 - Left Front: 16K BTU
 - Right Rear: 5K BTU
 - Left Rear: 9.5K BTU
 - Center (Oval): 10K BTU

Convenience

- Wi-Fi Connectivity
- Voice-Enabled
- Convection Auto Conversion
- Self Clean
- Child Safety Lock
- Delay Start
- Auto Oven Light
- Kitchen Timer
- Sabbath Mode




NX60T8711SS

LOT 5-10, PH5, APPLIANCES

SAMSUNG


Samsung Front Control Slide-in Gas Range with Smart Dial & Air Fry

Installing Your Range

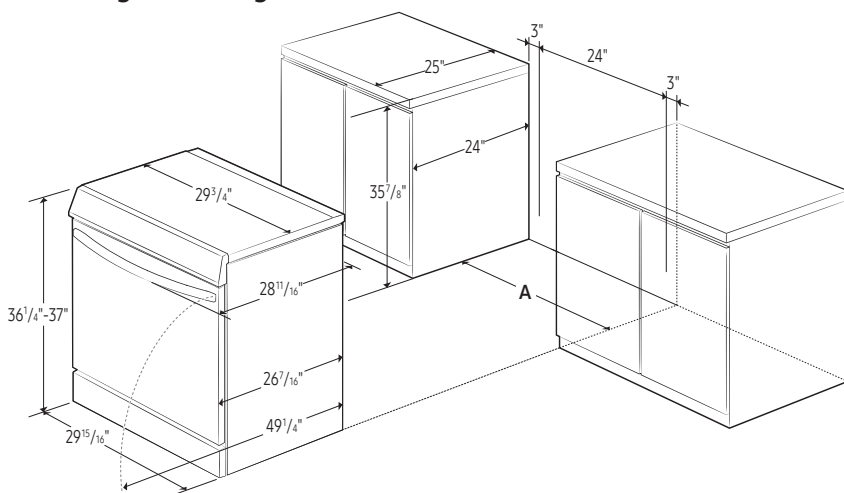

A: Cabinet opening 30"

IMPORTANT: If your cabinets are over 37" high, you must install this range on a hard, heat-resistant support that raises the surface of the range so that it is about even with the countertop.

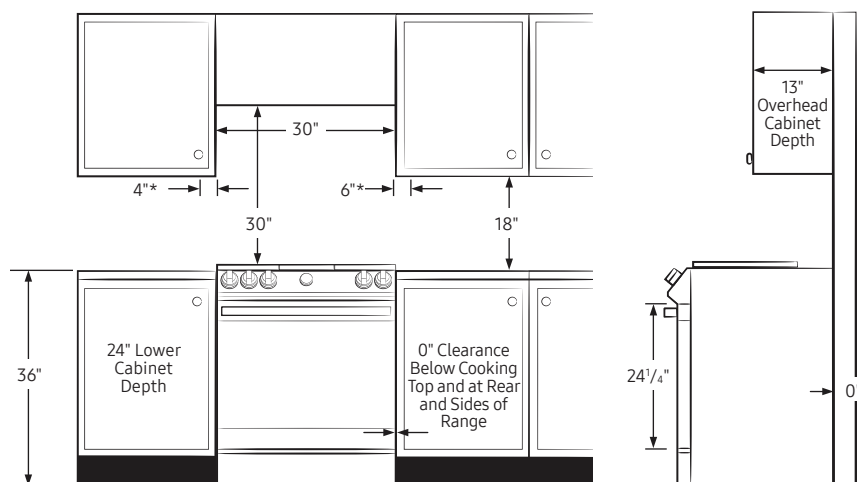


*Side clearance above cooking surface to any objects, i.e., wall.

IMPORTANT: Consult with Installation Manual for detailed instructions before installing.

All ranges must be installed with the Anti-Tip device that is included.

Recommended Locations for Gas Piping and Electrical Outlets

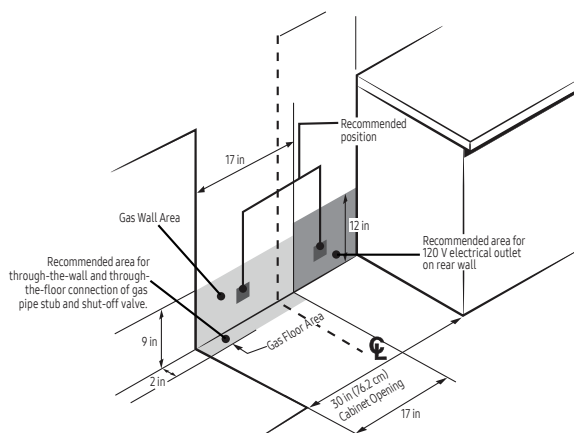

Power Source

120V/60Hz/20A

Total Power (BTU)

62,500 BTU

Black Enamel 5-Burner Cooktop

- Right Front: 22K BTU Dual Ring, Brass
- Left Front: 16K BTU
- Right Rear: 5K BTU
- Left Rear: 9.5K BTU
- Center (Oval): 10K BTU

Oven

- Capacity: 6.0 cu. ft.
- Convection Element/Heater
- Convection Bake
- Convection Roast
- Bake
- Variable Broil: Low/High
- Air Fry
- Bread Proof
- Dehydrate

Warranty

One (1) Year Parts and Labor

Product Dimensions & Weight (WxHxD)

Actual Oven Dimensions:

24¹³/₁₆" x 21⁵/₈" x 19⁵/₈"

Outside Dimensions:

29¹⁵/₁₆" x 36¹/₄-37" (Adjustable) x 28¹¹/₁₆"

Weight: 220 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions:

33¹/₁₆" x 41³/₄" x 30⁵/₁₆"

Weight: 246 lbs

Color

Model

UPC Code

Fingerprint Resistant

NX60T8711SS

887276409139

Stainless Steel

Fingerprint Resistant

NX60T8711SG

887276409122

Black Stainless Steel

Fingerprint Resistant

NX60T8711ST

887276409269

Tuscan Stainless Steel



Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.

©2020 Samsung Electronics America, Inc. 85 Challenger Road, Ridgefield Park, NJ 07660. Tel: 800-SAMSUNG. samsung.com. Samsung is a registered trademark of Samsung Electronics Co. Ltd.

Cooktop

Samsung 30 in. 6.0 cu.ft Stainless-steel Slide-in Gas Range with Air Fryer

Specifications

Brand	Samsung
Colour	Stainless Steel
Compatible with	Alexa
Compatible with	Google Assistant
Compatible with	SmartThings
Connectivity	Wi-Fi Enabled
Cooktop Style	Gas
Cooktop Surface Type	Grate
Dimensions: W x D x H	76.2 cm x 72.87 cm x 93.98 cm (30 in. x 28.69 in. x 37 in.)
Features	Smart
Fit Width	30 Inch
* Model	NX60T8711SS/AA *
Number of Burners	5
Number of Oven Racks	2
Number of Rack	7
Positions	
Oven Capacity	169.9 L (6 cu. ft.)
Oven Cleaning Options	Self Cleaning
Oven Configuration	Single Oven
Oven Cooking Process	Air Fry
Oven Cooking Process	True Convection
Oven Features	Self-Cleaning
Oven Settings	Delay Bake/Delay Start
Oven Settings	Keep Warm
Power Source	Gas
Range Type	Slide-In
Weight	99.7 kg (219.8 lb.)

ME11A7710DG

LOT 5-10, PH5, APPLIANCES

SAMSUNG

1.1 cu. ft. Low Profile Over-the-Range Microwave



Signature Features

Space saving design

Accommodates a variety of snacks and meals. Enough room to accommodate everyday meals.

Powerful Suction

Powerful ventilation system that eliminates steam, fumes, and odour from the kitchen. Quiet system clears the air with 550 cubic feet per minute of turbo ventilation.

Effortless Control with Auto Hood Connectivity

Striking ice blue LED display provides a stylish accent to enhance any kitchen interior. Time and setting are clearly visible for greater cooking convenience.

Available Colours




Black Stainless Steel



Stainless Steel



4-Speed/550 CFM Ventilation

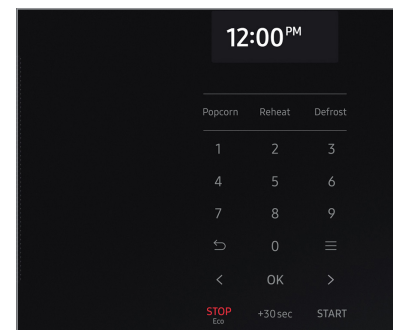

LED Display

Features


- 1.1 cu. ft. Microwave Capacity
- 4-Speed/550 CFM Ventilation
- System LED Display
- Cooking Presets
- Eco Mode
- Auto Connectivity

Convenience

- Wi-Fi
- Voice Control
- SmartThings Cooking
- Vent Fan Control: On/Off

1.1 cu. ft. Low Profile Over-the-Range Microwave


Dimensions

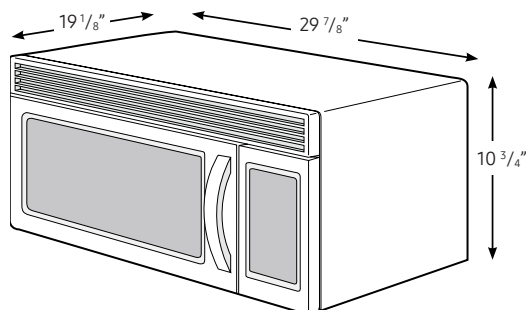

Specifications:

Power Output: 1000 W
 Power Consumption: 1,500 W
 Power Source: 120V/60 Hz
 Plug Type: 3 prong plug
 Power Cord Length: 1 m
 Control Method: Digital Glass Touch
 Display: LED
 Cooking Control: 10 power levels including defrost
 Cooking Timer: Digital, up to 99 minutes, 99 seconds
 Microwave Distribution System: Turntable
 Vent Fan: 550 CFM
 Vent Fan Control: On/Off

Installation Specifications

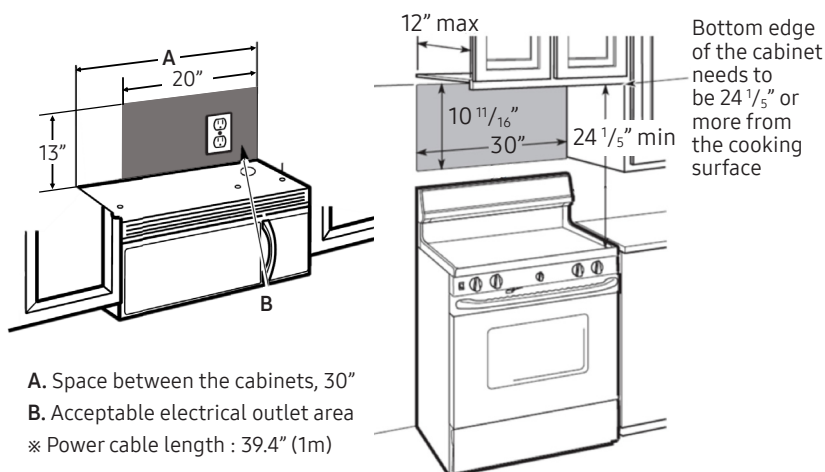

Warranty

One (1) Year Parts and Labour
 Five (5) Years Parts on Magnetron

Product Dimensions & Weight (WxHxD)

Dimensions: 29 7/8" x 10 3/4" x 19 1/8"
 Dimensions (without filter): 29 7/8" x 15 5/8" x 16 1/2"
 Cavity Dimensions: 18 1/2" x 6 15/16" x 14 15/16"
 Weight: 55.8 lbs (25.3 kg)

Shipping Dimensions & Weight (WxHxD)

Dimensions: 33 1/5" x 15 2/5" x 22 1/10"
 Weight: 65.3 lbs (29.6 kg)

Colour	Model #	UPC
Black Stainless Steel	ME11A7710DG/AC	887276582146
Stainless Steel	ME11A7710DS/AC	887276582153

This microwave oven is designed for adaptation to the following three types of ventilation:

- A. Outside Top Exhaust (Vertical Duct)
- B. Recirculating (Non-Vented Ductless)
- C. Outside Back Exhaust (Horizontal Duct)
- The space between the cabinets must be 30" wide and free of obstructions.
- This microwave oven is for installation over ranges up to 36" wide.
- If you are going to vent your microwave oven to the outside, see the Hood Exhaust Section for exhaust duct preparation.

FOR EASIER INSTALLATION AND PERSONAL SAFETY, WE RECOMMEND THAT TWO PEOPLE INSTALL THIS MICROWAVE OVEN.

CAUTION: For personal safety, remove the house fuse or open the circuit breaker before beginning the installation to avoid severe or fatal shock injury.

CAUTION: For personal safety, the mounting surface must be capable of supporting the cabinet load in addition to the added weight of this 69 pound product, plus additional oven loads of up to 50 pounds or a total weight of 109 pounds.

CAUTION: For personal safety, do not install this product in cabinetry configured as an island or a peninsula. The microwave oven must be mounted to BOTH a top cabinet AND a wall.

Microwave

Samsung 1.1 Cu.ft. 550 CFM Black Stainless Steel Slim Over the Range Microwave

Specifications

Brand	Samsung
Capacity	31.15 L (1.1 cu. ft.)
Colour	Black Stainless Steel
Compatible with	Google Assistant
Compatible with	Alexa
Compatible with	SmartThings
Connectivity	Wi-Fi Enabled
Cooking Mode/Settings	Defrost
Cooking Mode/Settings	Sensor Cook
Dimensions: W x D x H	75.9 cm x 48.59 cm x 27.3 cm (29.88 in. x 19.13 in. x 10.75 in.)
Features	Fingerprint Resistant
Features	Smart
Features	Turntable
Installation Type	Over-the-Range
✕ Model	ME11A7710DG/AC ✕
Vent Power (CFM)	550 CFM
Voltage	120 Volt
Weight	26.72 kg (58.9 lb.)

Fridge

Samsung BESPOKE 36 in 23.9 cu ft Stainless Steel 3 Door French Door Counter Depth Refrigerator with Beverage Center

Specifications

Brand	Samsung
Colour	Stainless Steel
Connectivity	Wi-Fi Enabled
Dimensions (WxDxH)	90.93 cm x 73.15 cm x 177.8 cm (35.8 in. x 28.8 in. x 70 in.)
Features	Dual Cooling
Features	Energy Star Certified
Fit Width	34 - 36 Inch Wide
Freezer Features	Ice Maker
Freezer Features	Interior LED Lighting
Model	RF24BB6600QLAA
Overall Capacity	20 - 24.9 cu. ft.
Refrigerator Capacity	676.77 L (23.9 cu. ft.)
Refrigerator Features	Interior LED Lighting
Refrigerator Features	Water Dispenser
Refrigerator Features	Water Filter
Refrigerator Installation Depth	Counter Depth
Refrigerator Shelf Material	Tempered Glass
Refrigerator Type	Bottom Freezer
Refrigerator Type	French Door
Warranty Type	Appliances
Weight	139.98 kg (308.6 lb.)

Dishwasher

Whirlpool 24 in. Stainless Steel Large Capacity Dishwasher with 3rd Rack

Specifications

Brand	Whirlpool
Colour	Stainless Steel
Control Panel Style	Hidden
Dimensions: W x D x H	60.66 cm x 62.23 cm x 87.48 cm (23.88 in. x 24.5 in. x 34.44 in.)
Features	Adjustable Racks
Features	Delay Start
Features	Quietest (0-50 dBA)
Features	Stainless Steel Tub
Fit Width	24 Inch
Installation Type	Built-In
Model	WDTA50SAKZ
Number of Racks	3
Number of Wash Cycles	5 Cycle
Power Source	Electric
Sound Rating	47 dBA
Tub Material	Stainless Steel
Weight	40.37 kg (89 lb.)