Sales Selection Sheet Checklist

Model: 20-1957 B BRAXTON

LOT 697-5

Page 1 of 1

1 of 46

PURCHASERS: NICOLE, AMANDA DIAS/ **Heathwood Homes (Whitby) Limited VENDOR: WOB DECK ON MAIN** FINISHED BASEMENT **COLD CELLAR UPGRADED / MODIFIED ELEVATION CORNER UPGRADE** REAR UPGRADE SIDE UPGRADE **CEILING UPGRADE - SMOOTH** MAIN FLOOR SECOND FLOOR **BASEMENT** LOWER LEVEL ADDITIONAL ROUGH-INS 200 AMP SERVICE (STD 200AMP TOWNS) WET BAR ROUGH-IN **HUMIDIFIER (STD in Singles)** Y AIR CONDITIONING (SITE STD) **GAS ROUGH-IN STOVE DRYER BBQ** ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE Y 6 IN ROUND DUCT 7 IN ROUND DUCT (STD FOR TOWNS) **FULL BASEMENT STAIRS:** Paint Grade **UPPER BASEMENT STAIRS:** N/A LOWER LEVEL STAIRS: All Oak LOWER BASEMENT STAIRS: N/A MAIN STAIRS: All Oak MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A June 22, 2022 TINA LEFUR June 22, 2022 Signature on file **Decor Consultant: Date** Purchaser: Date June 23, 2022 MARILYN ROSEN **Purchaser: Date Heathwood Homes (Whitby) Limited Date**

NICOLE, AMANDA DIAS/ Project: Country Lane Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON



Locked: Closed:

nen/Breakfast		
Cabinet Colour/Style	0	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***
Island Cabinet Colour/Style	0	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD***
Sink	4010	Plumbing-KINDRED Kitchen Sink Collection - Reginox NDC1827 RU/9-Double (Large Bowl/Full Bowl) Undermount Sink (or equivalent)-Stainless Steel
Crumb Vac Color	9486	Vacuum-Crumb Vac (Dust Pan)-Silver
HoodFan	9904	YWMH31017HZ-Whirlpool Over-The-Range Microwave Hood Combination-SS-30 inch
Opt. Backsplash	9904	OD.ON.DGR.02.HEX.MT-ONTARIO HEXAGON MATTE-DARK GREY ***2***
Opt. Backsplash Grout	2225	Grout-(27) Silver ***STD***
Opt. Backsplash Tile Pattern	3110	HORIZONTAL HEX ***STD***
Flooring	8913	UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Direction on Sketch Page ***2***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3040	FRONT TO BACK ***STD***

- Purchasers have been advised: standard fridge opening is a minimum 37 $3/8 \times 73 \ 3/8$ inches. Ice Waterline Rough-In is included.
- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

	_		_	_		
Comment						

Foyer			
Flooring	8913	UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile Direction on Sketch Page ***2***	S 3
Floor Tile Grout	2225	Grout-(27) Silver ***STD***	
Floor Tile Pattern	3050	SIDE TO SIDE ***STD***	
5 4 67			

NICOLE, AMANDA DIAS/ Project: Country Lane Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON



Locked: Closed:

Comment				
Powder Room				
Flooring		8913	UN.BL.BIA.1224-Biel-Bianco (White)-12 x 24 See Tile	S 3
3			Direction on Sketch Page ****2***	
Floor Tile Gr	out	2225	Grout-(27) Silver ***STD***	
Floor Tile Pa	ttern	3040	FRONT TO BACK ***STD***	
Plumbing Fix	ture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***	7
Comment				
Great Room				
Flooring		7502	Red Oak Pearl-Vintage	7
Comment Great Room Fire	place		Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch	
Туре	DIA	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***	7
Mantle		8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***	PG 19
Opt. Surroun	d	1111	N/A *****	Ī
- Purchasers	have been advised:	heat from the	e FP can damage TV above a FP and items placed on mantle.	
- Heathwood Fireplace aft		will not be liab	ole for any damage on items placed and or installed above a	_
Comment				
Main Hall (Landiı	ngs)			
Flooring	- 3 - /	7502	Red Oak Pearl-Vintage	7
· · · · · · · · · · · · · · · · · · ·			Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch	
Comment				
Upper Hall				
Flooring		7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch	
Comment				
Page 2 of 7				

NICOLE, AMANDA DIAS/ Project: Country Lane Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON



Locked:

		Closed.
Master Bedroom		
Flooring	7502	Red Oak Pearl-Vintage
S .		Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch
		3
Comment		
Bedroom 2		
Flooring	7502	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
. 10011119	. 332	
Comment		
Bedroom 3		
Flooring	7502	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
. 10011119	. 332	
Comment		
Master Ensuite		
Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***
•		
Cabinet Hardware	7672	135-HARDWARE ***STD***
Countertop	8797	6697-46-Countertop-ARGENTO ROMANO ETCHINGS
		FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Floor Tile	1111	GE.SU.ATR.1313 Sauble Anthracite (Black) 13
Flore Till Control	555	0 . 1 (47) 01
Floor Tile Grout	2221	Grout-(47) Charcoal ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
<u></u>		
Shower Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Onowor Wall The Fattern	3070	I I I I I I I I I I I I I I I I I I I
Shower Floor Tile	8666	OD.ON.DGR.0202.MT.N-Ontario Series Mosaic-Dark
		Grav-2 v 2 ***1***
Page 3 of 7		

NICOLE, AMANDA DIAS/ Project: Country Lane Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON



Locked: Closed:

		OIGY-Z A Z
Shower Floor Tile Grout	7704	Grout-(19) Pearl Gray ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment	1707	I family includes with E OTE
Main Bathroom		
Cabinet Colour/Style	1737	Viking III-SIMCOE-NAVY BLUE-3DL ***STD***
Cabinet Hardware	7672	135-HARDWARE ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Floor Tile	1111	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
vvan ine	9020	Q1.WV.WIII.0010-Weave-Wilite-0 X 10 STB
Wall Tile Grout	2226	Grout-(00) White ***STD***
Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Opt. Shower Floor Tile	1111	N/A *****
Opt. Shower Floor Tile Grout	1111	N/A *****
Opt. Shower Floor Tile Pattern	1111	N/A *****
Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		

NICOLE, AMANDA DIAS/ Project: Country Lane Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON



Locked: Closed:

Laundry Room			
Flooring		1737	GE.BY.AZR.1313 New Byzantine Azzuro 13
Comment	STANDARD SILVER GR	OUT	
Lower Level Fam	nily Room		
Flooring		1737	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment			
Lower Level Mud	Room and Closet		
Flooring		1737	GE.SU.ATR.1313 Sauble Anthracite (Black) 13
Floor Tile Gro	out	7704	Grout-(19) Pearl Gray ***STD***
Floor Tile Pa		3000	STANDARD SQUARE ***STD***
1 loor tile i a	uem	3000	STANDARD SQUARE STD
r			
Comment			
L			
0	De due e un 4		
Opt. Lower Level	Bearoom 4	1111	N/A *****
Flooring		1111	JIV/A
Comment			
L			
	Bedroom 4 Hallway		
Flooring		1111	N/A *****
Comment			
Opt. Lower Level	Bedroom 4 Mud Roon	n	
Flooring		1111	N/A *****
Floor Tile Gro	out	1111	N/A *****
Floor Tile Pa		1111	N/A *****
ו וטטו ווופ ו מ			. *// *

NICOLE, AMANDA DIAS/ Project: Country Lane Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON 7 Created: 6, 2012 10:30: 9

Locked: Closed:

Comment		
Opt. Lower Level Bedroom 4 Bathroo	m	
Cabinet Colour/Style	1111	N/A *****
Cabinet Hardware	1111	N/A *****
Countertop	1111	N/A *****
o sum on to p		
Countertop Edge	1111	N/A *****
Floor Tile	1111	N/A *****
rioor riie	1111	
Floor The Occupa	4444	h/A *****
Floor Tile Grout Floor Tile Pattern	1111 1111	N/A ***** N/A *****
Floor file Falletti	1111	INA
Wall Tile	1111	N/A *****
Well The Orest	4444	h/A +++++
Wall Tile Grout Wall Tile Pattern	1111	N/A ***** N/A *****
wan me rattem	1111	INA .
Opt. Shower Floor Tile	1111	N/A *****
opt. Chower rise. The		
Opt. Shower Floor Tile Grout	1111	N/A *****
Opt. Shower Floor Tile Pattern	1111	N/A *****
		- L
Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****
Plumbing Fixture (colour) Comment	1111	N/A *****
Comment		
Lower Level and Main Stairs		
Туре	1712	Oak Stairs ***STD***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Handrail/Pickets/Posts Type	8148	Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)-BLACK ***2***

7922

Handrail/Pickets/Posts Colour

Page 6 of 7

Fclinse (Pewter) STAIN TO COMPLIMENT HARDWOOD

NICOLE, AMANDA DIAS/ Project: Country Lane Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON



Locked: Closed:

Hanaran	in lokelon dele delegi	· V	AND WILL	VARY FROM FLOORING ***	99***
Custom	Stain/Paint	1111	N/A *****		
l andine	(0)	7502	Pod Ook D	earl-Vintage	
Landing	(S)	7502	Engineered	ean-vintage d-PEWTER/ECLIPSE-3/4 incl	n x 3 1/4 inch
Opt. Carpet Runner		1111	N/A *****		
Comme	nt				
Basement St	toiro				
	lairs	1713	Daint Grad	e Stairs ***STD BASEMENT	QTAID ***
Type		1713	Faint Grau	e Stalls STD BASEWENT	STAIR
Comme	nt 5				
	L				
Throughout		_			
	s and Plug	5796	Decora Wh	nite Switches and Plugs ***S	TD***
Thresho	•	2232		sholds ***STD***	
Underpa	ad	1079	500 Series	-Underpad ***STD***	
Trim Siz	е	8705	4 ¼ Baseb	oard and 2 ¾ Casings ***STE)***
Trino D	aint Colour	1716	Tring \\/\LIT	E ***STD***	
	Paint Colour	1717		ARM GREY ***STD***	
Commei		17 17	22-VVaII-VV/	ARWIGRET SID	
Commo					
Purchaser:					
	NICOLE, AMANDA DIAS		Date	Decor Consultant	Date
Purchaser:			D. (.	Otl	- -
			Date	Country Lane	Date Approved

CONSTRUCTION SUN

HEATHWOOD HOME AT LAST.

Lot: 697-5

Model: 20-1957 B BRAXTON

9 of 46

Project/Phase: Country Lane / 6

ADMIN FEE

Invoice	Qty.	Description
1213	1	- The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not entitled to a referral fee under Heathwood Homes Referral program.
28Nov22 NoCat		

APPLIANCES

Invoice	Qty.	Description
1100	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
335,505		
25Nov22		
		CABINETRY-Notify; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct Size change
1213	1	- Five Appliances: SS Fridge, Stove, Dishwasher; White Front Loader Washer/Dryer – Townhomes
28Nov22 NoCat		

CABINETRY

Invoice	Qty.	Description
1100 335,505 25Nov22 **	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ CABINETRY-Notify; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct Size change t
1100 336,763 25Nov22	1	KITCHEN - Cabinetry - Opt. Light Valance Trim Only - UPG
1100 335,950 25Nov22	1	MASTER ENSUITE - CABINETRY-D04-Increase vanity to kitchen height greater than 3? (90cm high, maintains vanity depth) VIKING
1100 335,976 25Nov22	1	- CABINETRY-H05-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep cabinet) (this is not a zero clearance enclosure) (standard heights and widths will be used) VIKING DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1100 335,951 25Nov22	1	MASTER ENSUITE - CABINETRY-D13-Vanity top drawer/lower drawer (per drawer) (Metabox standard levels 1-7, soft-close Tandembox standard levels 8-13) VIKING
1213 342,581 28Nov22	1	MASTER ENSUITE - CABINETRY-B08-Upgrade levels 1-4, 5-7 drawers from Metabox to soft-close Tandembox drawers per drawer (appliance cabinets may also have drawers to be counted; pull-outs and all drawers in the room must be counted and upgraded) VIKING

CARPET

CAINI	7 I	
Invoice	Qty.	Description
1100	1	MASTER BEDROOM - Hardwood - 3-1/4 in Vintage NSS Red Oak - Master Bedroom - UPG
336,106		
25Nov22 **		CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round

DisciplineMS.rpt 13dec21 Page 1 of 4

Printed and Sent: 28-Nov-22

10 of 46



Lot: 697-5

Model: 20-1957 B BRAXTON Project/Phase: Country Lane / 6

CERAMICS

Invoice	Qty.	Description
1100 339,406 25Nov22	1	Kitchen Optional Backsplash - Ceramics - Upgrade 2 Tile - Kitchen Optional Backsplash - UPG
1100 339,419 25Nov22	1	FOYER - Ceramics - Upgrade 2 Tile - Foyer Floor - UPG
1100 339,407 25Nov22	1	POWDER ROOM - Ceramics - Upgrade 2 Tile - Powder Room Floor - UPG
1100 339,418 25Nov22	1	KITCHEN/BREAKFAST - Ceramics - Upgrade 2 Tile - Kitchen/Breakfast Floor - UPG
1100 339,399 25Nov22	1	Master Ensuite Shower Floor - Ceramics - Upgrade 1 Tile - Master Ensuite Shower Floor - UPG
1100 339,498 25Nov22	1	Master Ensuite Floor - Ceramics - Upgrade Grout - Master Ensuite Floor - UPG

DRYWALL

Invoice	Otv.	Description
III v OICC	Q.J.	Description

1100 335,584	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHESMAIN FLOOR (SEE SLIM LINE FOR BASEMENT) 4X IN KITCHEN ON ONE SWITCH AND 4 X IN GREAT ROOM ON ONE SWITCH
25Nov22 **		SKETCH DRYWALL-Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate potlights
1100 335,976	1	- CABINETRY-H05-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep cabinet) (this is not a zero clearance enclosure) (standard heights and widths will be used) VIKING
25Nov22 **		DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify

DisciplineMS.rpt 13dec21

Page 2 of 4

Printed and Sent: 28-Nov-22

CONSTRUCTION SUMMARY Of 46



Lot: 697-5 Model: 20-1957 B BRAXTON

Project/Phase: Country Lane / 6

ELECTRICAL

Invoice	Qty.	Description
1100 335,505 25Nov22 **	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ CABINETRY-Notify; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct Size change to
1100 335,578 25Nov22	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS) INSTALL CENTERED ABOVE FIREPLACE 70" +/- FROM FLOOR
1100 335,584 25Nov22	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHESMAIN FLOOR (SEE SLIM LINE FOR BASEMENT) 4X IN KITCHEN ON ONE SWITCH AND 4 X IN GREAT ROOM ON ONE SWITCH SKETCH DRYWALL-Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate potlights
1100 335,588 25Nov22	1	GREAT ROOM - ELECTRICAL - RELOCATION OF SWITCHES/LIGHTS (MUST SPECIFY LOCATION) - NOTE: PLUGS CANNOT BE RELOCATED- MUST PURCHASE ADDITIONAL OUTLET. RELOCATE STANDARD KITCHEN LIGHT CENTERED +/- IN CENTER OF GREAT ROOM SKETCH
1100 335,570 25Nov22	3	KITCHEN - ELECTRICAL - CEILING ROUGH-IN (CAPPED) INSTALL 3 X CAPPED CEILING ABOVE KITCHEN ISLAND USE STANDARD KITCHEN SWITCH SKETCH

FRAMING

LIXAIVI	1110	
Invoice	Qty.	Description
1100 335,584	1	- ELECTRICAL - POTLIGHT BUNDLE - 8 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 2 SWITCHESMAIN FLOOR (SEE SLIM LINE FOR BASEMENT) 4X IN KITCHEN ON ONE SWITCH AND 4 X IN GREAT ROOM ON ONE SWITCH
25Nov22 **		SKETCH DRYWALL-Drywall/Ceiling cutouts for potlights; FRAMING-Frame to accommodate potlights
1100 335,976	1	- CABINETRY-H05-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep cabinet) (this is not a zero clearance enclosure) (standard heights and widths will be used) VIKING
25Nov22 **		DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify

GRANITE

Invoice	Qty.	Description
1100 335,864 25Nov22 **	1 -	POWDER ROOM - PLUMBING - MOEN -VICHY - LAV SINGLE HANDLE FAUCET WITH LIFT ROD DRAIN - CHROME (MODEL: 6710) -

HARDWOOD

Invoice	Qty.	Description
1100	1	MASTER BEDROOM - Hardwood - 3-1/4 in Vintage NSS Red Oak - Master Bedroom - UPG
336,106		
25Nov22		
		CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round

HEATING / AIR CONDITIONING

Invoice	Qty.	Description
1100	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
335,505		
25Nov22		
**		CABINETRY-Notify; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct Size change

DisciplineMS.rpt 13dec21 Page 3 of 4

Printed and Sent: 28-Nov-22

12 of 46



Lot: 697-5

Model: 20-1957 B BRAXTON Project/Phase: Country Lane / 6

INTERIOR TRIM AND DOORS

Invoice	Qty.	Description

1100	1	MASTER BEDROOM - Hardwood - 3-1/4 in Vintage NSS Red Oak - Master Bedroom - UPG
336,106		
25Nov22		

** | CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round

PAINTING

Invoice Qty. De	escription
-----------------	------------

1100 336,106	1	MASTER BEDROOM - Hardwood - 3-1/4 in Vintage NSS Red Oak - Master Bedroom - UPG
25Nov22		
**		CARPET-delete std carpet; INTERIOR TRIM-supply and install quarter rounds; PAINTING-paint quarter round
1100	1	- CABINETRY-H05-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep cabinet)
335,976	1	(this is not a zero clearance enclosure) (standard heights and widths will be used) VIKING

PLUMBING

Invoice Qty. Description

1100 335,864 25Nov22

STRUCTURED WIRING

Invoice Qty. Description

1100	1	GREAT ROOM - STRUCTURED WIRING - HDMI TO ABOVE FIREPLACE ROUGH-IN INSTALL 70" +/- FROM FLOOR
335,886		
25Nov22		

DisciplineMS.rpt 13dec21

Page 4 of 4

Project: Country Lane Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON

13 of 46


The Braxton

ELEVATION A & B: 1,957 SQ. FT.

THE TRAILS OF COUNTRY LANE

SKETCH #1

20-1957 ELEV. B

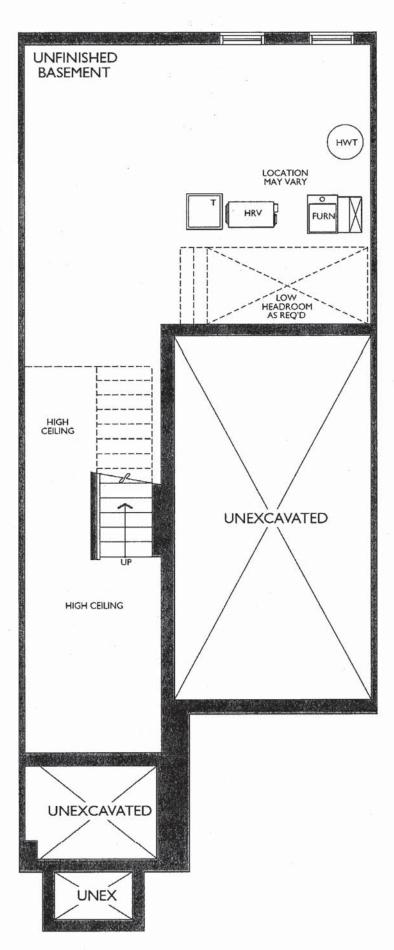

BASEMENT ELEVATION A & B 20

Model: 20-1957 B BRAXTON

14 of 46

The Braxton

ELEVATION A & B: 1,957 SQ. FT.

THE TRAILS OF COUNTRY LANE

SKETCH #2 20-1957 ELEV. B DECK ABOVE FAMILY ROOM **GARAGE**

LOWER LEVEL **ELEVATION A & B**

Legal Plan Jan. 22, 2021

Model: 20-1957 B BRAXTON

15 of 46

The Braxton


SKETCH #3

20-1957 ELEV. B

ELEVATION A & B: 1,957 SQ. FT.

THE TRAILS OF

COUNTRY LANE

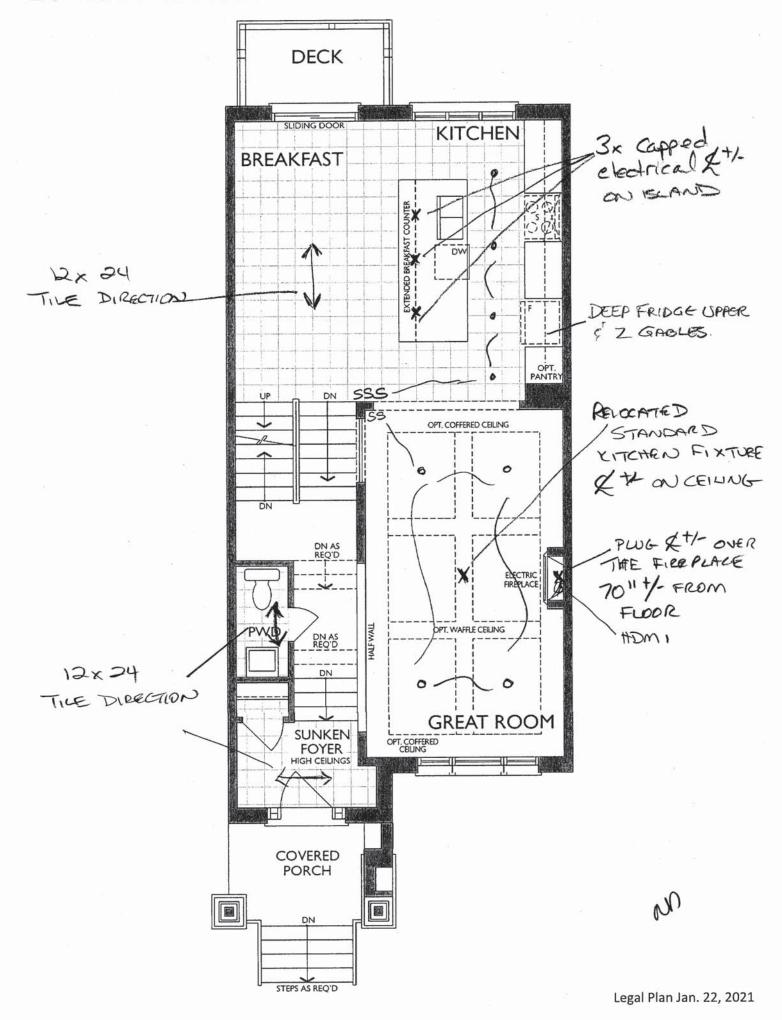

Project: Country Lane Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON


16 of 46

The Braxton

ELEVATION A & B: 1,957 SQ. FT.

THE TRAILS OF COUNTRY LANE

SKETCH #4 20-1957 ELEV. B

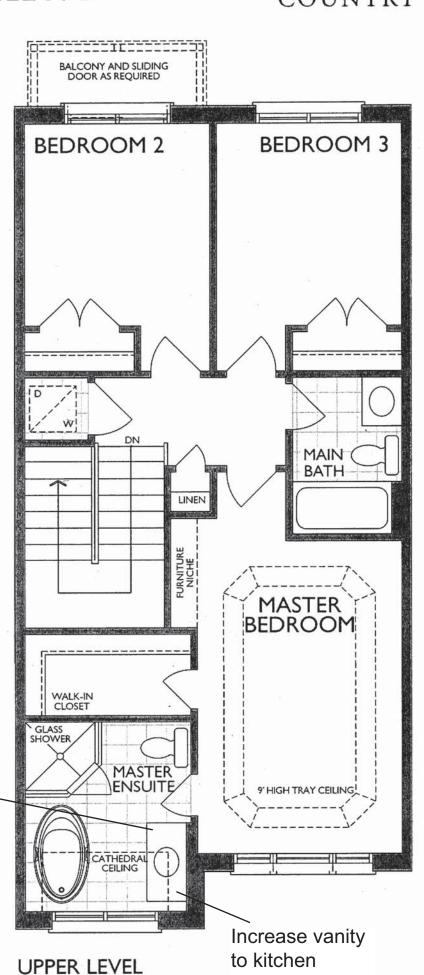


height

ELEVATION B

ADD TOP DRAWER (TOTAL OF 2)

n

Legal Plan Jan. 22, 2021

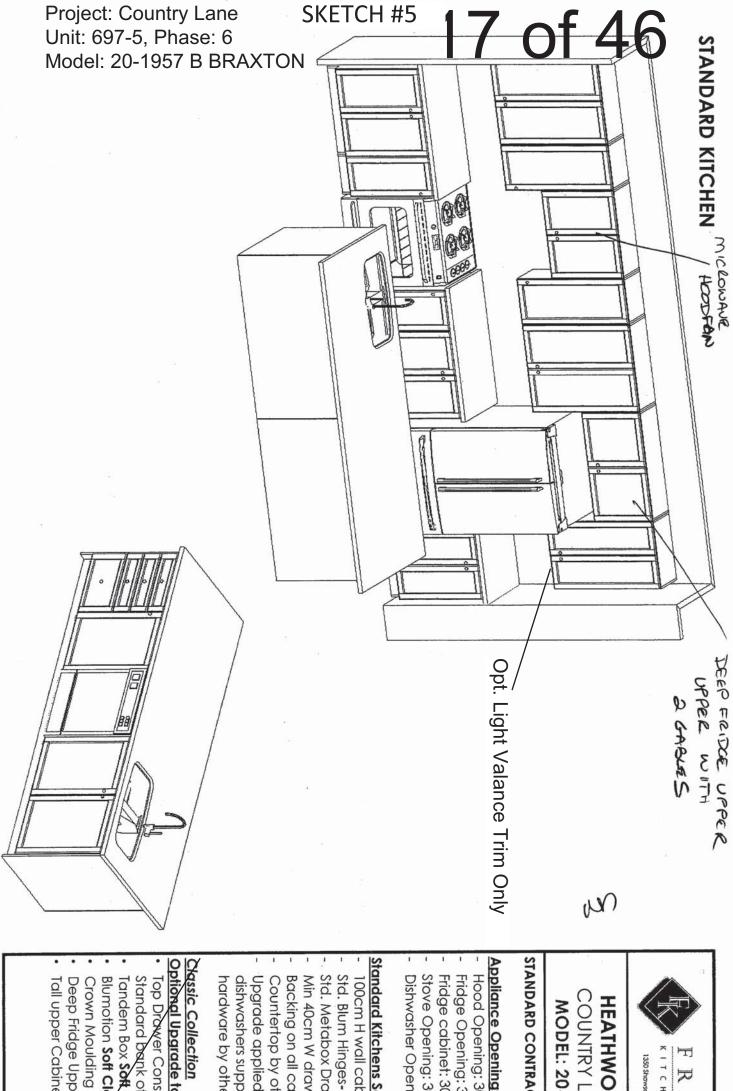

N

Z

U H -

HEATHWOOD HOMES KITCHENS LIMITED 1350 Shawson Drive, Mississauga, ON L4W 1C5

STANDARD CONTRACT INCLUDES

COUNTRY LANE, WHITBY

MODEL: 20-1957 (2003)

- **Appliance Openings** Hood Opening: 30"W builder hood
- Fridge Opening: 37 3/8 "W X 73 3/8"
- Stove Opening: 30" Freestanding Dishwasher Opening: 24" Fridge cabinet: 30cm deep

Standard Kitchens Scope

- 100cm H wall cabinets
- Std. Blum Hinges- not soft close
- Std. Metabox Drawers- not soft close Min 40cm W drawer
- Backing on all cabinets
- Countertop by others Upgrade applied paneled fridge & dishwashers supply only (appliance

Classic Collection

nardware by others)

Optional Upgrade to Includes:


- Standard bank of drawers) Top Drawer Construction (In lieu of
- Blumotion Soft Close Hinges for Doors Tandem Box Soft Close Drawers
- Tall upper Cabinets Deep Fridge Upper w/Deep Panel


Project: Country Lane


Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON

SKETCH #6

MAIN BATH



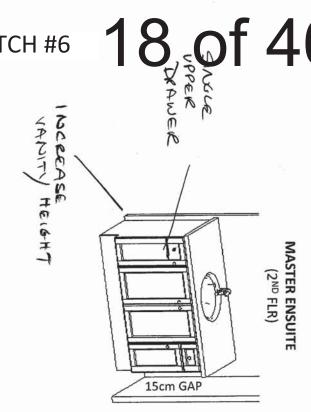

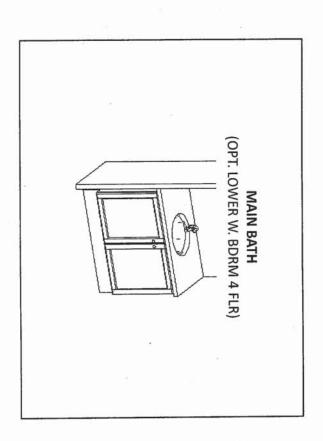

M

COUNTRY LANE, WHITBY

MODEL: 20-1957 (2003)

HEATHWOOD HOMES

KITCHENS LIMITED 1350 Shawson Drive, Mississauga, ON LAW 1C5 T

Z

U H

STANDARD CONTRACT INCLUDES:

Standard Vanity & Laundry Scope:

Powder by others, pedestal

Std. Blum Hinges- not soft close Std. Tandem Box Drawers-Soft Closing All vanities include laminate top

Master Ens: (x1) Top drawer

Mains: Full height doors (top drawers added if Masters can't accommodate Optional laundry base & wall cabinets

Project: Country Lane Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON

19 of 46






NFAS NF17 Mantel - CABINET

Model: 20-1957 B BRAXTON
Reginox
Undermount

20 of 46





17 3 /4" [45.1 cm] Outside Sink Rim Dimensions: 17 3/4" FB x 26 7/8" LR

Large Bowl Dimensions: 16" FB x 14" LR x 8 1/2" DP

Small Bowl Dimensions: 16" FB x 10" LR x 7" DP

Minimum Cabinet Size: 30"

Corner Radius: 70mm

Gauge: 18

Finish: Linear Brushed Bowl with Silk Finished Rim

Sound Dampening: Undercoating Installation: Undermount


Shipping Weight: 15.6 lbs

Drain Hole Location: Rear

NDC1827RU-9

Project: Country Lane Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON

21 of 46

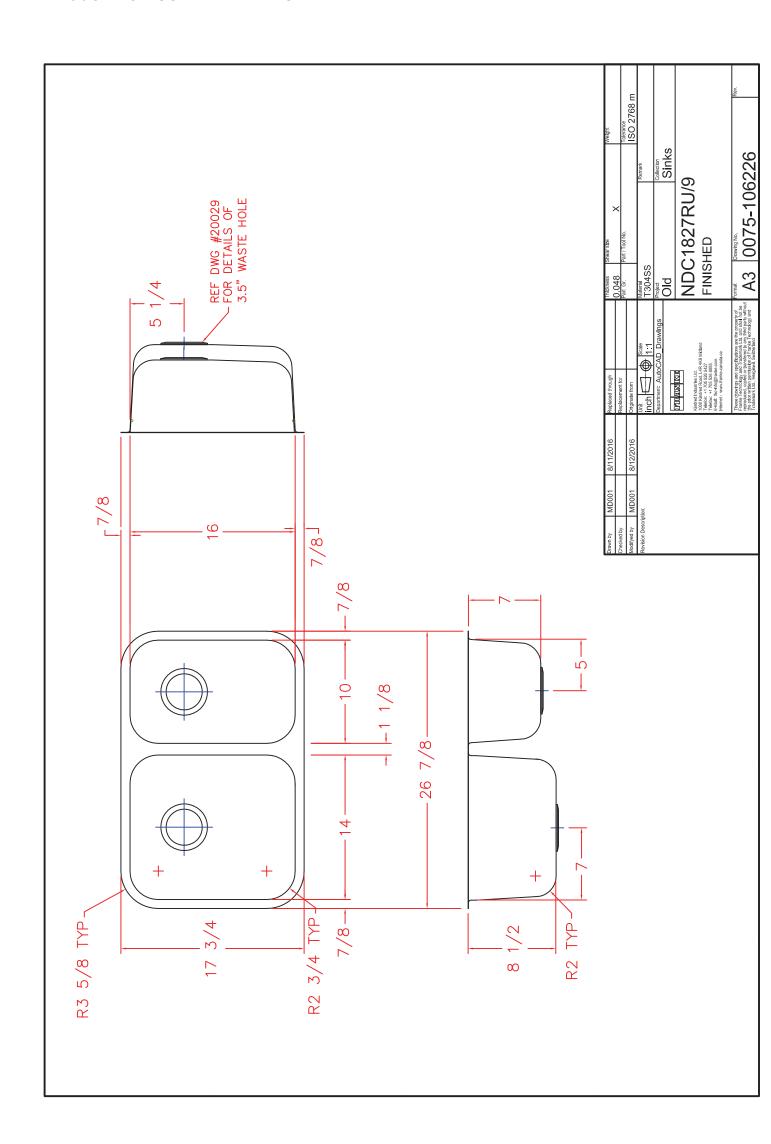

Model: 20-1957 B BRAXTON

22 of 46

MOEN

FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking Power Clean™ spray technology Metal construction with various finishes identified by suffix

Quick connect installation

Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings

High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout

Faucet designed for handle to be mounted on right side only

OPERATION

Lever style handle

Temperature controlled by 100° arc of handle travel

Operates with less than 5 lbs. of force

• Operates in stream or spray mode in the pullout or retracted position **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

STANDARDS


Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



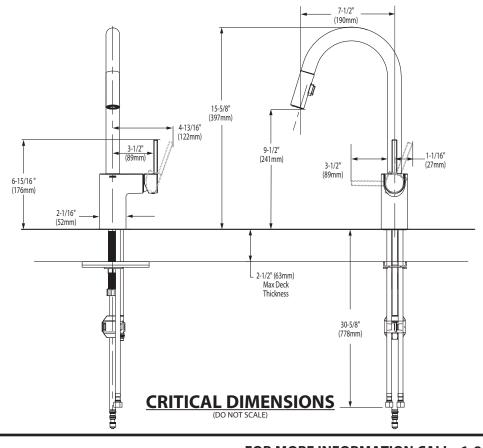

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20



BOULEVARD® PEDESTAL SINK VITREOUS CHINA

b BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK

- ☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)
- □ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - Rear overflow
 - Supplied with mounting kit
 - Right Height® for greater comfort during use
 - Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

^{*} See faucet section for additional models available

Model: 20-1957 B BRAXTON

24 of 46

American Standard

BARRIER FREE

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

COLONY COUNTERTOP SINK

- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)




Centre hole only


Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")


Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep









COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

To Be Specified ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen □ Faucet*: □ Faucet Finish: Supplies & Stops: ☐ Trap 1-1/4" (32 mm):

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198

^{*} See faucet section for additional models available

Model: 20-1957 B BRAXTON

25 of 46



DEMI™ **Product Specification Sheet**

Two Piece Freestanding Collection

CF2007 Two Piece Freestanding Soaker


Size: 60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


TWO PIECE ASSEMBLY

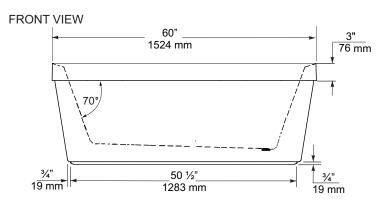

TOP VIEW

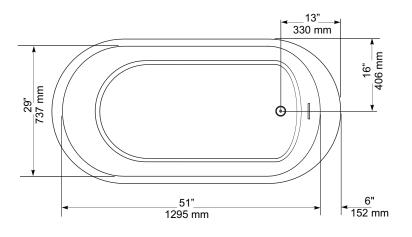

END VIEW



GENERAL SPECIFICATIONS

Average Weight	90 lb	41 kg
Bathing Well at bottom	43"x 20"	1092 x 508 mm
Capacity Drain to Overflow		195 litres
Water Depth Drain to Overflow	16"	406 mm
Drain Opening (dia.)	2"	51 mm
Overflow Opening	2 ¼"x ½"	57 x 13 mm
Drain to Floor Clearance	3 1/4"	83 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm %" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 Canada, U.S.A.: 800.**MIROLIN**(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018

Model: 20-1957 B BRAXTON

26 of 46

American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA

765mm (30-1/8)


FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank



- **☐** 3067 316 Elongated Bowl
- **4035 516** Lined Tank

Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")

Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:



LFINISHED

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are perimenal and may use within the prepare of the present IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by Anki Graindan A 112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284 © 2008 American Standard 08/08 **Project: Country Lane** Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON

27 of 46

MASTER ENSUITE X 1 MAIN BATH X 1

MOEN®

Specifications



DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted **OPERATION**
- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel **FLOW**

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

- CARTRIDGE 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly


Model: L4625 series L4631BC **Bulk Packed (12 per carton):** L64624 series

with 50/50 Waste Assembly **Bulk Packed (12 per carton):** L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



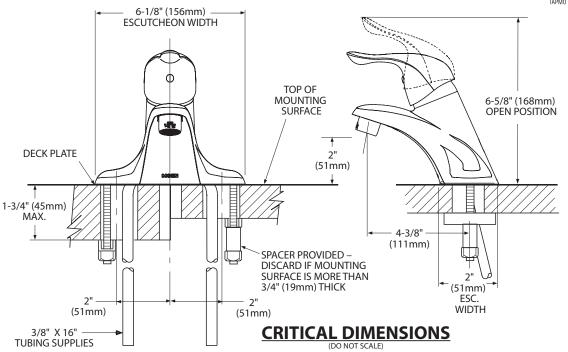

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev 8/15

Model: 20-1957 B BRAXTON

28 of 46

POWDER ROOM ONLY X 1

MOEN

Buy it for looks. Buy it for life.®

FAUCET DESCRIPTION

- · Metal construction with chrome finish
- Flexible supply lines with 3/8" compression fittings
- · Includes metal pop-up waste assembly
- Optional 3 hole deck plate (escutcheon) available

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Includes hot & cold temperature indicators

FLOW

• Flow is limited to 1.2 gpm max (4.5 L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge
- Nonmetallic/nonferrous and ceramic material


STANDARDS

- Third party certified to WaterSense,® ASME A112.18.1/CSA B125.1, and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications




Vichy™ Single-Handle Lavatory Faucet

Model: 6710

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 1 HOLE, 1-1/4" MIN. DIA.



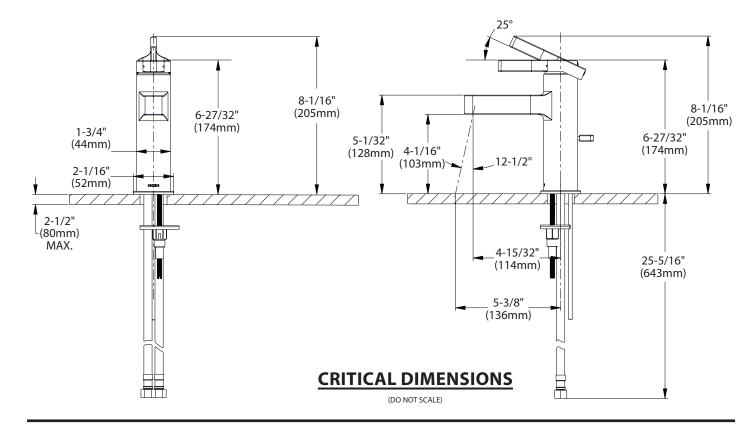

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

02/01/2017 SPC15111 50/01/0254809 Rehssed 00

Model: 20-1957 B BRAXTON

29 of 46



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

ADA (for lever handle

6.5" (165mm) ESC. DIAM.

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

4-1/2" (114mm)

WALL OPENING

7-1/2" (190mm)

to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications






CHATEAU° POSI-TEMP° Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim

(Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

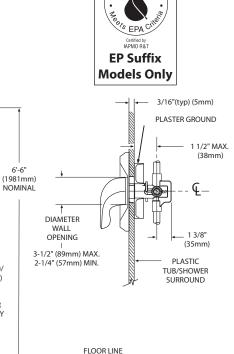

THIN WALL APPLICATION

32" (813mm) (133mm AND TUB ONLY FLOOR LINE **THICK WALL APPLICATION CRITICAL DIMENSIONS** (DO NOT SCALE)

— 1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

2 1/2" MAX. (63mm)

SHOWER

48" (1219mm)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

Model: 20-1957 B BRAXTON

30 of 46

MOEN[®]

DESCRIPTION

 Metal construction with various finishes identified by suffix OPERATION

- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


Specifications




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

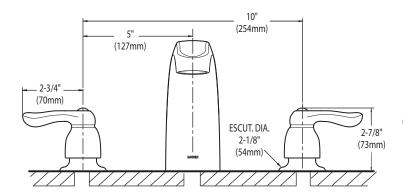

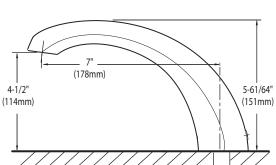

CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 3/19

Model: 20-1957 B BRAXTON

31 of 46

WMH31017H

OVER-THE-RANGE MICROWAVE



DISHWASHER-SAFE TURNTABLE PLATE



Clean up spills on the turntable by simply putting it in the dishwasher.

2-SPEED, 300 CFM MOTOR CLASS*



Match the right amount of ventilation to the dish being prepared and quickly get rid of cooking odors with two different fan speed settings.

MICROWAVE PRESETS



Get just the right amount of heat and time, whether you're cooking or defrosting, with specific preset options.

OTHER FEATURES • Add 30 seconds option • Electronic touch		White (W)	Black (B)	Fingerprint Resistaint Stainless Steel (Z)	Silver (S)
controls	MODEL	WMH31017HW	WMH 31017HB	WMH31017HZ	WMH31017HS
 Adjustable cooktop lighting 	Max height (in)	17-1/8"	17-1/8"	17-1/8"	17-1/8"
ligi tui ig	Width (in)	29-15/16"	29-15/16"	29-15/16"	29-15/16"
	Depth (in)	15-9/16"	15-9/16"	15-9/16"	15-9/16"



^{*}Performance varies based on installation. ®/™ ©2018 Whirlpool. All rights reserved. 1/18. WC170107A

Model: 20-1957 B BRAXTON

32 of 46

VENTING DESIGN SPECIFICATIONS

This section is intended for architectural designer and builder/ contractor reference only.


- Vent materials needed for installation are not provided with microwave hood combination.
- We do not recommend using a flexible metal vent.
- To avoid possible product damage, be sure to vent air outside, unless using recirculation installation. Do not vent exhaust air into concealed spaces, such as spaces within walls or ceilings, attics, crawl spaces, or garages.

For optimal venting installation, we recommend:

- Using roof or wall caps that have backdraft dampers
- Using a rigid metal vent
- Using the most direct route by minimizing the length of the vent and number of elbows to provide efficient performance
- Using uniformly sized vents
- Using duct tape to seal all joints in the vent system
- Using caulking compound to seal exterior wall or roof opening around cap
- Not installing 2 elbows together for optimal hood


If venting through the wall, be sure that there is proper clearance within the wall for the damper to open fully.

If venting through the roof, and rectangular-to-round transition is used, be sure there are at least 3" (7.6 cm) of clearance between the top of the microwave oven and the transition piece. See "Rectangular-to-Round Transition" illustration.



Rectangular-to-Round Transition


NOTE: The minimum 3" (7.6 cm) clearance must exist between the top of the microwave oven and the rectangular to round transition piece so that the damper can open freely and fully.



- A. Roof cap
- B. 6" (15.2 cm) min. diameter round vent
- C. Elbow (for wall venting only)
- D. Wall cap
- E. 31/4" x 10" to 6" (8.3 x 25.4 cm to 15.2 cm) rectangular to round transition piece
- F. Vent extension piece, at least 3" (7.6 cm) high

Recommended Standard Fittings

The following length equivalents are for use when figuring vent length. See the examples in "Recommended Vent Length".



- A. Rectangular-to-round transition piece: $3^{1/4}$ " x 10" to 6" = 5 ft (8.3 x 25.4 cm to 15.2 cm = 1.5 m)
- B. Roof cap: 31/4" x 10" = 24 ft (8.3 x 25.4 cm = 7.3 m) C. 90° elbow: 31/4" x 10" = 25 ft (8.3 x 25.4 cm = 7.6 m)
- D. 90° elbow: 6" = 10 ft (15.2 cm = 3 m)
- E. Wall cap: $3\frac{1}{4}$ " x 10" = 40 ft (8.3 x 25.4 cm = 12.2 m)
- F. 45° elbow: 6'' = 5 ft (15.2 cm = 1.5 m)
- G. 90° flat elbow: $3\frac{1}{4}$ " x 10" = 10 ft (8.3 x 25.4 cm = 3 m)

Model: 20-1957 B BRAXTON


33 of 46

Recommended Vent Length

The total length of the vent system including straight vent, elbow(s), transitions, and wall or roof caps must not exceed the equivalent of 140 ft (42.7 m) for either type of vent. See the "Recommended Standard Fittings" section for equivalent lengths.


For best performance, use no more than three 90° elbows. To calculate the length of the system you need, add the equivalent lengths of each vent piece used in the system. See the following examples:

$3\frac{1}{4}$ " x 10" (8.3 x 25.4 cm) vent system = 73 ft (22.2 m) total



- A. One $3\frac{1}{4}$ " x 10" (8.3 x 25.4 cm) 90° elbow = 25 ft (7.6 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

6" (15.2 cm) vent system = 73 ft (22.2 m) total



- A. Two 90° elbows = 20 ft (6.1 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 1 rectangular-to-round transition piece = 5 ft (1.5 m)
- D. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

If the existing vent is round, a rectangular-to-round transition piece must be used. In addition, a rectangular 3" (7.6 cm) extension vent between the damper assembly and rectangularto-round transition piece must be installed to keep the damper from sticking.

Model: 20-1957 B BRAXTON

34 of 46



Whirtpool® 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic Stainless Steel	WRT541SZDM

Capacity				
Total Capacity	21 cu. ft.			
Refrigerator Capacity	15 cu. ft.			
Freezer Capacity	6 cu. ft.			
General Features & Properti	es			
EZ Connect Icemaker Kit				
LED Interior Lighting				
ENERGY STAR® Certified				
Electronic Temperature Controls				
Freezer Temperature Controls				
Clear Door Bins				
Adjustable Door Bins				
Quiet Cooling				
Fingerprint Resistant				
Electrical Details				
Amps	6.5			
Volts	115			
Certifications				
ADA Compliant Yes				
ENERGY STAR® Certified	Yes			

Technical Details	
Refrigerator Type	Top-Freezer
Number of Doors	2
Number of Interior Refrigerator Shelves	3
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1
Number of Freezer Door Bins	2 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location	Freezer
Dispenser Type	N/A
Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear
Reference Material	

Key Features & Benefits

Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

Humidity-Controlled Crispers

Store fruits and vegetables in their ideal environment.

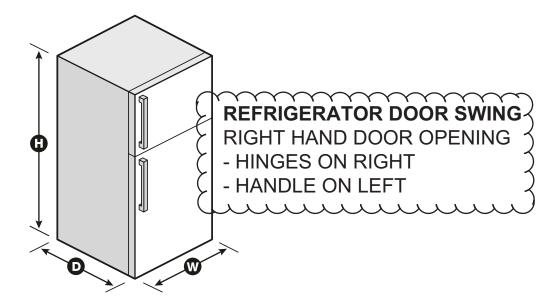

Dimension Guide Use & Care Guide

Energy Guide

Warranty

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Model: 20-1957 B BRAXTON

35 of 46



Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15-or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

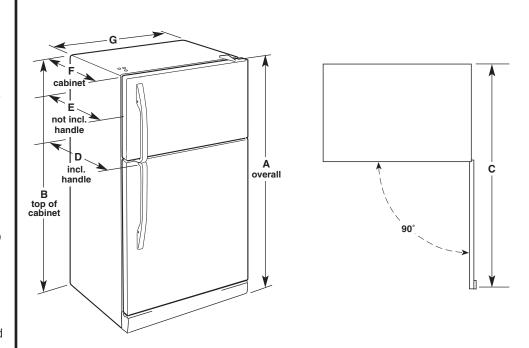

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	62 ¹ / ₄ " (158.1 cm)	32 ⁷ / ₈ " (83.5 cm)	30 ⁵ %" (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66½" (168.3 cm)	65½" (166.4 cm)	62½" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 20-1957 B BRAXTON

36 of 46





Available Finishes/Colours



YWFE515S0JB Black



YWFF515S0JS Stainless Steel



YWFE515S0JW White

Manuals & Literature:





Use and Care

<u> Warranty</u>

5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

Top Features

FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep Warm setting

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Closed Door Broiling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Exterior

Handle Type

Dimensions	
Depth	27 3/4
Height	36
Width	29 7/8

Configuration and Overview					
Range Type	Freestanding				
Fuel Type	Electric				
Size (IN,inches)	30				
Exterior					
Door Removable	Yes				

Features	
Hot Surface Indicator Light	Yes
Heating Element On Indicator Light	Yes
Power On Indicator Light	No
Griddle	NA
Automatic Convection Conversion Temperature Adjust	No
Power Outage Compatible	No

Reach-Through Handle


Door Removable	Yes
Drawer Type	Storage Drawer
Oven Door	Glass Window
Oven Window Size	Extra Large
Handle Color	Stainless Steel
Handle Material	Metal

Model: 20-1957 B BRAXTON

37 of 46

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 297/8" (75.9 cm) width
- E. 255/16" (64.3 cm) depth back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- *Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- **Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Model: 20-1957 B BRAXTON

38 of 46

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only

AWARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

 Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection
120/240 V	120/208 V	Amps
8.8 - 16.5 KW 16.6 - 22.5 KW	7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50

^{*}The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

INSTALLATION INSTRUCTIONS


Unpack Range

AWARNING

Excessive Weight Hazard

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- **1.** Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

^{**}If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.

Model: 20-1957 B BRAXTON

39 of 46

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket

AWARNING



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- 2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.



A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting



Wall Mounting



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two $\#12 \times 1^5/8$ " (4.1 cm) screws provided.
- **6.** Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- 7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

Project: Country Lane Unit: 697-5, Phase: 6 Model: 20-1957 B BRAXTON

40 of 46





Stainless Steel

Also available in:

White	WDF330PAHW	
Black	WDF330PAHB	

Capacity	
Total Place Settings	13
General Features & Properti	es
Heavy Cycle	
High Temperature Wash Op	tion
Heated Dry Option	
ENERGY STAR® Certified	
Industry's Best Selling Dishwasher Brand [†]	
Designed, Engineered and Assembled in the U.S.A. with American Pride	
Electrical Details	
Amps	10
Volts	120
Hz	60
Certifications	
ENERGY STAR® Certified	Yes

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Button
Number of Wash Cycles	3
Number of Options	4
dBA	55
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"

Reference Material

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.*

Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

Normal Cycle

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.



^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

Model: 20-1957 B BRAXTON

41 of 46




Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDF131PAH	WDF545PAF	

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

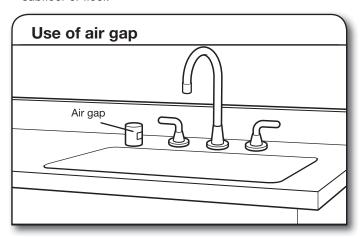

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- ³/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with ³/₄" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

■ Use a UL Listed/CSA Approved metallic strain relief.

Model: 20-1957 B BRAXTON

42 of 46

PRODUCT AND CABINET OPENING DIMENSIONS — 23⁷/8" -(606 mm) — 25¹/₄" -(641 mm) — ³/₄" (19 mm) 30" (762 mm) 331/2" 301 (851 mm) min. with (762 mm) leveling legs removed **4**−3³/₄" (94 mm) 31/2" - 41/2" (88 mm - 106 mm) (533 mm) For 4" (100 mm) toe kick, height of cabinet opening is 341/2" (863 mm). A. Insulation may be compressed (not used on all models). B. Door handles may protrude forward of the face of the dishwasher, (varies by model). Check that all surfaces have no protrusions that would prohibit dishwasher installation. 101/2" NOTE: Shaded areas (864 mm) of cabinet walls show where utility -6³/₄" (102 mm) (172 mm) connections may be installed. (76 mm (159 mm) 2¹/₄" (64 mm) 24" / (620 mm) (44 mm) 2" (51 mm) 24' (620 mm) D C. Measured from the lowest point on the underside of the countertop. May be reduced to 33¹/₂" (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.


D. Minimum, measured from narrowest point of opening.

Model: 20-1957 B BRAXTON

43 of 46

5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

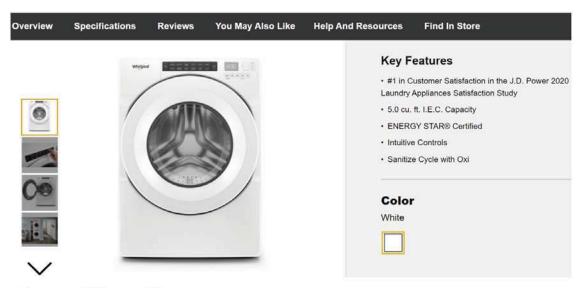

Specifications

Width: 6858.00, 27.0" Centimeters, Inches

Depth: 8016.88, 31-9/16" Centimeters, Inches


Dimensions	
Capacity	4-3/10
Depth	8016.88 cm, 31-9/16 in
Gross Weight	97068688.00 kg, 214 lbs
Net Weight	92532768.00 kg, 204 lbs
Width Appearance	6858.00 cm, 27.0 in
LCD Touch Screen	No
Window	Yes
Details	
Advanced Vibration Control™	No
Dispense System	Detergent, Fabric Softener & Bleach
Eco Monitor/Efficiency Monitor	No
Hoses Included	4ft 4in Drain Hose Included
Internal Heater	No
Maximum Spin Speed	1160
Out Of Balance Sensing	Yes
Water Factor	3-1/5
Cycles and Options	
Number Of Wash Cycles	35
Electrical	
Power Cord Included	Yes
Controls	
Automatic Temperature Controls	Yes
Control Location	Front
LCD Touch Screen	No

Compatibility Works With No **Options** Number Of Washer Options **Features** Stackable Yes Water Faucet No Cycles Number Of Wash Cycles 35 Exterior Lid/Door Lock Yes Lid/Door Swing Left Modifiers Delay Start No Number Of Rinse Options Number Of Soil Levels 3 Number Of Spin Speeds Number Of Wash/Rinse Temperatures 4 Pre Soak Yes Temperature Selections Hot, Cold, Cool, Warm


Model: 20-1957 B BRAXTON

44 of 46


Recessed area or closet installation (stacked washer and dryer)




Custom under counter installation



Recessed area or closet installation (washer only)

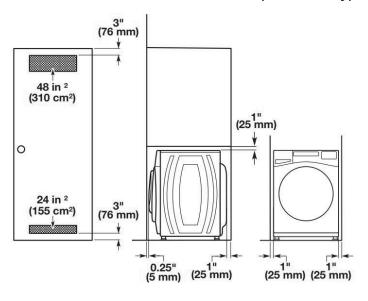

Custom cabinet installation

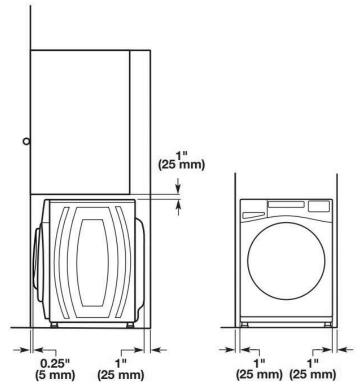


Drain System

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of o leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

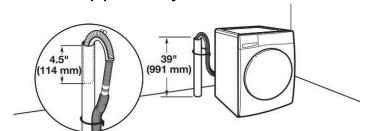


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts"

Model: 20-1957 B BRAXTON


45 of 46

Wall standpipe drain system

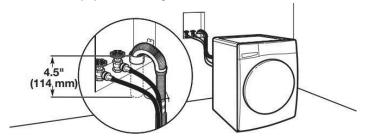


See requirements in "Floor standpipe drain system."


Laundry tub drain system

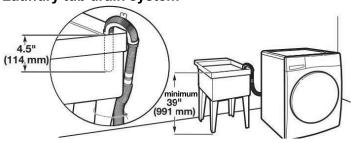

Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

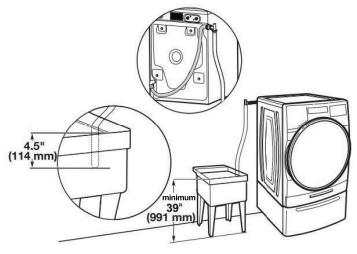

Floor drain system

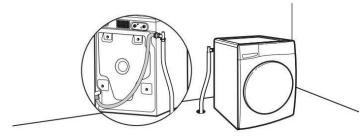

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Electrical Requirements

AWARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

GROUNDING INSTRUCTIONS

For a grounded, cord-connected appliance:

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

WARNING: Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

For a permanently connected appliance:

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

SAVE THESE INSTRUCTIONS

Model: 20-1957 B BRAXTON

46 of 46

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW



Define Your Style

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Configuration and Overview	
Width	68.58 cm, 27.0 in
Height	98.42 cm, 38-3/4 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Depth	78.74 cm, 31.0 in

Configuration and Overview

Fuel Type	Electric

Cycles and Options

Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60

Power Cord Included Yes