




KitchenAid® 30-Inch, 4-Element Induction Cooktop

Send Page to Printer Close Window

KICU500XSS

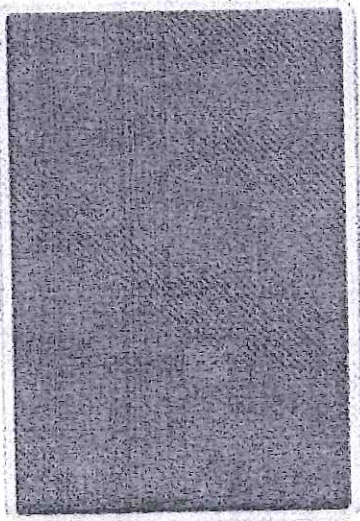

AVAILABLE COLORS

- Black
Model: KICU500XBL
- Stainless Steel**
Model: KICU500XSS

DIMENSIONS

Height	2 3/8 Inches
Depth	21 5/16 Inches
Width	30 13/16 Inches

Dimensions shown are for planning purposes only. For complete information, see installation instructions packed with product.

SPECIFICATIONS

Performance

Fuel Type	Electric
Element Type	Induction
Number of Elements	4

Cooktop Features

Left Front Element Type	Single-Ring Round
Left Front Element Size (Inches)	6
Left Rear Element Type	Single-Ring Round
Left Rear Element Size (Inches)	10

KEY FEATURES

- 10" 3200-watt element accommodates the high-temperature cooking methods required for some recipes.
- Performance boost function allows you to exceed maximum heat-level setting for up to 10 minutes for rapid boiling.
- Touch-activated controls integrate seamlessly into the surface and include a slider for heat-level selection.
- Simmer function automatically selects a low power level to help maintain a constant simmer.
- Melt & Hold function uses low power levels for melting delicate ingredients or keeping cooked food warm.

Center Front Element Type	Induction Single
Right Front Element Type	Single-Ring Round
Right Front Element Size (Inches)	7
Right Rear Element Type	Single-Ring Round
Right Rear Element Size (Inches)	9
Heat-Level Settings	9
Performance Boiling Boost	Yes
Pan Size Detection	Yes
Simmer	Yes
Melt & Hold	Yes
Minute Timer	Yes
All Element Power Off	Yes
Design	
Cooktop Design	Ceramic Glass
Cooktop Controls	G8 Tap Touch
Hot Surface Indicator	4

Specifications

Left Front Element Wattage (@240V)	1400/1800 Boost
Left Rear Element Wattage (@240V)	2300/3200 Boost
Right Front Element Wattage (@240V)	1400/1800 Boost
Right Rear Element Wattage (@240V)	2300/3200 Boost

ELECTRICAL

40 Amps, 60 Hz, 240 V.