Sales Selection Sheet Checklist

PURCHASERS: KULJINDER, S SIDHU/MANDIP, KAUR SIDHU // RASHPAL, KAUR SI

Heathwood Homes (Huron) Limited

Model: 28-2590 B THE BRISTOL

LOT 345

1 of 40

11716	tare in the second second second		18 18 18 18 18 18 18 18 18 18 18 18 18 1	
			AND THE STREET, SAN THE STREET,	
	UNFINISHED BASEMENT			
	NO COLD CELLAR			
	NO COLD CELLAR			÷
	WOB			
	DECK			
UPGR	RADED / MODIFIED ELEVATION	ON		
	CORNER UPGRADE			
	REAR UPGRADE			
	7	The state of the s		
CEILI	NG UPGRADE - SMOOTH	on the processor of the	The state of the s	
	MAIN FLOOR			
_	SECOND FLOOR			
	BASEMENT			
		45000000		
ADDI	FIONAL ROUGH-INS			
✓	200 AMP SERVICE (STD IN	SINGLES)		080
\exists	WET BAR ROUGH-IN			
	HUMIDIFIER	STD)		
✓	AIR CONDITIONING (SITE S	(טופ)		
040	POLICH IN		, a	
GAS	ROUGH-IN		The state of the s	
	STOVE			
_	DRYER			*
=	BBQ ADDITIONAL GAS FIREPLA	CE		
	ADDITIONAL GAS FIREPLA	OL		
KITCI	HEN: HOODFAN VENTING SI	ZE		
Miletinesessia. ✓	6 IN ROUND DUCT		AND THE PROPERTY OF THE PROPER	
	7 IN ROUND DUCT			12
_				
FIIII	BASEMENT STAIRS:	Paint Grade		
	R BASEMENT STAIRS:	N/A		
	ER BASEMENT STAIRS:	N/A		
	STAIRS:	All Oak		
	A STAIRS (if applicable):	N/A		
	STAIRS (if applicable):	N/A	1401	
	on the (ii approadio).	<u> </u>	3.95	
0	1.		S. 1	10 8-
	T 23/22 Augnoture	۵	SEPT 23/22	1RIT SALEM
	Date Purchaself:		Date De	cor Consultant:
	on to	L	- WINNE	
	V		00	mark
	Date Purchaser:		-09- 23 2022	TV Brew
				athwood Homes (Huron) Limited
ocke	ed Date:		Approved	#0 A

KULJINDER, S SIDHU/MANDIP, KAUR SIDHU // RASHPAL, KAUR SIDHU

Project: Wallaceton Unit: 345, Phase: 3

Model: 28-2590 B THE BRISTOL

2 510/10 2 12:01:45

Locked: Closed:

Kitchen		
Cabinet Colour/Style	9163	Viking II-GEORGIAN-RAIN CLOUD-3DL ***STD***
Island Cabinet Colour/Style	9163	Viking II-GEORGIAN-RAIN CLOUD-3DL ***STD***
Cabinet Hardware	2092	9661-HARDWARE ***STD***
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Countertop Edge		

- Please note some islands may require a seam as per manufacturer and fabricator discretions.

Sink		9487	Plumbing-KINDRED Kitchen Sink Collection - Reginox ND1831 U/9-Double (equal size) Bowl Undermount Sink (or equivalent)-Stainless Steel	PG 16
HoodFan	A	9393	SCB51930-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS	PG 25-26
Backsplash	,	1111	N/A *****	
Backsplash Grout		1111	N/A *****	
Backsplash Tile Pattern		1111	N/A *****	

- Purchasers have been advised: standard fridge opening is a minimum 37 $3/8 \times 73 \ 3/8$ inches. Ice Waterline Rough-In is included.
- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

tchen / Breakfast	MUNICIPAL PROGRAMMA CONT.	
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13 x13 *** STD
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
	0	
Comment		

oyer		
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13 x13 *** STD
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tilo Pottorn	2000	CTANDADD COLLADE ***CTD***



KULJINDER, S SIDHU/MANDIP, KAUR SIDHU // RASHPAL, KAUR SIDHU Project: Wallaceton Unit: 345, Phase: 3 Model: 28-2590 B THE BRISTOL

Comment

Locked:

Closed:

Floor the Fattern	5000	BININDAND SQUANE SID
*		
Comment		
Comment		
Powder Room		
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13 x13 *** STD

Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
*	0000	ON WAS A COUNTY OF STATE OF ST
Discribing Fishers (Calaus)	4707	Disselies Figure WillE ***CTD***
Plumbing Fixture (Colour) Comment	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Mud Room / Laundry		
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13 x13 *** STD
50		***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
0-1-0-1:1-0-1	4444	N/A *****
Opt. Cabinet Colour/Style - Uppers	1111	N/A
Opt. Cabinet Hardware - Uppers	1111	N/A *****
Opt. Cabinet Colour/Style - Base	1111	N/A *****
Opt. Cabinet Hardware - Base	1111	N/A *****
Opt. Countertop	1111	N/A *****
Opt. Countertop Edge	1111	N/A *****
Opt. Countertop Eage	1111	
Comment		
Main Hall		
Flooring	7502	Red Oak Pearl-Vintage
		Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch

M. B.

Customer Colours KULJINDER, S SIDHU/MANDIP, KAUR SIDHU // RASHPAL, KAUR SIDHU Project: Wallaceton Unit: 345, Phase: 3 Locked: Model: 28-2590 B THE BRISTOL Closed: Dining Room Red Oak Pearl-Vintage Flooring 7502 Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch Comment **Great Room** Red Oak Pearl-Vintage 7502 Flooring Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch Comment **Great Room Fireplace** Type 8869 Majestic MERC32 ***STD*** NF 15-Paint Grade Mantle- Cabinet (Per Plan)-WHITE Mantle 9114 PG 15 **STD*** N/A ***** Surround (Opt.) 1111 - Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle. - Heathwood and its contractors will not be liable for any damage on items placed/@installed above a FP after closing. Comment **Upper Hall** 9510 88664-MINOTAUR-MORNING LIGHT-40 oz Poly ***STD*** Flooring Comment **Master Bedroom** 88664-MINOTAUR-MORNING LIGHT-40 oz Poly ***STD*** 9510 Flooring Comment Bedroom 2 88664-MINOTAUR-MORNING LIGHT-40 oz Poly ***STD*** 9510 Flooring

Comment

Bedroom 3

Flooring

9510





88664-MINOTAUR-MORNING LIGHT-40 oz Poly ***STD***

KULJINDER, S SIDHU/MANDIP, KAUR SIDHU // RASHPAL, KAUR SIDHU Project: Wallaceton Unit: 345, Phase: 3 Model: 28-2590 B THE BRISTOL

Main Bathroom

Locked:

0		-
	os	eu
	US	

Comment		
edroom 4		
Flooring	9510	88664-MINOTAUR-MORNING LIGHT-40 oz Poly ***STE
Comment		
1		
ster Ensuite		
Cabinet Colour/Style	9164	Viking II-GEORGIAN-MOONLIGHT-3DL ***STD***
Cabinet Hardware	2093	9671-HARDWARE ***STD***
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STI
Countertop Lage	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH STI
Floor Tile	9255	TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13 ***STD***
		SID
Floor Tile Grout	7704	Grout-(19) Pearl Gray ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
O	5000	OT MANUAL IT COME MANUAL DAY AND
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow
		White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
	75.5 II - 3	Shower Jamb / Sill-Thassos White ***STD***
Shower Jamb(s) and Sill(s) 8923	Shower Jamp / Sill-Thassos White STD



KULJINDER, S SIDHU/MANDIP, KAUR SIDHU // RASHPAL, KAUR SIDHU Project: Wallaceton Unit: 345, Phase: 3 Model: 28-2590 B THE BRISTOL

Locked: Closed:

Cabinet Colour/Sty	le	9164	Viking II-GEORGIAN-MOONLIGHT-3DL ***STD***
Cabinet Hardware		2093	9671-HARDWARE ***STD***
Countertop		8822	MM&4*38**Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge		1111	N/A *****
Floor Tile		9255	TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13 ***STD***
Floor Tile Grout		7704	Grout-(19) Pearl Gray ***STD***
Floor Tile Pattern		3000	STANDARD SQUARE ***STD***
Shower Wall Tile		9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile G	irout	2226	Grout-(00) White ***STD***
Shower Wall Tile P		3090	VERTICAL STACKED ***STD***
4			
Shower Floor Tile		8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile (Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile F	Pattern	3000	STANDARD SQUARE ***STD***
Shower Jamb(s) ar	nd Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)		1737	Plumbing Fixtures-WHITE ***STD***

9164	Viking II-GEORGIAN-MOONLIGHT-3DL ***STD***
2093	9671-HARDWARE ***STD***
8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
1111	N/A *****
9255	TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13 ***STD***
7704	Grout-(19) Pearl Gray ***STD***
3000	STANDARD SQUARE ***STD***
	2093 8822 1111 9255



KULJINDER, S SIDHU/MANDIP, KAUR SIDHU // RASHPAL, KAUR SIDHU Project: Wallaceton Unit: 345, Phase: 3 Model: 28-2590 B THE BRISTOL

Locked: Closed:

[1] 大百万十二年,以下,大大大大大大大大大大大大大大大大大大大大大大大大大大大大大大大大大大大		
Wall Tile	0020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
vvali file	9020	Q1.vv v.vv A1.0610-vveave-vvriite-8 x 10 S1D
Wall Tile Grout	2226	Grout-(00) White ***STD***
Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
86		
Opt. Shower Floor Tile	1111	N/A *****
Opt. Shower Floor Tile Grout	1111	N/A *****
Opt. Shower Floor Tile Pattern	1111	N/A *****
Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		100000000000000000000000000000000000000
1		
<u> </u>		
man limited to the first terms are the second		
ower Level Recreation Room (Opt. F	THE RESERVE OF THE PERSON NAMED IN COLUMN TWO IS NOT THE PERSON NAMED IN COLUMN TWO IS NAMED IN COLUMN TW	N/A *****
Flooring	1111	N/A ········
Comment		
talana ang a khartonian (1922)		
Lower Level Bathroom (Opt. Finished Cabinet Colour/Style	Bas 1111	N/A *****
Cabinet Colour/Style	1111	
Cabinet Colour/Style Cabinet Hardware	1111	N/A *****
Cabinet Colour/Style	1111	
Cabinet Colour/Style Cabinet Hardware	1111	N/A *****
Cabinet Colour/Style Cabinet Hardware Countertop	1111 1111 1111	N/A ***** N/A *****
Cabinet Colour/Style Cabinet Hardware Countertop	1111 1111 1111	N/A ***** N/A ***** N/A *****
Cabinet Colour/Style Cabinet Hardware Countertop	1111 1111 1111	N/A ***** N/A *****
Cabinet Colour/Style Cabinet Hardware Countertop Countertop Edge	1111 1111 1111 1111	N/A ***** N/A ***** N/A *****
Cabinet Colour/Style Cabinet Hardware Countertop Countertop Edge Floor Tile	1111 1111 1111 1111	N/A ***** N/A ***** N/A ***** N/A ******
Cabinet Colour/Style Cabinet Hardware Countertop Countertop Edge	1111 1111 1111 1111	N/A ***** N/A ***** N/A *****

KULJINDER, S SIDHU/MANDIP, KAUR SIDHU // RASHPAL, KAUR SIDHU

Project: Wallaceton Unit: 345, Phase: 3

Model: 28-2590 B THE BRISTOL

Locked:

Closed:

	国的	
Snower Wall Tile	าาาา	N/A
Shower Wall Tile Grout	1111	N/A *****
Shower Wall Tile Pattern	1111	N/A *****
Shower Floor Tile	1111	N/A *****
Shower Floor Tile Grout	1111	N/A *****
Shower Floor Tile Pattern	1111	N/A *****
Shower Jamb(s) and Sill(s)	1111	N/A *****
Plumbing Fixture (colour)	1737 11	New Plumbing Fixtures-WHITE ***STD*** NA
Comment		
lain Stairs		
Туре	1714	Oak Stairs ***STD MAIN STAIRS***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***STD***
Handrail/Pickets/Posts Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Custom Stain/Paint	1111	N/A *****
Landing(s)	7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch
Opt. Carpet Runner	1111	N/A *****
Comment		
ower Level Stairs		- C 1951 AU
Type	1713	Paint Grade Stairs ***STD UNFINISHED BASEMENT STAIL
	1111	N/A *****
Colour	[1117	
Handrail/Pickets/Posts Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***

N/A *****

N/A *****

N/A *****

N/A *****

1111

1111

1111

1111

Handrail/Pickets/Posts Colour

Custom Stain/Paint

Opt. Carpet Runner

Landing(s)

M B X.S

Customer Colours KULJINDER, S SIDHU/MANDIP, KAUR SIDHU // RASHPAL, KAUR SIDHU Project: Wallaceton Unit: 345, Phase: 3 Model: 28-2590 B THE BRISTOL Closed: Closed:

0.0	510	Ω
Created: 9/8/202	2 12:01:45	U

				S = 9 = 2		
Commer	nt	111115				
Comme						
					-	
Throughout	STAND STANDS OF BUILDING WEST STANDS					
Switches	and Plug	5796	Decora Wh	ite Switches and Plugs ***ST	'D***	
Threshol	ds	2232	Metal Thres	sholds ***STD***		
Underpa	d	1079	500 Series-	-Underpad ***STD***		
Trim Size	•	8705	4 1/4 Basebo	pard and 2 ¾ Casings ***STD	***	
Trim - Pa	aint Colour	1716	Trim-WHIT	E ***STD***		
Walls - P	aint Colour	1717	22-Wall-WARM GREY ***STD***			
Commer	nt					
				TO THE RESERVE OF THE PARTY OF		
	- 15	0				
Purchaser:	Kulindes &	3.51		IRIT SALEM	Sept 9/22	
	KULJINDER, S SIDHU	-100 1	Date	Decor Consultant	Date	
				-	· 10:10:10:10	
		111	,	Mark)	े न्या व्यवस्थात	
Purchaser:	Manus Salu / Kx	Wal		Mycren	-09- 12 2022	
	MANDIP, KAUR SIDHU //	RASE I	Date	Wallaceton	Date Approved	
	,				,	

10 of 40 construction summary



Lot: 345

Model: 28-2590 B THE BRISTOL Project/Phase: Wallaceton / 3

Offer	Five Appliances: SS Fridge, Stove, Chimney Hood Fan, Dishwasher: White Front Loader Washer/Dryer (Singles)
Worksheet	Note:
Offer	The Division of the sylvent of the state of the sylvent of the syl
	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not
	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not entitled to a referral fee under Heathwood Homes Referral program.
	entitled to a referral fee under Heathwood Homes Referral program.

DisciplineMS.rpt 13dec21 Page 1 of 2

construction summary of 40



Lot: 345

Model: 28-2590 B THE BRISTOL Project/Phase: Wallaceton / 3

ELECTRICAL

ı,	invoice	Qty.	Description
	1155 314,232	-	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS)
	29Sep22		TO BE INSTALLED ABOVE THE FIRE PLACE 70"-+ FROM FLOOR SEE SKETCH # 2

Printed and Sent: 18-Jan-23

Model: 28-2590 B THE BRISTOL

12 of 40

THE BRISTOL


ELEVATION A & B | 2,590 SQ. FT.

706 sq. ft. of opt. finished Lower Level

WALLACETON

Sketch # 1

28-2590 ELEV. B

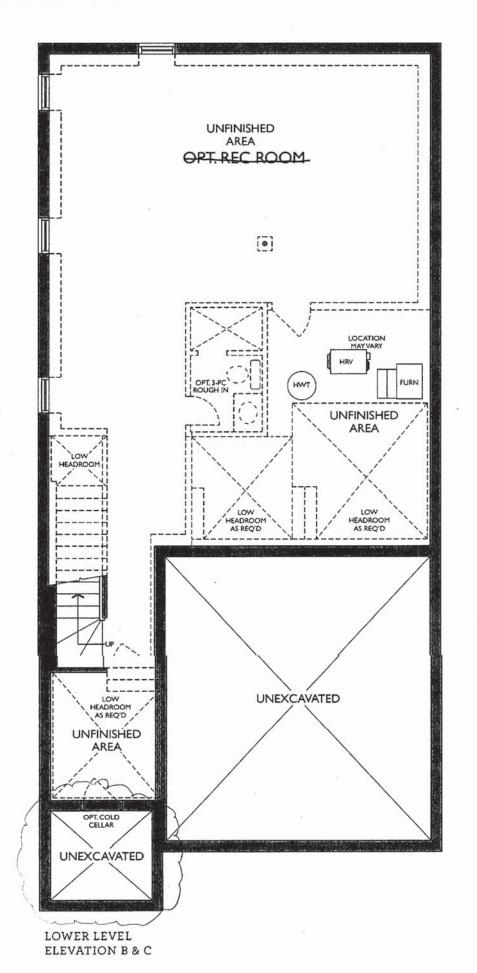



Model: 28-2590 B THE BRISTOL

13 of 40

THE BRISTOL


Sketch#2

ELEVATION A & B | 2,590 SQ. FT.

706 sq. ft. of opt. finished Lower Level

WALLACETON

28-2590 ELEV. B

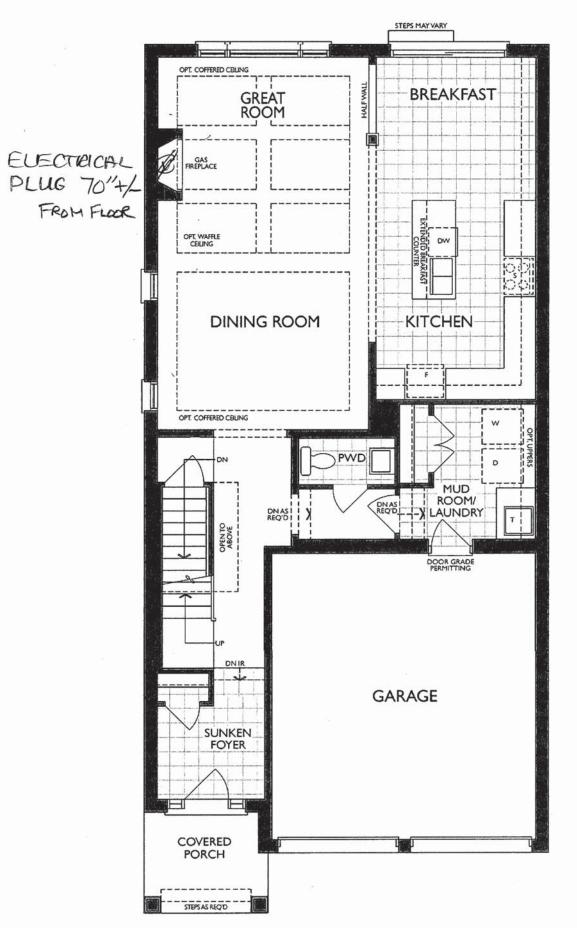

M S K.C

MAIN FLOOR ELEVATION B & C

Legal Plan Feb. 17, 2021

Model: 28-2590 B THE BRISTOL

14 of 40

THE BRISTOL


ELEVATION A & B | 2,590 SQ. FT.

706 sq. ft. of opt. finished Lower Level

WALLACETON

Sketch #3

28-2590 ELEV. B

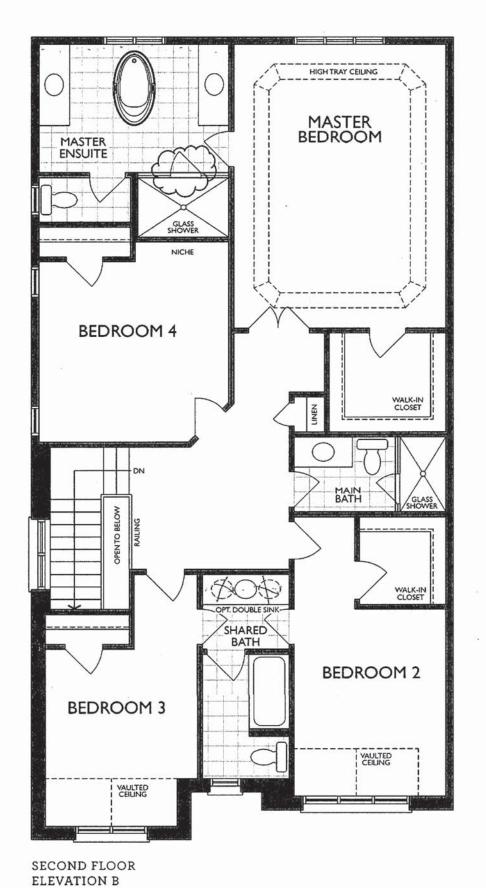


* Master Ensuite Shower Door Swing Changed

Project: Wallaceton Unit: 345, Phase: 3 Model: 28-2590 B THE BRISTOL

15 of 40



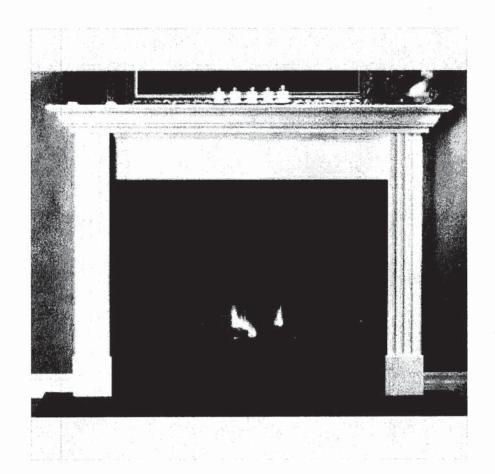

NFAS NF15 Mantel - Cabinet

Model: 28-2590 B THE BRISTOL


16 of 40

Optional Accessories


MB100

шш

DBR10S

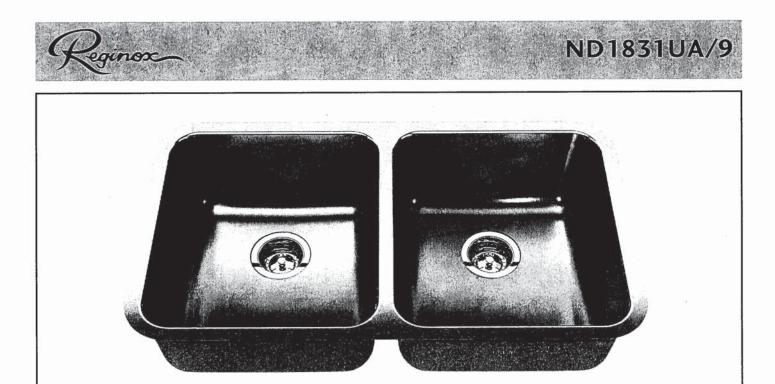



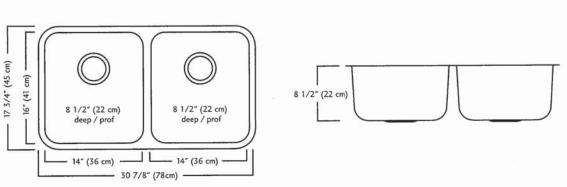

ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

Model: 28-2590 B THE BRISTOL

17 of 40

There is more than 1 version of this model. Page down to identify the version you have.

FAUCET DESCRIPTION

FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking

Power Clean™ spray technology

Metal construction with various finishes identified by suffix

Duralock™ connect installation

Pulldown spray with 68″ braided hose

Flexible supply lines with 3/8″ compression fittings

High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing

360° rotating spout

Faucet designed for handle to be mounted on right side only

OPERATION

Lever style handle

Lever style handle
 Temperature controlled by 100° arc of handle travel
 Operates with less than 5 lbs. of force
 Operates in stream or spray mode in the pullout or retracted position
FLOW

Flow is the stream of the pullout or retracted position
FLOW

Flow is the stream of the pullout or retracted position
FLOW

Flow is the stream of the pullout or retracted position
FLOW

Flow is the stream of the pullout or retracted position
FLOW

Flow is the stream of the pullout or retracted position
FLOW

Flow is the stream of the pullout or retracted position
FLOW

Flow is the stream of the pullout or retracted position is the p

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge
STANDARDS

Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all

- applicable requirements therein including NSF 61/9G & 372
 Meets CalGreen and Georgia SB370 requirements
 Complies with California Proposition 65 and with the Federal Safe Drinking
 Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow


ADA (5) for lever handle

Lifetime limited warranty against leaks, drips and finish defects to the original homeowner

10 year limited warranty when used in a multifamily installation

5 year limited warranty when used in a commercial installation
 Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ Single Handle High Arc **Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



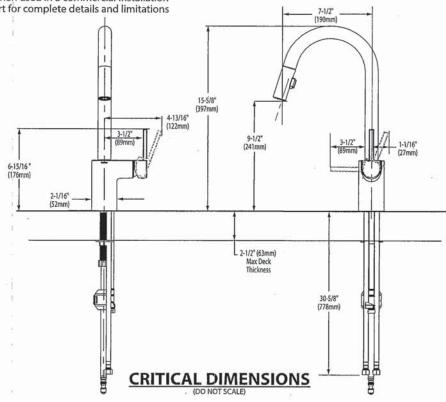

Rev. 6/20

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com





Model: 28-2590 B THE BRISTOL

18 of 40



BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

O641.800 Faucet holes on 8" (203mm) centers (Illustrated) STD 0641.400 Faucet holes on 4" (102mm) centers

- ☐ 0641.100 Center hole only
 - Classic styled rectangular pedestal lavatory
 - Vitreous china
 - · Rear overflow
 - · Supplied with mounting kit
 - Right Height® for greater comfort during use
 - · Faucet ledge with large deck area (faucet not included)
 - Design coordinates with Boulevard® Toilet
 - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- □ Color: □ White □ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

© 2018 AS America Inc.

spec_0641_BoulevardPedSink Rev 2/18

My b

K.S

^{*} See faucet section for additional models available

Model: 28-2590 B THE BRISTOL

19 of 40

American Standard

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

COLONY COUNTERTOP SINK

& BARRIER FREE

- · Vitreous china
- · Self-rimming

0346 001

Centre hole only

- · Front overflow
- · Supplied with template
- · Faucet deck (Faucet shown not included)

0346 803 Faucet holes on 203mm (8") centres
0346 403 (Illustrated) Faucet holes on 102mm (4") centres

Nominal Dimensions:


521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes: 422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS -Meets or exceeds the following Specifications: ASME A112.19.2M for Vitreous China Fixtures. · CAN/CSA B45 Series.

	i i	
Colour: White	■ Bone	☐ Silver Gray
Linen		
Faucet*:		
Faucet Finish:	4	
Supplies & Stops:	è	
Trap 1-1/4" (32 mn	n):	



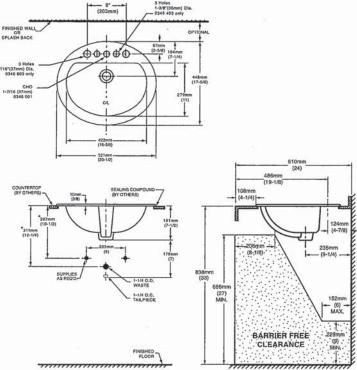

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.

See faucet section for additional models available BAS-198 -

© 2000 American Standard Inc.

01/07

Model: 28-2590 B THE BRISTOL

20 of 40



DEMI™ **Product Specification Sheet**

Two Piece Freestanding Collection

CF2007

Two Piece Freestanding Soaker

Size:


60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular
- Includes levelling feet


TWO PIECE ASSEMBLY

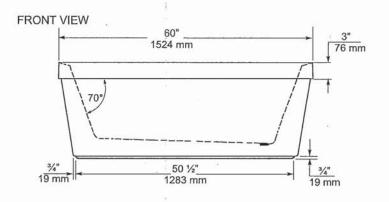

TOP VIEW

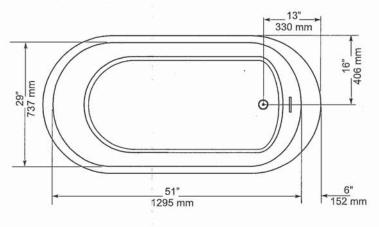

END VIEW



GENERAL SPECIFICATIONS 90 lb Average Weight 41 kg Bathing Well at bottom 43"x 20" 1092 x 508 mm Capacity Drain to Overflow 195 litres Water Depth Drain to Overflow 16" 406 mm Drain Opening (dia.) 51 mm 2 1/4"x 1/2" Overflow Opening 57 x 13 mm Drain to Floor Clearance 3 1/4" 83 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm %" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications:
- CAN/CSA - B45 Series





mirolin. 60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1 Telephone: 416.231.9030 Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 Canada, U.S.A.: 800.MIROLIN(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018



American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA

FIoWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- · Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- · Easy to clean sanitary dam on bowl
- · Includes Elongated Slow Close Seat
- · 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- 4035 216 Unlined Tank
- 2476 516 Same as above with Lined tank
 - ☐ 3067 316 Elongated Bowl
 - 4035 516 Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:

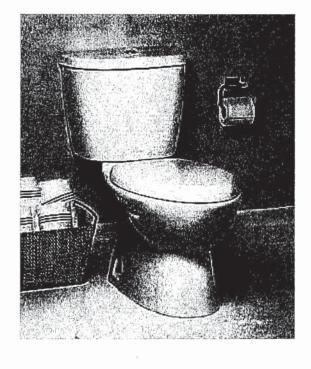



NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284 © 2008 American Standard



MOEN

There is more than 1 version of this model. Page down to identify the version you have.

DESCRIPTION

- Metal construction with various finishes identified by suffix Flexible supplies with 3/8" compression fittings
- Includes metal or 50/50 pop-up type waste assembly where noted OPERATION

Pivot action lever style handle

Temperature controlled through 100° degree arc of handle travel

- Water usage is limited to these maximum flow rates as indicated by the corresponding product markings

 1.2 gpm max (4.5L/min) at 60 psi

 5.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1255™ Duralast™ cartridge Nonmetallic/nonferrous and stainless steel material

Third party certified to WaterSense*, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
Certified to NSF 61/9 & 372
Products marked with 1.2 gpm are compliant with California water

- efficiency regulations
 Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects
- to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications



CHATEAU® Single-Handle Lavatory Faucet


with Metal Waste Assembly Model: L4625 series L4631BC

Bulk Packed (12 per carton): L64624 series

with 50/50 Waste Assembly Bulk Packed (12 per carton): L64625 series

Less Waste Bulk Packed (12 per carton): L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

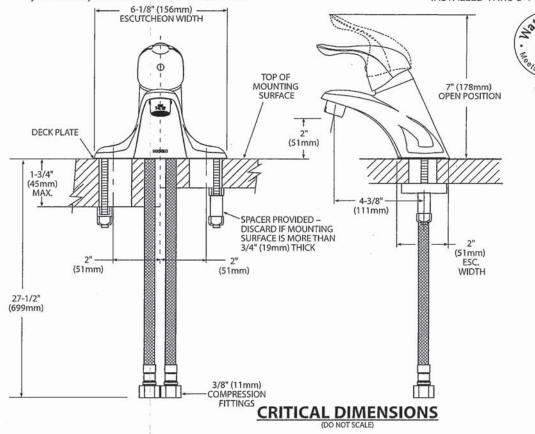

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 8/15

Model: 28-2590 B THE BRISTOL

23 of 40



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein EP suffix models are third party certified to WaterSense®
- ADA (for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects
- to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications






CHATEAU' POSI-TEMP' Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

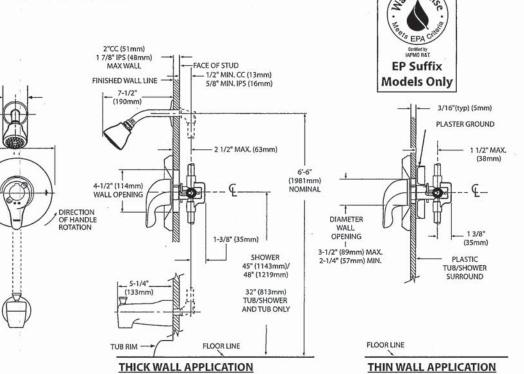

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

MONTH!

TL183sp: Rev. 5/13

Model: 28-2590 B THE BRISTOL

24 of 40

MOEN®

DESCRIPTION

Metal construction with various finishes identified by suffix

OPERATION

- Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🖒 for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


Specifications




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

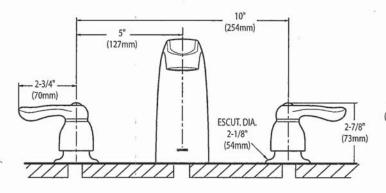



CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN


www.moen.com

Model: 28-2590 B THE BRISTOL

25 of 40

SC(B)519 | ALITO Collection



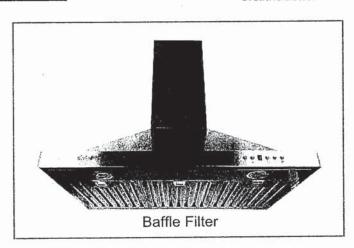

Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button Control Panel



Long-Lasting LED Lights



Time-Delay OFF Feature



Grease Cup



Model	Colour	Ducting	Filters	Size	CFM
Model		The Desired Belleville Control of the Control of th		THE RESERVE OF THE PARTY OF THE	AND DESCRIPTION OF PERSONS

	I Chalaina Chaol	C"	Baffle	(30")	550
SCB51930	Stainless Steel	Ь		30	550
SCB51936	Stainless Steel	6"	Baffle	36"	550

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.

Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

M-l



Model: 28-2590 B THE BRISTOL


26 of 40


SC(B)519 | ALITO Collection



Features

- · Wall mount range hood
- · 6" round duct adapter
- · Non-stick aluminum fan blades
- 3 speed push button control
- · 2 LED lights (2 x 1.4W, 4000K)
- Quick release aluminum mesh filters
- · Standard chimney fits up to 9 ft. ceiling
- · Up to 9 minutes time-delay OFF feature
- · Plug-in connection





Options

· Filters:

SCB519 - Quick Release Stainless Steel Baffle Filters

Chimney Flues:

A1.CH10 - short (7'-8' ceilings)
A1.CH18 - standard (8'-9' ceilings)
A1.CH30 = extended (9'-11' ceilings)

• Widths: 24", 30", 36"

Specifications

- · Air Flow Volume: 550 CFM
- Electrical Connection: 120 V/60 Hz
- Power Consumption: 300 Watts
- Current: 2.5 Amps
- Fan Speed: 1599 RPM
- Fan Type: Centrifugal Blower
- · Finishes: Stainless Steel
- Ducting: 6" Round
- Noise Level: Min. 2 Sones
 Max. 6 Sones





Toronto • Vancouver • Boston www.CycloneRangeHoods.com

K.S

Model: 28-2590 B THE BRISTOL

27 of 40



Whirlpool 20 cu. ft. French Door Refrigerator

20 cu. ft.

14 cu. ft.

Capacity **Total Capacity**

Refrigerator Capacity

General Features & Properties

Frameless Glass Shelves

Interior Water Dispenser with EveryDrop®


Full-Width, Temperature-Controlled Drawer

Accu-Chill™ Temperature Management

Freezer Capacity

Water Filtration

Gallon Door Bins



Fingerprint-Resistant Stainle WRF540CWHZ

Also available in:

0	White

WRF540CW



WRF540CW



WRF540CW

	System	
	Adaptive Defrost	
	FreshFlow™ Produce Prese	rver
ess	LED Interior Lighting	
	Designed, Engineered and U.S.A.	Assembled in the
	Electrical Details	
/HW	Amps	20
/НВ	Volts	115
	Certifications	
/HV	ENERGY STAR® Certified	Yes

Technical Details	
Refrigerator Type	

French Door

Number of Doors Number of Interior

5

Number of Refrigerator Door Bins

Number of Interior

2 Fixed. 4 Adjustable 1 Wire,

Freezer Shelves Lighting Type

1 Plastic LED

Ice Maker

Factory Installed

Ice Maker Location Dispenser Type

Freezer Interior Water

Dimensions

Product Dimensions $(H \times W \times D)$

70-1/8" x 35-5/8" x 29 3/8"

Depth with Door Open 90°

43"

Allow extra 1/2" on sides and top

Cutout Dimensions

Allow extra 1' on rear

Reference Material Dimension Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

Fingerprint Resistant


Resists fingerprints and smudges with an easy-to-clean finish.


Counter Depth Design

Add additional kitchen space with styling that fits virtually flush with the countertop.

Humidity-Controlled Crispers

Store fruits and veggies in their ideal environment.











Model: 28-2590 B THE BRISTOL


28 of 40




French Door Bottom Mount Refrigerator

WRF532SMH, WRF540CWH, WRF535SMH

PRODUCT DIMENSIONS





Model Number	WRF532SMH	WRF535SMH	WRF540CWH
Model Size	22.1 cu. ft.	25.2 cu. ft.	20.0 cu. ft.
Height - Overall "A"	70%"	70%"	701/s"
	(178.1 cm)	(178.1 cm)	(178.1 cm)
Height - Top of	68%"	68%"	687/6"
Cabinet "B"	(174.9 cm)	(174.9 cm)	(174.9 cm)
Depth - Doors Open	47%"	481/4"	43*
90° "C"	(119.7 cm)	(122.2 cm)	(109.2 cm)
Depth - Drawer	521/s"	521/s"	45%"
Open "D"	(132.4 cm)	(132.4 cm)	(115.3 cm)
Depth - With	34 ¹ / ₂ "	35 ¹ / ₂ "	30 ¹ / ₂ "
Handles "E"	(87.4 cm)	(89.9 cm)	(77.5 cm)
Depth - Without	32"	33"	26 ⁷ / ₈ "
Handles "F"	(81.3 cm)	(83.8 cm)	(68.3 cm)
Depth - Cabinet	28 ¹ / ₈ "	291/s"	24 ¹ / ₈ "
Only "G"	(71.3 cm)	(73.9 cm)	(61.2 cm)
Width - Cabinet "H"	32%"	35%"	35%"
	(82.9 cm)	(90.5 cm)	(90.5 cm)
Width - Door Open	40%"	43%"	43%"
90° "!"	(102.6 cm)	(110.2 cm)	(110.2 cm)

AWARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

Electrical: A 115 V, 60 Hz, AC only 15 A or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 35 psi and 120 psi (241 kPa and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 psi and 120 psi (241 kPa and 827 kPa).

Reverse Osmosis Water Supply:

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 psi to 60 psi (276 kPa to 414 kPa).

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice







Model: 28-2590 B THE BRISTOL



French Door Bottom Mount Refrigerator

LOCATION REQUIREMENTS

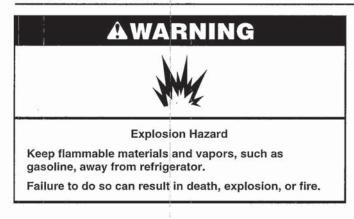



IMPORTANT: This refrigerator is designed only for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2½" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Mh

C



Model: 28-2590 B THE BRISTOL


30 of 40

4.8 cu. ft. guided Electric Front Control Range with the easy-wipe ceramic glass cooktop

YWEE510S0FS

Whirlpool

 $\textbf{Home} \ \rightarrow \ \textbf{Kitchen Appliances} \ \rightarrow \ \textbf{Cooking Appliances} \ \rightarrow \ \textbf{Ranges} \ \rightarrow \ \textbf{Slide-In Ranges} \ \rightarrow \ \texttt{YWEE510S0FS}$

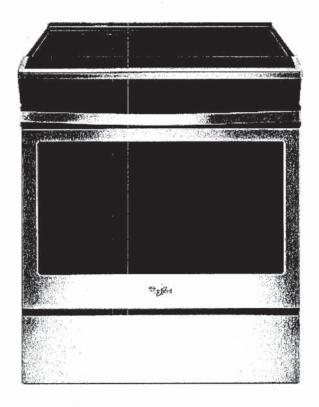











Mb

Model: 28-2590 B THE BRISTOL

31 of 40

WHIRLPOOL YWEE510S0FS

4.8 cu. ft. guided Electric Front Control Range with the easy-wipe ceramic glass cooktop

INSTALLATION REQUIREMENTS

Tools and Parts

Gather the required tools and parts before starting installation. Read and follow the instructions provided with any tools listed here.

Tools Needed

- Tape measure
- Phillips screwdriver
- Level
- Hand or electric drill
- Wrench or pliers
- Marker or pencil
- 1/6" (3.2 mm) drill bit (for wood floors)
- Flashlight

Parts Supplied

Check that all parts are included.

- #10 x 15%" (4.1 cm) screws (for mounting anti-tip bracket) (2)
- Anti-tip bracket (inside oven cavity)
 - Anti-tip bracket must be securely mounted to the back wall or floor. Thickness of flooring may require longer screws to anchor bracket to subfloor. Longer screws are available from your local hardware store.

Location Requirements

IMPORTANT: Observe all governing codes and ordinances,

- It is the installer's responsibility to comply with installation clearances specified on the model/serial/rating plate. The model/serial/rating plate is located behind the oven door on the top right-hand side of the oven frame.
- The range should be located for convenient use in the kitchen.
- Recessed installations must provide complete enclosure of the sides and rear of the range.
- To eliminate the risk of burns or fire by reaching over the heated surface units, cabinet storage space located above the surface units should be avoided. If cabinet storage is to be provided, the risk can be reduced by installing a range hood or microwave hood combination that projects horizontally a minimum of 5" (12.7 cm) beyond the bottom of the cabinets.
- All openings in the wall or floor where range is to be installed must be sealed.
- Cabinet opening dimensions that are shown must be used. Given dimensions are minimum clearances.
- The anti-tip bracket must be installed. To install the anti-tip bracket shipped with the range, see "Install Anti-Tip Bracket" section.
- Grounded electrical supply is required. See the appropriate "Electrical Requirements" section.
- Contact a qualified floor covering installer to check that the floor covering can withstand at least 200°F (93°C).
- Use an insulated pad or ¼" (0.64 cm) plywood under range if installing range over carpeting.

IMPORTANT: To avoid damage to your cabinets, check with your builder or cabinet supplier to make sure that the materials used will not discolor, delaminate, or sustain other damage. This oven has been designed in accordance with the requirements of UL and CSA International and complies with the maximum allowable wood cabinet temperatures of 194°F (90°C).

Me

11 0

Model: 28-2590 B THE BRISTOL

32 of 40

WHIRLPOOL YWEE510S0FS

4.8 cu. ft. guided Electric Front Control Range with the easy-wipe ceramic glass cooktop

Mobile Home - Additional Installation Requirements

The installation of this range must conform to the Manufactured Home Construction and Safety Standard, Title 24 CFR, Part 3280 (formerly the Federal Standard for Mobile Home Construction and Safety, Title 24, HUD Part 280). When such standard is not applicable, use the Standard for Manufactured Home Installations, ANSI A225.1/NFPA 501A or with local codes.


In Canada, the installation of this range must conform with the current standards CAN/CSA-A240-latest edition, or with local

Mobile Home Installations Require:

When this range is installed in a mobile home, it must be the range is adequate as long as it conforms to the standards listed above.

Product Dimensions

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.



- A. 13/16" (3.0 cm) height from cooktop to top of vent
- B. 291/8" (75.9 cm)
- Model/serial/rating plate (located behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in*
- E. 28²⁵/₄" (72.1 cm) max. depth from front of console to back of range
- 291/64" (73.7 cm) max. depth from handle to back of range

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth, and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Range may be installed next to combustible walls with zero clearance.

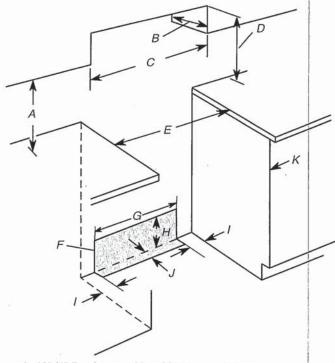

- 18" (45.7 cm) upper side cabinet to countertop
- B. 13" (33 cm) max. upper cabinet depth
- C. 30" (76.2 cm) min. opening width
- D. For minimum clearance to top of cooktop, see NOTE*.
- 30" (76.2 cm) min. opening width
- The shaded area is recommended for installation of grounded outlet.
- G. 131/8" (33.3 cm)
- H. 7¹¹/₁₆" (19.5 cm) I. 4¹³/₁₆" (12.2 cm)
- J. 311/16" (9.4 cm)
- K. Cabinet door or hinges should not extend into the cutout.
- * NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than ¼" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Model: 28-2590 B THE BRISTOL

33 of 40

WHIRLPOOL YWEE510S0FS

4.8 cu. ft. guided Electric Front Control Range with the easy-wipe ceramic glass cooktop

Electrical Requirements - Canada Only

AWARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection	
120/240 Volts	120/208 Volts	Amps	
8.8 - 16.5 KW	7.8 - 12.5 KW	40 or 50**	i
16.6 - 22.5 KW	12.6 - 18.5 KW	50	

*The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

**If connecting to a 50-amp circuit, use a 50-amp rated cord with kit. For 50-amp rated cord kits, use kits that specify use with a nominal 1%" (3.5 cm) diameter connection opening.

- A circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



- Do not use an extension cord.
- The tech sheet and wiring diagram are located on the back of the range in a plastic bag.





Model: 28-2590 B THE BRISTOL

34 of 40

WHIRLPOOL YWEE510S0FS

4.8 cu. ft. guided Electric Front Control Range with the easy-wipe ceramic glass cooktop

INSTALLATION INSTRUCTIONS

Unpack Range

AWARNING

Excessive Weight Hazard

Use two or more people to move and install range. Failure to do so can result in back or other injury.

- Remove shipping materials, tape, and film from the range. Keep cardboard bottom under range. Do not dispose of anything until the installation is complete.
- Remove oven racks and parts package from oven and shipping materials.
- To remove cardboard bottom, first take 4 cardboard corners from the carton. Stack 1 cardboard corner on top of another. Repeat with the other 2 corners. Place them lengthwise on the floor behind the range to support the range when it is laid on its back.
- Using 2 or more people, firmly grasp the range and gently lay it on its back on the cardboard corners.
- 5. Remove cardboard bottom.

The leveling legs can be adjusted while the range is on its back. See the "Adjust Leveling Legs" section.

NOTE: To place range back up into a standing position, put a sheet of cardboard or hardboard on the floor in front of range to protect the flooring. Using 2 or more people, stand range back up onto the cardboard or hardboard.

Insiall Anti-Tip Bracket

AWARNING



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.

Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.


Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.

- 1. Remove the anti-tip bracket from the inside of the oven.
- Determine which mounting method to use: floor or wall.
 If you have a stone or masonry floor, you can use the wall
 mounting method. If you are installing the range in a mobile
 home, you must secure the range to the floor.

This anti-tip bracket and screws can be used with wood or metal studs.

3. Determine and mark centerline of the cutout space. The mounting bracket can be installed on either the left-hand or right-hand side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 12½" (31.8 cm) from centerline as shown.



A. 12½" (31.8 cm) B. Bracket V-notch

M



Model: 28-2590 B THE BRISTOL

35 of 40

WHIRLPOOL YWEE510S0FS

4.8 cu. ft. guided Electric Front Control Range with the easy-wipe ceramic glass cooktop

4. Drill two 1/6" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting



Rear position



Front position



Diagonal (2 options)

Wall Mounting



- 5. Using the two #10 x 15%" (4.1 cm) Phillips-head screws provided, mount anti-tip bracket to the wall or floor.
- Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard, or hardboard from under range.
- Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



Move range forward onto shipping base, cardboard, or hardboard to continue installing the range, using the following installation instructions.

Adjust Leveling Lega

 If range height adjustment is necessary, use a wrench or pliers to loosen the 4 leveling legs.

This may be done with the range on its back or with the range supported on 2 legs after the range has been placed back to a standing position.

NOTE: To place range back up into a standing position, put a sheet of cardboard or hardboard in front of range. Using 2 or more people, stand range back up onto the cardboard or hardboard.

AWARNING



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.

Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.

- 2. Measure the distance from the top of the counter to the floor.
- 3. Measure the distance from the top of the cooktop to the bottom of the leveling legs. This distance should be the same. If it is not, adjust the leveling legs to the correct height. The leveling legs can be loosened to add up to a maximum of 1" (2.5 cm). A minimum of 3/16" (5 mm) is needed to engage the anti-tip bracket.

NOTE: If height adjustment is made when range is standing, tilt the range back to adjust the front legs, and then tilt forward to adjust the rear legs.

4. When the range is at the correct height, check that there is adequate clearance under the range for the anti-tip bracket. Before sliding range into its final location, check that the antitip bracket will slide under the range and onto the rear leveling leg prior to anti-tip bracket installation.

NOTE: If a Trim Kit will be used, the top of the cooktop should be higher than the counter. See the Installation Instructions included with the Trim Kit for the correct height.

Level Range

 Place level on the oven bottom, as indicated in one of the 2 figures below, depending on the size of the level. Check with the level side to side and front to back.



If range is not level, use a wrench or pliers to adjust leveling legs up or down until the range is level.





Model: 28-2590 B THE BRISTOL

36 of 40





Monochromatic Stainless Steel WDF540PADM

Also available in:

White	WDF540PADW
Black	WDF540PADB

Capacity		
Total Place Settings	15	
General Features & Properties		
Soil Sensor		
In-Door Silverware Basket		
Sani Rinse Option		
Normal Cycle		
Heavy Cycle		
High Temperature Wash Option		
Heated Dry Option		
ENERGY STAR® Certified		
Industry's Best Selling Dishwasher Brand [†]		
Electrical Details		
Amps	15	
Volts	120	
Hz	60	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details		
Dishwasher Type	Built-in	
Control Location	Front	
Control Type	Electronic	
Number of Wash Cycles	5	
Number of Options	5	
dBA	53	
Number of Racks	2	
Tub Material	Plastic	
Wash System	Filter	
Wash System Type	Removable Filter	
Number of Wash Arms	3	
Dimensions		
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"	
Depth with Door Open 90°	49-1/2"	
Reference Material		

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

Sensor Cycle


Automatically get the right wash and dry settings for each load with two sensors that measure temperature, soil level and load size during prewash and the wash cycle.

1-Hour Wash Cycle

Clean the dishes you need fast with a cycle that thoroughly takes care of plates, pans and glasses in just an hour."

Cycle Memory

Quickly start your dishwasher with one button. It automatically remembers the last cycle you picked so it's stored and ready to go.



^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of unit sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF540PADSPECSHEETV01.

Model: 28-2590 B THE BRISTOL

37 of 40



PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored,

or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for

your home and local codes and ordinances.

Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit



instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use %" O.D. copper tubing with compression fitting or flexible braided water supply line (½" minimum plastic tubing is not recommended). Use a 90°elbow with ¾"N.P.T. external pipe threads on one end. Do not solderwithin 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

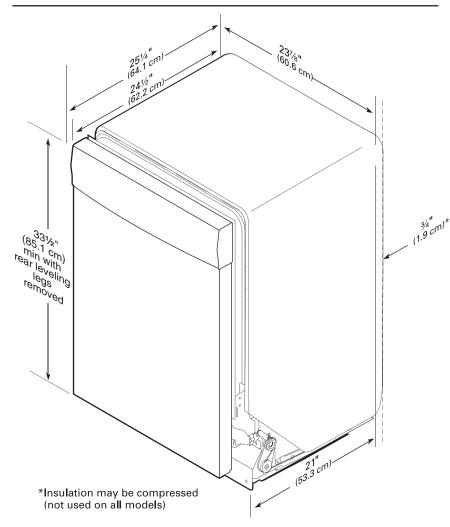


Model: 28-2590 B THE BRISTOL

38 of 40

CABINET CUTOUT DIMENSIONS

NOTE: Shaded areas of cabinet walls show where utility connections may be installed.

- *Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.
- **Minimum, measured from narrowest point of opening.

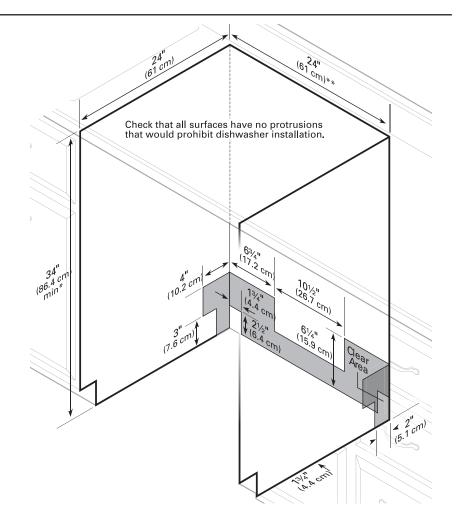

Model: 28-2590 B THE BRISTOL

39 of 40

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW





7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



Whirlpool

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

		1.47
Depth		78.74 cm, 31.0 in
Depth With Doo	r Open 90 Degree	138.43 cm, 54-1/2 in
Height		98.42 cm, 38-3/4 in
Width		68.58 cm, 27.0 in
Configuration a	nd Overview	
Fuel Type		Electric
Cycles and Op	tions	
Cycle Time Ren	maining	Yes
Lint Filter Indica	ator	No
Number of Drye	er Cycles	36
Number of Dry	ness Levels	3
Ventilation Sys	stem	
Long Vent		No
Maximum Vent	Length	64
Venting Direction	on	Left, Right, Bottom, Rear
Electrical		
Hz	v.	. 60
Power Cord Inc	cluded	Yes



Model: 28-2590 B THE BRISTOL


40 of 40

WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5620HW



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser



Whirlpool

5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser

Model #: WFW5620HW

Dimensions

Depth

80.17 cm, 31-9/16 in

Depth With Door Open 90 Degree

143.51 cm, 56-1/2 in

Minimum Height

98.11 cm, 38-5/8 in

Width

68.58 cm, 27.0 in

Appearance

LCD Touch Screen

No

Window

Yes

Details

Drum Material

Stainless Steel

Cycles and Options

Number of Wash Cycles

37

Electrical

Hz

60

Power Cord Included

Yes

M B KE