Sales Selection Sheet Checklist

Model: 20-2070 ALT A APPLEDALE

LOT 644

PURCHASERS: SUJATHA KANTHAVEL/JAMES, VINCENT WALSH Heathwood Homes (Whitby) Limited VENDOR: WAFFLE CEILING IN GREAT ROOM WOB **DECK** FINISHED BASEMENT COLD CELLAR **UPGRADED / MODIFIED ELEVATION** CORNER UPGRADE REAR UPGRADE SIDE UPGRADE CEILING UPGRADE - SMOOTH MAIN FLOOR (STD FOR SINGLES) 1 SECOND FLOOR **BASEMENT** ADDITIONAL ROUGH-INS 200 AMP SERVICE (STD 100AMP SINGLES) WET BAR ROUGH-IN **HUMIDIFIER (STD FOR SINGLES)** AIR CONDITIONING (SITE STD) GAS ROUGH-IN STOVE **DRYER BBQ** ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE 6 IN ROUND DUCT (STD FOR SINGLES) 7 IN ROUND DUCT **FULL BASEMENT STAIRS:** All Oak **UPPER BASEMENT STAIRS:** N/A LOWER LEVEL STAIRS: N/A MAIN STAIRS: All Oak MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A OCT 20 OCT 20/22 **Decor Consultant:** Date Purchaser: Date Heathwood Homes (Whitby) Limited Date Approved Locked Date:

SUJATHA KANTHAVEL/JAMES, VINCENT WALSH

Project: Country Lane Unit: 644, Phase: 6

Model: 20-2070 ALT A APPLEDALE

452 5 Created: 1/2 22 15:0 :45

Locked: Closed:

Kitchen			
Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***	
Cabinet Colour/Style - Base Cab	inets 9111	Viking III-SIMCOE ORCHID 3DL ***STD***	
Island Cabinet Colour/Style	9156	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***	
Cabinet Hardware	2093	9671-HARDWARE ***STD***	
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***	
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***	
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***	
Sink	9494	Blanco Kitchen Sink Quatrus U 2 #401247 (32" x 18") Undermount 2 Bowl Equal Size 9" Deep in Stainless Steel	PG 21
Crumb Vac Color	9486	Vacuum-Crumb Vac (Dust Pan)-Silver	
HoodFan	9393	SCB51430CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS	PG 34-3
Backsplash	5728	QT.CD.STG.0306.BR-Colour and Dimension Bright-Sterling Grey-3 x 6 ***2***	
Backsplash Grout	2225	Grout-(27) Silver ***STD***	
Backsplash Tile Pattern	3100	HERRINGBONE ***UPG***	
Flooring	9360	Red Oak Pearl-Vintage Northern Solid Sawn-BARISTA-3/4 inch x 5 inch ***STD in Single*** SAMBUCCA STAIN REQUIRED	
Floor Tile Grout	1111	N/A *****	
Floor Tile Pattern	1111	N/A *****	

- Purchasers have been advised: standard fridge opening is a minimum $37\ 3/8\ x\ 73\ 3/8$ inches. Ice Waterline Rough-In is included.
- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

Comment		œ			
	39			£ .	

Foyer	N.C. SHOW	
Flooring	1111	GE.BY.PEN.1313 New Byzantine Pentallic (Grey) 13
Eloor Tila Grout	2222	Grout (105) Driftwood ***STD***

Sc

SUJATHA KANTHAVEL/JAMES, VINCENT WALSH Project: Country Lane Unit: 644, Phase: 6 Model: 20-2070 ALT A APPLEDALE

Mud Room

Flooring Page 2 of 7

Locked: Closed:

Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	
. Comment			
		The second secon	
owder Room			
Flooring	3000	GE.BY.PEN.1313 New Byzantine Pentallic (Grey) 13	
Floor Tile Grout	2222	Grout-(105) Driftwood ***STD***	
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	
			7
Plumbing Fixture (Colour) Comment	1737	Plumbing Fixtures-WHITE ***STD***	_
Comment			
ning Room			
Flooring	9360	Red Oak Pearl-Vintage Northern Solid Sawn-BARISTA-3/4	
Comment		inch x 5 inch ***STD in Single*** SAMBUCCA STAIN]
eat Room	- Te		
market with a second control of the second	9360	Red Oak Pearl-Vintage Northern Solid Sawn-BARISTA-3/4 inch x 5 inch ***STD in Single*** SAMBUCCA STAIN	
Flooring			
Comment			
ory gave en to a sec			
Comment			
ory gave en to a sec	8869	Majestic MERC32 ***STD***	
eat Room Fireplace	8869 8891	Majestic MERC32 ***STD*** NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***]]PG 2
eat Room Fireplace		NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE]]PG 2
eat Room Fireplace Type Mantle Surround (STD)	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***] PG 2
eat Room Fireplace Type Mantle Surround (STD) - Purchasers have been advised - Heathwood and-its contractors	8891 1111 : heat from the	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD*** N/A ******	
eat Room Fireplace Type Mantle Surround (STD) - Purchasers have been advised	1111 : heat from the	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD*** N/A ****** Property of the planet (Per Plan)-WHITE ***STD*** Property of the planet (Per Plan)-WHITE ***STD** Property of the planet (Per P	

GE.BY.PEN.1313 New Byzantine Pentallic (Grey) 13

1111

SUJATHA KANTHAVEL/JAMES, VINCENT WALSH Project: Country Lane Unit: 644, Phase: 6 Model: 20-2070 ALT A APPLEDALE

Locked:

	· · · · · · · · · · · · · · · · · · ·	
Floor Tile Grout	2222	Grout-(105) Driftwood ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
	٠	
Comment	(8.95)	
Main Hall		
Flooring	9360	Red Oak Pearl-Vintage Northern Solid Sawn-BARISTA-3/4 inch x 5 inch ***STD in Single*** SAMBUCCA STAIN
Comment		Indix 5 indi STD in Single SAMBOCCA STAIN
Upper Hall	, Root	
Flooring	9360	Red Oak Pearl-Vintage Northern Solid Sawn-BARISTA-3/4 inch x 5 inch ***STD in Single*** SAMBUCCA STAIN
Comment	##000 really in the	Indix 3 indi 310 in Single SAMBOCCA STAIN
	0.10 3 000000 at	
Master Bedroom		
Flooring	9247	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly***STD***
Comment		
		*
Bedroom 2	The state of the s	
Flooring	9247	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly***STD***
Comment	40-1000-10-300-00-00-00-00-00-00-00-00-00-00-00-0	
D. J		
Bedroom 3	9247	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz
Flooring	9247	Poly***STD***
Comment		
		30.00 A 30.00
Master Ensuite		
Cabinet Colour/Style	6319	Viking III-MANCHESTER-CAVIAR CL-MAPLE ***STD***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***1***

SUJATHA KANTHAVEL/JAMES, VINCENT WALSH

Page 4 of 7

Project: Country Lane
Unit: 644, Phase: 6
Model: 20-2070 ALT A APPLEDALE

Locked:

C	ountertop Edge	4010	GROUP 1 - SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***1***
Flo	oor Tile	4010	TR.SP.WHITE.1313 SEMPRE White Matte 13
		1010	THEOLOGICAL TO SEAT THE WHITE WAITE TO
Flo	oor Tile Grout	2225	Grout-(27) Silver ***STD***
Flo	oor Tile Pattern	3000	STANDARD SQUARE ***STD***
Sh	nower Floor Tile	8109	OD.ON.BLK.02.HEX.MT-ONTARIO HEXAGON
Oil	lower Floor The	0109	MATTE-BLACK UPG 2 ***UPG***
Sh	ower Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Sh	ower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
		to to	
01	\A/- II T II	0000	TD ODWINE 4040 CEMPRE White Matte 42 at 1906
Sn	ower Wall Tile	3000	TR.SP.WHITE.1313 SEMPRE White Matte 13 · · · UPg · ·
Sh	ower Wall Tile Grout	222 6	Grout-(27) White ** STD ***
Sh	ower Wall Tile Pattern	3000	STANDARD SQUARE ***STD***
Sh	ower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
	umbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
	mment		
SCHOOL S	athroom	CATOTOCKES	TABLE BUILDING SENIOR OF THE ORDER STREET
Ca	binet Colour/Style	1737	Viking III-SIMCOE-NAVY BLUE-3DL ***STD***
Ca	binet Hardware	2086	9677-HARDWARE ***STD***
Со	untertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Co	untertop Edge	1111	N/A *****
Flo	por Tile	1111	GE.BY.AZR.1313 New Byzantine Azzuro 13
CI.	or Tilo Crout	DOOF.	Crout (27) Silver ***STD***
Floor Tile Grout		2225 3000	Grout-(27) Silver ***STD*** STANDARD SQUARE ***STD***
FIG			THE RESERVE OF THE PARTY OF THE
Flo	oor Tile Pattern	5000	STANDARD GGARLE STB

SUJATHA KANTHAVEL/JAMES, VINCENT WALSH

Project: Country Lane
Unit: 644, Phase: 6
Model: 20-2070 ALT A APPLEDALE

Locked:

Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***
Wall Tile Grout	2226	Grout-(00) White ***STD***
Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
35 Table 1 Tab	2	
Opt. Shower Floor Tile	1111	N/A *****
Opt. Shower Floor Tile Grout	1111	N/A *****
Opt. Shower Floor Tile Pattern	1111	N/A *****
Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Laundry Room		
Flooring	1737	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Over 4		
Floor Tile Grout Floor Tile Pattern	2225 3000	Grout-(27) Silver ***STD*** STANDARD SQUARE ***STD***
Opt. Cabinet Colour/Style - Uppers	3000	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***
Opt. Cabinet Hardware - Uppers	2086	9677 HARDWARE
Comment	40000	
Lower Level Recreation Room		
Flooring	9247	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly ***STD***
Comment		
Lower Level Bedroom		
Flooring	9247	DY 16611-Dynasty Tex-SANDY BEIGE-40 oz Poly ***STD***
Comment		

SUJATHA KANTHAVEL/JAMES, VINCENT WALSH Project: Country Lane Unit: 644, Phase: 6 Model: 20-2070 ALT A APPLEDALE

Locked: Closed:

	J

Cabinet Colour/Style	9168	Viking III-CHARLESTON-MOONLIGHT-3DL ***STD***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Countertop	8827	4925K-07-Countertop-CALCUTTA MARBLE-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Floor Tile	1111	GE.BY.PEN.1313 New Byzantine Pentallic (Grey) 13
Floor Tile Grout	2222	Grout-(105) Driftwood ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	8833	QT.UW.WHT.0810-Uniwall-White-8 x 10 ***STD***
Wall Tile Grout	2226	Grout-(00) White ***STD***
Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
		
Opt. Shower Floor Tile	1111	N/A *****
Opt. Shower Floor Tile Grout	1111	N/A *****
Opt. Shower Floor Tile Pattern	1111	N/A *****
	1, 3	
Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment	No.	

Type	1714	Oak Stairs ***STD MAIN STAIRS***
iybe	17 14	Oak Stalls STD WAIN STAIRS
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Handrail/Pickets/Posts Type	8148	Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)-BLACK ***2***
Handrail/Pickets/Posts Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Custom Stain/Paint	1111	N/A *****
Landing(s)	8906	Red Oak-Vintage 5 inch Pre-Sanded Smooth Unfinished

SUJATHA KANTHAVEL/JAMES, VINCENT WALSH Project: Country Lane Unit: 644, Phase: 6 Model: 20-2070 ALT A APPLEDALE

Locked:

		Red Oak-Unfinished-3/4 inch x 5 inch ***1***
Opt. Carpet Runner	1111	N/A *****
Comment LANDING TO E	BE STAINED SAME	BUCCA
wer Level Stairs		O LOCAL STATE MAIN OTAL DOTAL
Туре	1714	Oak Stairs ***STD MAIN STAIRS***
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Handrail/Pickets/Posts Type	8148	Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)-BLACK ***2***
Handrail/Pickets/Posts Colo	ur 7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND
CEST of Gentless and States		WILL VARY FROM FLOORING ***99***
Custom Stain/Paint	1111	N/A *****
Landing(s)	8906	Red Oak-Vintage 5 inch Pre-Sanded Smooth Unfinished Red Oak-Unfinished-3/4 inch x 5 inch ***1***
Opt. Carpet Runner	1111	N/A *****
Comment		
Comment		
		. 4
oughout		
Switches and Plug	5796	Decora White Switches and Plugs ***STD***
Thresholds	2232	Metal Thresholds ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Trim Size	8704	5 1/4 inch Baseboard and 3 inch Integrated Backbend Casings ***UPG*** / ***STD in Singles***
Trim - Paint Colour	1716	Trim-WHITE ***STD***
Walls - Paint Colour	1717	22-Wall-WARM GREY ***STD***
Comment		
	MIN	gan mila and and and and and and and and and an
V 01		and also
rchaser:	(· K · C	my 1/12 Ath mig
SUJATHAKANTH	AVEL	Date Decor Consultant Date
	1	- Marcheson
A 1/1		- 1 3 3033 Cluc Et -80-
chaser: ///	_ (lug 9/22 Kosen -08- 23 2022.
JAMES, VINCENT	WALSH	Date Country Lane Date approve

2 of 45 construction summary



Lot: 644 Model: 20-2070 ALT A APPLEDALE Project/Phase: Country Lane / 6

Offer	Supply and Install Central Air Conditioning
Worksheet	Note:
Offer	Classic Collection: Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer (Singles)
Worksheet	Note:
	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not
1	entitled to a
Worksheet	referral fee under Heathwood Homes Referral program.
worksneet	Note.

10 of 45



Lot: 644

Model: 20-2070 ALT A APPLEDALE Project/Phase: Country Lane / 6

APPLIANCES

Invoice	Qty.	Description
1079	1	KITCHEN - GRANITE - GRANITE CUTOUT W/ STRAIGHT EDGE POLISH TO ACCOMMODATE COOK TOP
335,619		
20Oct22 **		

voice	Qty.	Description						
1172 342,581 20Oct22	2	KITCHEN - CABINETRY-B08-Upgrade levels 1-4, 5-7 drawers from Metabox to soft-close Tandembox drawers per drawer (appliance cabinets may also have drawers to be counted; pull-outs and all drawers in the room must be counted and upgraded) VIKING FOR ADDITIONAL POT AND PAN CABINET BESIDE FRIDGE. SKETCH # 2 AND 3						
1079 335,619 20Oct22	1	N/A						
1079 335,927 20Oct22	1	KITCHEN - CABINETRY-B17-PER UNIT 45cm wide pull-out door base cabinet waste/recycle centre with soft-close ([2] 35L bins) available only with 45cm wide cabinet) VIKING NSTALL IN ISLAND SKETCH # 3						
1079 335,924 20Oct22	1	KITCHEN - CABINETRY-B10-Pots and pans (3) drawers (width min. 60cm/max. 90cm) (size subject to floor plan) VIKING SKETCH # 3						
1079 336,764 20Oct22	1	Laundry Room - Cabinetry - VIKING II/III - Opt. Laundry Uppers - UPG						
1079 336,004 20Oct22	1	KITCHEN - CABINETRY-L01-PER KITCHEN Two-tone colour/style selection for island (must be of equal or lower level to main selection) VIKING						
1079 336,210 20Oct22	1	Kitchen - Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Kitchen - UPG CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics						
1079 335,751 20Oct22	1	- PLUMBING - KITCHEN SINK UPGRADE - BLANCO KITCHEN SINK QUATRUS U 2 #401247 (32 INCH X 18 INCH) UNDERMOUNT 2 BOWL EQUAL SIZE 9 INCH DEEP IN STAINLESS STEEL - CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink						
1079 335,621 20Oct22	2	N/A						
1079 337,997 20Oct22	1	Master Ensuite - Granite - Countertop upgrade with 4? backsplash - 3/4 GROUP 1 with single edge - Master Ensuite - UPG CABINETRY-delete std countertop; GRANITE-see upgraded undermount sink						
1079 336,765 20Oct22	1	KITCHEN - Cabinetry - VIKING II/III - Opt. Built-Ins - UPG SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-delete partial countertop due to Built-in; PAINTII						

DisciplineMS.rpt 13dec21 Page 1 of 6

CONSTRUCTION SUMMARY Of 45



Lot: 644 Model: 20-2070 ALT A APPLEDALE

Project/Phase: Country Lane / 6

CABINETRY

Invoice	Qty. Description			
1291 342,581 11Feb23	l	- CABINETRY-B08-Upgrade levels 1-4, 5-7 drawers from Metabox to soft-close Tandembox drawers per drawer (appliance cabinets may also have drawers to be counted; pull-outs and all drawers in the room must be counted and upgraded) VIKING FOR BUILT IN BOTTOM DRAWER AND POTS AND PANS UNDER COOKTOP		

CERAMICS

Invoice	Qty.	escription			
1079 339,533 20Oct22	1	Master Ensuite Shower Floor - Ceramics - Upgrade 2 Tile - Master Ensuite Shower Floor - UPG			
1079 336,210 20Oct22 **	1	en - Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Kitchen - UPG INETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics			
1079 339,519 20Oct22	1	Master Ensuite Shower Wall - Ceramics - Standard Floor Tile on Wall - Master Ensuite Shower Wall - UPG			
1079 339,529 20Oct22	1	Kit. Backsplash - Ceramics - Upgrade 2 Tile - Kit. Backsplash - UPG (Includes Area Behind Chimney)			
1079 339,620 20Oct22	1	Kit. Backsplash - Ceramics - Install in Specified Pattern - Kit. Backsplash - UPG HERRINGBONE PATTERN			
1291 339,610 11Feb23	1	N/A			

DRYWALL

DRIWALL					
Invoice	Qty.	Description			
1079	1	- Drywall - Smooth Ceilings - Basement - UPG			
337,737					
20Oct22					
		PAINTING-Notify			
1079	1	- Drywall - Smooth Ceilings - Second Floor - UPG			
337,771					
20Oct22					
		ELECTRICAL-DROP ELECTRICAL BOXES; PAINTING-Paint smooth ceiling			
1079	1	KITCHEN - Cabinetry - VIKING II/III - Opt. Built-Ins - UPG			
336,765					
20Oct22		SKETCH # 3			
**		DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-delete partial countertop due to Built-in; PAINTING			

DisciplineMS.rpt 13dec21 Page 2 of 6

Printed and Sent: 11-Feb-23

construction summary of 45



Lot: 644 Model: 20-2070 ALT A APPLEDALE

Project/Phase: Country Lane / 6

ELECTRICAL

Invoice	Qty.	Description
1079 335,619 20Oct22 **	1	N/A
1079 337,771 20Oct22 **	1	- Drywall - Smooth Ceilings - Second Floor - UPG ELECTRICAL-DROP ELECTRICAL BOXES; PAINTING-Paint smooth ceiling
1079 335,562 20Oct22	1	KITCHEN - ELECTRICAL - ADDITIONAL 40AMP/240V OUTLET, PLEASE SPECIFY LOCATION FOR BUILT IN OVEN / MICRO SKETCH # 3
1079 335,588 20Oct22	1	KITCHEN - ELECTRICAL - RELOCATION OF SWITCHES/LIGHTS (MUST SPECIFY LOCATION) - NOTE: PLUGS CANNOT BE RELOCATED- MUST PURCHASE ADDITIONAL OUTLET. RELOCATE STD KITCHEN LIGHT TO CENTRED OVER ISLAND SKETCH # 2
1079 335,596 20Oct22	1	GREAT ROOM FIREPLACE - ELECTRICAL - SUPPLY AND INSTALL RECESSED PLUG ON EXISTING CIRCUIT INSTALL OVER FIREPLACE APPROX 70" FF SKETCH # 2
1079 335,557 20Oct22	1	- ELECTRICAL - 4 INCH LINE VOLTAGE POTLIGHTS INSTALLED ON MAIN FLOOR (SEE SLIM LINE FOR BASEMENT) 20 BONUS POTLIGHTS 6 X GREAT ROOM - 1 SWITCH 4 X KITCHEN - 1 SWITCH - RELOCATE STD LIGHT TO OVER ISLAND 4 X MAIN HALL - 1 SWITCH - DELETE STD LIGHTS 6 X RECREATION ROOM - 1 SWITCH - DO NOT DELETE STD SKETCH # 1 AND 2

FIREPLACE AND MANTLE

Invoice	Qty.	Qty. Description				
1291	1	GREAT ROOM FIREPLACE - DELETE STD FIREPLACE SURROUND				
11Feb23						
NoCat						

FRAM	FRAMING					
Invoice	Qty.	Description				
1079 338,716 20Oct22 **	1	GREAT ROOM - Waffle Ceiling - Install Waffle Ceiling. Coffered ceiling is standard - GREAT ROOM - UPG FRAMING-std Coffered Ceiling to accommodate Waffle; PAINTING-Paint mouldings (waffle) in Great Room				
1079 336,765	1	KITCHEN - Cabinetry - VIKING II/III - Opt. Built-Ins - UPG				
20Oct22 **		SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-delete partial countertop due to Built-in; PAINTING-				

Page 3 of 6

13 of 45



Lot: 644

Model: 20-2070 ALT A APPLEDALE Project/Phase: Country Lane / 6

GRANITE

Invoice	Qty.	Description		
1079 335,619 20Oct22	1	KITCHEN - GRANITE - GRANITE CUTOUT W/ STRAIGHT EDGE POLISH TO ACCOMMODATE COOK TOP		
1079 335,751 20Oct22 **	1	- PLUMBING - KITCHEN SINK UPGRADE - BLANCO KITCHEN SINK QUATRUS U 2 #401247 (32 INCH X 18 INCH) UNDERMOUNT 2 BOWL EQUAL SIZE 9 INCH DEEP IN STAINLESS STEEL - CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink		
1079 335,710 20Oct22 **	2	MASTER ENSUITE - PLUMBING - AMERICAN STANDARD - SINK OPTIONS - UNDERMOUNT SINK - STUDIO - WHITE - MODEL 0614 000 020 (21 INCH X 15 INCH) - GRANITE-cutout to accommodate undermount sinks		
1079 335,621 20Oct22	2	MASTER ENSUITE - GRANITE - GRANITE CUTOUT W/ STRAIGHT EDGE POLISH TO ACCOMMODATE UNDER MOUNT VANITY SINK		
1079 337,997 20Oct22	1	Master Ensuite - Granite - Countertop upgrade with 4? backsplash - 3/4 GROUP 1 with single edge - Master Ensuite - UPG CABINETRY-delete std countertop; GRANITE-see upgraded undermount sink		
1079 336,765 20Oct22 **	1	KITCHEN - Cabinetry - VIKING II/III - Opt. Built-Ins - UPG SKETCH # 3 DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-delete partial countertop due to Built-in; PAINTING-		

HARDWOOD

335,692 20Oct22

Invoice	Qty.	escription			
1079	1	Kitchen - Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Kitchen - UPG			
336,210					
20Oct22					
		CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics			
1079	1	- PAINT - STAIN STAIR LANDING IN SAMBUCCA. LANDING UNDER 25 SQ.FT. EACH			

HARDWOOD-Supply and Install smooth UNFINISHED pre-sanded red oak at stair landing(s)

DisciplineMS.rpt 13dec21

Page 4 of 6

Printed and Sent: 11-Feb-23

14 of 45



CONSTRUCTION SUMMARY

Lot: 644 Model: 20-2070 ALT A APPLEDALE

Project/Phase: Country Lane / 6

A 1	T	T A	
^	N		

Invoice	Qty.	Description				
1079	1	- Drywall - Smooth Ceilings - Basement - UPG				
337,737						
20Oct22						
**		PAINTING-Notify				
1079	1	- Drywall - Smooth Ceilings - Second Floor - UPG				
337,771						
20Oct22						
**		ELECTRICAL-DROP ELECTRICAL BOXES; PAINTING-Paint smooth ceiling				
1079	1	- PAINT - STAIN STAIR LANDING IN SAMBUCCA. LANDING UNDER 25 SQ.FT. EACH				
335,692						
20Oct22						
		HARDWOOD-Supply and Install smooth UNFINISHED pre-sanded red oak at stair landing(s)				
1079	1	GREAT ROOM - Waffle Ceiling - Install Waffle Ceiling. Coffered ceiling is standard - GREAT ROOM - UPG				
338,716						
20Oct22						
**		FRAMING-std Coffered Ceiling to accommodate Waffle; PAINTING-Paint mouldings (waffle) in Great Room				
1079	1	KITCHEN - Cabinetry - VIKING II/III - Opt. Built-Ins - UPG				
336,765		•				
20Oct22		SKETCH # 3				
**		DRYWAL-Notify; FRAMING-Modify Bulkhead; GRANITE-delete partial countertop due to Built-in; PAINTING-				

PLUMBING

Invoice	Qty.	Description
IIIVOICC	Qıy.	Description

1079 335,751	1	- PLUMBING - KITCHEN SINK UPGRADE - BLANCO KITCHEN SINK QUATRUS U 2 #401247 (32 INCH X 18 INCH) UNDERMOUNT 2 BOWL EQUAL SIZE 9 INCH DEEP IN STAINLESS STEEL -
20Oct22		CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink
1079 335,710 20Oct22	2	MASTER ENSUITE - PLUMBING - AMERICAN STANDARD - SINK OPTIONS - UNDERMOUNT SINK - STUDIO - WHITE - MODEL 0614 000 020 (21 INCH X 15 INCH) -
		GRANITE-cutout to accommodate undermount sinks
1079 342,591 20Oct22	1	- PLUMBING - MOEN -CHATEAU - POSI-TEMP TUB/SHOWER WITH 3 FUNCTION DIVERTER VALVE, SLIDE BAR WITH HANDH ELD AND SHOWERHEAD CHROME (MODEL: 62320/U361CI/UT2721/TL183EP/3669EP/A725)
1	ı	

SECURITY

Invoice	Otv.	Description

1172 335,879	2	- SECURITY - SECURITY CAMERA ROUGH-IN INSTALL 1 X AT EXTERIOR BACKYARD AND 1 X BASEMENT REC ROOM
20Oct22		SEE SKETCH # 1 AND 2

STRUCTURED WIRING

Invoice	Otv.	Description

1079 335,885	1 1	GREAT ROOM FIREPLACE - STRUCTURED WIRING - HDMI ROUGH-IN; SHORT - WHEN USED WITHIN SAME ROOM (MAX 10FT)
20Oct22		INSTALL APPROX 70" FF BESIDE RECESSED PLUG SKETCH # 2

Page 5 of 6

15 of 45 construction summary



Lot: 644

Model: 20-2070 ALT A APPLEDALE

Project/Phase: Country Lane / 6

WAFFLE CEILING

Invoice	Qty.	Description
1079	1	GREAT ROOM - Waffle Ceiling - Install Waffle Ceiling. Coffered ceiling is standard - GREAT ROOM - UPG
338,716		
20Oct22		
		FRAMING-std Coffered Ceiling to accommodate Waffle; PAINTING-Paint mouldings (waffle) in Great Room

DisciplineMS.rpt 13dec21 Page 6 of 6

Printed and Sent: 11-Feb-23

Model: 20-2070 ALT A APPLEDALE

16 of 45

The Appledale


ELEVATION A: 2569 SQ. FT.

{ Includes 499 sq. ft. of opt. finished Lower Level }

THE TRAILS OF COUNTRY LANE

Sketch#1

20-2070 ALT ELEV. A

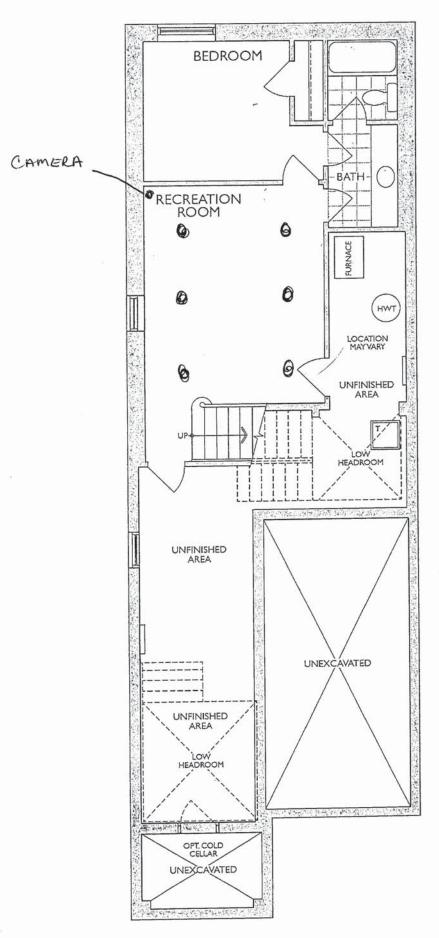

LOWER LEVEL ELEV. A

Dav

Legal Plan Feb. 3, 2021

Model: 20-2070 ALT A APPLEDALE

17 of 45

The Appledale


ELEVATION A: 2569 SQ. FT.

{ Includes 499 sq. ft. of opt. finished Lower Level }

THE TRAILS OF COUNTRY LANE

Sketch # 2

20-2070 ALT ELEV. A

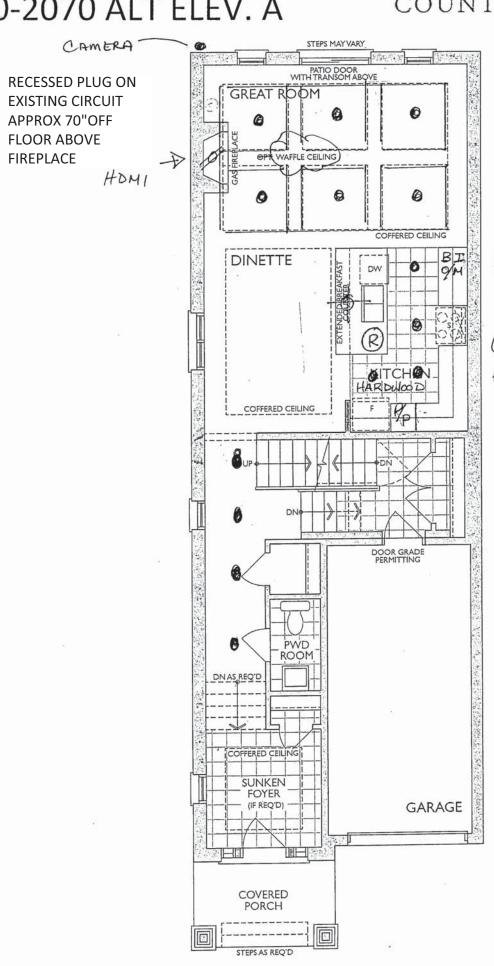

GROUND FLOOR ELEVATION A


POT LIGITS CAPPED CEILING

BUILT IN OVEN/MICRO

(R) = RECYCLE CABINET P/P : POTS + PANS.

Legal Plan Feb. 3, 2021



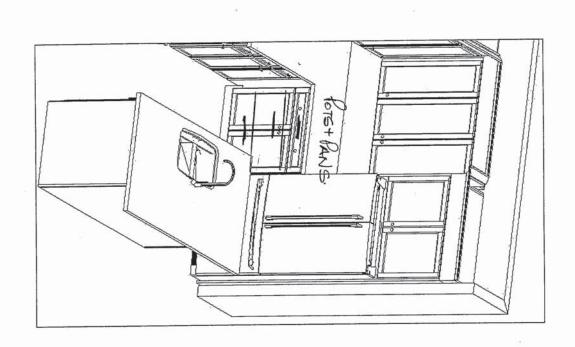

Z

D'E

Heathwood Homes KITCHENS LIMITED 1350 Shawson Drive, Mississauga, ON LAW ICS Ħ

The Classic Series

Model: 20-2070 ALT. (2603 ALT.)

Country Lane, Whitby

Standard Features:

- Tandem Box Soft Close Drawers
- **Blumotion Hinges for Doors** Top Drawer Construction Crown Moulding & facia

Tall upper Cabinets

Deep Fridge Upper

w/Deep Panel

Date: June 6, 2022 Revision: Drawn By: Sepideh B

Scale: Not To Scale

Approved By Builder

Date:

Model: 20-2070 ALT A APPLEDALE

19 of 45

The Appledale


ELEVATION A: 2569 SQ. FT.

{ Includes 499 sq. ft. of opt. finished Lower Level }

THE TRAILS OF COUNTRY LANE

Sketch #4

20-2070 ALT ELEV. A

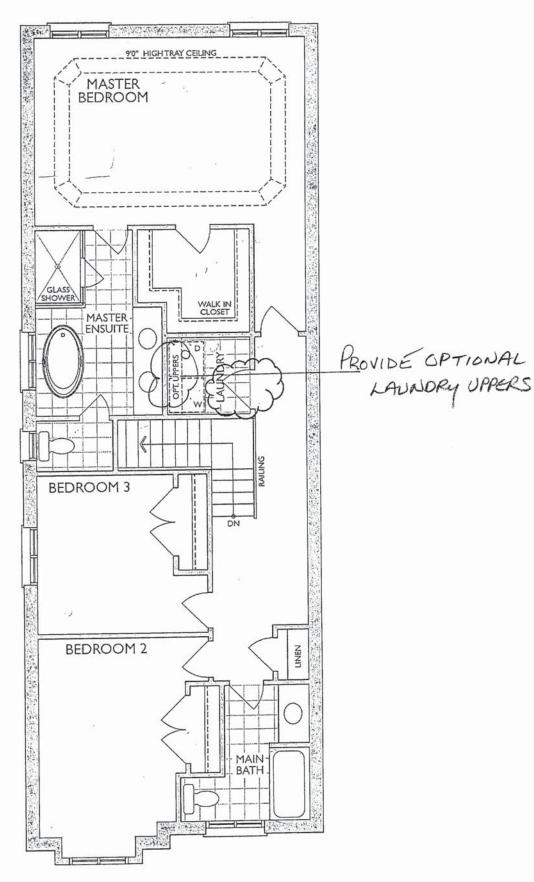


SECOND FLOOR ELEV. A

*Laundry Room Door Swing Change

Project: Country Lane Unit: 644, Phase: 6 Model: 20-2070 ALT A APPLEDALE

20 of 45



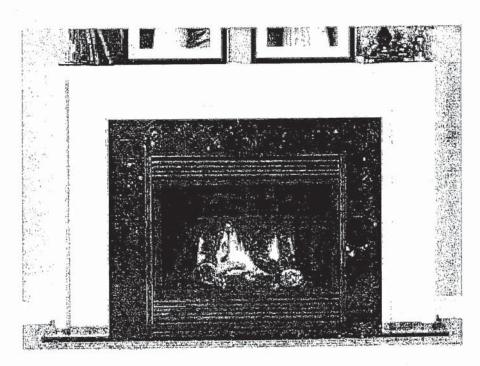

NO MARBLE

NFAS NF17 Mantel-Cabinet

Model: 20-2070 ALT A APPLEDALE

21 of 45

BLANCO

Sink Specifications

Colour

SKU

brushed finish

401247

Design and planning tips

Min cabinet size: 36 in (915 mm)

• Bowl Depth: 9 in (230.0 mm)

Specifications:

Installation clips, Sink template, Installation instructions, 3 ½" (90 mm) stainless steel strainers

Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer. Codes/Standards: ASME A112.19.3-2017/ CSA B45.4-17

32" T A Sign of the second s

QUATRUS U 2

Stainless steel brushed finish

Optional Accessories

CapFlow Strainer Cover
Workstation 406344
Ash Cutting Board 406345
Sink Grid 406349

Warranty

Limited lifetime warranty on all sinks and faucets. One-year warranty on all accessories and soap dispensers.

Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME, IAPMO and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.



Need support? Learn more by watching our sink & faucet How-to videos: https://www.blanco.com/ca-en/support/how-to-videos/how-to-videos-for-sinks/



BLANCO Canada Inc 100 Corporation Drive Brampton ON L6S 6B5 Tel & Fax

Tel: 905-494-2400 Toll free: 1-877-425-2626 Fax: 905-494-2425 Toll free: 1-877-825-2626

While BLANCO strives to provide accurate information, all images and dimensions in this document are intended for reference only and are subject to change at any time without notice. This document is not intended for use as an installation guide. For technical installation details, refer to installation instructions provided with the product. BLANCO assumes no responsibility for the use of superseded or voided specifications.





Model: 20-2070 ALT A APPLEDALE

22 of 45

MOEN

FAUCET DESCRIPTION

• Reflex™ pulldown system offers smooth operation, easy movement and secure docking
Power Clean™ spray technology
Metal construction with various finishes identified by suffix
Quick connect installation
Pulldown spray with 68" braided hose
Flexible supply lines with 3/8" compression fittings

High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning

360° rotating spout Faucet designed for handle to be mounted on right side only

OPERATION

Lever style handle

Temperature controlled by 100° arc of handle travel
Operates with less than 5 lbs. of force
Operates in stream or spray mode in the pullout or retracted position

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE 1255™ Duralast™ cartridge

STANDARDS

Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372


- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA (5) for lever handle

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original homeowner

10 year limited warranty when used in a multifamily installation
 5 year limited warranty when used in a commercial installation
 Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ Single Handle High Arc Pulldown Kitchen Faucet

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



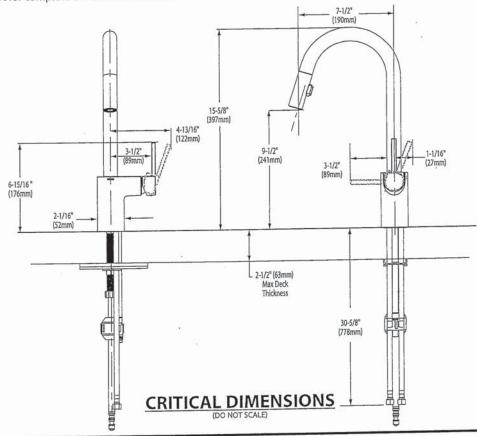

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



Rev. 6/20



Model: 20-2070 ALT A APPLEDALE

23 of 45



BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK

VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

Q-3641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD Q 0641.400 Faucet holes on 4" (102mm) centers

□ 0641.100 Center hole only

- · Classic styled rectangular pedestal lavatory
- Vitreous china
- Rear overflow
- · Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- · Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- O010.000 Pedestal only

Bowl sizes:


17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

- To Be Specified: ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

© 2018 AS America Inc.

spec_0641_BoulevardPedSink Rev 2/18

See faucet section for additional models available


Model: 20-2070 ALT A APPLEDALE

24 of 45



BOULEVARD® PEDESTAL SINK VITREOUS CHINA

COUNTERTOP

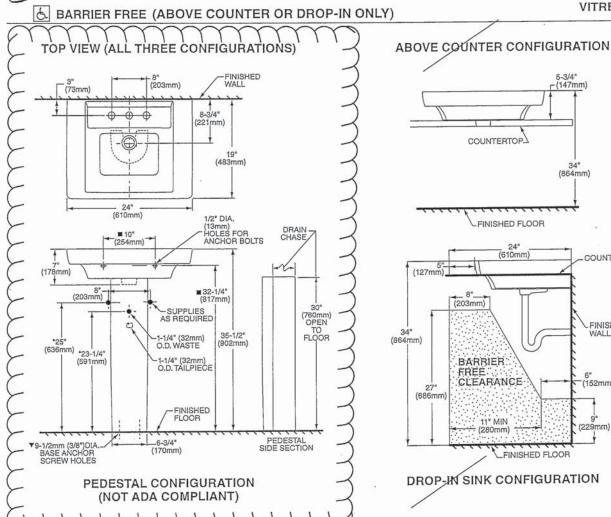

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Model: 20-2070 ALT A APPLEDALE

25 of 45

American Standard

& BARRIER FREE

STUDIO™ UNDERCOUNTER SINK

- Rectangular undercounter mount sink
- Made from vitreous china
- Front overflow
- Supplied with mounting kit (047194-0070A) and template
- ☐ 0614.000 Unglazed Rim 540 x 387mm (21-1/4" x 15-1/4")
- ☐ 0614.300 Glazed underside

Bowl size:

464mm (18-1/4") wide 308mm (12-1/8") front to back 171mm (6-3/4") deep

☐ 0618.000 Unglazed Rim 600 x 422mm (23-5/8" x 16-5/8")

☐ 0618.300 Glazed underside

Bowl size:

537mm (21-1/8") wide 356mm (14") front to back 152mm (6") deep

Compliance Certifications -Meets or Exceeds the Following Specifications:


- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series


To Be Specified: ☐ Color: ☐ White ☐ Bone ☐ Linen ☐ Black ☐ Faucet*: ☐ Faucet Finish: ☐ Supplies: ☐ 1-1/4" Trap:

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

 Countertop 864mm (34") from finished floor. Lavatory installed 102mm (4") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

MASTER ENS. X2 STUDIOTM UNDERCOUNTER SINK VITREOUS CHINA

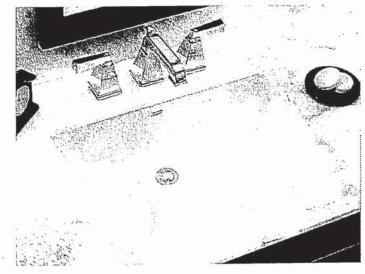

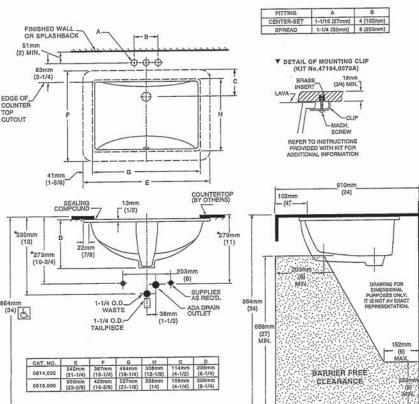

NOTES:
WE RECOMMEND USING BASIN AS A TEMPLATE TO DETERMINE PROPER CONTOUR. CUT COUNTERTOP 38MM (1-1/2") INSIDE BASIN CONTOUR.

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P" TRAP ARE

SUGGESTED.

▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

Revised 2/08

^{*} See faucet section for additional models available

Model: 20-2070 ALT A APPLEDALE

26 of 45

American Standard


COLONYTM COUNTERTOP SINK

VITREOUS CHINA

BARRIER FREE

COLONY COUNTERTOP SINK

- · Vitreous china
- · Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)



Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS -Meets or exceeds the following Specifications:

- · ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

7	Colour: ☐ White	□Bone	☐ Silver Grav
_	Linen		
	Faucet*:		
	Faucet Finish:		
	Supplies & Stops	:	
	Trap 1-1/4" (32 m	nm):	

16:0

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.

BAS-198 .

© 2000 American Standard Inc.

01/07





^{\$\$\$} 1-7/16 (37mm) 0345 001

See faucet section for additional models available

Model: 20-2070 ALT A APPLEDALE

27 of 45



DEMI[™] Product Specification Sheet

Two Piece Freestanding Collection

CF2007

Two Piece Freestanding Soaker

Size:


60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


TWO PIECE ASSEMBLY

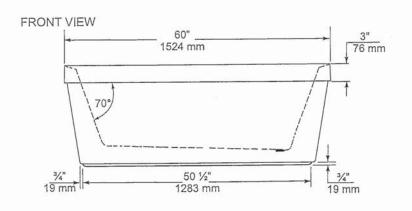

TOP VIEW

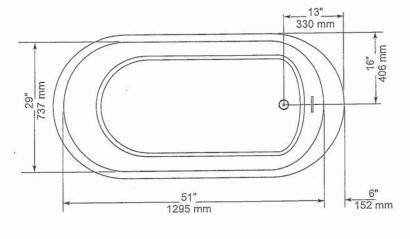

END VIEW



GENERAL SPECIFICATIONS

Average Weight

90 lb 43"x 20" 41 kg

Bathing Well at bottom Capacity Drain to Overflow

1092 x 508 mm 195 litres

Water Depth Drain to Overflow Drain Opening (dia.)

16"

406 mm 51 mm

Overflow Opening Drain to Floor Clearance 2 1/4"x 1/2 3 1/4"

57 x 13 mm 83 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary $\pm~1/4^{\circ}$ (6 mm). Weight may vary $\pm~5$ lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series






60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1
Telephone: 416.231.9030 Fax: 416.231.0929 Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 Canada, U.S.A.: 800.MIROLIN(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018







Model: 20-2070 ALT A APPLEDALE

28 of 45

American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA

FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- · Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- · Easy to clean sanitary dam on bowl
- · Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- 3067 316 Elongated Bowl with Slow Close Seat
- 4035 216 Unlined Tank
- 2476 516 Same as above with Lined tank
 - ☐ 3067 316 Elongated Bowl
 - 4035 516 Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- ☐ Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2
These measurements are subject to change or cancellation. No responsibility is assumed for of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284 @ 2008 American Standard

08/08







Model: 20-2070 ALT A APPLEDALE

29 of 45

MOEN°

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections
- Includes metal or 50/50 pop-up type waste assembly where noted

OPERATION

- Pivot action lever style handle
- Temperature controlled through 180° degree arc of handle travel FLOW

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

- CARTRIDGE 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

STANDARDS

- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and
- all applicable requirements referenced therein including NSF61/9
 Complies with California Proposition 65 and with the Federal Safe
 Drinking Water Act
 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



CHATEAU® Single-Handle Lavatory Faucet


with Metal Waste Assembly Model: L4625 series L4631BC Bulk Packed (12 per carton): L64624 series

with 50/50 Waste Assembly Bulk Packed (12 per carton): L64625 series

Less Waste Bulk Packed (12 per carton): L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



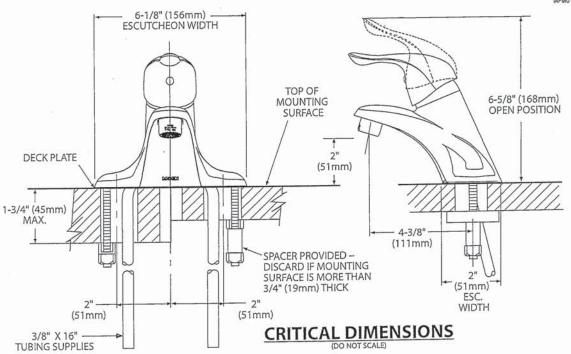

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Rev 8/15




Chateau®

Project: Country Lane Unit: 644, Phase: 6 Model: 20-2070 ALT A APPLEDALE

30 of 45


POSI-TEMP®



Posi-Temp® Tub/Shower Faucet with 3 Function Transfer Valve/Trim and Slide Bar with Hand Shower*


TL183EP / U361CI / UT2721 / 3669EP / A725 / 62320

MASTER ENS.




Posi-Temp® Shower Only with 3 Function Transfer Valve/Trim and Slide Bar with Hand Shower*

TL182EP / U361CI / UT2721 / 3669EP / A725 / 62320



Posi-Temp® Tub/Shower Faucet with 4 Function Hand Shower*

TL2359EP / 62320



Eco-Performance Posi-Temp® Tub/Shower Faucet*

TL183EP / 62320



Eco-Performance Posi-Temp® Shower Only*

TL182EP / 62320

CHATEAU FINISH OPTION



Chrome

To order Chrome (C) model, use model number only.

* Refer to the Shower Design Guide for Installation Instructions

Model: 20-2070 ALT A APPLEDALE

31 of 45



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

Metal construction with various finishes identified by suffix Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction

Adjustable temperature limit stop to control maximum hot water temperature

Pressure balancing mechanism maintains selected discharge temperature to ± 3°

FLOW

Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi NH suffix models contain no showerhead

CARTRIDGE

1222 cartridge design Accommodates back to back installations

Nonmetallic/nonferrous and stainless steel material

STANDARDS

Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein EP suffix models are third party certified to WaterSense®

ADA (for lever handle

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser

5 year warranty if used in commercial installations

Specifications






CHATEAU° POSI-TEMP° Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

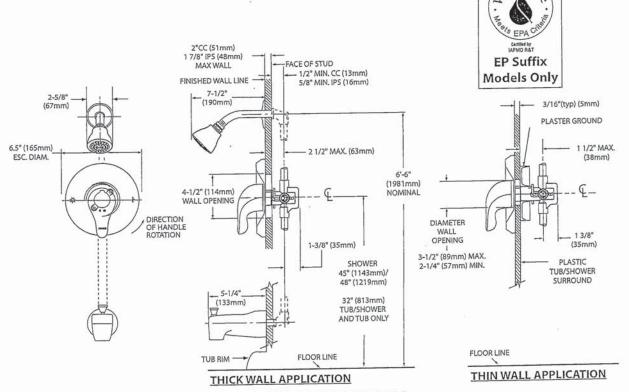

CRITICAL DIMENSIONS

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



TL183sp: Rev. 5/13

Model: 20-2070 ALT A APPLEDALE

32 of 45

MOEN

DESCRIPTION

Metal construction with various finishes identified by suffix

OPERATION

- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA **(a)** for lever handles

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation
 Visit www.moen.com/support for complete details and limitations


Specifications




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

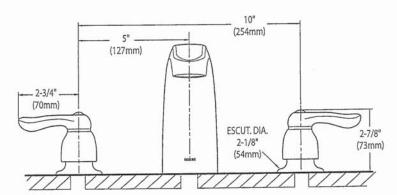



CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com



Rev. 3/19




Model: 20-2070 ALT A APPLEDALE

33 of 45

SC(B)514 | ALITO Collection





Wall Mount

The SC(B)514 makes a statement of strength and power with a bold frame and 550 CFM fan. Features mesh or baffle filters, two bright LED lights and a three-speed panel for total control. It is also fitted with a time-delay OFF feature up to nine minutes.

Green Features



3 Speed Push Button Control Panel




Long-Lasting LED Lights



Time-Delay OFF Feature



Grease Cup

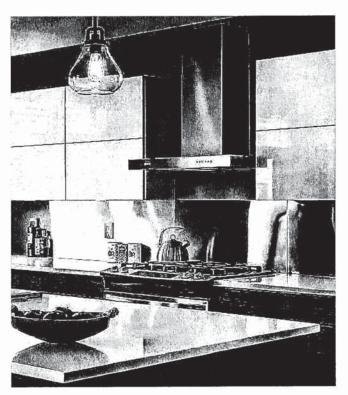

Model	Colour	Ducting	Filters	Size	CFM
	A CONTRACTOR OF THE PARTY OF TH				

			1		
SCB51430	Stainless Steel	6"	Baffle	30"	550
SCB51436	Stainless Steel	6"	Baffle	36"	550

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.

Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com

Model: 20-2070 ALT A APPLEDALE


34 of 45


SC(B)514 | ALITO Collection



Features

- · Wall mount range hood
- · 6" round duct adapter
- · Non-stick aluminum fan blades
- · 3 speed push button control
- · 2 LED lights (2 x 1.4W, 4000K)
- · Quick release aluminum mesh filters
- · Standard chimney fits up to 9 ft. ceiling
- · Up to 9 minutes time-delay OFF feature
- · Plug-in connection





Options

· Filters:

SCB514 - Quick Release Stainless Steel Baffle Filters

Chimney Flues:

B2.CH16 - short (7'-8' ceilings)

B2.CH22 - standard (8'-9' ceilings)

B2.CH32 - extended (9'-11' ceilings)

Widths: 30", 36"

Specifications

Air Flow Volume: 550 CFM

Electrical Connection: 120 V/60 Hz

Power Consumption: 300 Watts

Current: 2.5 Amps

Fan Speed: 1599 RPM

Fan Type: Centrifugal Blower

· Finishes: Stainless Steel

· Ducting: 6" Round

Noise Level: Min. 2 Sones
 Max. 6 Sones



Model: 20-2070 ALT A APPLEDALE

35 of 45

Prepared by

Ranjit Parmar

rparmar@appliancecanada.com (647) 406-2167





30-Inch 4-Element Induction Cooktop, Architect® Series II

KICU509XBL

Available Finishes/Colours
KICU509XBL

	Stai
	Controls
21 5/16	Control T
3 1/8	Knob Col
30 3/4	promoved the same
	Misc.
100	Accessor
Yes	Home De
Yes	Will Call
Yes	y is regerment to be in-
No	Details
Yes	Cooktop
Yes	GDS
NA	isBaseUr
	isConsun
Salar Salar	GPC Cod
Front	IsDispato
	3 1/8 30 3/4 Yes Yes Yes No Yes Yes NA

KICU509XSS Stainless Steel

Stainless Steel	
Controls	
Control Type	Tap Touch
Knob Color	NA
Misc.	r
Accessory Relationships	Yes
Home Delivery	Yes
Will Call	Yes
Details	Same and the second
Cooktop Surface Material	Ceramic Glass
GDS	
isBaseUnit	true
isConsumerUnit	true
GPC Code	10001951
isD spatchUnit	ě
IsInvoiceUnit	true
IsOrderableUnit	true

This 30-inch induction cooktop uses electromagnetic energy to generate instant heat directly to your cookware without spreading the heat across the entire cooking surface. A bridge function lets you combine the power of two elements into one large cooking zone for specialty cookware such as a griddle or oval pan.

Top Features	
4-Element Cooktop	The second secon
2 Elements with Bridge	e Function
12 Heat Level Settings	
Manuals & Literature:	
Dimension Guide	Installation Guide
Use and Care Guid	Warranty information

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Product Type

Model: 20-2070 ALT A APPLEDALE

36 of 45

Kitchen Aid 30" (76.2 CM) AND 36" (91.4 CM) ELECTRIC INDUCTION COOKTOP

PRODUCT MODEL NUMBERS

KICU509X

KICU569X

ELECTRICAL REQUIREMENTS:

BEFORE YOU MAKE THE ELECTRICAL CONNECTION:


To properly install your cooktop, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- · A 4-wire or 3-wire, single phase, 240 volt, 60 Hz., AC only electrical supply is required on a separate, 50-amp circuit (36" [91.4 cm] models) or 40-amp circuit (30° [76.2 cm] models), fused on both sides of the line.
- The cooktop should be connected directly to the junction box through flexible, armored or nonmetallic sheathed, copper cable. The flexible, armored cable extending from the fuse box or circuit breaker box should be connected directly to the junction box.
- · Locate the junction box to allow as much slack as possible between the junction box and the cooklop so that the cooklop can be moved if servicing becomes necessary in the luture.
- Do not cut the conduit. The length of conduit provided is for serviceability of the cooktop.
- · A UL listed or CSA approved conduit connector must be provided at each end of the power supply cable (at the cooktop and at the junction box). A listed conduit connector is already provided at the cooktop.
- If the house has aluminum wiring, follow the procedure below:
- Connect a section of solid copper wire to the pigtail leads.
 Connect the aluminum wiring to the added section of copper wire using special connectors and/or too's designed and UL listed for joining copper to aluminum.

Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.


PRODUCT DIMENSIONS

30" (76.2 cm) Cooktop




MODEL JIC4430	Model KICU509
A. 21: *(54.1 cm)	A. 21: *(54.1 cm)
B. 30 (77.0 cm)	B. 30 . " (78.2 cm)
C. 3 *(8.0 cm)	C. 3: * (8.0 cm)

36" (91.4 cm) Cooktop




CABINET DIMENSIONS

IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.



- A. 29½" (75.0 cm) on 30" (76 2 cm) models 33 1/16" (84.0 cm) on 36" (91.4 cm) models
- B. Combustible area above countertop (shown by dashed box above)
- C. 30" (76.2 cm) minimum clearance between top of cooktop platform and bottom of uncovered wood or metal cabinet (24" [61 cm] minimum clearance if bottom of wood or metal cabinet is covered by not less than ½" [0.6 cm] flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" [0.04 cm] stainless steel, or 0.024" [0.06 cm] aluminum or 0.020" [0.05 cm] copper)
- D. 13" (33.0 cm) recommended upper cabinet depth
- E. 2" (5.1 cm)
- F. 19 518" (49.0 cm)
- G. 18" (45.7 cm) minimum clearance from upper cabinet to countertop within minimum horizontal clearances to cooktop
- H. Junction box or outlet; 12" (30.5 cm) minimum from bottom of countertop
- 1. Junction box or outlet; 10° (25.4 cm) from right-hand side of cabinet
- J- 29½" (75.0 cm) on 30" (76.2 cm) models 33 ½° (84.0 cm) on 36" (91.4 cm) models
- K. 1* (2.5 cm) minimum distance to nearest left and right side combustible surface above cooktop
- L. 1" (2.5 cm) minimum clearance between back wall and countertop
- M. IMPORTANT: For proper ventilation, provide a vent of ½6′ (5 mm) under the countertop, in the front of the cabinet. The ventilation opening is to extend the full length of the cooktop cutout. See the following illustration.



NOTES: After you make the countertop cutout, some installations may require notching down the base cabinet side walls to clear the cooktop base. To avoid this modification, use a base cabinet with sidewalls wider than the cutout.

If cabinet has a drawer, a 5 * (13 cm) depth clearance from the countertop to the top of the drawer (or other obstruction) in base cabinet is required.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

O'mensions are for planning purposes only, For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


Ref. 501961902036B

Model: 20-2070 ALT A APPLEDALE

37 of 45

Prepared by Ranjit Parmar rparmar@appliancecanada.com (647) 406-2167





30" Combination Wall Oven with Even-Heat™ True Convection (Lower Oven)

KOCE500ESS

Available Finishes/Colours

KOCE500EBL Black

KOCE500EWH White

KOCE500ESS Stainless Steel

Dimensions	
Depth	27 1/8
Height	42 1/2
Width	30

Control Type	Glass Touch
erencessor.	Digital Display
Electronic Display Type	Digital

This 30" Combination Wall Oven with Even-Heat™
True Convection provides consistent heating and
even cooking. A unique bow-tie shaped design and
convection fan helps ensure there are no burnt edges
or under cooked centers. Its upper Microwave
Convection Cooking Oven combines a 900 watt
microwave with a 1600 watt convection element for
high speed cooking. Bold design details are the
perfect balance of elegance and functionality.
PLOS DEL SER PROBLEM DE LA TRANSPORTATION DE LA TRA

Top Features	B A The Apparent of Hotel
Even-Heat™	True Convection Oven (lower oven)
Microwave C	Convection Cooking (upper oven)
Temperature	Probe
	the product of the state of the
Manuala 9 I II	

Manuals & Literature:	
Dimension Guide	Installation Guide
Use and Care Guide	Warranty Information

Exterior	
Door Removable	Yes
Door Release	Handle
Door Lock	Yes
Door Type	Metal & Glass
Flush Installation Approved	Yes
Oven Window Size	Extra Large
Handle Color	Stainless Steel
Handle Material	Metal
Controls	
Display Color	White

Control Type	Glass Touch Digital Display
Electronic Display Type	Digital
GDS	
isBaseUnit	true
isConsumerUnit	true
IsDispatchUnit	
IsInvolceUnit	true
IsOrderableUnit	true
Product Type	EA
UDEX	1100400623
GPC Code	10001950
Features	
Sensor Cooking	Yes - Microwave
Language Conversion	English/French
Microwave Details	
Microwave Capacity (cu. ft.)	1.4

KitchenAid^{*}

Because Whirtpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Model: 20-2070 ALT A APPLEDALE

38 of 45

KitchenAid 27" (68.6 cm) and 369 (76.2 cm) Electric Built-In Microwave/Oven Combination

PRODUCT MODEL NUMBERS

KEMS309E

(KOCE500E)

KOCE507E

ELECTRICAL CONNECTION

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes.


Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code. Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

· Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. See the following illustration.



A. Model/serial/rating plate

- Models rated from 7.3 to 9.6 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.8 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 30-amp circuit.
- · A circuit breaker is recommended.
- · Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
- · Flexible conduit from the oven should be connected directly to the iunction box.
- . Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- · If the house has aluminum wiring, follow the procedure below:
 - 1. Connect a section of solid copper wire to the pigtail leads.
 - 2. Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.


Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table.

Model	Voltage	Amperage (L1)*	Amperage (L2)*	Rating (W)
KOCE507E/KOCE500E	120/240	32	30	8000
KOCE507E/KOCE500E	120/208	30	28	6600


*Amperage values noted above are for information purposes only: the units are rated in watts.

PRODUCT DIMENSIONS



- 27" (68.6 cm) models
- A. 42% (108.0 cm) overall height
- B. 25 1/m" (64.6 cm) recessed
- C. 41* (104.1 cm) recessed height
- D. 231/4" (59.1 cm) max.
- E. 27° (68.6 cm) overall width
- F. 48* (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.
 - 30" (76.2 cm) models
 - A. 42% (108.0 cm) overall height B. 281/4" (72.3 cm) recessed
 - width
 - C. 41" (104.1 cm) recessed
 - D. 231/4" (59.1 cm) max. recessed depth
 - E. 30° (76.2 cm) overall width
 - F. 48" (121.9 cm) flexible conduit length measured from the conduit clamp located at the rear of the oven. Do not remove the conduit clamp.

Cabinet Dimensions



27" (68.6 cm) models


- A. 27° (68,6 cm) min. cabinet width B. 1" (2.5 cm) top of cutout to bottom of upper cabinet door
- C. 191/4" (48.9 cm) bottom of cutout to floor is recommended. 4"-19"/4" (10.2-48.9 cm) bottom of cutout to floor is acceptable D. 251/2" (64.8 cm) cutout width
- E. 11/2" (3.8 cm) min, bottom of cutout to top of cabinet door
- F. 415/11" (105 cm)* recommended cutout height
- G. 24" (60.7 cm) cutout depth 30" (76.2 cm) models
- A. 30° (76.2 cm) min. cabinet width B. 1° (2.5 cm) top of cutout to bottom
- C. 191/4" (48.9 cm) bottom of cutout to floor is recommended. 4"-19%" (10.2-48.9 cm) bottom of cutout to floor is acceptable.
- D. 281/1" (72.4 cm) cutout width E. 11/2" (3.8 cm) min. bottom of cutout
- F. 411/s" (105 cm)* recommended cutout G. 24" (60.7 cm) cutout depth
- * NOTE: The cabinet height can be between 41" (104.1 cm) and 411/3" (105.6 cm) for microwave/oven combination.

Model: 20-2070 ALT A APPLEDALE

39 of 45

Prepared by Ranjit Parmar rparmar@appliancecanada.com (647) 406-2167





Keep up with the tools you use from prep to table with this dishwasher's three racks of versatile loading possibilities and complete wash coverage. The FreeFlex™ Third Rack fits glasses, mugs, bowls, silverware and cooking tools, freeing up room below for pots, plates and mixing bowls. Advanced Clean Water Wash System circulates clean water to dishes in all three racks, and the Fan-Enabled ProDry™ System provides thorough drying, so dishes come out

Top Features	
FreeFlex™ Third Rack	
ENERGY STAR® Certified	
44 dBA	

Manuals & Literature:

Dimension Guide

ready for more enjoying.

Energy Guide

Use and Care Guide Warranty Information

44 dBA Dishwasher in PrintShield™ Finish with FreeFlex™ Third Rack

KDPM604KPS

Control Location

End of Cycle Signal

Sensor

Status Light

Available Finishes/Colours

Dimensions	
Depth	24 1/2
Width	23 7/8
Height .	34 5/8
Controls	an Childe
Automatic Temperature Controls	Yes
Control Type	Tap Touch with Display

	Feat
	Rinse
	Disp
4	Sour
uch with	Num
,Тор	-
	Exter
	Cont
	Hand
	Hand

Yes

White

Yes

KDPM604KPS Stainless Steel with Prints	Shield™ Finish
Misc.	
Will Call	Yes
Features	
Rinse Aid Dispenser Level Indicator	Yes
23.	1721

Features		
Rinse Aid Dispenser Level Indicator	Yes	
Dispensers	Delergent and Rinse Aid Yes	
Sound Package		
Number of Wash Levels		
Exterior		
Control Panel Color	Black	
Handle Color	Black	
Handle Material	Plastic	
Handle Type	Long Pocket	
True Hold Door	Yes	
Door Style	Flat	

KitchenAid'


Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



24" Dishwasher DETAILED PLANNING DIMENSIONS GUIDE

OPENING/CLEARANCE DIMENSIONS

IMPORTANT: Check that all surfaces have no protrusions that would prohibit dishwasher installation.

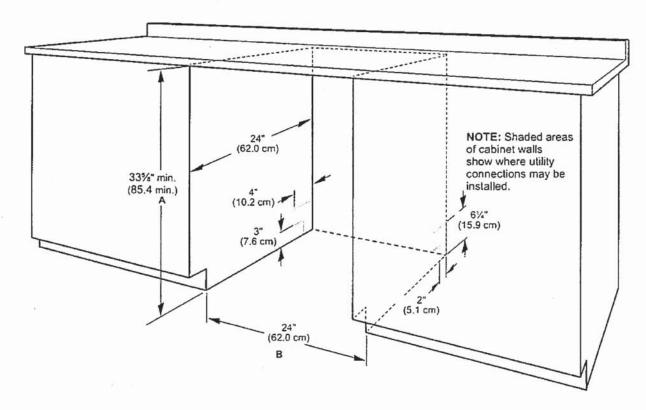

- A. Measured from the lowest point on the underside of the countertop. May be reduced to 33%" M IN. (85.4 cm) M IN. by removing the feet and perforated area of insulation (blanket) on dishwasher.
- B. Minimum, measured from narrowest point of opening.

NOTE: Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

Model: 20-2070 ALT A APPLEDALE


41 of 45

DRAIN REQUIREMENTS

■ A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/ IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

NOTE: Do not connect multiple drain hoses together.

- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.



- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" (1.3 cm) minimum I.D, drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 psi to 120 psi (138 kPa to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher.
- 3/8" (0.95 cm) O.D. copper tubing with compression fitting or flexible braided water supply line.

NOTE: 1/2" (1.3 cm) minimum plastic tubing is not recommended.

- A 90° elbow with 3/4" (0.95 cm) hose connection with rubber washer.
- Do not solder within 6" (15.2 cm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

AWARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association 1 Batterymarch Park Quincy, MA 02169-7471

You Must Have:

- 120 V, 60 Hz, AC only, 15 A or 20 A, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

■ A time-delay fuse or circuit breaker.

Circuit Requirements:

- The dishwasher may be installed on the same circuit as a garbage disposal providing that the branch circuit cannot exceed rated circuit load and must comply with all governing codes and regulations such as but not limited to National Electrical Code, ANSI/NFPA 70 - latest edition.
- No electrical connections other than the dishwasher power and ground connections can be made inside of the dishwasher terminal box.

If connecting dishwasher with a power supply cord:

- Use UL Listed power cord kit marked for use with dishwasher.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.

If connecting dishwasher with direct wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.






Model: 20-2070 ALT A APPLEDALE

42 of 45

WF50T8500AV

SAMSUNG

Samsung Smart Front Load Washer with Super Speed 5.8 cu.ft. capacity IEC.

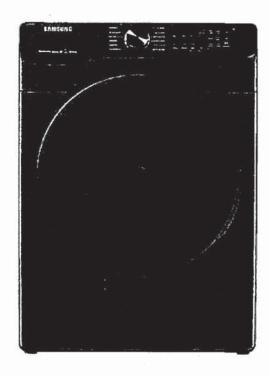

Signature Features

Super Speed

Wash a full load of laundry in just 30 minutes¹, without sacrificing cleaning performance.

Bixby Enabled 🛜

Wi-Fi connected so you can remotely start or stop your cycle, schedule laundry on your time, receive end of cycle alerts, and do more right from your smartphone.²

5.8 Cu.Ft. Extra-large Capacity

Fewer loads means less time in the laundry room and more time for you.

Available Colour



Black Stainless Steel



Super Speed



Bixby Enabled

Features

- Bixby Enabled 🕏
- Super Speed¹
- Steam
- VRT Plus™ Technology
- Swirl Drum Design
- Self Clean+
- Internal Water Heater
- 1200 RPM Maximum Spin Speed
- Direct Drive Motor
- 12 Preset Washing Cycles
- 10 Additional Washing Options
- 5 Temperature Levels
- LED Display: Ice Blue
- 24-Hour Delay End

Convenience

- Child Lock
- Delay End
- Dispenser Trays: Main Wash, Softener, Bleach

Rating



ENERGY STAR² - Rated CEE Tier 2 IMEF = 2.92 IWF = 2.9

Based on using Super Speed on a normal cycle with an 8th load

The Samsung Smart Things application is required and is available on Android and iOS devices. A Wi-Fi connection is required. User will be so ely responsible for any consequence(s) that may result, including but not limited to any damage or have rewent by increast information provided by the user.

Model: 20-2070 ALT A APPLEDALE

43 of 45

WF50T8500AV

SAMSUNG

Samsung Smart Front Load Washer with Super Speed 5.8 cu.ft. capacity IEC.


Installation Specifications

If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72-inch2 (see stacked baild below). Your washer alone does not require a specific air opening.


*Required spacing (External enhaust ellow may require additional space.)

1. Alcove or closet installation


Minimum Clearance for Closet and Alcove Installations:

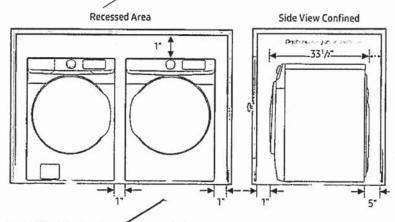

2. With stacked washer and dryer

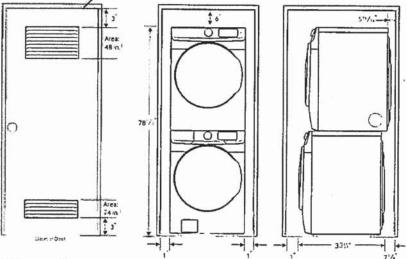

Dimensions

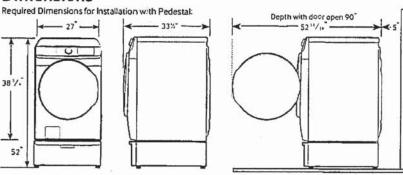

12 Preset Washing Cycles:

Normal, Heavy Duty, Bedding, Quick Wash, Permanent Press, Delicates, Whites, Sanitize, Activewear, Rinse and Spin, Self Clean.

10 Additional Washing Options:

Presoak, Steam, Delay End, Smart Control, Super Speed, Drum Light, Alarm Off, Child Lock, Smart Care, Spin Only

5 Temperature Levels:

Hot, Warmer, Warm, Cool, Cold

5 Spin Speeds:

High, Medium High, Medium, Low, Na Spin

5 Soil Levels:

Heavy, Medium Heavy, Normal, Medium Low, Light

Dispenser Trays:

Main Wash, Softener, Bleach

Warranty

One (1) Year Parts and Labor

Ten (10) Years Direct Drive Motor (Part Only)

Product Dimensions & Weight (WxHxD)

Dimensions: 27" x 38 7/13" x 33 1/2"

Weight: 214 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions: 29 3/8" x 42 2/5" x 35 2/5"

Weight: 218 lbs

Colour Model # UPC Code
Black Stainless Steel WF50T8500AV 887276398754

Matching Dryer

Black Stainless Steel DVE50R8500V 887276406893

Pedestal

Black Stainless Steel WE402NV 887276310145

Accessories

Stacking Kit SKK-8K 887276344034

Actual colour may vary Design, specifications, and colour availability are subject to change without notice. Non-metric weights and measurements are approximate


Model: 20-2070 ALT A APPLEDALE

44 of 45

DVE50R8500V

SAMSUNG

Samsung Smart Front Load Electric Dryer with Steam Sanitize+7.5 cu. ft. Capacity DOE



Signature Features

Bixby Enabled 🛜

 Wi-Fi connected so you can receive end of cycle alerts, remotely start or stop your cycle, schedule laundry on your time and more, right from your smartphone.

Steam Sanitize+

 The Steam Sanitize+ cycle removes 99.9% of germs and bacteria, over 95% of pollen, and kills 100% of dust mites². Multi-Steam Technology steams away wrinkles, odors, and static.

Sensor Dry

 Automatically optimizes the time and temperature of your drying cycle to protect your clothes from heat damage, white avoiding excess energy use.


Available Colors




Fingerprint Resistant Black Stainless Steel (shown)



White



Bixby Enabled 🕏



Steam Sanitize+

Features

- Bixby Enabled 🕏
- Steam Sanitize+
- Sensor Dry
- Vent Sensor
- ENERGY STAR® Certified
- Interior Drum Light
- · Reversible Tinted Door
- 4-Way Venting
- Dual Heaters
- Stainless Steel Drum
- ADA Compliant³
- Accessibility (AUI, Braille)
- Drying Rack

• 12 Preset Drying Cycles


- 10 Additional Drying Options
- 5 Temperature Levels
- LED Display: Ice Blue

Convenience

- · Child Lock
- · Lint Filter Indicator



Rating



The Samsung SmartThings application is required and is available on Android and iOS devices. A Wi-Fi connect on is required. User will be solely responsible for any consequence(s) that may result, including but not limited to any damage or harm caused by incorrect information provided by the user. Only monitoring is allowed for Gas dryer for safety reasons.

Based on Internal testing and Independently verified by Intertek Individual results may vary

ADA Compliant when using a Samsung 27" wide riser (WE272NV or WE272NW).

Model: 20-2070 ALT A APPLEDALE

45 of 45

DVE50R8500V

SAMSUNG

Samsung Smart Front Load Electric Dryer with Steam Sanitize+


7.5 cu. ft. Capacity DOE

Installation Specifications


If the washer and dryer are installed together or the dryer alone, the closet front must have two unobstructed air openings for a combined minimum total area of 72-inch² (see stacked build below). Your washer alone does not require a specific air opening.

*Required spacing (External exhaust elbow may require additional space.)


Alcove or closet installation Minimum Clearance for Closet and Alcove Installations

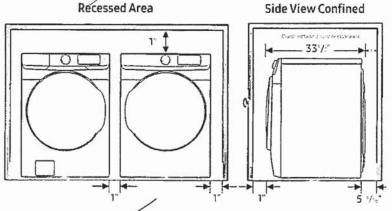


2. With stacked washer and dryer

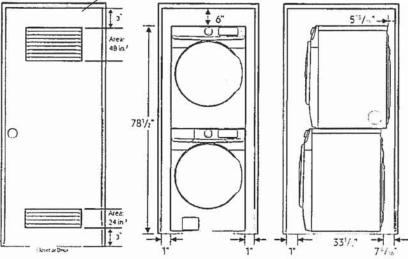

Dimensions





4-Way Venting

12 Preset Drying Cycles:

Refresh, Steam Sanitize+, Normal, Heavy Duty, Permanent Press, Active Wear, Bedding, Delicates, Time Dry, Air Fluff, Quick Dry, Downloaded

10 Additional Drying Options:

Damp Alert, Wrinkle Prevent, Smart Control, Adjust Time (Up), Adjust Time (Down), Eco Dry, Drum Light, Child Lock, Smart Care, Alarm Off

5 Temperature Levels:

High, Medium High, Medium, Medium Low, Low

5 Dry Levels:

More Dry, Normal-More Dry, Normal Dry, Normal-Less Dry, Less Dry

Warranty

One (1) Year Parts and Labor

Product Dimensions & Weight (WxHxD)

Dimensions: 27" x 383/4" x 313/4"

Weight: 123 lbs

Shipping Dimensions & Weight (WxHxD)

Dimensions: $29^{3}/_{8}$ " x $42^{9}/_{16}$ " x $34^{11}/_{16}$ "

Weight: 130 lbs

Electric Fingerprint Resistant	Model #	UPC Code
Fingerprint Resistant Black Stainless Steel White	DVE50R8500V DVE50R8500W	887276348803 887276348810
Gas Fingerprint Resistant Black Stainless Steel	DVG50R8500V	887276348827
White	DVG50R8500W	887276348384
Matching Washer Fingerprint Resistant Black Stainless Steel	WF50R8500AV	887276348063
White	WF50R8500AW	887276348070
Pedestal Fingerprint Resistant Black Stainless Steel White	WE402NV WE402NW	887276310145 887276310152
Accessories Stacking Kit Vent Kit	SKK-8K DV-2A	887276344034 887276146416

Actual color may vary. Design, specifications, and color availability are subject to change without notice. Non-metric weights and measurements are approximate.

22019 Samsung Electronics America, Inc. 85 Challenger Read, Ridgefield Park, NJ 07660. Tell 800-SAMSUNG samsung com. Samsung is a registered trademark of Samsung Electronics Co. LL4