



French Door Refrigerator with Beverage Chiller™ Compartment

★★★★★ 4.4 / 5

[Read all 333 reviews](#) | [Write a review](#)

BASE MSRP

AVAILABLE COLOR OPTIONS



Stainless Steel - MFI2269VEM

Top Features

Beverage Chiller™ Compartment

Keeps gallon-size containers of milk, juice or other drinks up to 4°F colder than the rest of the refrigerator.

Wide-N-Fresh™ Deli Drawer

This drawer is the ideal size for large party platters, deli trays and snacks. Most models feature temperature controlled drawers.

Spill-Catcher™ Glass Shelves

Help contain spills for quick and easy cleanup. Spill-Catcher™ shelves also feature sealed edges and select shelves slide out for convenience.

Additional Features

21.8 Cu. Ft. Total Capacity

QuietSeries™ 200 Sound Silencing System

Fits a 33-inch Opening

PuriClean® II Retractable Water Filter

ENERGY STAR® Qualified

Access fresh food at eye level

Save on your energy bills—#1 in energy efficiency. Saves up to \$670 in lifetime energy costs.¹

Built-In Door Organizer

Electronic Ice and Water Dispenser

Easy-Glide Shelves

Max Cool Setting

Electronic Quad Cool™ System

Sealed FreshLock™ Crispers with Humidity Control

Temp Alarm

The full-size design of these crispers provides ample storage for produce, while humidity control allows you to increase the humidity for leafy vegetables and lower it for fruits.

Door Alarm

BrightSeries™ Lighting Package

Factory Installed Ice Maker

A factory-installed ice maker churns out all the ice cubes you need, all year round.

***** String exceeded column size *****



Bottom Mount Refrigerator

PRODUCT MODEL NUMBERS

MFI2269VE
MFI2569VE

Electrical: A 115-volt, 60-Hz, AC-only, 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.



NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

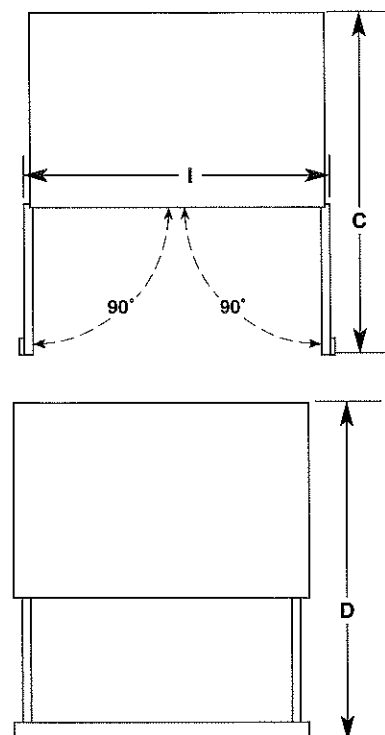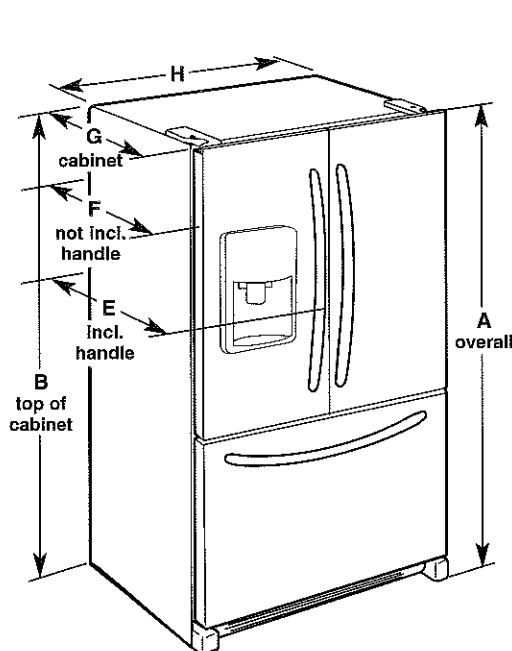

Model Number	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"	Width - Door Open 90° "I"
MFI2269VE	70 ¹ / ₁₆ " (178.0 cm)	68 ³ / ₁₆ " (173.2 cm)	47" (119.4 cm)	N/A	34 ¹ / ₁₆ " (87.2 cm)	31 ¹ / ₁₆ " (81.0 cm)	28 ¹ / ₁₆ " (71.3 cm)	32 ³ / ₁₆ " (82.9 cm)	N/A
MFI2569VE	70 ¹ / ₁₆ " (178.0 cm)	68 ³ / ₁₆ " (173.2 cm)	48" (121.9 cm)	N/A	35 ³ / ₁₆ " (89.7 cm)	32 ³ / ₁₆ " (83.5 cm)	29 ¹ / ₁₆ " (73.8 cm)	35 ³ / ₁₆ " (90.5 cm)	N/A

LOCATION REQUIREMENTS

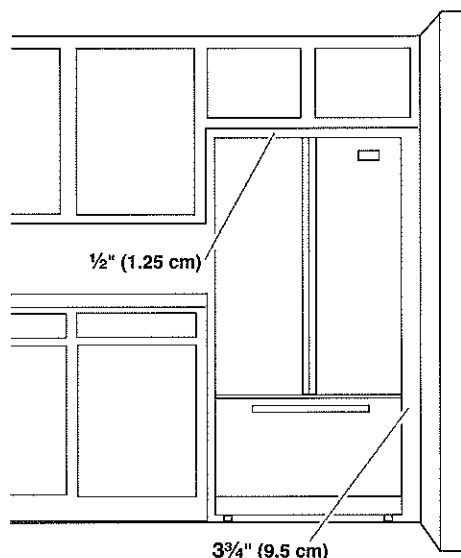

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 3 3/4" (9.5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: It is recommended that you do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 55°F (13°C).



6.2 cu. ft. Capacity Electric Range with Triple-Choice™ Elements

★★★★★ 4.5 / 5 ▼

[Read all 205 reviews](#) | [Write a review](#)

BASE MSRP

~~\$949.00~~

AVAILABLE COLOR OPTIONS



Stainless Steel - MER8775AS

Top Features

6.2 cu. ft. cooking capacity

When a surprise visit turns the family dinner into a reunion, there's no need to worry. With 6.2 cu. ft. capacity, your range has got you covered. The standing rib roast is still cooking while you toss in a big pan of asparagus and a porcelain roaster loaded with a family favorite, potatoes au gratin. Cooking big has never been so easy.

10-year limited parts warranty³ on elements and ceramic glass cooktop*

No other appliance brand offers peace of mind like Maytag. Backed by a 10-year limited parts warranty³* on the elements and ceramic glass cooktop, these ranges are Better Built for years of dependable cooking. *Visit maytag.com for warranty details.

Designed, Engineered, Assembled in the USA. Assembled in Tulsa, OK

American Pride is all about hard work and dependability. At Maytag, we carry on that tradition. From Oklahoma to you, Maytag® ranges are designed, engineered and assembled in the U.S.A.

Additional Features

AquaLift® Self-Clean Technology

Get your oven clean in less than an hour with odor-free, low temperature AquaLift® self-clean technology. This innovative coating on the oven interior activates with water and heat to release tough, baked-on soils from underneath so food and debris easily wipe away. Plus, with AquaLift® self-clean technology, temperatures stay below 200°F as compared to ovens that require heat of up to 800°F during traditional self-cleaning cycles.

Triple-Choice™ element

12"/9"/6" Triple-Choice™ element provides more cooktop options and ensures even heating by allowing you to match the cooking surface to the

Precision Warming™ center

This dedicated fifth cooktop element keeps cooked food warm and frees up other elements for additional meal preparation.

Panoramic view oven window

The extra-large oven window provides better visibility of the oven interior, allowing you to monitor cooking progress without opening the door, keeping oven temperatures steady and undisturbed.

Keep Warm™ setting

Keep hot food hot without having to keep cooking.

pan size.

By maintaining the oven's lowest temperature at a steady 175 °F, you can be confident knowing that you can serve everything at once.

10" 3,200-watt Speed Heat™ element

With 3,200 watts of power, the Speed Heat™ element is perfect for big cooking jobs like searing steaks or boiling a large pot of water for pasta.

Reliable electronic touch oven controls

Easy-to-use touch pad electronic controls offer precise temperature adjustment.

Max capacity rack

Delay Bake

This lower oven rack is recessed to provide maximum cooking capacity, making it perfect for large items and holiday meals.

The oven kicks on while your family is watching a movie with an hour to go. Thanks to Delay Bake, your family can finish the evening with homemade apple crisp—so you can be the hero and still enjoy the rest of the movie.

Power Center cooktops

Hot surface indicator

Power Center cooktops include a powerful configuration of 5 elements built to provide the power and flexibility you've come to expect from Maytag brand.

The hot surface indicator lets you know when the cooktop is still hot.

Precision Cooking™ system with Precise Preheat, Precise Bake and Precise Broil

Control Lockout

This cooking system combines Precise Preheat, Precise Bake and Precise Broil to provide dependable, even cooking for exceptional results and optimal performance.

Disables the control panel to avoid unintended use or other changes to your cooking settings, like turning on the cooktop surface.

Variable broil

Located in the top of the oven cavity for easier access, the broil element can be adjusted for precise, consistent results.

Better Built cooking components

The heavy-duty door hinges and shatter-resistant cooktop give you confidence that your range is built to last. That's just another example of the durable, reliable performance you love, and that Maytag brand is known for.

(1) Visit maytag.com for warranty details. (2) *Among single cavity 30" freestanding electric ranges. (3) See warranty for details.



30" (76.2 cm) Freestanding Electric Range

PRODUCT MODEL NUMBERS

MER7662W	MER8670A	MER8880A
MER7664X	MER8674A	MER8885A
MER7685B	MER8775A	MIR8890A

Electrical: To properly install your range, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Range must be connected to the proper electrical voltage and frequency as specified on the model/serial number rating plate. The model/serial number rating plate is located on the left side frame behind the storage drawer panel or behind the top right side of the oven door. Refer to the figures in the "Product Dimensions" section of the "Location Requirements" section.
- This range is manufactured with the neutral terminal connected to the cabinet. Use a 3-wire, UL listed, 40- or 50-amp power supply cord (pigtail) (see following Range Rating chart). If local codes do not permit ground through the neutral, use a 4-wire power supply cord rated at 250 volts, 40 or 50 amps and investigated for use with ranges.

Range Rating*

Specified Rating of Power Supply Cord Kit and Circuit Protection

120/240 Volts	120/208 Volts	Amps
8.8 - 16.5 KW	7.8 - 12.5 KW	40 or 50**
16.6 - 22.5 KW	12.6 - 18.5 KW	50

*The NEC calculated load is less than the total connected load listed on the model/serial rating plate.

**If connecting to a 50-amp circuit, use a 50-amp rated cord with kit. For 50-amp rated cord kits, use kits that specify use with a nominal 1 $\frac{1}{8}$ " (34.9 mm) diameter connection opening.

• A circuit breaker is recommended.

CABINET OPENING DIMENSIONS

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.


IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.

***NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than $\frac{1}{4}$ " (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than $\frac{1}{4}$ " (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

PRODUCT DIMENSIONS

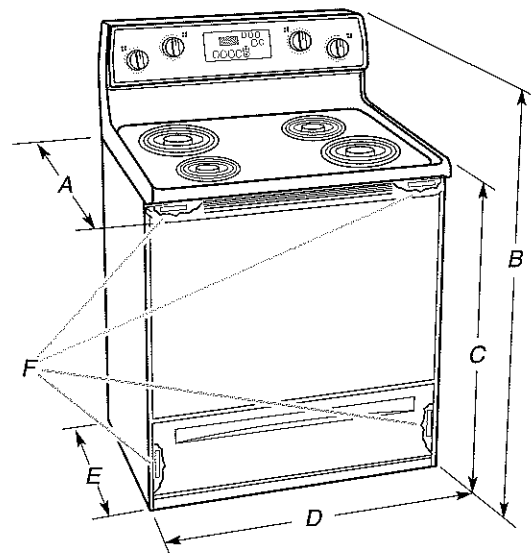

A. 27 $\frac{3}{4}$ " (70.5 cm) max. depth with handle

B. 46 $\frac{7}{8}$ " (119.1 cm) overall height (max.) with leveling legs screwed all the way in*

C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*

D. 29 $\frac{7}{8}$ " (75.9 cm) width


E. 25 $\frac{1}{8}$ " (64.3 cm) depth - back of range to front of cooktop**

F. Model/serial rating plate (located on the left side frame behind storage drawer or right side of frame behind the oven door)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

**Front of door and drawer may extend further forward depending on styling.

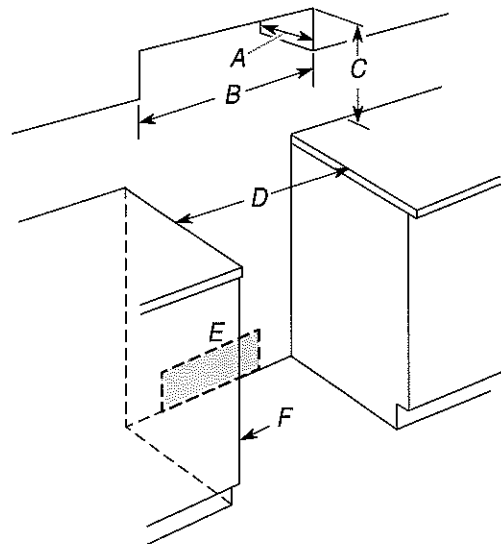

A. 13" (33.0 cm) max. upper cabinet depth


B. 30" (76.2 cm) min. opening width

C. For minimum clearance to top of cooktop, see NOTE*

D. 30 $\frac{1}{8}$ " (76.5 cm) min. opening width

E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 5 $\frac{1}{2}$ " (14.0 cm) max. from floor

F. Cabinet door or hinges should not extend into the cutout

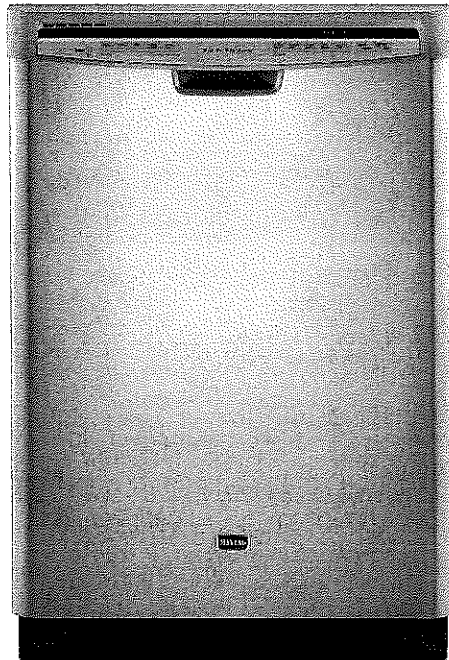

Jetclean® Plus Dishwasher with the Steam Sanitize option

★★★★★ 4.3 / 5 ▼

[Read all 360 reviews](#) | [Write a review](#)

BASE MSRP

AVAILABLE COLOR OPTIONS



Stainless Steel – MDB4709PAM

Top Features

4-Blade Stainless Steel Chopper

No more scraping plates. The 4-blade stainless steel chopper disintegrates the food particles that come off your dishes so they don't end up recirculating and sticking to your dishes and glassware.

Industry's Most Powerful Motor¹ Available

Strengthened by the Industry's most powerful motor¹ available, each cycle blasts away tough soils for clean dishes the first time.

Tiered Upper Rack

When cleaning up after a big meal, you always need room to fit just one more glass or plate. The tiered upper rack is designed like stadium seating to hold large plates and taller items. In the lower rack, this creates enough space to place two 9" x 13" pans vertically.

Additional Features

Designed, Engineered and Assembled in the USA

From Ohio to you, every Maytag® dishwasher is designed, engineered and assembled in the U.S.A.

Steam Sanitize Option

The Steam Sanitize option lets you confidently wash important items with a high-temperature rinse that reduces 99.999% of food soil bacteria.

JetClean® Plus Wash System

Uses high-pressure spray jets to remove tough food particles. A stainless steel chopper blade

Premium Dark Duraguard® Nylon Racks

These heavy-duty racks protect dishes from scratches and damage while also resisting rust.

ENERGY STAR® Qualified

ENERGY STAR® qualified dishwashers use less water and energy than standard models helping to save money on utility bills.

Oversize Capacity Plus Tall Tub

The oversized tub provides enough capacity to clean tall and large items like cookie sheets, pitchers and mixing bowls.

3/5/2014

Jetclean® Plus Dishwasher with the Steam Sanitize option (MDB4709PAM Stainless Steel) |

pulverizes food, preventing particles from plugging the wash system and spray jets. The filtration system captures tiny food particles to prevent redistribution during the cycle for optimal cleaning without the need to prerinse.

(1) Among leading brands.



Undercounter Dishwasher

PRODUCT MODEL NUMBERS

MDB4630AW	MDB6769PA
MDB4630PA	MDBH949AW
MDB4409PA	MDBH949PA
MDB4709AW	MDBH969AW
MDB4709PA	MDBS469PA
MDB6709AW	MDBTT53AW
MDB6769AW	

Electrical Requirements: 120-volt, 60-Hz, AC-only, 15- or 20-amp. fused electrical supply. Copper wire only. A timedelay fuse or circuit breaker and separate circuit is recommended.


If direct wiring dishwasher: Use flexible, armored or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

Use a U.L.-listed or CSA-approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit


instructions for installing the power supply cord. Power supply cord must plug into a grounded three-prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90° elbow with 3/4" N.P.T. external pipe threads on one end. Do not solder within 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended



that the drain hose either be looped up and securely fastened to the underside of the counter, or be connected to an air gap.


Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or

floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

PRODUCT DIMENSIONS

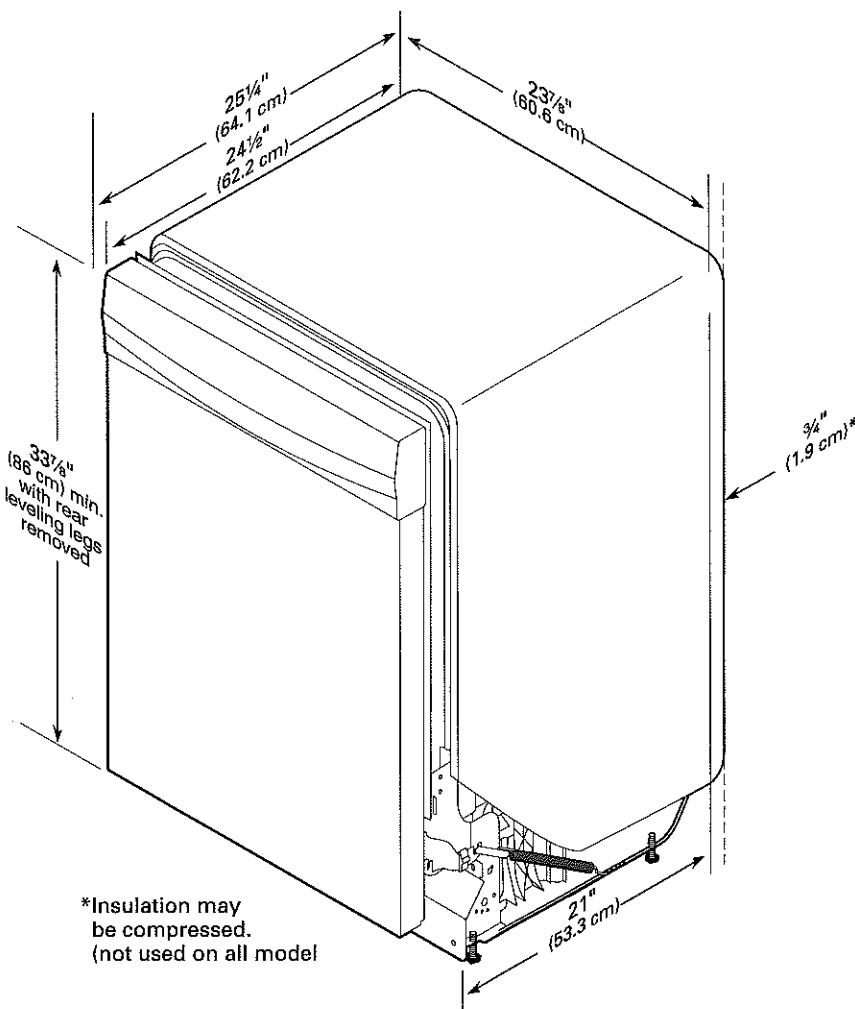


CABINET CUTOUT DIMENSIONS

NOTE: Shaded area of cabinet walls show where utility connections may be installed.

*Measured from the lowest point on the underside of the countertop. May be reduced to 33 $\frac{7}{8}$ " (86 cm) by removing rear leveling legs from dishwasher.

**Minimum, measured from narrowest point of opening.

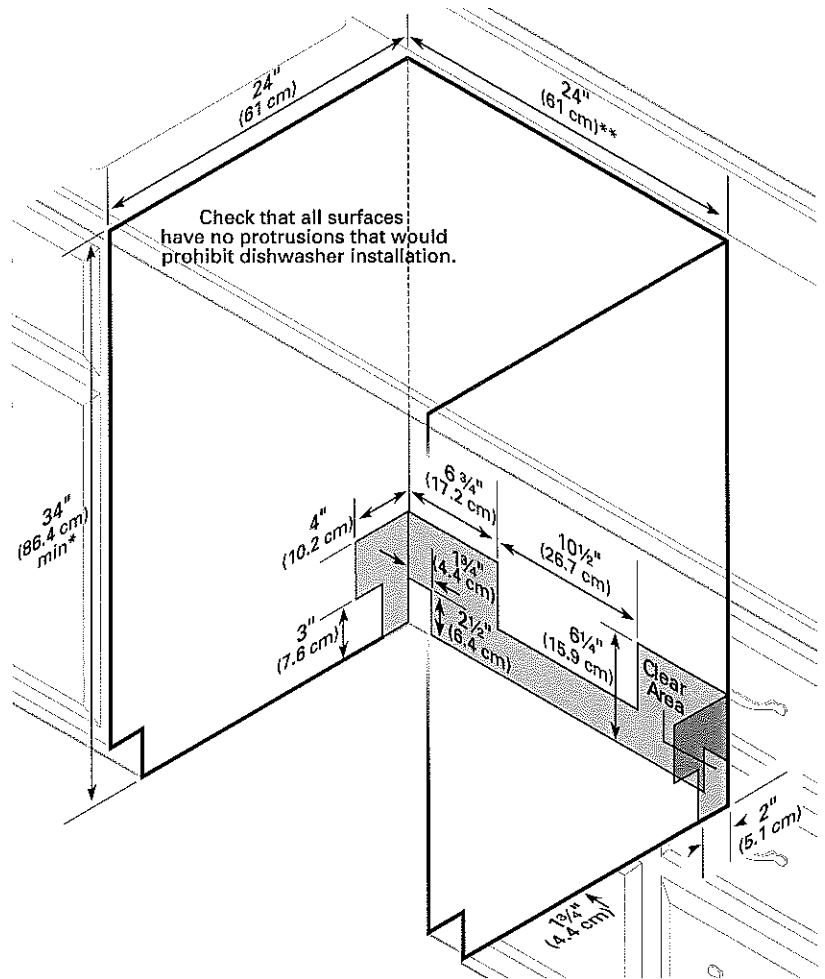



2.0 cu. ft. Over-the-Range Microwave With Hidden Vent

★★★★★ 4.6 / 5 ▼

[Read all 127 reviews](#) | [Write a review](#)



BASE MSRP

~~MSRP~~

AVAILABLE COLOR OPTIONS



Stainless Steel - MMV4203WS

Top Features

Better Built with More Power for Your Cooking Needs

Hidden Vent

A hidden vent makes the over-the-range microwave stylish and easy to clean.

2.0 Cu. Ft. Capacity

Provides plenty of space and flexibility for large or multiple dishes. It easily fits a 9" x 13" pan.

Additional Features

3 Speed Exhaust Fan

Frozen Entree Option

Precision Touch Electronic Controls

Offers a set of preprogrammed cycles, allowing the user to easily cook a variety of frozen food options.

Variable Power Levels

Variable levels of power make it possible to find the ideal setting for nearly every type of food, from melting butter to reheating a large casserole.

Control Lockout

The control lockout disables the control panel, so you don't have to worry about clumsy cleaning or accidental elbows dialing up the wrong numbers.

Oversized Turntable

Easily accommodates larger-sized items for quick and efficient cooking.

Kids Meal Option

1000 Watts of Power

3/5/2014

2.0 cu. ft. Over-the-Range Microwave With Hidden Vent (MMV4203WS Stainless Steel) |

Incandescent Cooktop Light

300 CFM Airflow

Provides direct light to the cooktop below for better cooking visibility.

industry-leading 10-year warranty

Auto Defrost


See warranty certificate for more details.



3.5 cu. ft. Front Load Washer with Deep Clean Wash System



3.7 / 5

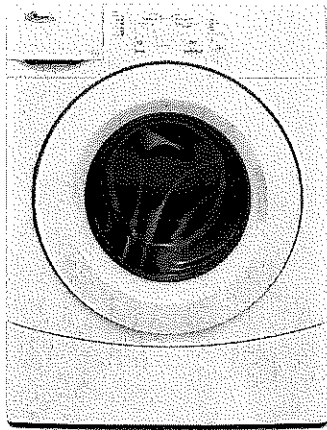[Write a review](#)


Team up with this ENERGY STAR® qualified front load washer to clean up to 16 pairs of jeans in one load. Plus, Care Control Temperature Management enabled by 6th Sense® technology adjusts the hot and cold water inlets to reach temperatures that are warm enough to dissolve detergents but keeps the water from overheating to help reduce shrinking and color bleeding. And, the anti-escape valve of the Deep Clean Wash System ensures the detergent stays at maximum concentration. Show no mercy to dirty clothes.

Top Features

smart temperature control helps reduce shrinking and color bleeding

The Care Control temperature management system enabled by 6th Sense™ technology helps protect your clothes by controlling water amount and temperature.

conserves natural resources while saving you time and money

This ENERGY STAR® qualified washer's features and technology meet government standards for eco-efficiency and can save you money on your utility bills.

keep operational sounds inside the washer

With the Quiet Wash noise reduction system, sound-absorbing materials around the wash basket or drum reduce operational noise.

additional features

Rated a "Best Buy" by a leading consumer magazine

3.5 cu. ft. Stainless Steel Wash Basket

Wash up to 16 pairs of jeans in a single load. You can clean larger, fewer loads to help save time and energy. Or take advantage of the ample space to wash bulky items like comforters, sleeping bags or dog beds.

ENERGY STAR® Qualified

Meets government standards to help conserve natural resources and save money on utility bills.

Push-button Cycle Selector

Precision Dispense

Penetrates stains and pretreats soils with a concentrated burst of detergent. The wash cycle begins only after the entire load has been treated.

Care Control Temperature Management

Adjusts the cold and hot water inlets to reach temperatures that are warm enough to dissolve detergents. Water is kept from overheating to help reduce shrinking and/or color bleeding.

Smooth Spin Technology

Shock absorbers, springs and electronic controls help redistribute the load automatically and minimize movement of the wash drum during the spin cycle. The result is less noise and vibration for laundry without disruption.

6 Automatic Cycles

3 Temperature Settings

7 Adaptive Wash Actions

1,100 RPM Maximum Spin Speed

Quiet Wash

Innovative noise reducing technology brings the beauty of silence to the laundry room. Choose a washer with the quiet wash package that meets your needs; Ultra Quiet Wash, Quiet Wash Plus and Quiet Wash. All three packages are remarkable for what they don't do - make noise.

Ultra Quiet Wash: Our quietest wash system ever. Strategically-placed, sound absorbing materials on the front, sides and bottom of the washer cabinet, along with a quieter hose design, gives you the flexibility to operate the washer wherever and whenever without disruption.

Quiet Wash Plus: Sound-absorbing materials on the front, sides and bottom of the cabinet help keep operational sounds inside the washer and out of your daily life.

Quiet Wash: Helps reduce operational noise with a sound-absorbing pad on the front of the washer cabinet.

Add-A-Garment Indicator Light

Illuminates for the first 8 minutes of the wash cycle as a convenient reminder that forgotten items can still be added to the load in progress.

Stainless Steel Wash Basket

Resists odors, rust and chipping. The smooth surface helps protect delicate fabrics from snagging.

Delicate Cycle

Select a Delicates Cycle when cleaning delicate or knit items. A reduced agitation speed and low spin speed provide needed fabric care without sacrificing cleaning performance.

Heavy Duty Cycle

A faster spin speed coupled with the Direct Inject system works to remove the toughest stains from the toughest and heaviest fabrics.

Normal/Casual Cycle

Adjustable End-of-Cycle Signal

Drain/Spin Option

Rinse and Spin Option

3/7/2014

3.5 cu. ft. Front Load Washer with Deep Clean Wash System (WFW9050XW) |

3-Tray Detergent, Bleach, Fabric Softener Dispenser

Automatic detergent, bleach and fabric softener dispensers give you the freedom and confidence to load and go.

Automatic Water Level Control

The Duet washer can save up to 23 gallons of water per load. Built-in sensors regulate the amount of water used to match the size of the load so that only the absolute minimum water needed is used.

Door Window

Optional Storage Pedestals

Whirlpool brand offers an ergonomic solution for its front-load washers and dryers to help reduce bending, stooping, or arching. Based on your height and laundry room needs, optional 10" and 15.5" pedestals make loading, unloading, and filling the dispensers easier. From the Home Page, please go to [All Products > Laundry > Laundry 1-2-3](#) to view more details and options.

Optional Laundry Tower

Optional Laundry Worksurface

Convert your washer & dryer top into a seamless surface to sort, treat & fold.

Helps contain spills for easy cleanup. The innovative mat design is stain resistant to help it stay looking new longer. The SpillGuard™ surface also helps contain liquids and eases cleanup, preventing a small spill from becoming a large mess.

Keep small laundry items handy. Three rear channels with an easy-to-clean surface provide a convenient spot for dryer sheets and stain sticks. The backguard also prevents items from falling behind machines.

Sort - Organizing laundry by color, fabric type or soil level is more convenient than ever before. Utilize the laundry worksurface to sort everything from socks to sweaters.

Treat - Treating garments for stubborn stains has never been easier. The stain-resistant rubber surface provides a spacious and easy-to-clean area to treat fabrics before washing.

Fold - Unload and fold items fresh from the dryer without leaving the laundry room. The worksurface provides plenty of space to fold and stack all your laundry in one convenient place.

Model Numbers:

WW29000SW - White

WW29000SU - Diamond Dust

XW29000TA - Aspen

Optional Stack Kit #8572546

Stack Kit provides a galvanized bracket to stack your new Duet® washer and dryer vertically, dryer over washer. May be installed in an enclosure if water supply faucets, electrical outlets and gas line connection (gas dryer only) are available. Installation instructions included. Basic tools required. At least two people needed to lift and move the units for your own safety.

Deep Clean Wash System

Combines two powerful technologies for optimal results. The Anti-Escape valve ensures the maximum concentration of detergent is used, while Care Control temperature management keeps wash water warm enough for detergent enzymes to work.

Laundry Worksurface

CEE Tier III Qualified

Based on the Consortium for Energy Efficiency qualified product listings--with Tier III being the most efficient. This model features advanced water & energy savings and may qualify for rebates from local utility companies.

Configuration and Overview

UL :	Yes
Fuel Type :	Electric
CEE Tier Rating :	Tier III (Highest Possible Efficiency Rating)
ADA Compliant :	ADA Height and Side and Front Reach Compliant
Energy Star® Qualified :	Yes

Cycle and Options

Temperature Selections :	Cold, Hot, Warm
Number of Wash Cycles :	6
Delay Start :	No
Number of Temperatures :	3
Maximum Spin Speed (RPM) :	1100
Option Selections :	Add a Garment, Deep Clean
Pre Soak :	No
Water Factor :	3.8
Washer Cycle Selections :	Clean Washer with affresh, Delicates, Drain & Spin, Heavy Duty, Normal, Rinse & Spin
Spin Speeds :	2

Style and Extras

Feedback-Status Indicators :	Add Garment, Door Locked, Rinse, Spin, Wash
Sound Package :	Yes
Automatic Load Size Sensing Technology :	No
Eco Monitor :	No
Hoses Included :	No
Drum Material :	Stainless Steel
Control Type :	Electronic
Stackable :	Yes
Pedestal Options :	Yes
Out of Balance Sensing :	Yes

Dimensions

Depth :	30 1/2
Height :	36
Width :	27

MSRP is Manufacturer's Suggested Retail Price and may not necessarily be the price at which the product is sold in the consumer's area. Dealer alone determines actual price.


©/TM © 2014 Whirlpool. All rights reserved. All other trademarks are owned by their respective companies.



Electric Dryer with AccuDry™ Drying System



4.8 / 5

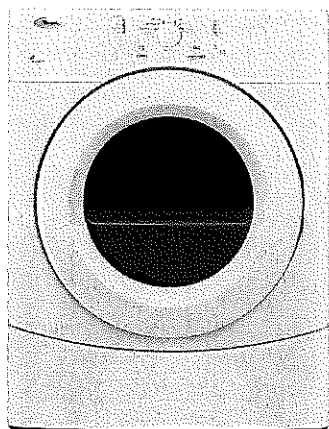[Write a review](#)


Installed side-by-side, under a cabinet, or stacked with your washer, this electric dryer goes just about anywhere you need it. The AccelerCare® and AccuDry™ systems automatically sense when clothes are dry and stop the cycle, saving 10 percent more energy than the already-energy-saving AutoDry™ system. Six cycles with four temperature settings ensure that you get results, while the Quiet Dry Plus noise reduction system helps keep the peace. Smart, quiet, and fits just about anywhere you want it. Done deal!

Top Features

built-in sensors help prevent overdrying

Intuitive, built-in sensors enabled by 6th Sense™ technology automatically sense when your laundry is dry and stop the cycle so you don't have to.

energy-saving technology saves you time and money

Resource Saver® dryers combine the energy-efficient Eco Normal cycle with the AccelerCare® drying system, using up to 40 percent less dryer energy.

keep operational noise out of your living spaces

This dryer's Quiet Dry noise reduction system uses special insulation to help reduce sound and vibration while your laundry dries.

additional features

AccelerCare® Drying System

Dry Time = Wash Time. Senses how fast the load is drying, how hot the air should be and when clothes are dry. Automatically stops the cycle to save time & energy and also to prevent fabric damage and shrinking.

6.7 Cu. Ft. Capacity

Quiet Dry Noise Reduction System

Keep operational sounds inside dryer and out of living areas with sound-absorbing materials around the dryer drum.

Heavy Duty Cycle

Normal Cycle

Dry everyday items like work clothes and sheets with this standard cycle.

Delicate Cycle

Cares for lingerie and other delicate fabrics by drying them at a low temperature.

Timed Dry

Allows you to run the dryer for a set period of time to help synchronize your washing and drying process.

Reversible Door

The reversible door gives you the flexibility to set the dryer door to open to the right or to the left, depending on what best suits your laundry space.

Adjustable End-of-Cycle Signal

Avoid leaving items in the dryer with the adjustable end-of-cycle signal. Thanks to a helpful tone, you'll know when your dry cycle is finished. You can even adjust the volume if you'd like, or completely turn it off.

Interior Drum Light

Interior drum light allows you to see inside the dryer for easy loading and unloading.

Optional Dryer Rack W10121663 Sold Separately

Optional Stack Kit 8572546 Sold Separately

Stack Kit provides a galvanized bracket to stack your new Duet® washer and dryer vertically, dryer over washer. Maybe installed in an enclosure if water supply faucets, electrical outlets and gas line connection (gas dryer only) are available. Installation instructions included. Basic tools required. At least two people needed to lift and move the units for your own safety.

Optional Laundry Tower-WVP8600S Sold Separately

Optional 10" or 15" Pedestals Sold Separately

Pedestals provide an ideal ergonomic solution to ease loading & unloading.

Optional Laundry Worksurface Sold Separately

AccuDry™ Drying System

Measures moisture and temperature levels with two built-in sensors to reduce over drying and automatically stop the cycle when the load is dry. Dryers with the AccuDry™ system use less energy than Whirlpool® top load dryers equipped with the AutoDry™ system.

3 Automatic Cycles

4 Temperature Settings

4-Way Venting

Increases the number of installation options in the home.

Configuration and Overview

Fuel Type :	Electric
UL :	Yes
ADA Compliant :	ADA Height and Side and Front Reach Compliant

Dimensions

Depth :	29
Width :	27
Height :	36

MSRP is Manufacturer's Suggested Retail Price and may not necessarily be the price at which the product is sold in the consumer's area. Dealer alone determines actual price.

®/TM © 2014 Whirlpool. All rights reserved. All other trademarks are owned by their respective companies.