### Sales Selection Sheet Checklist

1 of 42

LOT 654 Model: 20-2217 ALT B HAZELWOOD

PURCHASERS: HASNAIN SAIFUDDIN MEHESRY/TASNEEM, HASNAIN MEHESRY

VENDOR: Heathwood Homes (Whitby) Limited

OPTIONAL WAFFLE CEILING IN GREAT ROOM HARDWOOD FLOORING IN BREAKFAST ROOM ONLY- KITCHEN TO REMAIN CERAMIC TILE **WOB DECK** FINISHED BASEMENT **COLD CELLAR UPGRADED / MODIFIED ELEVATION CORNER UPGRADE** REAR UPGRADE SIDE UPGRADE **CEILING UPGRADE - SMOOTH** MAIN FLOOR (STD FOR SINGLES) SECOND FLOOR **BASEMENT** ADDITIONAL ROUGH-INS 200 AMP SERVICE (STD 100AMP SINGLES) WET BAR ROUGH-IN **HUMIDIFIER (STD FOR SINGLES)** Y Y AIR CONDITIONING (SITE STD) GAS ROUGH-IN **STOVE DRYER** BBQ ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE 6 IN ROUND DUCT (STD FOR SINGLES) 7 IN ROUND DUCT **FULL BASEMENT STAIRS:** All Oak **UPPER BASEMENT STAIRS:** N/A LOWER LEVEL STAIRS: N/A MAIN STAIRS: All Oak MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A Aug 12, 2022 Signature on file Aug 12, 2022 IRIT SALEM **Purchaser: Decor Consultant: Date** Date Aug 12, 2022 MARILYN ROSEN Purchaser: **Date** Date **Heathwood Homes (Whitby) Limited Approved Locked Date:** 

HASNAIN SAIFUDDIN MEHESRY/TASNEEM, HASNAIN MEHESRY

Project: Country Lane Unit: 654, Phase: 6

Model: 20-2217 ALT B HAZELWOOD

ER-OREGANO-MAPLE ***STD***
ER-OREGANO-MAPLE ***STD***
*STD***
HORE SAND ***STD***
HORE SAND 3/4 inch with Mitered
INCH ***UPG***
uatrus U 1 Maxi #401248 (32" x 18") Deep in Stainless Steel
Oust Pan)-Black
30 inch CANOPY CHIMNEY S STEEL ******
Colour and Dimension 1***
***STD***
***UPG***
ble Grey 13
age Red Oak Solid Sculpted RBOR-3/4 inch X 5 inch ***9***
***STD***
***STD***

- Purchasers have been advised: standard fridge opening is a minimum 37  $3/8 \times 73 \ 3/8$  inches. Ice Waterline Rough-In is included.
- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

(	Comment	BREAKFAST ROOM: HARDWOOD	

Foyer			
Flooring	5731	GE.SU.GRY.1313 Sauble Grey 13	
Page 1 of 8			

HASNAIN SAIFUDDIN MEHESRY/TASNEEM, HASNAIN MEHESRY Project: Country Lane Unit: 654, Phase: 6 Model: 20-2217 ALT B HAZELWOOD

Living Room Page 2 of 8

Floor Tile Grout	5731	Grout-(19) Pearl Gray ***STD***
Floor Tile Pattern	5731	STANDARD SQUARE ***STD***
Comment		
Powder Room		
Flooring	5731	GE.SU.GRY.1313 Sauble Grey 13
Floor Tile Grout	5731	Grout-(19) Pearl Gray ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (Colour)	5731	Plumbing Fixtures-WHITE ***STD***
Comment		
Dining Room Flooring Comment	5731	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-HARBOR-3/4 inch X 5 inch ***STD***
Great Room		
Flooring	5731	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-HARBOR-3/4 inch X 5 inch ***STD***
Comment		Gridinates F Existe Fixes Best 6/4 men x e men x
Great Room Fireplace		
Туре	5731	Majestic MERC32 ***STD***
Mantle	5731	NF 17-Paint Grade Mantle-Flat Wall-WHITE ***STD***
Surround (STD)	5731	3 pc- 4 inch Marble Surround-Nero Marquina ***STD***
- Purchasers have been advised	d: heat from the	e FP can damage TV above a FP and items placed on mantle.
<ul> <li>Heathwood and its contractors after closing.</li> </ul>	will not be liab	ble for any damage on items placed/@installed above a FP
Comment		

HASNAIN SAIFUDDIN MEHESRY/TASNEEM, HASNAIN MEHESRY Project: Country Lane Unit: 654, Phase: 6 Model: 20-2217 ALT B HAZELWOOD

Flooring	1111	N/A *****
Comment		
Study		16
Flooring	1111	N/A *****
Comment		
Mud Room and Hall	_	
Flooring	1111	GE.SU.GRY.1313 Sauble Grey 13
Floor Tile Grout	1111	Grout-(19) Pearl Gray ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Main Hall		
Flooring	1111	Red Oak PEARL-Vintage Red Oak Solid Sculpted
		Character PEARL-HARBOR-3/4 inch X 5 inch ***STD***
Comment		
Upper Hall		
Flooring	1111	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-HARBOR-3/4 inch X 5 inch ***STD***
Comment		Character PEARL-HARBOR-3/4 IIICH X 5 IIICH 51D
Comment		
Master Bedroom		DV 40707 D T . NVCTIC DEICE
Flooring	1111	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
Comment		
Bedroom 2		
Flooring	1111	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz
		Poly***STD***
Comment		
Page 3 of 8		

HASNAIN SAIFUDDIN MEHESRY/TASNEEM, HASNAIN MEHESRY Project: Country Lane Unit: 654, Phase: 6 Model: 20-2217 ALT B HAZELWOOD

Bedroom 3		
Flooring	1111	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
Comment		
Bedroom 4		
Flooring	1111	DY 16787 -Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
Comment		
Master Ensuite		
Cabinet Colour/Style	1111	Viking III-SIMCOE-NAVY BLUE-3DL ***STD***
Cabinet Hardware	1111	135-HARDWARE ***STD***
Countertop	1111	4987K-07-Countertop-LECHE VESTA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Floor Tile	1111	TR.ST.GRY.1313-Serpantine-Grey-13x13 ***STD***
Floor Tile Grout	1111	Grout-(27) Silver ***STD***
Floor Tile Pattern	1111	STANDARD SQUARE ***STD***
Shower Wall Tile	8258	TR.ST.GRY.0810-Serpantine-Grey-8 x 10 ***STD***
Shower Wall Tile Grout	8258	Grout-(27) Silver ***UPG***
Shower Wall Tile Pattern	8258	VERTICAL STACKED ***STD***
Shower Floor Tile	8666	OD.ON.DGR.0202.MT.N-Ontario Series Mosaic-Dark Grey-2 x 2 ***1***
Shower Floor Tile Grout	8666	Grout-(19) Pearl Gray ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Jamb(s) and Sill(s)	8666	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	8666	Plumbing Fixtures-WHITE ***STD***
Page 4 of 8		

HASNAIN SAIFUDDIN MEHESRY/TASNEEM, HASNAIN MEHESRY Project: Country Lane Unit: 654, Phase: 6 Model: 20-2217 ALT B HAZELWOOD

Comment		
Main Bath		
Cabinet Colour/Style	8666	Viking III-TRINITY VIVA-SUNSET CRUISE ***STD***
Cabinet Hardware	8666	135-HARDWARE ***STD***
Countertop	8666	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Floor Tile	1111	GE.SU.ATR.1313 Sauble Anthracite (Black) 13
Floor Tile Grout	1111	Grout-(19) Pearl Gray ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	0000	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
vvaii Tiie	9020	Q1.vvv.vvn1.0o10-vveave-vviiile-o x 10 S1D
Wall Tile Grout	9020	Grout-(00) White ***STD***
Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Opt. Shower Floor Tile	1111	N/A *****
Opt. Shower Floor Tile Grout	1111	N/A *****
Opt. Shower Floor Tile Pattern	1111	N/A *****
Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****
Plumbing Fixture (colour)	1111	Plumbing Fixtures-WHITE ***STD***
Comment Colour)	1111	Fluitibility Fixtures-Willie 31D
Comment		
Laundry Room		
	1111	GE.SU.ATR.1313 Sauble Anthracite (Black) 13
Flooring	1111	OL.30.ATT. 1313 Sauble Attititable (Dlack) 13
Floor Tile Grout	1111	Grout-(19) Pearl Gray ***STD***
Floor Tile Pattern	1111	STANDARD SQUARE ***STD***

HASNAIN SAIFUDDIN MEHESRY/TASNEEM, HASNAIN MEHESRY Project: Country Lane Unit: 654, Phase: 6 Model: 20-2217 ALT B HAZELWOOD

Opt. Cabinet Colour/Style - Uppers	1111	N/A *****
Opt. Cabinet Hardware - Uppers - Base Cabinet Not Available	1111	N/A *****
Comment		
Lower Level Recreation Room and Hal	I	
Flooring	9252	DY 16787-Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
Comment		
Lower Level Bedroom	_	
Flooring	9252	DY 16787-Dynasty Tex-MYSTIC BEIGE-40 oz Poly***STD***
Comment		
Lower Level Bathroom	<b>-</b>	
Cabinet Colour/Style	9252	Viking III-TRINITY VIVA-SUNSET CRUISE ***STD***
Cabinet Hardware	9252	135-HARDWARE ***STD***
Countertop	9252	4987K-07-Countertop-LECHE VESTA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Floor Tile	1111	GE.SU.ATR.1313 Sauble Anthracite (Black) 13
Floor Tile Grout	1111	Grout-(19) Pearl Gray ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	9022	QT.WV.TGR.0810-Weave-Tender Grey-8 x 10 ***STD***
Wall Tile Grout	9022	Grout-(00) White ***STD***
Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Opt. Shower Floor Tile	1111	N/A *****
Page 6 of 8		

HASNAIN SAIFUDDIN MEHESRY/TASNEEM, HASNAIN MEHESRY Project: Country Lane Unit: 654, Phase: 6 Model: 20-2217 ALT B HAZELWOOD

Opt. Shower Floor Tile Grout	1111	N/A *****
Opt. Shower Floor Tile Pattern	1111	N/A *****

Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****
Plumbing Fixture (colour)	1111	Plumbing Fixtures-WHITE ***STD***
Comment		

Main Stairs		
Туре	1111	Oak Stairs ***STD***
Colour	7932	Harbor STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Handrail/Pickets/Posts Type	7932	Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)-BLACK ***2***
Handrail/Pickets/Posts Colour	7932	Harbor STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Custom Stain/Paint	1111	N/A *****
Landing(s)	1111	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-HARBOR-3/4 inch X 5 inch ***STD***
Opt. Carpet Runner	1111	N/A *****
Comment		

er Level Stairs		
Туре	1111	Oak Stairs ***STD***
Colour	7932	Harbor STAIN TO COMPLIMENT HARDWOOD AND WILI VARY FROM FLOORING ***99***
Handrail/Pickets/Posts Type	7932	Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)-BLACK ***2***
Handrail/Pickets/Posts Colour	7932	Harbor STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Custom Stain/Paint	1111	N/A *****
_anding(s)	1111	Red Oak PEARL-Vintage Red Oak Solid Sculpted Character PEARL-HARBOR-3/4 inch X 5 inch ***STD***
Opt. Carpet Runner	1111	N/A *****
Comment		

Throughout		
Switches and Plug	1111	Decora White Switches and Plugs ***STD***
Thresholds	1111	Metal Thresholds ***STD***
Underpad	1111	500 Series-Underpad ***STD***
Page 7 of 8	0704	[E 4/4 in als Decahasend and O in als Indeemaked Decahlerand

HASNAIN SAIFUDDIN MEHESRY/TASNEEM, HASNAIN MEHESRY Project: Country Lane Unit: 654, Phase: 6 Model: 20-2217 ALT B HAZELWOOD

	ASNAIN MEHESF	 Date	Country Lane	Date Approved	
Walls - Paint Colour	AIFUDDIN MEHES	Date	Decor Consultant	Date	
Walls - Paint Colour					
Trim - Paint Colour	8704	22-Wall-W	22-Wall-WARM GREY ***STD***		
	8704	Trim-WHI	TE ***STD***		
Trim Size	8704		basepoard and 3 inch integrees **UPG*** / ***STD in Singles		

# 0 of 42



Lot: 654

Model: 20-2217 ALT B HAZELWOOD Project/Phase: Country Lane / 6

### **CABINETRY**

Invoice	Qty.	Description
1101 335,924	1	KITCHEN - CABINETRY-B10-Pots and pans (3) drawers (width min. 60cm/max. 90cm) (size subject to floor plan) VIKING
22Dec22		+SOFT CLOSE SKETCH # 2
1101 335,989	1	KITCHEN - CABINETRY-H36-Base cabinet for built-in microwave/small appliance with trim kit with drawer below (not available for panasonic trimkit NN-TK714SS) (supply specs) (not available in some laminates) VIKING
22Dec22		+ SOFT DRAWER SKETCH # 2
1101 335,956 22Dec22	3	KITCHEN - CABINETRY-D18-EACH Upgrade levels 1-4, 5-7 drawers from Metabox to soft-close Tandembox drawers per drawer (BD x 4, BPP x 3, BT/VT x 1, VBD x 3, VPP x 2) (pull-outs must also be counted and upgraded) (single drawer upgrades are not permitted, all drawers in the room must be upgraded - rooms cannot have both soft-close Tandembox and Metabox) VIKING TO BE USED FOR THE POT AND PAN DRAWER AND FOR THE MICROWAVE DRAWER SKETCH # 2
1101 335,698	4	- PLUMBING - AMERICAN STANDARD - SINK - ABOVE COUNTER SINK - BOULEVARD - WHITE - MODEL 0641 004 020 4 INCH CENTRES - STD COUNTERTOPS
22Dec22 **		2X MASTER BATHROOM 2X MAIN BATHROOM  CABINETRY-See specs
1101 335,750	1	KITCHEN - PLUMBING - KITCHEN SINK UPGRADE - BLANCO KITCHEN SINK QUATRUS U 1 MAXI #401248 (32 INCH X 18 INCH ) UNDERMOUNT 1 BOWL 9 INCH DEEP IN STAINLESS STEEL -
22Dec22 **		CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink
1101 336,877 22Dec22	1	KITCHEN - Cabinetry - Opt. Light Valance Trim and Luminiz LED Slimline Strip Light - UPG
1101 335,906	1	KITCHEN - CABINETRY-A11-Upper angle corner per unit VIKING
22Dec22		SKETCH # 2 FRAMING-Notify; DRYWAL-Notify; PAINTING-Notify
1101 335,933	1	KITCHEN - CABINETRY-B26-Base pie-cut corner VIKING
22Dec22		SKETCH # 2

### **CERAMICS**

Invoice	Qty.	Description
1101 336,226	1	BREAKFAST - Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Optional Break - UPG
22Dec22 **		BREAKFAST ROOM ONLY - KITCHEN TO REMAIN TILE SEE SKETCH # 2 CERAMICS-Delete Std Ceramics
1101 340,087 22Dec22	1	Master Ensuite Shower Wall - Ceramics - Upgrade Grout - Master Ensuite Shower Wall - UPG
1101 339,990 22Dec22	1	Master Ensuite Shower Floor - Ceramics - Upgrade 1 Tile - Master Ensuite Shower Floor - UPG

DisciplineMS.rpt 13dec21 Page 1 of 3

# construction summary of 42



Lot: 654

Model: 20-2217 ALT B HAZELWOOD

Project/Phase: Country Lane / 6

### **DRYWALL**

Invoice	Qty.	Description
1101	1	KITCHEN - CABINETRY-A11-Upper angle corner per unit VIKING
335,906		
22Dec22		SKETCH # 2
**		FRAMING-Notify; DRYWAL-Notify; PAINTING-Notify

### **ELECTRICAL**

ELECTRICAL				
Invoice	Qty.	Description		
1101 335,575	1	KITCHEN - ELECTRICAL - EXTRA WALL INTERIOR OUTLET (120V/15A) ON A SEPARATE CIRCUIT (ON ARCFAULT)		
22Dec22		TO BE USED FOR THE MICROWAVE SKETCH # 2		
1101 335,584	1	THROUGHOUT - ELECTRICAL - POTLIGHT BUNDLE - 20 X T477GR-W 4 INCH LINE VOLTAGE POTLIGHTS INCLUDES 4 SWITCHES MAIN FLOOR (SEE SLIM LINE FOR BASEMENT)		
22Dec22		6 X TO BE INSTALLED IN THE GREAT ROOM- USE EXISTING SWITCHED PLUG 4X TO BE INSTALLED IN THE DINING ROOM- USE SEPARATE SWITCH 4X TO BE INSTALLED IN THE BREAKFAST ROOM- USE SEPARATE SWITCH 4X TO BE INSTALLED IN THE REC ROOM- USE SEPARATE SWITCH 2XTO BE INSTALLED IN THE KITCHEN- USE SEPARATE SWITCH SEE SKETCH #'S 1 AND 2		
1101 335,683	1	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * STANDARD 220V WILL STAY		
22Dec22 **		ELECTRICAL-Notify		
1101 336,877	1	KITCHEN - Cabinetry - Opt. Light Valance Trim and Luminiz LED Slimline Strip Light - UPG		
22Dec22 **				
1101 335,588	1	KITCHEN - ELECTRICAL - RELOCATION OF SWITCHES/LIGHTS (MUST SPECIFY LOCATION) - NOTE: PLUGS CANNOT BE RELOCATED- MUST PURCHASE ADDITIONAL OUTLET.		
22Dec22		RELOCATE STD. KITCHEN LIGHT TO BE CENTERED +/- ABOVE THE BREAKFAST BAR- USE STD. KITCHEN LIGHT SWITCH SEE SKETCH # 2		

### **FRAMING**

Invoice	Qty.	Description
1101	1	GREAT ROOM - Waffle Ceiling - Install Waffle Ceiling. Coffered ceiling is standard - GREAT ROOM - UPG
338,719		
22Dec22		SKETCH # 2
**		FRAMING-Coffered Ceiling to accommodate Waffle; PAINTING-Paint mouldings (waffle) in Great Room
1101	1	KITCHEN - CABINETRY-A11-Upper angle corner per unit VIKING
335,906		
22Dec22		SKETCH # 2
**		FRAMING-Notify; DRYWAL-Notify; PAINTING-Notify

### **GRANITE**

Invoice	Qty.	Description
1101 335,750		KITCHEN - PLUMBING - KITCHEN SINK UPGRADE - BLANCO KITCHEN SINK QUATRUS U 1 MAXI #401248 (32 INCH X 18 INCH ) UNDERMOUNT 1 BOWL 9 INCH DEEP IN STAINLESS STEEL -
22Dec22 **		CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink

DisciplineMS.rpt 13dec21 Page 2 of 3

Printed and Sent: 22-Dec-22

# 12 of 42 construction summary



Lot: 654

Model: 20-2217 ALT B HAZELWOOD Project/Phase: Country Lane / 6

### HARDWOOD

Invoice	Qty.	Description
1101	1	BREAKFAST - Hardwood - 5 in Vintage Sculpted NSS Red Oak UVF-Oil or Pearl - Optional Break - UPG
336,226		
22Dec22		BREAKFAST ROOM ONLY - KITCHEN TO REMAIN TILE SEE SKETCH # 2
		CERAMICS-Delete Std Ceramics

### **HEATING / AIR CONDITIONING**

Invoice	Qty.	Description
1101 335,683		KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * STANDARD 220V WILL STAY
22Dec22		
		ELECTRICAL-Notify

### **PAINTING**

Invoice	Qty.	Description
1101	1	GREAT ROOM - Waffle Ceiling - Install Waffle Ceiling. Coffered ceiling is standard - GREAT ROOM - UPG
338,719		
22Dec22		SKETCH # 2
**		FRAMING-Coffered Ceiling to accommodate Waffle; PAINTING-Paint mouldings (waffle) in Great Room
1101	1	KITCHEN - CABINETRY-A11-Upper angle corner per unit VIKING
335,906		
22Dec22		SKETCH # 2
**		FRAMING-Notify; DRYWAL-Notify; PAINTING-Notify

### **PLUMBING**

Invoice	Qty.	Description
1101 335,698 22Dec22		- PLUMBING - AMERICAN STANDARD - SINK - ABOVE COUNTER SINK - BOULEVARD - WHITE - MODEL 0641 004 020 4 INCH CENTRES - STD COUNTERTOPS  2X MASTER BATHROOM 2X MAIN BATHROOM  CABINETRY-See specs
1101 335,750 22Dec22		KITCHEN - PLUMBING - KITCHEN SINK UPGRADE - BLANCO KITCHEN SINK QUATRUS U 1 MAXI #401248 (32 INCH X 18 INCH ) UNDERMOUNT 1 BOWL 9 INCH DEEP IN STAINLESS STEEL -  CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink

### **SECURITY**

Invoice	Qty.	Description
1237	1	- SECURITY - SECURITY CAMERA ROUGH-IN
335,879		
14Dec22		AT REAR PATIO DOOR SEE SKETCH # 2

### WAFFLE CEILING

WAFFI	WAFFLE CEILING			
Invoice	Qty.	Description		
1101 338,719	1	GREAT ROOM - Waffle Ceiling - Install Waffle Ceiling. Coffered ceiling is standard - GREAT ROOM - UPG		
22Dec22		SKETCH # 2		
		FRAMING-Coffered Ceiling to accommodate Waffle; PAINTING-Paint mouldings (waffle) in Great Room		

DisciplineMS.rpt 13dec21 Page 3 of 3

Printed and Sent: 22-Dec-22

Model: 20-2217 ALT B HAZELWOOD

13 of 42


### The Hazelwood

Sketch #1

ELEVATION B: 2,920 SQ. FT. [Includes 695 sq. ft. of opt. finished Lower Level ]

THE TRAILS OF COUNTRY LANE

20-2217 ALT ELEV. B

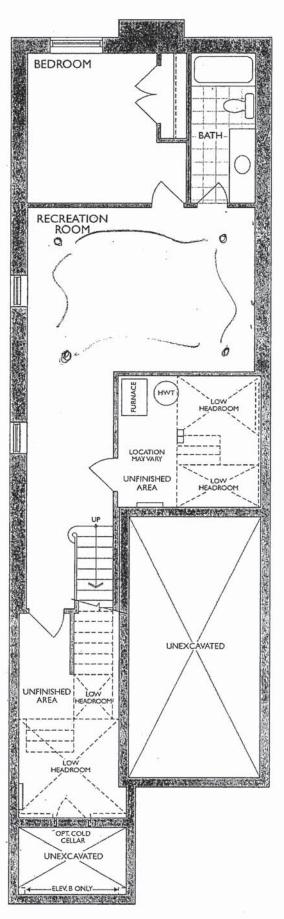

4 POT LIGHTS ON SEPARATE SWITCH

LOWER LEVEL ELEV. A & B

Model: 20-2217 ALT B HAZELWOOD

## 14 of 42


### The Hazelwood

Sketch#2

ELEVATION B: 2,920 SQ. FT.

{ Includes 695 sq. ft. of opt. finished Lower Level }

### THE TRAILS OF COUNTRY LANE

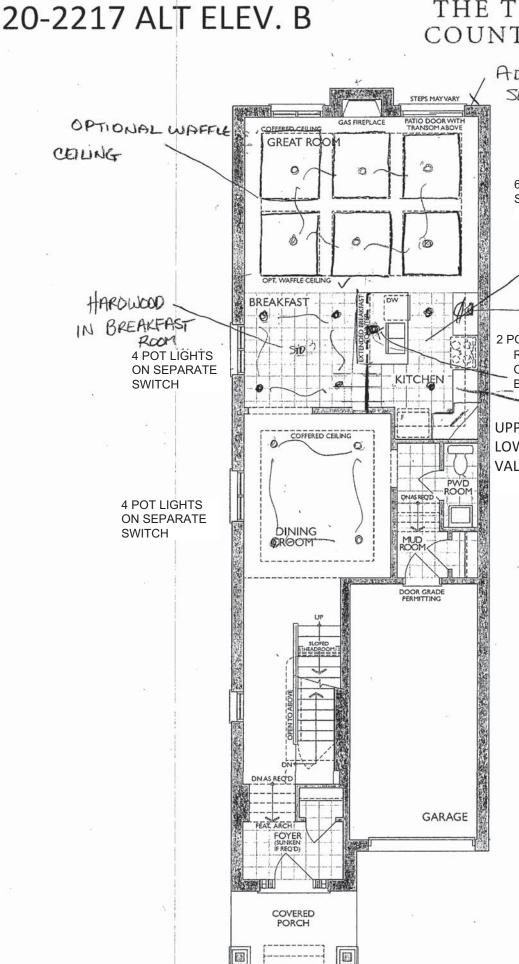

GROUND FLOOR

ELEV. B

ADDITIONAL REAR SECURITY CAMERA ROUGH-IN

6 POT LIGHTS ON EXISTING SWITCHED PLUG

MICROWAVE BASE
CABINET AND PLUG

2 POT LIGHTS ON SEPARATE SWITCH
RELOCATE STD. KITCHEN LIGHT TO BE
CENTERED +/- ABOVE THE BREAKFAST
BAR- USE STD. KITCHEN LIGHT SWITCH
Pots and pans

UPPER ANGLE LOWER BASE PIE CUT VALANCE TRIM AND LIGHTS

Hagnam

Legal F

Model: 20-2217 ALT B HAZELWOOD

15 of 42


### The Hazelwood

Sketch # 3

ELEVATION B: 2,920 SQ. FT. { Includes 695 sq. ft. of opt. finished Lower Level }

THE TRAILS OF COUNTRY LANE

### 20-2217 ALT ELEV. B

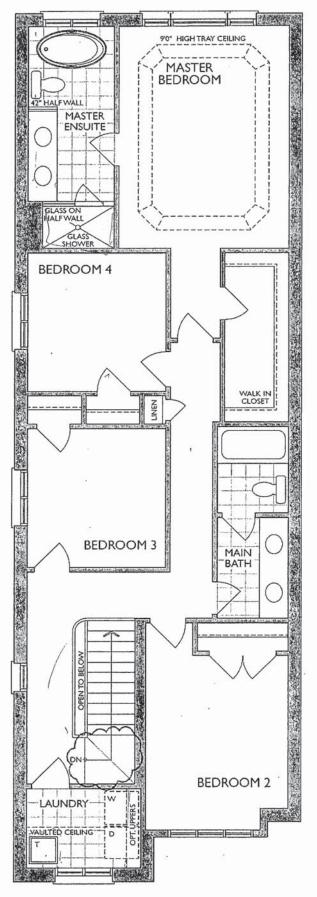

SECOND FLOOR ELEV. B

\* last step change to winder stair

Jaman

Project: Country Lane Unit: 654, Phase: 6 Model: 20-2217 ALT B HAZELWOOD

16 of 42





NFAS NF17 Mantel

Model: 20-2217 ALT B HAZELWOOD

## 17 of 42



### Sink Specifications

Colour SKU brushed finish 401248

### Design and planning tips

Min cabinet size: 36 in (915 mm)Bowl Depth: 9 in (230.0 mm)

### Specifications:

Installation clips, Sink template, Installation instructions, 3  $\frac{1}{2}$ " (90 mm) stainless steel strainer

Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer.

Codes/Standards: ASME A112.19.3-2017/ CSA

B45.4-17

### **Optional Accessories**

Elevated Grid 406346 Workstation 406344 CapFlow Strainer Cover 517666 Ash Cutting Board 406345 Sink Grid 402125

### QUATRUS U 1 SUPER SINGLE Stainless steel brushed finish



### Warranty

Limited lifetime warranty on all sinks and faucets. One-year warranty on all accessories and soap dispensers.

### Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME, IAPMO and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.



Need support? Learn more by watching our sink & faucet How-to videos: https://www.blanco.com/ca-en/support/how-to-videos/how-to-videos-for-sinks/



BLANCO Canada Inc 100 Corporation Drive Brampton ON L6S 6B5 Tel & Fax

Tel: 905-494-2400 Toll free: 1-877-425-2626 Fax: 905-494-2425 Toll free: 1-877-825-2626

While BLANCO strives to provide accurate information, all images and dimensions in this document are intended for reference only and are subject to change at any time without notice. This document is not intended for use as an installation guide. For technical installation details, refer to installation instructions provided with the product. BLANCO assumes no responsibility for the use of superseded or voided specifications.

Model: 20-2217 ALT B HAZELWOOD

### 18 of 42

### MOEN

#### **FAUCET DESCRIPTION**

Reflex™ pulldown system offers smooth operation, easy movement and secure docking Power Clean™ spray technology Metal construction with various finishes identified by suffix

Quick connect installation

Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings

High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout

Faucet designed for handle to be mounted on right side only

#### **OPERATION**

Lever style handle

Temperature controlled by 100° arc of handle travel

Operates with less than 5 lbs. of force

• Operates in stream or spray mode in the pullout or retracted position **FLOW** 

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

#### **STANDARDS**


Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

### Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet** 

Models: 7565 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



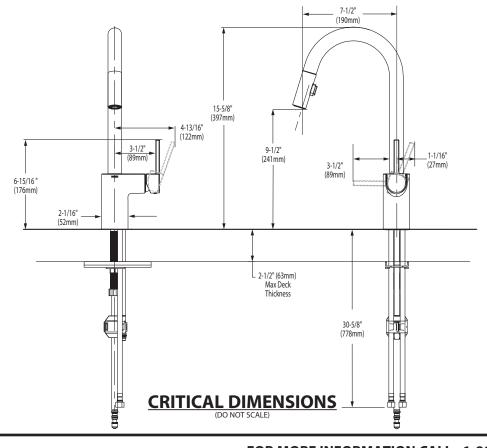

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20





### BOULEVARD® PEDESTAL SINK VITREOUS CHINA

#### **BOULEVARD® PEDESTAL SINK**

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD • 0641.400 Faucet holes on 4" (102mm) centers

### ☐ 0641.100 Center hole only

- · Classic styled rectangular pedestal lavatory
- Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an **above counter** sink or a **drop-in** sink (with u-shaped cut out)

### **Nominal Dimensions:**

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ **0010.000** Pedestal only

### Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

### **Compliance Certifications -**

### Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

### To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS


<sup>\*</sup> See faucet section for additional models available

Model: 20-2217 ALT B HAZELWOOD

20 of 42



### **BOULEVARD®** PEDESTAL SINK

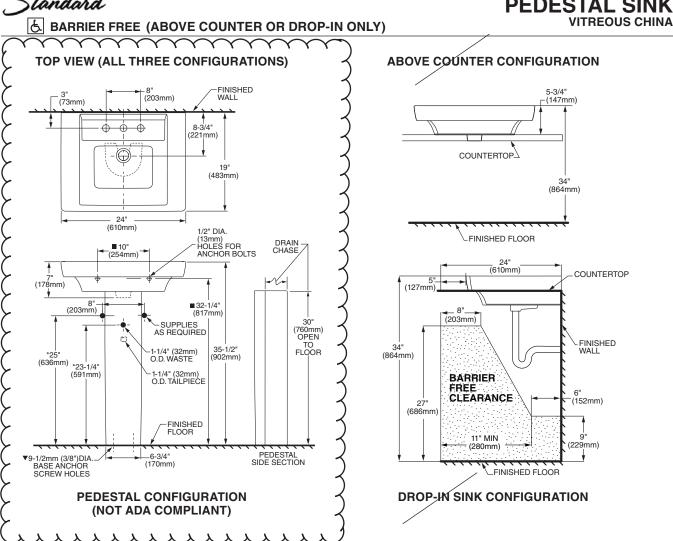

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.



MASTER ENSUITE X 2 MAIN BATH X 2

BOULEVARD®
PEDESTAL SINK
VITREOUS CHINA

**barrier free (above counter or drop-in only)** 

### **BOULEVARD® PEDESTAL SINK**

- □ **0641.800** Faucet holes on 8" (203mm) centers (Illustrated)
- □ 0641.400 Faucet holes on 4" (102mm) centers
- ☐ **0641.100** Center hole only
  - · Classic styled rectangular pedestal lavatory
  - Vitreous china
  - Rear overflow
  - Supplied with mounting kit
  - Right Height® for greater comfort during use
  - Faucet ledge with large deck area (faucet not included)
  - Design coordinates with Boulevard® Toilet
  - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

### **Nominal Dimensions:**

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- □ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- □ 0010.000 Pedestal only

### Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

### Compliance Certifications -


### Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

# To Be Specified: □ Color: □ White □ Linen □ Faucet Finish: □ Supplies: □ 1-1/4" Trap: □ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS



<sup>\*</sup> See faucet section for additional models available

Model: 20-2217 ALT B HAZELWOOD

22 of 42

### American Standard



### **BARRIER FREE**

### **COLONY™ COUNTERTOP SINK**

VITREOUS CHINA

### **COLONY COUNTERTOP SINK**

- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)

☐ 0346 803 → Faucet holes on 203 nm (6"), centres	$\mathcal{L}$
O346 403 (Illustrated) Faucet holes on 102mm (4") centres	3
MED 634606HUUUUUU	~


Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep



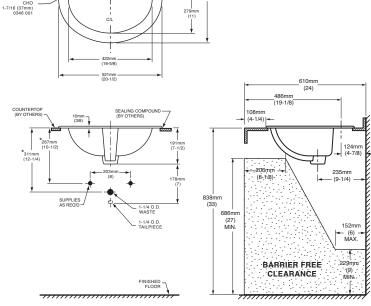

### COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

### To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen
- □ Faucet\*:
- □ Faucet Finish:
- Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198 .

<sup>\*</sup> See faucet section for additional models available

Model: 20-2217 ALT B HAZELWOOD

# 23 of 42



### DEMI™ **Product Specification Sheet**

### Two Piece Freestanding Collection

CF2007 Two Piece Freestanding Soaker


Size: 60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


#### TWO PIECE ASSEMBLY

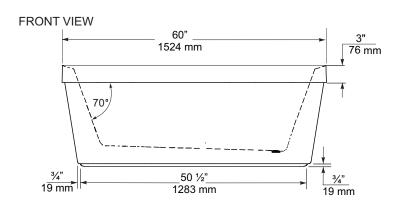

### **END VIEW**



### **TOP VIEW**

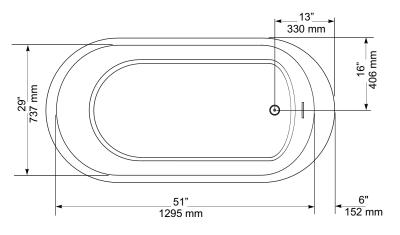

**GENERAL SPECIFICATIONS** 

Average Weight 90 lb 41 kg Bathing Well at bottom 43"x 20" 1092 x 508 mm 195 litres Capacity Drain to Overflow Water Depth Drain to Overflow 406 mm Drain Opening (dia.) 51 mm Overflow Opening 2 1/4"x 1/2" 57 x 13 mm Drain to Floor Clearance

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary  $\pm$  %" (6 mm). Weight may vary  $\pm$  5 lb ( 2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

**Compliance Certifications -**

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





Fax: 416.231.0929 www.mirolin.com

*Customer Service:* 416.231.5790 Canada, U.S.A.: 800.**MIROLIN**(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018

Model: 20-2217 ALT B HAZELWOOD

## 24 of 42

### American Standard

Style That Works Better

### FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


### FloWise™ DUAL FLUSH ELONGATED TOILET

### **2476 216**

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

### **Separate Component Parts:**

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank



- **☐** 3067 316 Elongated Bowl
- **4035 516** Lined Tank

Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


### **Compliance Certifications -**Meets or Exceeds the Following Specifications:


- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

### To Be Specified

- Colour: 020 White
- Supply with stop:







NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are perimenal and may use within the prepare of the present IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by Anki Graindan A 112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

### UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284

© 2008 American Standard

Model: 20-2217 ALT B HAZELWOOD

## 25 of 42

### **MOEN**<sup>®</sup>

#### DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted

### **OPERATION**

- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel **FLOW**

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

#### CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations


- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe
- Drinking Water Act

  ADA for lever handle

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

### Specifications



**CHATEAU® Single-Handle Lavatory Faucet** 

### with Metal Waste Assembly

Model: L4625 series L4631BC **Bulk Packed (12 per carton):** 

with 50/50 Waste Assembly **Bulk Packed (12 per carton):** 


L64624 series

L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



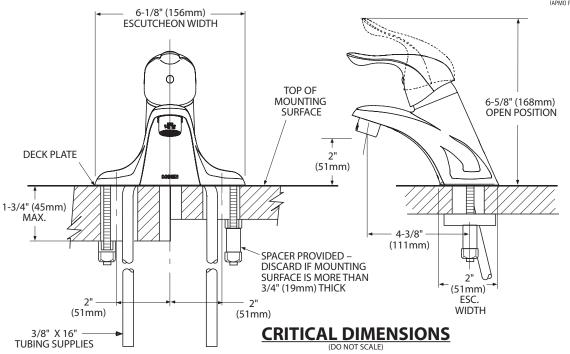

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev 8/15

Model: 20-2217 ALT B HAZELWOOD

## 26 of 42



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

### **OPERATION**

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

#### **CARTRIDGE**

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

### **STANDARDS**

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

### ADA ( for lever handle

6.5" (165mm) ESC. DIAM.

### **WARRANTY**

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

4-1/2" (114mm)

WALL OPENING

(133mm

7-1/2" (190mm)

to the original consumer purchaser 5 year warranty if used in commercial installations

### **Specifications**






### CHATEAU° POSI-TEMP° Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim

(Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

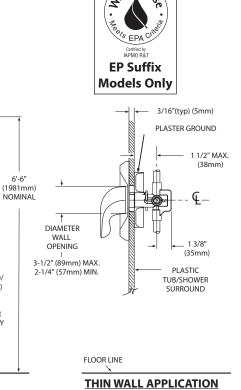

**THICK WALL APPLICATION CRITICAL DIMENSIONS** 

FLOOR LINE

— 1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

2 1/2" MAX. (63mm)

SHOWER

48" (1219mm) 32" (813mm)

AND TUB ONLY

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

Model: 20-2217 ALT B HAZELWOOD

### 27 of 42

### **MOEN**<sup>®</sup>

### DESCRIPTION

 Metal construction with various finishes identified by suffix OPERATION

- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


#### **STANDARDS**

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

### **WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


### Specifications




### CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

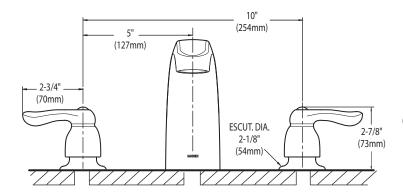



### CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 3/19

Model: 20-2217 ALT B HAZELWOOD

## 28 of 42

### SC(B)514 | ALITO Collection





### **Wall Mount**

The SC(B)514 makes a statement of strength and power with a bold frame and 550 CFM fan. Features mesh or baffle filters, two bright LED lights and a three-speed panel for total control. It is also fitted with a time-delay OFF feature up to nine minutes.

### **Green Features**



3 Speed Push Button Control Panel



Time-Delay OFF Feature



Long-Lasting LED Lights



Grease Cup



Model	Colour	Ducting	Filters	Size	CFM
-------	--------	---------	---------	------	-----

	1	1	I .	1	I
SCB51430	Stainless Steel	6"	Baffle	30"	550
SCB51436	Stainless Steel	6"	Baffle	36"	550

### Cyclone Range Hoods Inc.

Model: 20-2217 ALT B HAZELWOOD


## 29 of 42


### SC(B)514 | ALITO Collection



### **Features**

- · Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- · Quick release aluminum mesh filters
- · Standard chimney fits up to 9 ft. ceiling
- · Up to 9 minutes time-delay OFF feature
- Plug-in connection





### **Options**

Filters:

SCB514 - Quick Release Stainless Steel Baffle Filters

Chimney Flues:

B2.CH16 - short (7'-8' ceilings)

B2.CH22 - standard (8'-9' ceilings)

B2.CH32 - extended (9'-11' ceilings)

Widths: 30", 36"

### **Specifications**

Air Flow Volume: 550 CFM

Electrical Connection: 120 V/60 Hz

Power Consumption: 300 Watts

Current: 2.5 Amps

Fan Speed: 1599 RPM

Fan Type: Centrifugal Blower

· Finishes: Stainless Steel

Ducting: 6" Round

Noise Level: Min. 2 Sones
 Max. 6 Sones



Model: 20-2217 ALT B HAZELWOOD

30 of 42



# Whiripool® 20 cu. ft. French Door Refrigerator WRF540CWH



Fingerprint-Resistant Stainless WRF540CWHZ

### Also available in:

White	WRF540CWHW
Black	WRF540CWHB
Fingerprint- Resistant Black	WRF540CWHV

Capacity			
Total Capacity	20 cu. ft.		
Refrigerator Capacity	14 cu. ft.		
Freezer Capacity	6 cu. ft.		
General Features & Properti	es		
Interior Water Dispenser wit Water Filtration	h EveryDrop®		
Full-Width, Temperature-Co	ontrolled Drawer		
Frameless Glass Shelves			
Gallon Door Bins			
Accu-Chill™ Temperature Management System			
Adaptive Defrost			
FreshFlow™ Produce Preserver			
LED Interior Lighting			
Designed, Engineered and Assembled in the U.S.A.			
Electrical Details			
Amps	20		
Volts	115		
Certifications			
ENERGY STAR® Certified	Yes		

Technical Details	
Refrigerator Type	French Door
Number of Doors	3
Number of Interior Refrigerator Shelves	5
Number of Refrigerator Door Bins	2 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1 Wire, 1 Plastic
Lighting Type	LED
Ice Maker	Factory Installed
Ice Maker Location	Freezer
Dispenser Type	Interior Water
Dimensions	
Product Dimensions (H x W x D)	70-1/8" x 35-5/8" x 29 3/8"
Depth with Door Open 90°	43"
	Allow extra 1/2" on sides

and top

Allow extra 1" on rear

### Reference Material

**Cutout Dimensions** 

**Dimension Guide** 

Use & Care Guide

**Energy Guide** 

Warranty

### Key Features & Benefits

Stainless

### **Fingerprint Resistant**


Resists fingerprints and smudges with an easy-to-clean finish.

### **Counter Depth Design**

Add additional kitchen space with styling that fits virtually flush with the countertop.

### **Humidity-Controlled Crispers**

Store fruits and veggies in their ideal environment.



NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRF540CWHSPECSHEETV01.


Model: 20-2217 ALT B HAZELWOOD




### French Door Bottom Mount Refrigerator

WRF532SMH, WRF540CWH, WRF535SMH

### PRODUCT DIMENSIONS



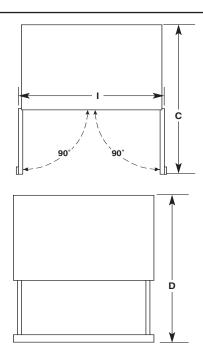

Model Number	WRF532SMH	WRF535SMH	WRF540CWH
Model Size	22.1 cu. ft.	25.2 cu. ft.	20.0 cu. ft.
Height - Overall "A"	701/8"	701/8"	701/8"
	(178.1 cm)	(178.1 cm)	(178.1 cm)
Height - Top of	68 <sup>7</sup> / <sub>8</sub> "	68½"	68%"
Cabinet "B"	(174.9 cm)	(174.9 cm)	(174.9 cm)
Depth - Doors Open	471/8"	481/8"	43"
90° "C"	(119.7 cm)	(122.2 cm)	(109.2 cm)
Depth - Drawer	521/8"	52½"	45¾"
Open "D"	(132.4 cm)	(132.4 cm)	(115.3 cm)
Depth - With	34 <sup>1</sup> / <sub>2</sub> "	35 <sup>1</sup> / <sub>2</sub> "	30 <sup>1</sup> / <sub>2</sub> "
Handles "E"	(87.4 cm)	(89.9 cm)	(77.5 cm)
Depth - Without	32"	33"	26 <sup>7</sup> / <sub>8</sub> "
Handles "F"	(81.3 cm)	(83.8 cm)	(68.3 cm)
Depth - Cabinet	28 <sup>1</sup> / <sub>8</sub> "	29 <sup>1</sup> / <sub>8</sub> "	24 <sup>1</sup> / <sub>8</sub> "
Only "G"	(71.3 cm)	(73.9 cm)	(61.2 cm)
Width - Cabinet "H"	325/8"	35½"	35½"
	(82.9 cm)	(90.5 cm)	(90.5 cm)
Width - Door Open	40%"	43%"	43%"
90° "I"	(102.6 cm)	(110.2 cm)	(110.2 cm)

### **AWARNING**



**Electrical Shock Hazard** 

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

**Electrical:** A 115 V, 60 Hz, AC only 15 A or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**NOTE:** Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

**Water:** A cold water supply with water pressure between 35 psi and 120 psi (241 kPa and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 psi and 120 psi (241 kPa and 827 kPa).

### **Reverse Osmosis Water Supply:**

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 psi to 60 psi (276 kPa to 414 kPa).

Model: 20-2217 ALT B HAZELWOOD



### **French Door Bottom Mount Refrigerator**

#### **LOCATION REQUIREMENTS**


### AWARNING



#### **Explosion Hazard**

Keep flammable materials and vapors, such as gasoline, away from refrigerator.

Failure to do so can result in death, explosion, or fire.



**IMPORTANT:** This refrigerator is designed only for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave  $2\frac{1}{2}$ " (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 20-2217 ALT B HAZELWOOD

33 of 42

### **DIMENSION GUIDE**

**WARNING:** To reduce the risk of fire, electric shock, or injury to persons, read the IMPORTANT SAFETY INSTRUCTIONS, located in your appliance's Owner's Manual, before operating this appliance.


This manual covers several models. Your model may have some or all of the items listed. Refer to this manual or the Frequently Asked Questions section of our website at **www.whirlpool.com** for more detailed instructions. In Canada, reference the Customer Service section at **www.whirlpool.ca**.

#### **PRODUCT MODEL NUMBERS**

WEE745H0L, YWEE745H0L

#### **PRODUCT DIMENSIONS**

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.

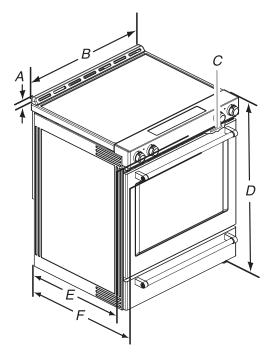

- A. 13/16" (3.0 cm) height from cooktop to top of vent
- B. 29<sup>7</sup>/<sub>8</sub>" (75.9 cm)
- C. Model/serial/rating plate (located behind the oven door on the top right-hand side of the oven frame)
- D. 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in\*
- E. 285/16" (71.9 cm) maximum depth from front of console to back of range
- F. 287/8" (73.3 cm) maximum depth from handle to back of range

**IMPORTANT:** Range must be level after installation. Follow the instructions in the "Level Range" section of your Owner's Manual. Using the cooktop as a reference for leveling the range is not recommended.

\*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

Model: 20-2217 ALT B HAZELWOOD

### 34 of 42





Monochromatic Stainless Steel WDF540PADM

#### Also available in:

White	WDF540PADW	
Black	WDF540PADB	

Capacity			
Total Place Settings	15		
General Features & Properti	es		
Soil Sensor			
In-Door Silverware Basket			
Sani Rinse Option			
Normal Cycle			
Heavy Cycle			
High Temperature Wash Option			
Heated Dry Option			
ENERGY STAR® Certified			
Industry's Best Selling Dish	washer Brand†		
Electrical Details			
Amps	15		
Volts	120		
Hz	60		
Certifications			
ENERGY STAR® Certified	Yes		

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Electronic
Number of Wash Cycles	5
Number of Options	5
dBA	53
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	3
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
Reference Material	

**Dimension Guide** 

Install Guide

Use & Care Guide

**Energy Guide** 

Warranty

### Key Features & Benefits

### **Sensor Cycle**


Automatically get the right wash and dry settings for each load with two sensors that measure temperature, soil level and load size during prewash and the wash cycle.

### 1-Hour Wash Cycle

Clean the dishes you need fast with a cycle that thoroughly takes care of plates, pans and glasses in just an hour."

### **Cycle Memory**

Quickly start your dishwasher with one button. It automatically remembers the last cycle you picked so it's stored and ready to go.



<sup>\*</sup>Per IEC standards. \*\*Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of unit sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. 

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF540PADSPECSHEETV01.

Model: 20-2217 ALT B HAZELWOOD

# 35 of 42



#### PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.


If direct wiring dishwasher: Use flexible, armored,

or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for

your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit




instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90°elbow with ¾"N.P.T. external pipe threads on one end. Do not solderwithin 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use ½" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

#### PRODUCT DIMENSIONS

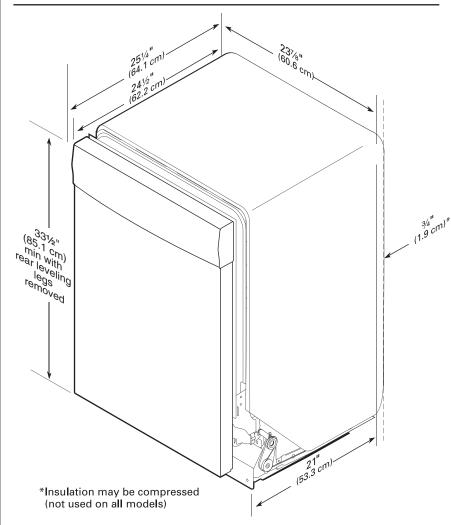


Model: 20-2217 ALT B HAZELWOOD

#### **CABINET CUTOUT DIMENSIONS**

**NOTE**: Shaded areas of cabinet walls show where utility connections may be installed.

- \*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.
- \*\*Minimum, measured from narrowest point of opening.

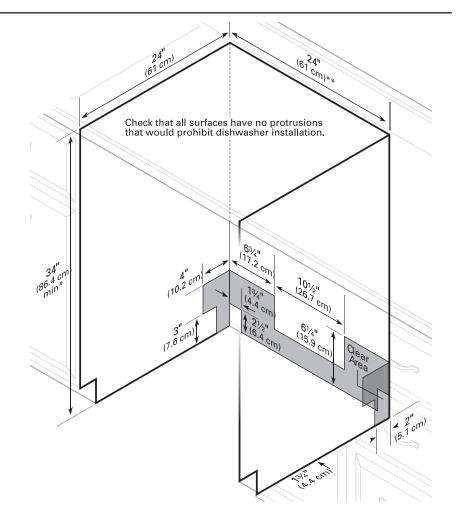


Model: 20-2217 ALT B HAZELWOOD

37 of 42

### 5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

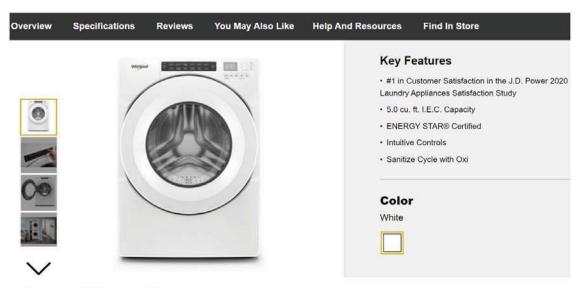

### **Specifications**

### Width: 6858.00, 27.0" Centimeters, Inches

### Depth: 8016.88, 31-9/16" Centimeters, Inches


Dimensions		
Capacity	4-3/10	
Depth	8016.88 cm, 31-9/16 in	
Gross Weight	97068688.00 kg, 214 lbs	
Net Weight	92532768.00 kg, 204 lbs	
width Appearance	6858.00 cm, 27.0 in	
LCD Touch Screen	No	
Window	Yes	
Details		
Advanced Vibration Control™	No	
Dispense System	Detergent, Fabric Softener & Bleach	
Eco Monitor/Efficiency Monitor	No	
Hoses Included	4ft 4in Drain Hose Included	
Internal Heater	No	
Maximum Spin Speed	1160	
Out Of Balance Sensing	Yes	
Water Factor	3-1/5	
Cycles and Options		
Number Of Wash Cycles	35	
Electrical		
Power Cord Included	Yes	
Controls		
Automatic Temperature Controls	Yes	
Control Location	Front	
LCD Touch Screen	No	

### Compatibility Works With No **Options** Number Of Washer Options **Features** Stackable Yes Water Faucet No Cycles Number Of Wash Cycles 35 Exterior Lid/Door Lock Yes Lid/Door Swing Left Modifiers Delay Start No Number Of Rinse Options Number Of Soil Levels 3 Number Of Spin Speeds Number Of Wash/Rinse Temperatures 4 Pre Soak Yes Temperature Selections Hot, Cold, Cool, Warm


Model: 20-2217 ALT B HAZELWOOD

## 38 of 42


### Recessed area or closet installation (stacked washer and dryer)

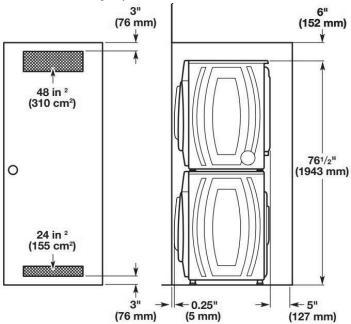


#### **Custom under counter installation**

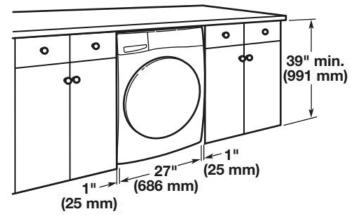

### Recessed area or closet installation (washer only)

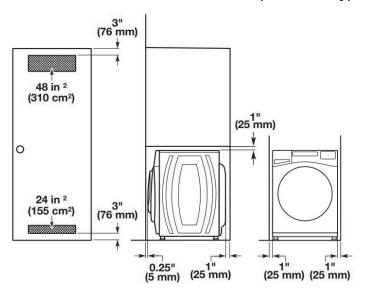

### **Custom cabinet installation**

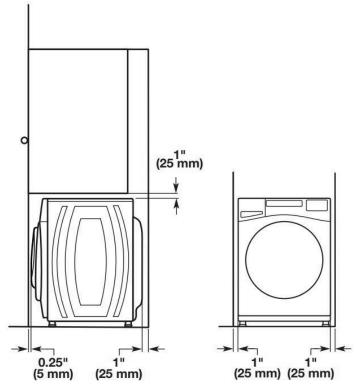


### **Drain System**

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of o leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

**IMPORTANT:** To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

### Floor standpipe drain system

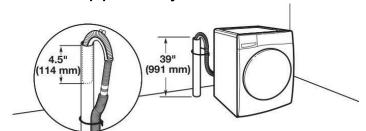


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts"

Model: 20-2217 ALT B HAZELWOOD


## 39 of 42

### Wall standpipe drain system

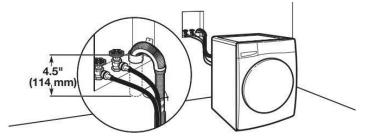


See requirements in "Floor standpipe drain system."


### Laundry tub drain system



Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

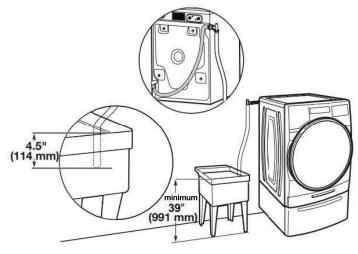

### Floor drain system

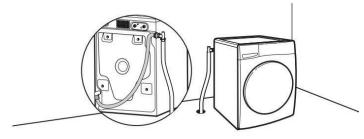

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

### **Electrical Requirements**

### AWARNING



#### **Electrical Shock Hazard**

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

### **GROUNDING INSTRUCTIONS**

### For a grounded, cord-connected appliance:

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

**WARNING:** Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

### For a permanently connected appliance:

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

### **SAVE THESE INSTRUCTIONS**

Model: 20-2217 ALT B HAZELWOOD

40 of 42

### WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HN



Define Your Style

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

### Dimensions

Dimensions			
Depth	78.74 cm, 31.0 in		
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in		
Height	98.42 cm, 38-3/4 in		
Width	68.58 cm, 27.0 in		
Configuration and Overview			
Fuel Type	Electric		
Cycles and Options			
Cycles and Options			
Cycles and Options  Cycle Time Remaining	Yes		
	Yes No		
Cycle Time Remaining			
Cycle Time Remaining Lint Filter Indicator	No		
Cycle Time Remaining Lint Filter Indicator Number of Dryer Cycles	No 36		

### Electrical

Maximum Vent Length

Venting Direction

Hz	60

Left, Right, Bottom, Rear

Power Cord Included Yes

Model: 20-2217 ALT B HAZELWOOD

# 41 of 42

### SHARP

### SMD2477ASC

24-INCH MICROWAVE DRAWER® OVEN



### TAKE YOUR MICROWAVE TO A BETTER PLACE

It's your kitchen, your design and your lifestyle. Sharp's Microwave Drawer Oven allows you to focus on the design elements you prefer by removing the microwave from sightlines and enabling more design versatility. The Microwave Drawer offers flexible placement options below an island, peninsula, or standard cabinetry, and can also be installed adjacent to your wall oven. The Microwave Drawer allows you to showcase your design savvy and create a kitchen that flows with your lifestyle.

Sharp introduces the next generation of this successful appliance—model SMD2477ASC - a 24" microwave drawer with a simpler and a sleeker design to match more built-in appliances.

### **Design Flexibility**

Sharp's Microwave Drawer product expands the option for microwave placement in almost any kitchen plan—it's a perfect choice for open-plan kitchens, islands, peninsulas, and a great addition to wet bars, family rooms and home theatres.

### **Location and Counter Space Saving**

You may place the drawer under a counter, cooktop or wall oven or above a warming drawer without a built-in kit, additional trim or venting. Sharp microwave drawer provides the best solution for a cleaner, uncluttered counter space.

### SHARP's Exclusive AutoTouch™ System

Sharp's exclusive AutoTouch $^{\text{TM}}$  system allows you to open and close the drawer automatically at one-finger operation by pressing a button on the control panel.

### **New Hidden Control Panel**

The new SMD2477ASC model features a hidden control panel which gives a more integrated look and feel within the kitchen. The new tall control panel, angled at 45° degrees, is easy to see, easy to access and easy to use.

### Specifications

TECHNICAL SPECIFICATIONS		TECHNICAL SPECIFICATIONS CONTINUED	
Size	24" wide	Demonstration Mode	Yes
Microwave Capacity	1.2 cu.ft	Built-in Ready	Yes
Microwave Power	950 watts	Available Colour	Stainless Steel
Control Panel	Digital LCD Display	Accessory	SKMD24F0AS
Control Type Drawer Opening Power Level Sensor Cook, Reheat, Popcorn Settings Reheat Auto Settings Defrost Auto Settings	Hidden Control Panel AutoTouch™ System 11 13 2 6	DIMENSIONS/WEIGHT(inches/I Cut-out Dimension Product Dimension Box Dimension Net Weight Gross Weight	22 1/8" x 15 9/16" 23 7/8" x 23 1/64" x 15 7/8" 29.8" w x 27.9" x 21.9" 74 lb. 85.8 lb.
Keep Warm Setting Melt / Soften / Settings Beverage Setting Programmable Stages Digital Clock	Yes, up to 30 min. Yes Yes Yes, 4 Yes	POWER/SAFETY Power / Ratings Ratings Safety Compliance WARRANTY/UPC	120V, 60Hz 1.67Kw, 14.5Amps FCC, DHHS, cUL
Kitchen Timer Child Lock +30 sec Interior Oven Light	Yes Yes Yes	Warranty UPC	1 year parts & labour with in-home service; 4 additional years for magnetron tube only 074000619944

5-03-2016

Model: 20-2217 ALT B HAZELWOOD

# 42 of 42

### SHARP

### SMD2477ASC

