


PWT BLK 13 LOT 127

falmec


MERCURIO

Version
FPMER30W3SS / Mercurio Wall
30" (76 cm) 280 CFM
Collection
Potenza
EAN code
8034122344287

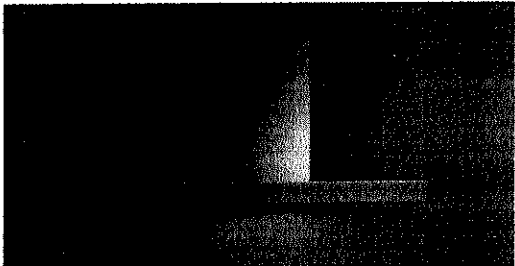

Photograph is for information purposes only
May not correspond to the selected version


FEATURES	TECHNICAL FEATURES	PACKAGING:WEIGHTS AND VOLUMES	CONSUMPTION AND CONNECTION FEATURES
Scotch brite stainless steel (AISI 304) Electronic control LED lighting Metallic grease filter, removable and washable Optional charcoal filter	Installation type Wall Dimensions 30" / 76" Finish Scotch brite stainless steel (AISI 304) Motor 280 CFM Type of control Electronic control Speed settings 3 Lighting Led 2x1,2 W - 3200 K Charcoal filter Square charcoal filter - Type 3 Minimum distance Gas hob: 25 in Electric hob: 21 in	Gross weight 42 lbs Net weight 31 lbs Volume 10 ft³ Packaging size Length 40 in Height 24 in Depth 18 in	Maximum consumption 150 W Voltage / Frequency 120V 60Hz Plug type standard
OPTIONAL ACCESSORIES KACL615 Protective cleaning cloths for stainless steel (box 10 pcs) 103050107 Square charcoal filter - Type 3			




Technical sheet - 09/06/2019



PWT BLK 13 LOT 127

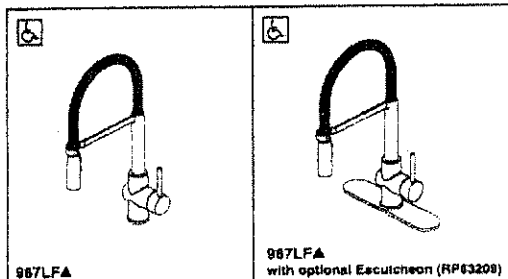

Submitted Model No.: _____
Specific Features: _____

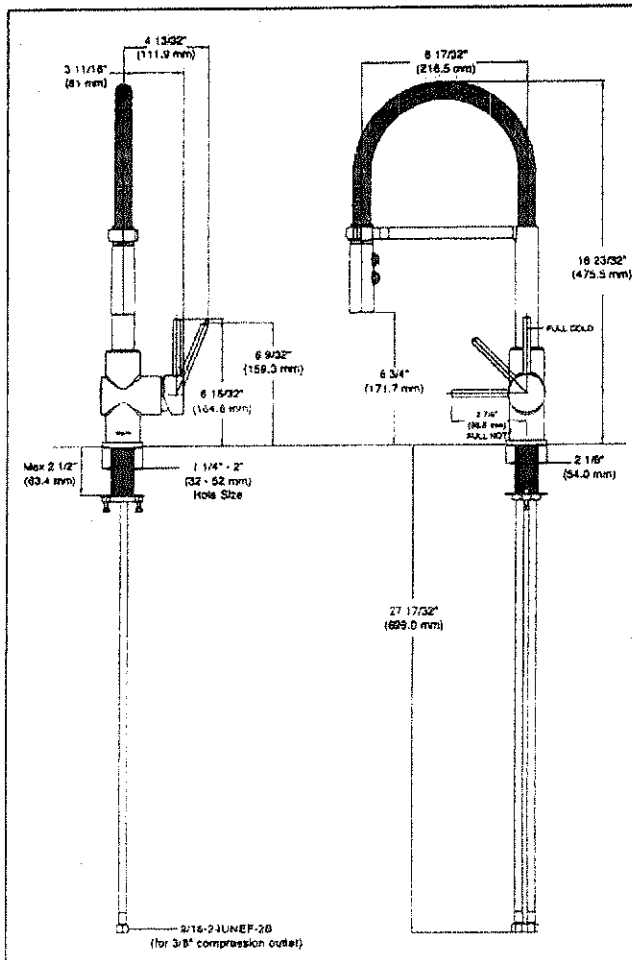

▲ Designate proper finish suffix.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specsheet.com for finish options and product availability.

DSP-K-987LF Rev. A



KITCHEN FAUCETS

- Tommy™ Gourmet Kitchen Faucet
- Single Handle Deck Mount
- 1 or 3 Hole Sink Applications

STANDARD SPECIFICATIONS:

- Solid brass fabricated body.
- Single handle kitchen faucet for exposed mounting on 1 or 3 hole sinks.
- Optional escutcheon – 8" centers, 10" long (RP63209).
- 18 23/32" (476mm) high, 8 17/32" (217mm) long spout nestled in a metal hub, swings 360°.
- Pull-down spout operates in an aerated or spray mode via an easy push button.
- Ceramic cartridge.
- 9/16-24 UNEF-28 threaded female adapter nuts for 3/8" compression fitting outlet.
- Integral double check valves in spray head.
- Maximum flow rate 1.8 gpm @ 60 PSI.


WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLIES WITH:

- Complies to ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations.

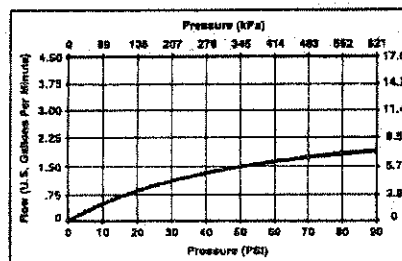

55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeview Road, St. Thomas, ON N5P 4L1
© 2014 Masco Corporation of Indiana

