Sales Selection Sheet Checklist

1 of 38

LOT 694-4 Model: 20-1841 B ARLINGTON

PURCHASERS: RORY, HAYDEN NARINE/STEFANIE, MARIA LUCIGNANI

VENDOR: Heathwood Homes (Whitby) Limited

	OPTION	IAL DOUBLE SINKS	IN MASTER ENSUI	TE VANITY		
	WOB					
Υ		N MAIN				
		ED BASEMENT				
	COLD C	ELLAR				
UPGR	ADED / I	MODIFIED ELEVATION	ON			
	CORNE	R UPGRADE				
Y	REAR U	IPGRADE				
	SIDE UF	PGRADE				
CEILIN	IG UPGF	RADE - SMOOTH				
Y	MAIN FI					
	SECON	D FLOOR				
	BASEM	ENT				
	LOWER	LEVEL				
ADDIT	IONAL F	ROUGH-INS				
Y	200 AMI	P SERVICE (STD 200	AMP TOWNS)			
		AR ROUGH-IN				
	HUMIDI	FIER (STD in Singles)			
Y	AIR COI	NDITIONING (SITE S	TD)			
GAS R	OUGH-I	N				
Y	STOVE					
	DRYER					
	BBQ					
	ADDITIO	ONAL FIREPLACE				
KITCH	EN: HO	ODFAN VENTING SIZ	ZE			
	6 IN RO	UND DUCT				
Y	7 IN RO	UND DUCT (STD FO	R TOWNS)			
FULL E	BASEME	NT STAIRS:	Paint Grade			
UPPE	R BASEN	MENT STAIRS:	N/A			
LOWE	R LEVEL	STAIRS:	All Oak			
LOWE	R BASE	MENT STAIRS:	N/A			
MAIN S	STAIRS:		All Oak			
MEDIA	STAIRS	(if applicable):	N/A			
LOFT	STAIRS ((if applicable):	N/A			
Augus	st 10, 20)22 Signature on f	ile	August 10,	2022 IRIT SALEM	
Di	ate	Purchaser:		Date	Decor Consultant:	
D	ate	Purchaser:		August 10, 2	2022 MARILYN ROS	SEN
				Date	Heathwood Homes (Whitby) Limited

RORY, HAYDEN NARINE/STEFANIE, MARIA LUCIGNANI

Project: Country Lane Unit: 694-4, Phase: 6

Model: 20-1841 B ARLINGTON



Locked: Closed:

hen			
Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***	
Island Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***	
Cabinet Hardware	2098	12801-HARDWARE ***STD***	
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***	
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***	
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD**	k :
Sink	9488	Plumbing-KINDRED Kitchen Sink Collection - Reginox NS1930 U/9-Single Bowl Undermount Sink (or equivalent)-Stainless Steel	PC
Crumb Vac Color	9486	Vacuum-Crumb Vac (Dust Pan)-Silver	
HoodFan	9486	AV1308 Air King 30	PC
Opt. Backsplash	1111	N/A *****	
Opt. Backsplash Grout	1111	N/A *****	
Opt. Backsplash Tile Pattern	1111	N/A *****	
Flooring	9358	Red Oak Pearl-Vintage Engineered-TITANIUM-3/4 inch x 3 1/4 inch ***UPG***	3
Floor Tile Grout	1111	N/A *****	
Floor Tile Pattern	1111	N/A *****	Ī

- Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8 inches. Ice Waterline Rough-In is included.
- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.

- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

Comment		

Foyer		
Flooring	1111	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

RORY, HAYDEN NARINE/STEFANIE, MARIA LUCIGNANI Project: Country Lane Unit: 694-4, Phase: 6 Model: 20-1841 B ARLINGTON

Locked:	
Closed:	

Comment		
Powder Room		
Flooring	3000	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	7705	Grout-(01) Alabaster ***UPG***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		i tunionig i maios vi i i z
Dining Room		
Flooring	9358	Red Oak Pearl-Vintage Engineered-TITANIUM-3/4 inch x 3
0		1/4 inch ***STD***
Comment		
Great Room Flooring	9358	Red Oak Pearl-Vintage Engineered-TITANIUM-3/4 inch x 3
Flooring	9330	1/4 inch ***STD***
Comment		
Great Room Fireplace		
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE PG 17 ***STD***
Opt. Surround	1111	N/A *****
B. of control of the control	J. L (C (L	ED and the second of the secon
- Purchasers have been advised	a: neat from the	e FP can damage TV above a FP and items placed on mantle.
	s will not be liab	ole for any damage on items placed/@installed above a FP
after closing. Comment		
Commont		
Hansa Hall		
Upper Hall Flooring	9358	Red Oak Pearl-Vintage Engineered-TITANIUM-3/4 inch x 3
. 10011119		1/4 inch ***STD***
Comment		
Page 2 of 7		

RORY, HAYDEN NARINE/STEFANIE, MARIA LUCIGNANI Project: Country Lane Unit: 694-4, Phase: 6 Model: 20-1841 B ARLINGTON



Locked: Closed:

Master Bedroom		
Flooring	9358	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment		
Comment		
Bedroom 2	_	
Flooring	9358	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment		
Bedroom 3		
	9358	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Flooring	9330	D1 09410 -Dynasty Tex-BLACK ICE-40 02 Poly STD
Comment		
Master Ensuite		
Cabinet Colour/Style	6319	Viking III-MANCHESTER-CAVIAR CL-MAPLE ***STD***
Cabinet Hardware	2098	12801-HARDWARE ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart
Countertop	0022	***STD***
Countertop Edge	1111	N/A *****
Floor Tile	1111	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tilo Crout	7705	Crout (01) Alabastar ***! IDC***
Floor Tile Grout Floor Tile Pattern	7705	Grout-(01) Alabaster ***UPG*** STANDARD SQUARE ***STD***
Floor Tile Pallern	3000	DIANDARD SQUARE "" STD"""
Shower Wall Tile	8833	QT.UW.WHT.0810-Uniwall-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Grout Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower wan the Fallerii	0090	VERTICAL STACKED STD
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow

RORY, HAYDEN NARINE/STEFANIE, MARIA LUCIGNANI Project: Country Lane Unit: 694-4, Phase: 6 Model: 20-1841 B ARLINGTON



Locked: Closed:

VVIIILE IVIALLE-L A L

Shower Floor Tile Grout		2226	Grout-(00) White ***STD***		
Shower Floo	r Tile Pattern	3000	STANDARD SQUARE ***STD***		
Chawar lam	b(a) and Sill(a)	8923	Shower Jamb / Sill-Thassos White ***STD***		
	b(s) and Sill(s) dure (colour)	1737	Plumbing Fixtures-WHITE ***STD***		
Comment	Rture (colour)	1131	Fluiribing Fixtures-Willie 31D		
Comment					
n Bathroom		_			
Cabinet Colo	our/Style	1737	Viking III-SIMCOE-NAVY BLUE-3DL ***STD***		
	·				
Cabinet Hard	dware	7667	12881-HARDWARE ***STD***		
Countertop		8830	1573-60-Countertop-FROSTY WHITE-Wilsonart		
			STD		
Countertop E	Edge	1111	N/A *****		
Floor Tile		1111	GE.BY.AZR.1313 New Byzantine Azzuro 13		
Floor Tile Gr	out	7705	Grout-(01) Alabaster ***UPG***		
Floor Tile Pa	ttern	3000	STANDARD SQUARE ***STD***		
Wall Tile		5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***		
			S1D		
Wall Tile Gro	nut	2226	Grout-(00) White ***STD***		
Wall Tile Pat		3090	VERTICAL STACKED ***STD***		
vvali filo i at	tom	0000			
Opt. Shower	Floor Tile	1111	N/A *****		
0.1.01	Flore The Order	4444	A1/A +++++		
Opt. Shower Floor Tile Grout		1111	N/A *****		
Opt. Shower	Floor Tile Pattern	1111	N/A *****		
Opt. Shower	Jamb(s) and Sill(s)	1111	N/A *****		
Opt. Shower		1111	N/A ***** N/A *****		

RORY, HAYDEN NARINE/STEFANIE, MARIA LUCIGNANI Project: Country Lane Unit: 694-4, Phase: 6 Model: 20-1841 B ARLINGTON



Locked: Closed:

Lower Level Family Room		
Flooring	1111	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
risoning	1111	BY 654 TO Byllasty Tex BENON TOE 40 62 Toly 61B
Comment		
Lower Level Laundry Mud Room		
Flooring	1111	GE.SU.ATR.1313 Sauble Anthracite (Black) 13
Floor Tile Grout	7704	Grout-(19) Pearl Gray ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Opt. Cabinet Colour/Style - Uppers	1111	N/A *****
Opt. Cabinet Colodi/Style - Oppers	1111	
Opt. Cabinet Hardware - Uppers	1111	N/A *****
Opt. Cabinet Colour/Style - Base	1111	N/A *****
opt. Cabinot Colodinotylo Base		
Opt. Cabinet Hardware - Base	1111	N/A *****
Opt. Countertop	1111	N/A *****
·		
Opt. Countertop Edge	1111	N/A *****
- Optional Bedroom 4 Layout Laund	Iry Rough in	Relocated to Unfinished Basement (No Opt. Cabinet)
Comment		
Opt. Lower Level Bedroom 4		
Flooring	1111	N/A *****
Comment		
<u> </u>		
Opt. Lower Level Bedroom 4 Hallway		18.148.44444
Flooring	1111	N/A *****
Comment		
<u> </u>		
0		
Opt. Lower Level Bedroom 4 Mud Roo		161/6 *****
Flooring	1111	N/A *****
Floor Tile Grout	1111	N/A *****
Page 5 of 7		

RORY, HAYDEN NARINE/STEFANIE, MARIA LUCIGNANI Project: Country Lane Unit: 694-4, Phase: 6 Model: 20-1841 B ARLINGTON

Туре

Page 6 of 7

Locked: Closed:

rioor file Orout	[1111	lianz
Floor Tile Pattern	1111	N/A *****
	-	
Comment		
Opt. Lower Level Bedroom 4 Bathroo		lava vivi
Cabinet Colour/Style	1111	N/A *****
Cabinet Hardware	1111	N/A *****
Countertop	1111	N/A *****
Countertop	1111	
Countertop Edge	1111	N/A *****
Floor Tile	1111	N/A *****
Tiest Tile		
Floor Tile Grout	1111	N/A *****
Floor Tile Pattern	1111	N/A *****
Wall Tile	1111	N/A *****
vvan Tile	1111	
Wall Tile Grout	1111	N/A *****
Wall Tile Pattern	1111	N/A *****
		lear and
Opt. Shower Floor Tile	1111	N/A *****
Opt. Shower Floor Tile Crout	1111	N/A *****
Opt. Shower Floor Tile Grout	1111	N/A *****
Opt. Shower Floor Tile Pattern	1111	
Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****
Plumbing Fixture (colour)	1111	N/A *****
Comment		
Lower Level and Main Stairs		

1111

Oak Stairs ***STD***

-- OTAIN TO COMPLIMENT LIADDINGOD AND

RORY, HAYDEN NARINE/STEFANIE, MARIA LUCIGNANI Project: Country Lane Unit: 694-4, Phase: 6 Model: 20-1841 B ARLINGTON



Locked: Closed:

Colour		/940		RY FROM FLOORING ***99***	
Handrail	/Pickets/Posts Type	8148		llar Alt. Plain w/ Shoes with 3 - LACK ***2***	1/2" Square/Cap
Handrail	/Pickets/Posts Colour	7940		a STAIN TO COMPLIMENT HARY FROM FLOORING ***99***	
Custom	Stain/Paint	1111	N/A *****		
Landing	(s)	9059		Vintage 3 1/4 inch Pre-Sanded d Red Oak-Unfinished-3/4 inch	
Opt. Car	pet Runner	1111	N/A *****		
Commer	nt				
Basement St	tairs				
Type		1713	Paint Gra	de Stairs ***STD BASEMENT	STAIR ***
Commer	nt				
Throughout					
Switches	s and Plug	5796	Decora W	hite Switches and Plugs ***S	TD***
Thresho	lds	2232	Metal Thr	esholds ***STD***	
Underpa	ad	1079	500 Series-Underpad ***STD***		
Trim Size	e	8705	4 ¼ Base	board and 2 ¾ Casings ***STI	D***
Trim - Pa	aint Colour	1716	Trim-WHI	TE ***STD***	
Walls - F	Paint Colour	1717	22-Wall-W	VARM GREY ***STD***	
Commer	nt				
Purchaser:					
	RORY, HAYDEN NARINE		Date	Decor Consultant	Date
Purchaser:	STEFANIE, MARIA LUCI	GNAN	Date	Country Lane	Date Approved

.9 of 38



CONSTRUCTION SUMMARY

Lot: 694-4 Model: 20-1841 B ARLINGTON Project/Phase: Country Lane / 6

Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer? Townhomes
Worksheet	Note:
Offer	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not
	entitle to a
	referral fee under Heathwood Homes Referral program.
Worksheet	Note:

DisciplineMS.rpt 13dec21 Page 1 of 4

10 of 38 construction summary



Lot: 694-4

Model: 20-1841 B ARLINGTON Project/Phase: Country Lane / 6

ADMIN FEE

Invoice Qty. Description

CABINETRY	NEW SPECS FOR UPGRADED APPLIANCES SEE REVISED COLOR CHART PAGES 39-45
Invoice Oty Description	

Invoice	Qty.	Description
1074 336,097	1	Kitchen - Hardwood - 3-1/4 in Vintage NSS Red Oak - Kitchen - UPG
21Nov22 **		CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics
1074 335,871 21Nov22	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING ONE ADDITIONAL STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 4
**		CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light
1074 335,924	1	KITCHEN - CABINETRY-B10-Pots and pans (3) drawers (width min. 60cm/max. 90cm) (size subject to floor plan) VIKING
21Nov22		SKETCH # 3

CERAMICS

Invoice		Description						
1074 339,254 21Nov22	1	Foyer Floor - Ceramics - Upgrade Grout - Foyer Floor - UPG						
1074 339,243 21Nov22	339,243							
1074 339,251 21Nov22	1	Main Bath Floor - Ceramics - Upgrade Grout - Main Bath Floor - UPG						
1074 339,249 21Nov22	1	Master Ensuite Floor - Ceramics - Upgrade Grout - Master Ensuite Floor - UPG						
1074 336,097 21Nov22 **	1	Kitchen - Hardwood - 3-1/4 in Vintage NSS Red Oak - Kitchen - UPG CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics						

DRYWALL

Invoice	Qty.	Description
1074	1	- Drywall - Smooth Ceilings - Main Floor - UPG
337,748		
21Nov22		
	l	PAINTING-Notify

DisciplineMS.rpt 13dec21

Page 2 of 4

construction summary of 38



Lot: 694-4 Model: 20-1841 B ARLINGTON

Project/Phase: Country Lane / 6

ELECT	RIC	CAL NEW SPECS FOR UPGRADED APPLIANCES SEE REVISED COLOR CHART PAGES 39-45
Invoice	Qty.	Description
1074 335,596	1	GREAT ROOM - ELECTRICAL - SUPPLY AND INSTALL RECESSED PLUG ON EXISTING CIRCUIT 70" +/- FROM FLOOR
21Nov22		SKETCH # 3
1074 335,570	1	KITCHEN/BREAKFAST - ELECTRICAL - CEILING ROUGH-IN (CAPPED)
21Nov22		OR: TO BE INSTALED IN THE CENTRE OF THE ISLAND USE SAME SWITCH AS BREAKFAST ROOM LIGH T SEE SKETCH # 3
1074 335,871 21Nov22	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING ONE ADDITIONAL STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 4
**		CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light
1074 335,570	1	- ELECTRICAL - CEILING ROUGH-IN (CAPPED)
21Nov22		TO BE INSTALLED IN THE CENTER OF THE ROOM- USE EXISTING SWITCH PLUG SEE SKETCH # 3
1074	1	- NOTIFY STANDARD 240V 40AMP TO REMAIN re: HEATING/AIR - ROUGH-IN GAS LINE FOR STOVE AT 2ND FLOOR UP TO 40 FT (QUICK CONNECT NOT INCLUDED);
21Nov22 NoCat		

HARDWOOD

Invoice	Qty.	Description
1074	1	Kitchen - Hardwood - 3-1/4 in Vintage NSS Red Oak - Kitchen - UPG
336,097		
21Nov22		
		CABINETRY-Raise Cabinet; CERAMICS-Delete Std Ceramics
1074	2	- PAINT - STAIN STAIR LANDING IN SAMBUCCA. LANDING UNDER 25 SQ.FT. EACH
335,692		
21Nov22		
**		HARDWOOD-Supply and Install smooth UNFINISHED pre-sanded red oak at stair landing(s)

HEATING / AIR CONDITIONING

HEATING / AIM CONDITIONING									
Invoice Qty. Description									
1074 342,252	_	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR STOVE AT 2ND FLOOR UP TO 40 FT (QUICK CONNECT NOT INCLUDED); STANDARD 240V 40AMP TO REMAIN							
21Nov22		SKETCH # 3 ELECTRICAL-Notify							

MIRRORS/GLASS PRODUCTS

Invoice	Qty.	Description
1074	1	Master Ensuite - Mirrors/Glass Products - Upgrade to Frameless clear glass with D-Ring Handle in chrome - Master Ensuite - UPG
338,682		
21Nov22		

DisciplineMS.rpt 13dec21 Page 3 of 4

construction summary of 38



Lot: 694-4

Model: 20-1841 B ARLINGTON **Project/Phase: Country Lane / 6**

PAINTING

Invoice	Qty.	Description
1074	1	- Drywall - Smooth Ceilings - Main Floor - UPG
337,748		
21Nov22		
**		PAINTING-Notify
1074	2	- PAINT - STAIN STAIR LANDING IN SAMBUCCA. LANDING UNDER 25 SQ.FT. EACH
335,692		
21Nov22		
		HARDWOOD-Supply and Install smooth UNFINISHED pre-sanded red oak at stair landing(s)

PLUMBING

Invoice	Qty.	Description
1074 335,871	-	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING ONE ADDITIONAL STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING
21Nov22		SKETCH # 4 CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light

DisciplineMS.rpt 13dec21 Page 4 of 4

Project: Country Lane Unit: 694-4, Phase: 6 Model: 20-1841 B ARLINGTON

13 of 38


The Arlington

ELEVATION A & B: 1,841 SQ. FT.

Sketch #1

THE TRAILS OF COUNTRY LANE

20-1841 ELEV. B

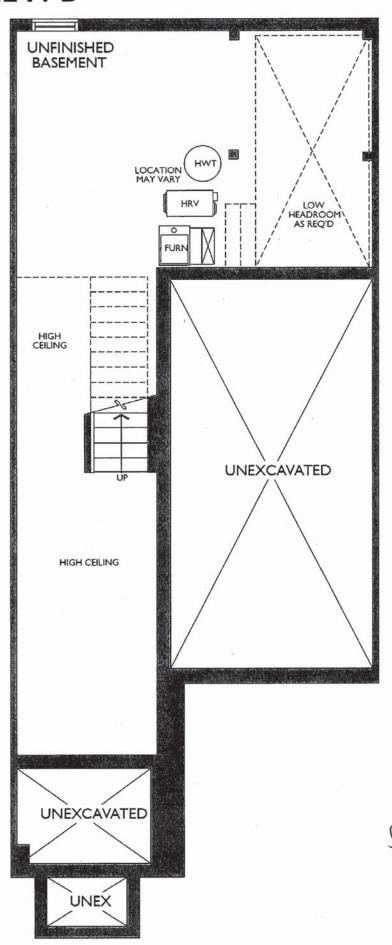

BASEMENT ELEVATION A & B St.

Legal Plan Jan. 22, 2021

Project: Country Lane Unit: 694-4, Phase: 6 Model: 20-1841 B ARLINGTON

14 of 38


The Arlington

ELEVATION A & B: 1,841 SQ. FT.

Sketch#2

THE TRAILS OF COUNTRY LANE

20-1841 ELEV. B

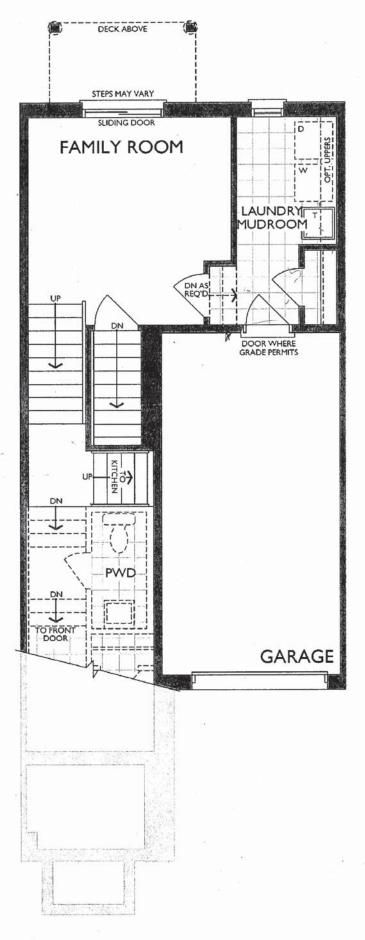

LOWER LEVEL ELEVATION A & B

SA

RV

Legal Plan Jan. 22, 2021

Model: 20-1841 B ARLINGTON

15 of 38


The Arlington

ELEVATION A & B: 1,841 SQ. FT.

THE TRAILS OF COUNTRY LANE

Sketch#3

20-1841 ELEV. B

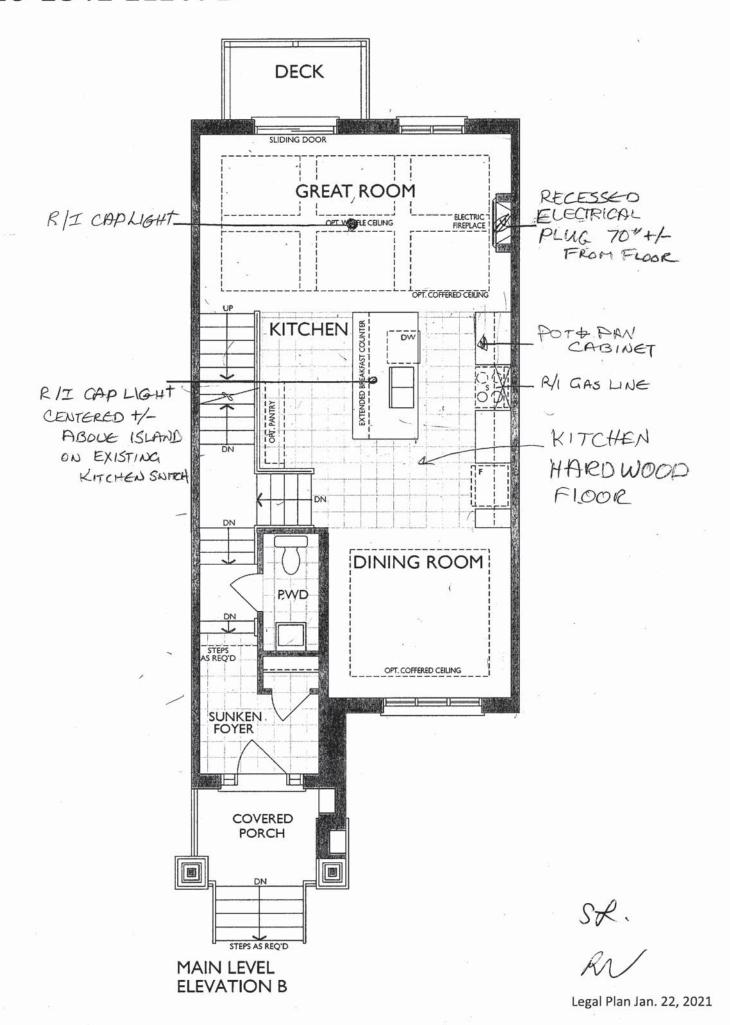

16 of 38 Model: 20-1841 B ARLINGTON


The Arlington

ELEVATION A & B: 1,841 SQ. FT.

THE TRAILS OF COUNTRY LANE

20-1841 ELEV. B

Sketch #4

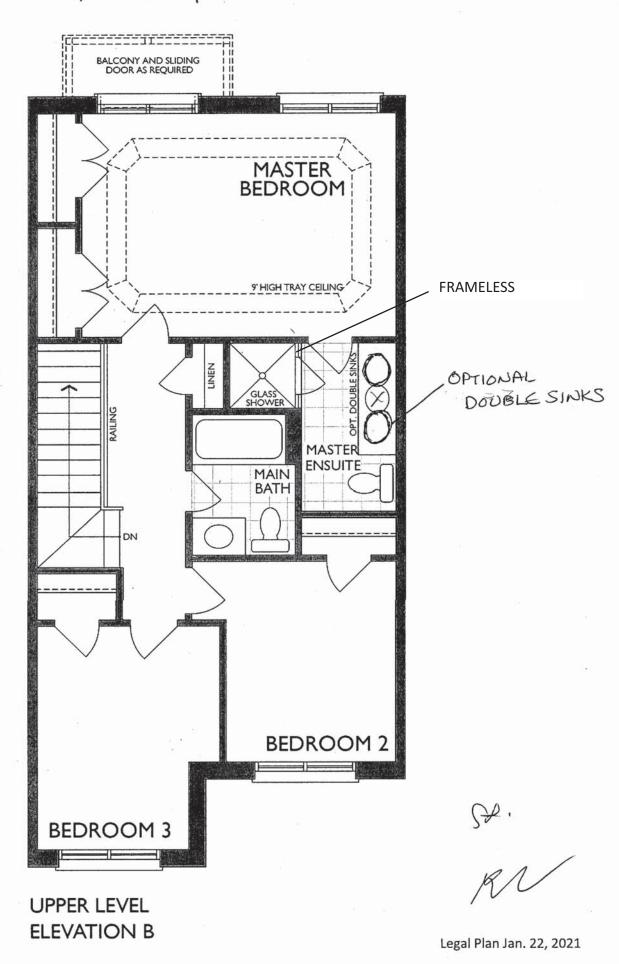

Project: Country Lane Unit: 694-4, Phase: 6 Model: 20-1841 B ARLINGTON

17 of 38





NFAS NF17 Mantel - CABINET


Model: 20-1841 B ARLINGTON

18 of 38



NS1930U/9



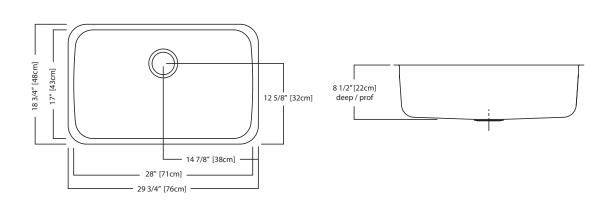

NS1930U/9 SPECIFICATION

Model NS1930U/9 is a single bowl, undermount sink manufactured for Franke Kindred Canada Limited from 18 gauge, 18-10 stainless steel. Product has mirror finished rim and brush finished bowl. Sink is fully undercoated. Basket strainer waste fitting (3 1/2", 89 mm) are included. Sink is backed with a limited buyer lifetime warranty.

- O.D. 18 3/4" x 29 3/4" x 8 1/2" (48 x 76 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

Model: 20-1841 B ARLINGTON

19 of 38

MOEN

FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking
Power Clean™ spray technology
Metal construction with various finishes identified by suffix

Quick connect installation

Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings

High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout

Faucet designed for handle to be mounted on right side only

OPERATION

Lever style handle

Temperature controlled by 100° arc of handle travel

Operates with less than 5 lbs. of force

• Operates in stream or spray mode in the pullout or retracted position **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

STANDARDS


Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation 5 year limited warranty when used in a commercial installation
- Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



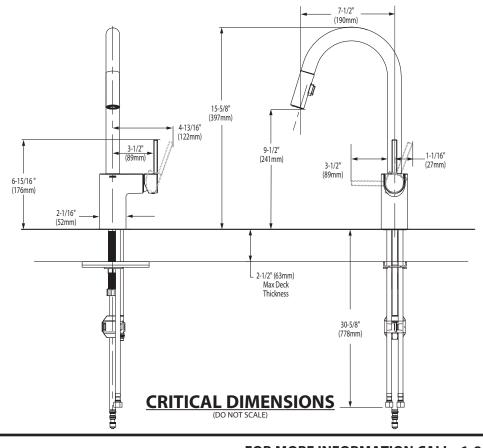

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20



BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD • 0641.400 Faucet holes on 4" (102mm) centers

☐ 0641.100 Center hole only

- · Classic styled rectangular pedestal lavatory
- · Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an **above counter** sink or a **drop-in** sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:




SEE REVERSE FOR ROUGHING-IN DIMENSIONS

^{*} See faucet section for additional models available

Model: 20-1841 B ARLINGTON



BOULEVARD® PEDESTAL SINK

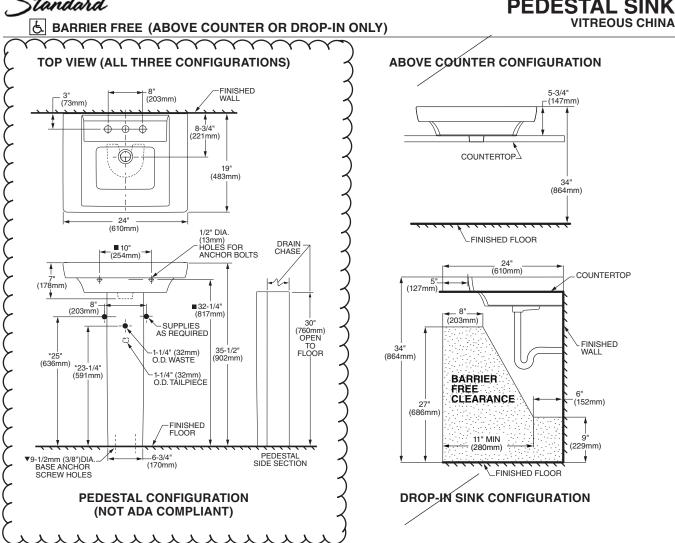

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Model: 20-1841 B ARLINGTON

22 of 38

American Standard


BARRIER FREE

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

COLONY COUNTERTOP SINK

- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)




Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep



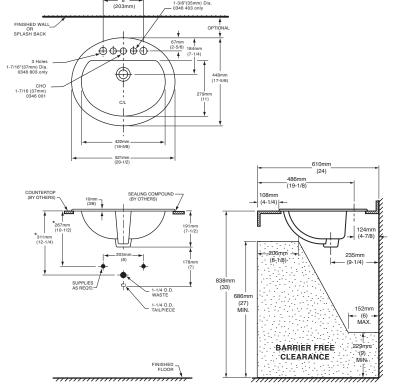

COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

To Be Specified ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen □ Faucet*: □ Faucet Finish: Supplies & Stops: ☐ Trap 1-1/4" (32 mm):

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198

^{*} See faucet section for additional models available

Model: 20-1841 B ARLINGTON

23 of 38

American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank



- ☐ 3067 316 Elongated Bowl
- **4035 516** Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are peripaid and may use within the prepare of the present IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by Ankist damagna (112.19.2). These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284

© 2008 American Standard

Model: 20-1841 B ARLINGTON

24 of 38

MOEN[®]

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted **OPERATION**
- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel **FLOW**

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly Model: L4625 series L4631BC


Bulk Packed (12 per carton): L64624 series

with 50/50 Waste Assembly **Bulk Packed (12 per carton):** L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



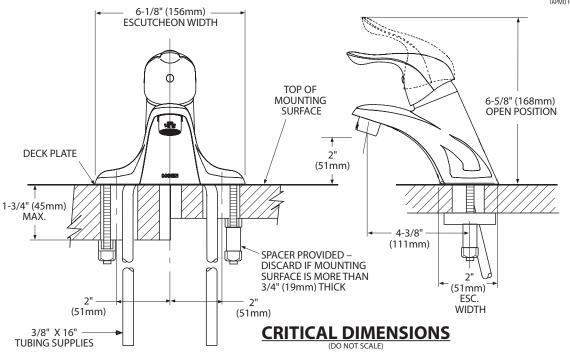

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev 8/15

Model: 20-1841 B ARLINGTON

25 of 38



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®
- ADA (for lever handle

6.5" (165mm) ESC. DIAM.

WARRANTY

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

4-1/2" (114mm)

WALL OPENING

7-1/2" (190mm)

to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications






CHATEAU° POSI-TEMP° **Single-Handle Tub/Shower Trim Kit**

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton)

TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

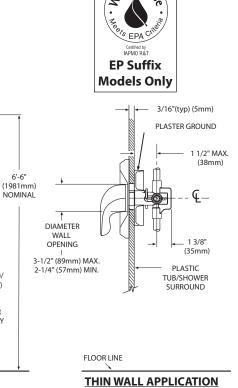



FLOOR LINE

— 1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

2 1/2" MAX. (63mm)

SHOWER

48" (1219mm) 32" (813mm) AND TUB ONLY

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

Model: 20-1841 B ARLINGTON

26 of 38







180 CFM/7.0 Sones @ 0.10" SP. Horizontal 180 CFM/7.5 Sones @ 0.10" SP. Vertical

Dimensions

Overall bottom projection - 183/8"
Overall top projection -12"
Height - 6"

Available widths: 21", 24", 30", 36" & 42"

Hood Body

Stainless Steel: 24 gauge, grade 430 stainless steel.

Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.

Motor

2 speed, single coil, thermally protected, permanently lubricated. Rated 120 volts, 60 hz. Complete with 200°C lead wires.

Lighting

Single 60 watt cook light capacity (bulb not included).

Ducting Options


Horizontal ducting: 31/4"x10" (duct adapter and damper included). Vertical ducting: 31/4"x10" (duct adapter and damper included). Vertical ducting: 7" round (duct adapter and damper not included). Ductless: removable front vent (charcoal filter not included).

Fan Blade


One piece polymeric, electronically balanced blade. $6^{5/8}^{\shortparallel}$ diameter with 5 paddles.

• Electrical connection

Hood top - 7/8" knockout hole for use with 1/2" cable clamp Hood back - 7/8" knockout hole for use with 1/2" cable clamp



AV SERIES



• Filters

UL rated, class 2 filter. Grease Filter: RF35 - 87/8"x103/8" (included). Charcoal Filter: RF34 (not included). Combo Grease/Charcoal: RF55 (not included).

• Available Finishes

White, Biscuit, Almond, Black & Stainless Steel.

EXPANDED PERFORMANCE											
		Static Pressure (inches of w.g.) Sones Fan Speed Power									
Air Flow - CFM	0	0.05	0.1	0.15	0.2	0.25	@ .1 SP	RPM	Watts	Apms	
Vertical Ducting High	246	232	218	203	181	147	7.5	2973	87.0	2.1	
Horizontal Ducting High	225	210	180	175	155	120	7.0	3024	87.0	2.1	

PROJECT								ARCHITECT			
LOCATION							ENGINEER				
CONTRACTOR						SUBMITTED BY DATE					
FAN MODEL CFM IN RPM WATTS AMPS NUMBER NUMBER W.C.					AMPS	SONES	QTY		EQUIPMENT Marks		





Air King: 820 Lincoln Avenue West Chester, Pennsylvania 19380-4466 Tel: (610) 692-7400 • 877-304-3785 Fax: (610) 696-8048 Canada: Brampton, Ontario Tel: 905-456-2033 Fax: (905) 456-1015

Model: 20-1841 B ARLINGTON

27 of 38



Whirtpool® 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic Stainless Steel	WRT541SZDM

Capacity			
Total Capacity	21 cu. ft.		
Refrigerator Capacity	15 cu. ft.		
Freezer Capacity	6 cu. ft.		
General Features & Properti	es		
EZ Connect Icemaker Kit			
LED Interior Lighting			
ENERGY STAR® Certified			
Electronic Temperature Controls			
Freezer Temperature Controls			
Clear Door Bins			
Adjustable Door Bins			
Quiet Cooling			
Fingerprint Resistant			
Electrical Details			
Amps	6.5		
Volts	115		
Certifications			
ADA Compliant	Yes		
ENERGY STAR® Certified	Yes		

Technical Details	
Refrigerator Type	Top-Freezer
Number of Doors	2
Number of Interior Refrigerator Shelves	3
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1
Number of Freezer Door Bins	2 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location	Freezer
Dispenser Type	N/A
Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear
Reference Material	

Key Features & Benefits

Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

Humidity-Controlled Crispers

Store fruits and vegetables in their ideal environment.

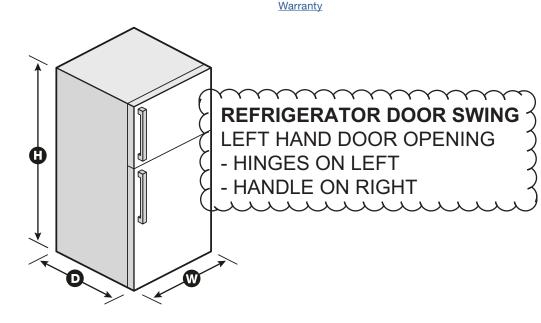

Dimension Guide Use & Care Guide

Energy Guide

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Model: 20-1841 B ARLINGTON

28 of 38



Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15-or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

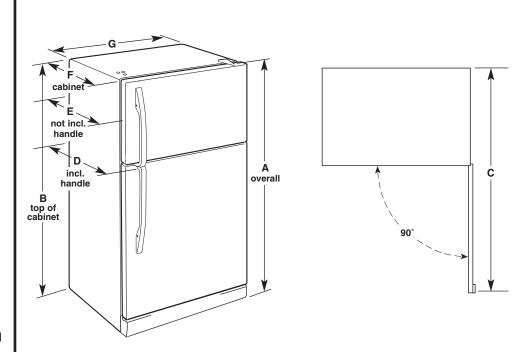

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	621/4" (158.1 cm)	32 ⁷ / ₈ " (83.5 cm)	30 ⁵ / ₈ " (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66½" (168.3 cm)	65½" (166.4 cm)	62½" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

29 of 38 Model: 20-1841 B ARLINGTON

FRIGIDAIRE.



30" Gas Range

Gas Range

Available Products: FCRG3052AB, FCRG3052AS, FCRG3052AW

Available Colors: Black, Stainless Steel, White

Version: 08/22

Product Specifications

Cooktop		Cooktop Performance	
Cooking Surface Type	Gas	Right Front Element Burner	16,000 BTU
Grate Material	Cast Iron	Right Rear Element Burner	5,000 BTU
Grate Quantity	3	Left Front Element Burner	9,500 BTU
Grate Style	Continuous	Left Rear Element Burner	12,000 BTU
Grace Style	Continuous	Center Element Burner	10,000 BTU
Cooking Controls		Genter Brement Burner	10,000 D10
Bake	Yes	Oven	
Broil	Yes	Bake System	Yes
Clear Off	Yes	Bake Element	18,000 BTU
Kitchen Timer	Yes	Broil System	Yes
Lockout	No	Broil Element	1,400 Watts
			Nickel Ladder
Oven Light	Yes	Rack Position Type	
Preheat Probe	Yes	Number of Rack Positions	6 Flat
	No	Rack Type 1	
Self Clean	No	Rack Type 1 Quantity	2
Temperature Display	Yes	Window Type	Extra Large Visual
Timed Bake	No		
Warmer Drawer	No	Controls	
		Control Lock	No
Drawer		Sabbath Mode	No
Drawer Type	Storage		
		Dimensions and Volume	
Display		Height	46 9/16"
Display Type	Membrane	Width	29 7/8"
Control Location	Rear	Depth	25 3/4"
		Depth With Door 90° Open	46 9/16"
Electrical Specifications		Oven Interior Height	18 5/8"
Minimum Circuit Required	12 Amps	Oven Interior Width	24 3/8"
Voltage Rating	120 V	Oven Interior Depth	19 1/8"
Toringe Timing	120 .	Oven Capacity	5 Cu. Ft.
General Specifications			
Prop 65 Label	Yes	Installation	
Warranty - Labor	1 Year	Adjustable Leveling Legs	Yes
Warranty - Labor Warranty - Parts	1 Year	Power Supply Connection Location	Bottom Center
vvarianty - raits	1 Teal	Tomer ouppry Connection Location	Dottom Center
Safety Certifications and Approvals		Certifications and Approvals	
CSA Listed	Yes	ADA Compliant	No
COLLEGE	100	1	

Model: 20-1841 B ARLINGTON

30 of 38

30" Gas Range Gas Range

Available Products: FCRG3052AB, FCRG3052AS,


FCRG3052AW

Available Colors: Black, Stainless Steel, White

Version: 08/22

Installation Diagram

Installation Drawing

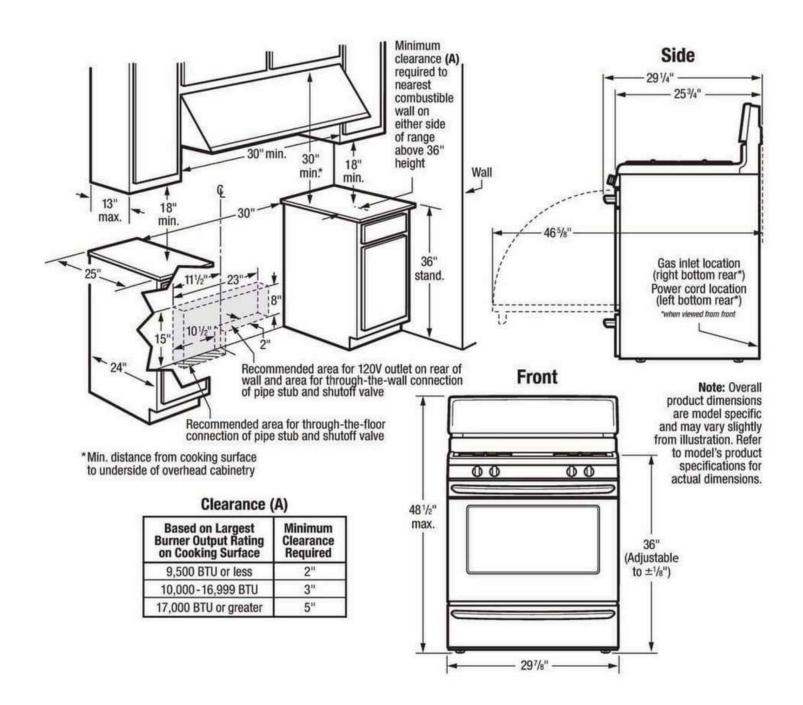

Model: 20-1841 B ARLINGTON

31 of 38












Inoxia Backsplashes Delta 30-inch Real Stainless Steel Backsplash

Model # BSNC-S

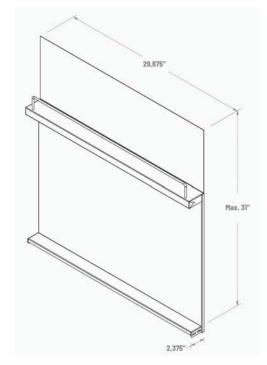

Specifications

Dimensions

Assembled Depth (in inches)	2.75	Assembled Height (in inches)	30
Assembled Weight (in lbs)	22.5	Assembled Width (in inches)	32
Packaged Depth (in inches)	3.25	Packaged Height (in inches)	24
Packaged Weight (In Ibs)	23	Packaged Width (in inches)	31.5

Details

Application	Wall Tile	Colour Family	Silver
Country of Origin	CA-Canada	Installation Type	Glue Down
Mosaic Pattern	Random	PEI Rating	1 - Very Light Traffic
Surface Type	Semi-Gloss	Tile Look & Feel	Metal Look
Tile Shape	Square	Tile Size	Others
Used For	Bath Tile, Kitchen Tile		

Model: 20-1841 B ARLINGTON

32 of 38



Whirlpool® 55 dBA* Front Control Dishwasher WDF330PAH



Stainless Steel

Also available in:

White	WDF330PAHW
Black	WDF330PAHB

Capacity		
Total Place Settings	13	
General Features & Properti	es	
Heavy Cycle		
High Temperature Wash Op	tion	
Heated Dry Option		
ENERGY STAR® Certified		
Industry's Best Selling Dishwasher Brand [†]		
Designed, Engineered and Assembled in the U.S.A. with American Pride		
Electrical Details		
Amps	10	
Volts	120	
Hz	60	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Button
Number of Wash Cycles	3
Number of Options	4
dBA [*]	55
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"

Reference Material

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.*

Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

Normal Cycle

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.

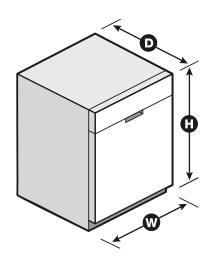

^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

Model: 20-1841 B ARLINGTON

33 of 38




Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDF131PAH	WDF545PAF	

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

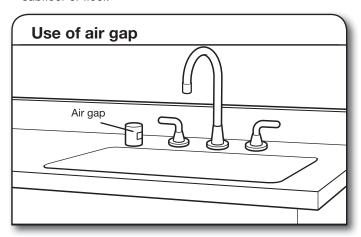

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- ³/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with ³/₄" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.




If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

■ Use a UL Listed/CSA Approved metallic strain relief.

Model: 20-1841 B ARLINGTON

34 of 38

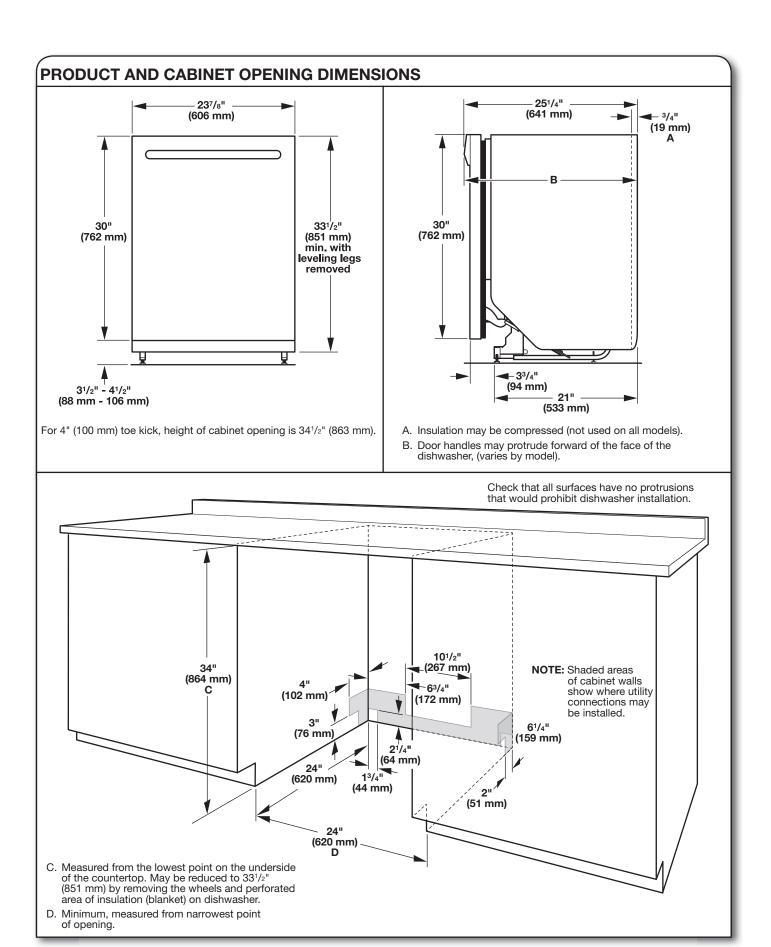


Model: 20-1841 B ARLINGTON

35 of 38

5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

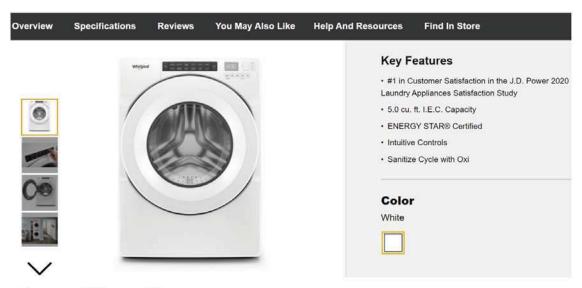

Specifications

Width: 6858.00, 27.0" Centimeters, Inches

Depth: 8016.88, 31-9/16" Centimeters, Inches


Dimensions	
Capacity	4-3/10
Depth	8016.88 cm, 31-9/16 in
Gross Weight	97068688.00 kg, 214 lbs
Net Weight	92532768.00 kg, 204 lbs
width Appearance	6858.00 cm, 27.0 in
LCD Touch Screen	No
Window	Yes
Details	
Advanced Vibration Control™	No
Dispense System	Detergent, Fabric Softener & Bleach
Eco Monitor/Efficiency Monitor	No
Hoses Included	4ft 4in Drain Hose Included
Internal Heater	No
Maximum Spin Speed	1160
Out Of Balance Sensing	Yes
Water Factor	3-1/5
Cycles and Options	
Number Of Wash Cycles	35
Electrical	
Power Cord Included	Yes
Controls	
Automatic Temperature Controls	Yes
Control Location	Front
LCD Touch Screen	No

Compatibility Works With No **Options** Number Of Washer Options **Features** Stackable Yes Water Faucet No Cycles Number Of Wash Cycles 35 Exterior Lid/Door Lock Yes Lid/Door Swing Left Modifiers Delay Start No Number Of Rinse Options Number Of Soil Levels 3 Number Of Spin Speeds Number Of Wash/Rinse Temperatures 4 Pre Soak Yes Temperature Selections Hot, Cold, Cool, Warm


Model: 20-1841 B ARLINGTON

36 of 38


Recessed area or closet installation (stacked washer and dryer)




Custom under counter installation

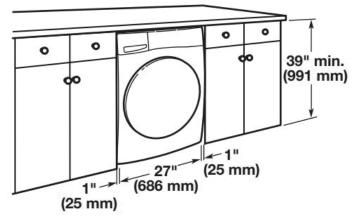

Recessed area or closet installation (washer only)

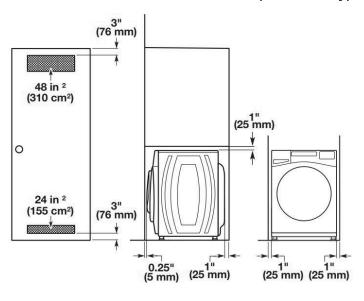

Custom cabinet installation

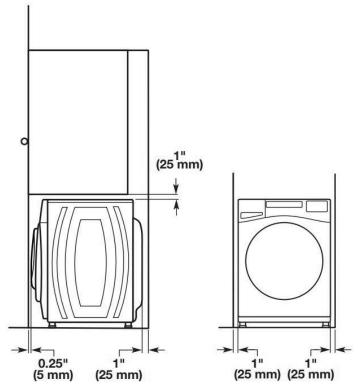


Drain System

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of o leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

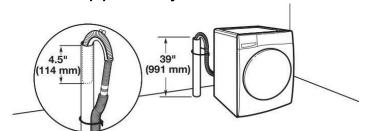


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts"

Model: 20-1841 B ARLINGTON


37 of 38

Wall standpipe drain system

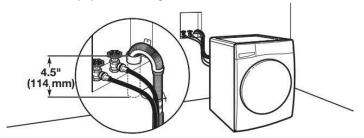


See requirements in "Floor standpipe drain system."


Laundry tub drain system



Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

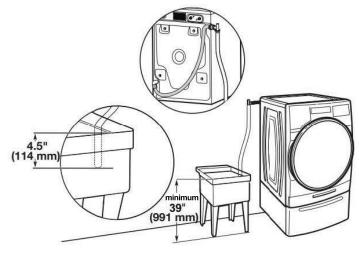

Floor drain system

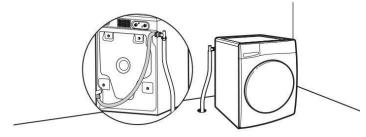

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Electrical Requirements

AWARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire. or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

GROUNDING INSTRUCTIONS

For a grounded, cord-connected appliance:

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

WARNING: Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

For a permanently connected appliance:

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

SAVE THESE INSTRUCTIONS

Model: 20-1841 B ARLINGTON

38 of 38

WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW



Define Your Style

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Tunibu di Diyiloss Edvois	

Ventilation System

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

Electrical

Hz	60

Power Cord Included Yes