# Sales Selection Sheet Checklist

LOT 3192D-22 Model: 20-2095 END ALT A The Forbes PURCHASERS: DANISH, N LALLANY/FARHAN LALLANY **VENDOR:** Heathwood Homes (Huron) Limited CONDUIT FROM GARAGE TO ELECTRICAL PANEL FINISHED BASEMENT **COLD CELLAR UPGRADED / MODIFIED ELEVATION CORNER UPGRADE REAR UPGRADE CEILING UPGRADE - SMOOTH** MAIN FLOOR SECOND FLOOR **BASEMENT** ADDITIONAL ROUGH-INS 200 AMP SERVICE (UPG FOR TOWNS) WET BAR ROUGH-IN **HUMIDIFIER** AIR CONDITIONING (SITE STD) GAS ROUGH-IN STOVE DRYER BBQ ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE **6 IN ROUND DUCT** 7 IN ROUND DUCT **FULL BASEMENT STAIRS:** Carpet Grade **UPPER BASEMENT STAIRS:** N/A LOWER BASEMENT STAIRS: N/A MAIN STAIRS: All Oak MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A APRIL 20/22 IRIT SACEM **Decor Consultant:** -04- 20 2022 Purchaser: Date Heathwood Homes (Huron) Limited Date

Approved.

Locked Date:

DANISH, N LALLANY/FARHAN LALLANY

Project: Wallaceton
Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

Locked: Closed:

Kitchen Cabinet Colour/Style 9166 Viking III-CHARLESTON-ORCHID-3DL \*\*\*STD\*\*\* MSI Quartz GROUP 1 ICED GREY \*\*\*STD\*\*\* 9070 Countertop 4010 SINGLE POLISHED STRAIGHT EDGE 3/4 INCH \*\*\*STD\*\*\* Countertop Edge Cabinet Hardware 2086 9677-HARDWARE \*\*\*STD\*\*\* Island Cabinet Colour/Style 9166 Viking III-CHARLESTON-ORCHID-3DL \*\*\*STD\*\*\* MSI Quartz GROUP 1 ICED GREY \*\*\*STD\*\*\* 9070 Island Countertop N/A \*\*\*\*\* 1111 Backsplash N/A \*\*\*\*\* 1111 Backsplash Grout 1111 N/A \*\*\*\*\* Backsplash Tile Pattern PG 28-30 9904 YWMH31017HZ-Whirlpool Over-The-Range Microwave HoodFan Hood Combination-SS-30 inch Purchasers have been advised: standard fridge opening is 9904 Appliance a minimum 37 3/8 x 73 3/8". Ice Waterline Rough-In is included. Standard stove opening is 30" and standard dishwasher 9904 Appliance opening is 24". Any gas stove will require backsplash or stainless steel backing to avoid fire hazards. Purchasers acknowledge: Heathwood Homes and its 9904 Appliance contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after Comment Kitchen/Breakfast TR.SP.WHITE.1313 SEMPRE White Matte 13 Flooring 9904 Grout-(27) Silver \*\*\*STD\*\*\* 2225 Floor Tile Grout

STANDARD SQUARE \*\*\*STD\*\*\*

3000

Floor Tile Pattern

Page 2 of 10

DANISH, N LALLANY/FARHAN LALLANY Project: Wallaceton Unit: 3192D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Locked:

Closed:

Comment	
Foyer	
i Oyei	
Flooring	TR.SP.WHITE.1313 SEMPRE White Matte 13
	*
Floor File Creat	0
Floor Tile Grout	2225 Grout-(27) Silver ***STD***
Floor Tile Pattern	3000 STANDARD SQUARE ***STD***
Command	
Comment	
Laundry Room	
Flooring	3000 TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	2225 Grout-(27) Silver ***STD***
Floor Tile Pattern	3000 STANDARD SQUARE ***STD***
Comment	
(A)	
Laundry Room Opt.	
	NI/A *****
Cabinet - Uppers	1111 N/A *****
Cabinet Hardware	1111 N/A *****
Comment	
-	
Mud Room	
COMPROMINATION OF A PARTY CONTROL AND	PROFILE OF THE PROFIL
Flooring	1111 TR.SP.WHITE.1313 SEMPRE White Matte 13



DANISH, N LALLANY/FARHAN LALLANY Project: Wallaceton Unit: 3192D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Page 3 of 10

· 大型工作的重要的 《 是	
Floor Tile Grout	2225 Grout-(27) Silver ***STD***
Floor Tile Pattern	3000 STANDARD SQUARE ***STD***
Comment	a-1
Powder Room	
Flooring	3000 TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	2225 Grout-(27) Silver ***STD***
Floor Tile Pattern	3000 STANDARD SQUARE ***STD***
Plumbing Fixture (Colour)	Plumbing Fixtures-WHITE ***STD***
Comment	
Hall	
Flooring	TR.SP.WHITE.1313 SEMPRE White Matte 13
Grout	2225 Grout-(27) Silver ***STD***
Floor Tile Pattern	STANDARD SQUARE ***STD***
Comment	
Great Room	
Flooring	Ped Oak Pearl-Vintage Engineered-TITANIUM-3/4 inch x 3 1/4 inch ***STD***
Comment	



Page 4 of 10

DANISH, N LALLANY/FARHAN LALLANY Project: Wallaceton Unit: 3192D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Upper Hall			
Flooring		9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment			
Finished Basen	nent (Rec) Room/Hall		
Flooring		9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***
Comment		7776	
Master Bedroor	n		
Flooring		9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment			
Bedroom 2			
Flooring		9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment		1	
Bedroom 3			
Flooring		9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment			
Bedroom 4			
Flooring		9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment	,: 	51t	



DANISH, N LALLANY/FARHAN LALLANY Project: Wallaceton Unit: 3192D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

	Visit ve	
ite 2		
Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
Countertop	8799	P-346 LM-Countertop-INUKSHUK CARBON-Arborite ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2076	181-HARDWARE ***STD***
Floor Tile	2076	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Γub Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Γub Wall Tile Grout	2226	Grout-(00) White ***STD***
Γub Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Comment		\$
er Ensuite		
Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
Countertop	8799	P-346 LM-Countertop-INUKSHUK CARBON-Arborite ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2076	181-HARDWARE ***STD***

DANISH, N LALLANY/FARHAN LALLANY Project: Wallaceton Unit: 3192D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Page 6 of 10

Floor Tile	2076	TR.SP.WHITE.1313 SEMPRE White Matte 13
	0005	
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment	÷	
Main Bathroom		
Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
Countertop	8799	P-346 LM-Countertop-INUKSHUK CARBON-Arborite ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2076	181-HARDWARE ***STD***
Flooring	2076	TR.SP.WHITE.1313 SEMPRE White Matte 13



DANISH, N LALLANY/FARHAN LALLANY Project: Wallaceton Unit: 3192D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Shower Floor Tile Pattern

Page 7 of 10

Locked:

			Closed:
	Floor Tile Grout	2225	Grout-(27) Silver ***STD***
	Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
	SERVICES TO TRANSPORT PROSTOR PRODUCT		
	Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
	Walter Co.		
	Wall Tile Grout	2226	Grout-(00) White ***STD***
	Main Bathroom Tile Pattern	3090	VERTICAL STACKED ***STD***
	Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
	Comment	<del>(111), 160</del>	
ini	shed Basement Bathroom		a e
	Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***
	Countertop	8799	P-346 LM-Countertop-INUKSHUK CARBON-Arborite ***STD***
	Countertop Edge	1111	N/A *****
	Cabinet Hardware	2076	181-HARDWARE ***STD***
	Flooring	2076	TR.SP.WHITE.1313 SEMPRE White Matte 13
	Floor Tile Grout	2225	Grout-(27) Silver ***STD***
	Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
	Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
	Shower Floor Tile Grout	2226	Grout-(00) White ***STD***

STANDARD SQUARE \*\*\*STD\*\*\*

3000



DANISH, N LALLANY/FARHAN LALLANY Project: Wallaceton Unit: 3192D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Locked:

Closed:

		Ciosed.
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Great Room Fireplace		
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE  ***STD***
Surround Opt.	1111	N/A *****
Disclaimer	1111	Purchasers have been advised: heat from the FP can
Disclaimer	1111	damage TV above a FP and items placed on mantle.  Heathwood and its contractors will not be liable for any
	-	damage on items placed/installed above a FP after closing.
Comment		4
Basement Stairs		
Туре	1714	Carpet Grade Stairs ***STD BASEMENT STAIRS***
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND
		WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
	122	
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pickets/Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing _pos
Carpet	9248	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD***



DANISH, N LALLANY/FARHAN LALLANY Project: Wallaceton Unit: 3192D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes

Page 9 of 10

Custom Stain/Paint	1111	N/A *****
Comment		
Basement Stairs Landings (Upper and	Lo	*
Flooring	1111	N/A *****
Comment		
Main Chaine		
Main Stairs	and the same of th	
Туре	1712	Oak Stairs ***STD MAIN STAIRS***
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	7651	1 5/16 inch Turned pickets with 3 1/2" Turned Post(s)-ALL OAK***STD***
Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,risers
Custom Stain/Paint	1111	N/A *****
Comment		
Main Stairs Landing(s) (Lower)		
Flooring	1111	N/A *****
Comment		
Throughout		
Walls - Paint Colour	1717	22-Wall-WARM GREY ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Thresholds	2232	Metal Thresholds ***STD***



# DANISH, N LALLANY/FARHAN LALLANY Project: Wallaceton Unit: 3192D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes Switches and Plug Trim Size 8705 4 1/4 Baseboard and 2 1/4 Casings \*\*\*STD\*\*\* Trim - Paint Colour 1716 Trim-WHITE \*\*\*STD\*\*\*

Date

**Decor Consultant** 

Wallaceton

PPPRPPER -

-04- 20 2022

Date Approved

Purchaser:

Purchaser:

**FARHAN LALLANY** 

# 12 of 41 construction summary



Lot: 3192D-22

Model: 20-2095 END ALT A The Forbes

Project/Phase: Wallaceton / 3

Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes
Worksheet	Note:
Offer	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not
	entitled to a referral fee under Heathwood Homes Referral program.
Worksheet	Note:

Printed and Sent: 06-May-23

# 13 of 41 construction summary



Lot: 3192D-22

Model: 20-2095 END ALT A The Forbes

Project/Phase: Wallaceton / 3

# **APPLIANCES**

Invoice	Qty.	Description
1013	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
313,492		
06May23		
		CABINETRY-Notify; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct Size change t

# **CABINETRY**

Invoice	Qty.	Description
1013	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
313,492		
06May23		CABINETRY-Notify; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct Size change
		CADINE IN I-NOUTY, ELECTRICAL-detete std fange 1100d; HEATING/AIR CONDITIONING-Duct Size change i

# **ELECTRICAL**

Invoice	Qty.	Description
1013 314,224	1	KITCHEN - ELECTRICAL - CEILING ROUGH-IN (CAPPED)
06May23		TO BE INSTALLED ABOVE THE BREAKFAST BAR- USE TOGETHER KITCHEN SWITCH SKETCH# 2
1013 314,224	1	GREAT ROOM - ELECTRICAL - CEILING ROUGH-IN (CAPPED)
06May23		TO BE INSTALLED IN THE CENTRE OF THE ROOM +/ USE EXISTING SWITCH PLUG SKETCH # 2
1013 314,209	1	- ELECTRICAL - 200 AMP SERVICE (Upgrade for Towns; Standard for Singles)
06May23		
1013 314,232	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS)
06May23		TO BE INSTALLED ABOVE THE FIRE PLACE 70" +/- FROM FLOOR SKETCH #
1013 313,492	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
06May23		CABINETRY-Notify; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct Size change t
1013 357,141	1	- ELECTRICAL - 2 INCH CONDUIT WITH 8X8 BOX FOR FUTURE CAR CHARGER
06May23		SKETCH # 2

HEAT	HEATING / AIR CONDITIONING						
Invoice	Qty.	Description					
1013	1	KITCHEN - APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ					
313,492							
06May23							
**		CABINETRY-Notify: ELECTRICAL-delete std range hood: HEATING/AIR CONDITIONING-Duct Size change (					

DisciplineMS.rpt 13dec21 Page 2 of 2



# Sales Selection Sheet

# Wallaceton

PURCHASERS: DANISH, N LALLANY and FARHAN LALLANY

TEL:

LOT / UNIT	PHASE	MODEL	
3192D-22	3	20-2095 END ALT A The Forbes	

- This Sales Selection Sheet when properly executed forms part of our Agreement of Purchase and Sale.
- 2. All extras and upgrades listed above are subject to Construction Progress and Architectural and Municipal requirements.
- 3. In the event the Vendor is unable to incorporate the work approved above in the construction of the house for any reason whatsoever, the Vendor will not be liable to the Purchaser in any way. The monies paid for any changes or optional extras not proceeded with shall be returned to the Purchaser, without interest. The cost of options or extras is non-refundable in all other circumstances. If for any reason whatsoever the Agreement of Purchase and Sale is not completed, the total cost of work approved above will be retained by the Vendor.
- 4. The Vendor reserves the right to substitute above materials and equipment with that of equal or better quality.
- 5. Purchaser acknowledges that items may not be exactly as shown. Variations from the Vendor's samples may occur in finished materials due to normal production processes. Vendor is not responsible for shade difference which may occur from different dye lots or wood grains. Variations from the Vendor's samples will occur with natural materials such as wood, marble, granite, hardwood and brick.
- 6. The Vendor reserves the right to select Grout & Thresholds that best suits the Tile selected.
- 7. Selections will not be processed unless signed by Heathwood Homes Head Office.
- 8. The selections made on this schedule are final and cannot be changed once submitted.
- 9. The Purchaser has checked and acknowledges the accuracy of this schedule.

Payment	Summary
---------	---------

Paid By

Amount

**Total Payment:** 

PURCHASER:

09-Mar-22

DATE

PURCHASER:

**FARHAN LALLANY** 

09-Mar-22

DATE

-04- 2 0 2022

Date Approved Heathwood Homes (Huron) Limited

**TAX#:1** 

PREPARED BY: Irit Salem

PE 1.013-2

SInvoice.rpt 28may19

Unit: 3192D-22, Phase: 3

20-2095 END ALT ELEV. A

Model: 20-2095 END ALT A The Forbes

15 of 41


# THE FORBES

Sketch #1

ELEVATION A | 2,733 SQ. FT.

Includes 638 sq. ft. of Finished Lower Level

WALLACETON

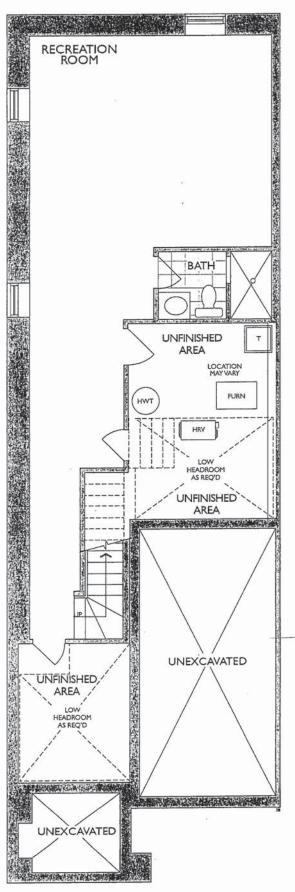





Legal Plan Dec. 3, 2020

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

16 of 41


# THE FORBES

ELEVATION A | 2,733 SQ. FT.

Includes 638 sq. ft. of Finished Lower Level

# 20-2095 END ALT ELEV. A

WALLACETON

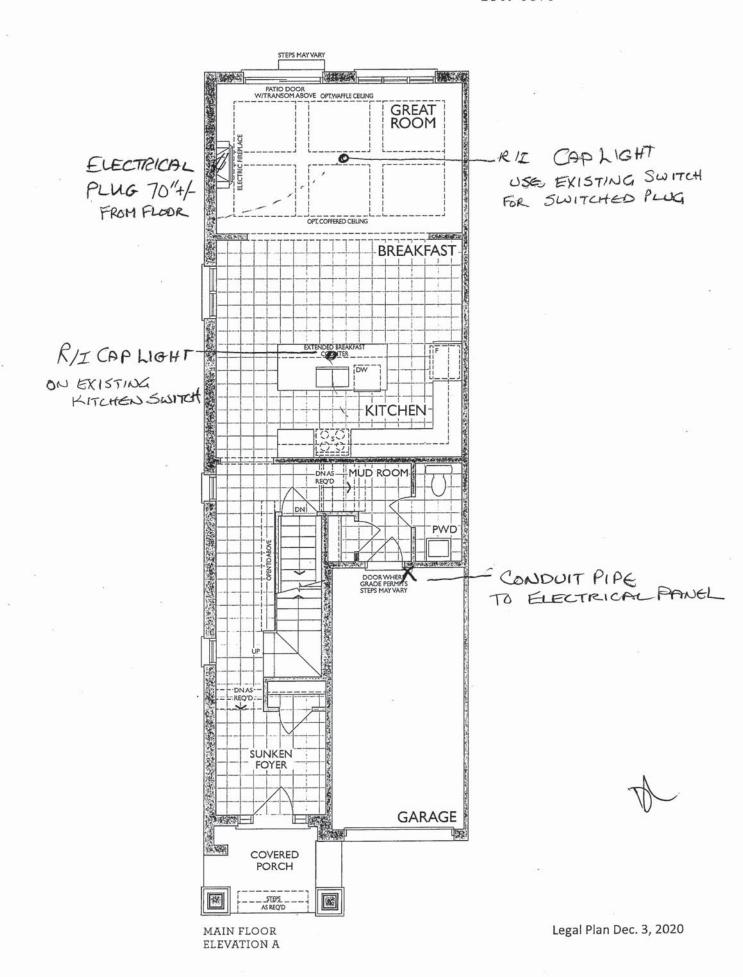

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

17 of 41


# THE FORBES

ELEVATION A | 2,733 SQ. FT.

Includes 638 sq. ft. of Finished Lower Level

# 20-2095 END ALT ELEV. A

WALLACETON

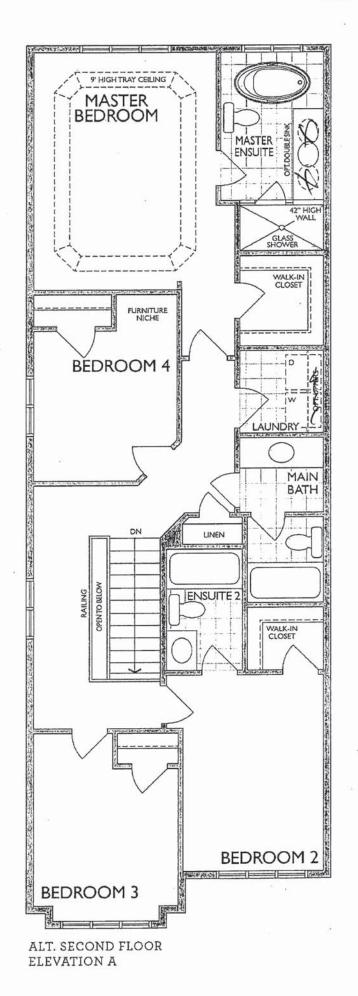

A)

Legal Plan Dec. 3, 2020

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

18 of 41







NFAS NF17 Mantel


Unit: 3192D-22, Phase: 3 Model: 20-2095 END ALT A The Forbes 19 of 41

Reginox\_

ND1831UA/9

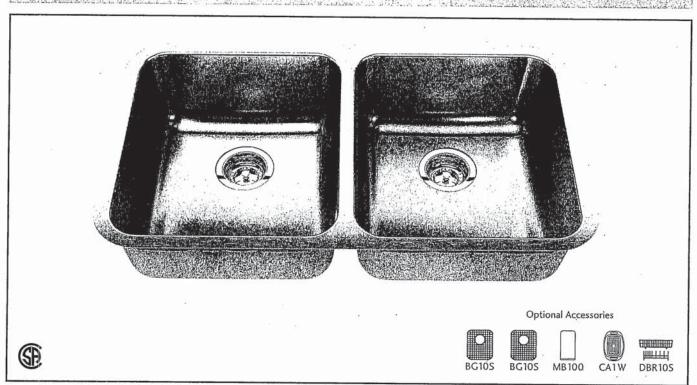





# ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408



Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

# 20 of 41

# **MOEN**<sup>®</sup>

# FAUCET DESCRIPTION

FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking

Power Clean™ spray technology

Metal construction with various finishes identified by suffix

Quick connect installation

Pulldown spray with 68″ braided hose

Flexible supply lines with 3/8″ compression fittings

High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing

360° rotating spout

Faucet designed for handle to be mounted on right side only

OPERATION

Lever style handle

- Lever style handle
  Temperature controlled by 100° arc of handle travel
  Operates with less than 5 lbs. of force

- Operates in stream or spray mode in the pullout or retracted position
- Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi CARTRIDGE

1255™ Duralast™ cartridge
 STANDARDS

- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

  Meets CalGreen and Georgia SB370 requirements

  Complies with California Proposition 65 and with the Federal Safe Drinking Water Act
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow


ADA for lever handle

# WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- original homeowner

  10 year limited warranty when used in a multifamily installation
  5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations

# Specifications




ALIGN™ Single Handle High Arc **Pulldown Kitchen Faucet** 

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



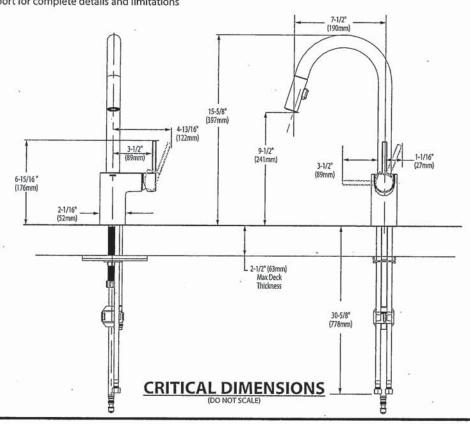

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes



BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

# BOULEVARD® PEDESTAL SINK VITREOUS CHINA

# **BOULEVARD® PEDESTAL SINK**

STD 0641.400 Faucet holes on 8" (203mm) centers (Illustrated) STD 0641.400 Faucet holes on 4" (102mm) centers

- ☐ 0641.100 Center hole only
  - · Classic styled rectangular pedestal lavatory
  - Vitreous china
  - Rear overflow
  - · Supplied with mounting kit
  - · Right Height® for greater comfort during use
  - Faucet ledge with large deck area (faucet not included)
  - Design coordinates with Boulevard® Toilet
  - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

# **Nominal Dimensions:**

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- O10.000 Pedestal only

# Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

# Compliance Certifications -

Meets or Exceeds the Following Specifications:

ASME A112.19.2 - 2008/CSA B45.1-08

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

# To Be Specified:

- □ Color: □ White □ Linen
- Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:





<sup>\*</sup> See faucet section for additional models available

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

22 of 41

# American Standard

# **BARRIER FREE**

# **COLONY™ COUNTERTOP SINK**

VITREOUS CHINA

# COLONY COUNTERTOP SINK

- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- · Faucet deck (Faucet shown not included)

0346	803
------	-----

Faucet holes on 203mm (8") centres



0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

0346 001

Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

# COMPLIANCE CERTIFICATIONS -Meets or exceeds the following Specifications:


- · ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

# To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray
  - Linen
- ☐ Faucet\*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

\* See faucet section for additional models available BAS-198 -



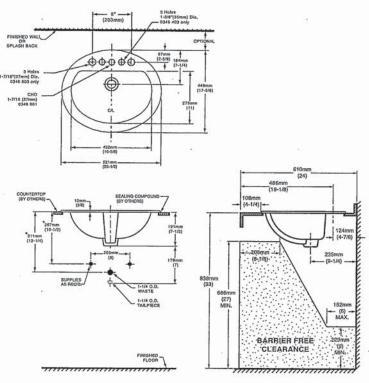

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of superseded or voided pages.

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

# 23 of 41



# DEMI™ **Product Specification Sheet**

# Two Piece Freestanding Collection

Two Piece Freestanding Soaker

Size:


60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


# TWO PIECE ASSEMBLY

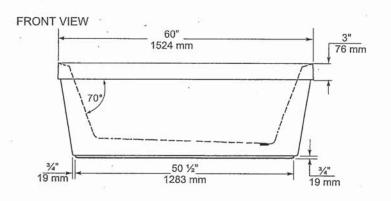

# END VIEW



TOP VIEW

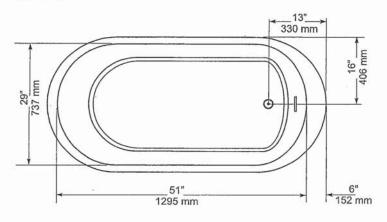

GENERAL SPECIFICATIONS

Average Weight 90 lb Bathing Well at bottom

43"x 20"

Capacity Drain to Overflow Water Depth Drain to Overflow 16"

Drain Opening (dia.)

51 mm 2 1/4"x 1/2"

Overflow Opening Drain to Floor Clearance

3 1/4"

57 x 13 mm 83 mm

195 litres

406 mm

41 kg

1092 x 508 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary  $\pm~\%''$  (6 mm). Weight may vary  $\pm~5$  lb ( 2.3~kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -Meets or Exceeds the following Specifications:
- CAN/CSA - B45 Series






mirolin 60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1 Telephone: 416.231.9030 Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 Canada, U.S.A.: 800.MIROLIN(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018





Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

24 of 41

# American Standard

Style That Works Better

# FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA

# FloWise™ DUAL FLUSH ELONGATED TOILET

# **2476 216**

- · Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- Elongated wash down bowl
- Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- · Easy to clean sanitary dam on bowl
- · Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

# **Separate Component Parts:**

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- 4035 216 Unlined Tank
- 2476 516 Same as above with Lined tank
  - ☐ 3067 316 Elongated Bowl
  - ☐ 4035 516 Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


# Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- CAN/CSA B45 series

# To Be Specified

- Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED. IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

# UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284

© 2008 American Standard

08/08

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

# **MOEN**®

# DESCRIPTION

- Metal construction with various finishes identified by suffix 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted OPERATION
- Pivot action lever style handle
- Temperature controlled through 180° degree arc of handle travel

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

# CARTRIDGE

- 1225 cartridge design Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

  ADA for lever handle

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser 5 year warranty if used in commercial installations

# Specifications



**CHATEAU®** Single-Handle Lavatory Faucet


# with Metal Waste Assembly Model: L4625 series L4631BC

Bulk Packed (12 per carton): L64624 series

# with 50/50 Waste Assembly Bulk Packed (12 per carton): L64625 series

# Less Waste Bulk Packed (12 per carton): L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

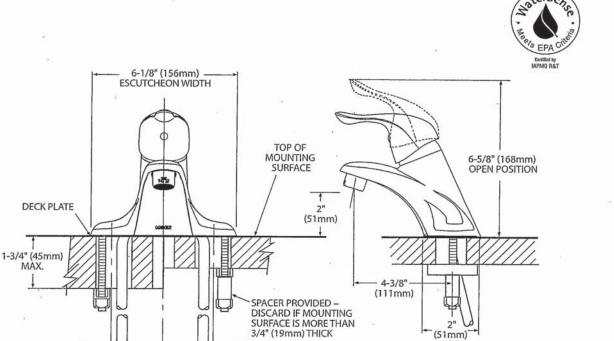

CRITICAL DIMENSIONS

(51mm)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

(51mm)



(51mm)

3/8" X 16" — TUBING SUPPLIES

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

# 26 of 41



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

### **OPERATION**

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in
- Adjustable temperature limit stop to control maximum hot water temperature limit stop to control maximum hot w temperature Pressure balancing mechanism maintains selected discharge temperature to ± 3°

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi NH suffix models contain no showerhead

# CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

### STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein EP suffix models are third party certified to WaterSense®
- ADA 👃 for lever handle

6.5" (165mm) ESC, DIAM,

### WARRANTY

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

TUB RIM

7-1/2"

to the original consumer purchaser 5 year warranty if used in commercial installations

# Specifications






# CHATEAU' POSI-TEMP' Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

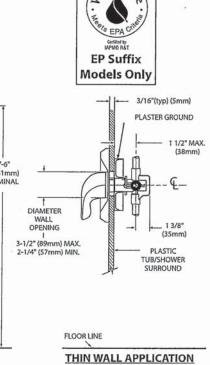

THICK WALL APPLICATION CRITICAL DIMENSIONS

FLOOR LINE

FACE OF STUD

- 1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

2 1/2" MAX. (63mm)

1-3/8" (35m

SHOWER 45" (1143mm)/ 48" (1219mm)

32" (813mm) AND TUB ONLY

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com



Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

27 of 41

# **MOEN**°

# DESCRIPTION

Metal construction with various finishes identified by suffix

### **OPERATION**

- Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


# **STANDARDS**

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🖨 for lever handles

# WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


# Specifications




# **CHATEAU®** Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

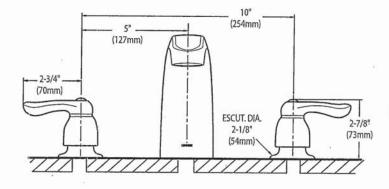



# **CRITICAL DIMENSIONS**

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

28 of 41

# WMH31017H

# **OVER-THE-RANGE MICROWAVE**



# **DISHWASHER-SAFE TURNTABLE PLATE**



Clean up spills on the turntable by simply putting it in the dishwasher.

# 2-SPEED, 300 CFM MOTOR CLASS\*



Match the right amount of ventilation to the dish being prepared and quickly get rid of cooking odors with two different fan speed settings.

# **MICROWAVE PRESETS**



Get just the right amount of heat and time, whether you're cooking or defrosting, with specific preset options.

# OTHER FEATURES

- Add 30 seconds option
- Electronic touch controls
- Adjustable cooktop lighting

	White (W)	Black (B)	Fingerprint Resistaint Stainless Steel (Z)	Silver (S)
MODEL	WMH31017HW	WMH31017HB	WMH31017HZ	WMH31017HS
Max height (in)	17-1/8"	17-1/8"	17-1/8"	17-1/8"
Width (in)	29-15/16"	29-15/16"	29-15/16"	29-15/16"
Depth (in)	15-9/16"	15-9/16"	15-9/16"	15-9/16"



<sup>\*</sup>Performance varies based on installation. ®/™ ©2018 Whirlpool. All rights reserved. 1/18. WC170107A

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

# 29 of 41

# VENTING DESIGN SPECIFICATIONS

This section is intended for architectural designer and builder/ contractor reference only.


- Vent materials needed for installation are not provided with microwave hood combination.
- We do not recommend using a flexible metal vent.
- To avoid possible product damage, be sure to vent air outside, unless using recirculation installation. Do not vent exhaust air into concealed spaces, such as spaces within walls or ceilings, attics, crawl spaces, or garages.

### For optimal venting installation, we recommend:

- Using roof or wall caps that have backdraft dampers
- Using a rigid metal vent
- Using the most direct route by minimizing the length of the vent and number of elbows to provide efficient performance
- Using uniformly sized vents
- Using duct tape to seal all joints in the vent system
- Using caulking compound to seal exterior wall or roof opening around cap
- Not installing 2 elbows together for optimal hood


If venting through the wall, be sure that there is proper clearance within the wall for the damper to open fully.

If venting through the roof, and rectangular-to-round transition is used, be sure there are at least 3" (7.6 cm) of clearance between the top of the microwave oven and the transition piece. See "Rectangular-to-Round Transition" illustration.



# **Rectangular-to-Round Transition**


NOTE: The minimum 3" (7.6 cm) clearance must exist between the top of the microwave oven and the rectangular to round transition piece so that the damper can open freely and fully.



- A. Roof cap
- B. 6" (15.2 cm) min. diameter round vent
- C. Elbow (for wall venting only)
- D. Wall cap
- E. 31/4" x 10" to 6" (8.3 x 25.4 cm to 15.2 cm) rectangular to round transition piece
- F. Vent extension piece, at least 3" (7.6 cm) high

# **Recommended Standard Fittings**

The following length equivalents are for use when figuring vent length. See the examples in "Recommended Vent Length".



- A. Rectangular-to-round transition piece:  $3^{1/4}$ " x 10" to 6" = 5 ft (8.3 x 25.4 cm to 15.2 cm = 1.5 m)
- B. Roof cap: 31/4" x 10" = 24 ft (8.3 x 25.4 cm = 7.3 m) C. 90° elbow: 31/4" x 10" = 25 ft (8.3 x 25.4 cm = 7.6 m)
- D.  $90^{\circ}$  elbow: 6" = 10 ft (15.2 cm = 3 m)
- E. Wall cap:  $3\frac{1}{4}$ " x 10" = 40 ft (8.3 x 25.4 cm = 12.2 m)
- F.  $45^{\circ}$  elbow: 6'' = 5 ft (15.2 cm = 1.5 m)
- G.  $90^{\circ}$  flat elbow:  $3\frac{1}{4}$ " x 10" = 10 ft (8.3 x 25.4 cm = 3 m)

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes


30 of 41

# **Recommended Vent Length**

The total length of the vent system including straight vent, elbow(s), transitions, and wall or roof caps must not exceed the equivalent of 140 ft (42.7 m) for either type of vent. See the "Recommended Standard Fittings" section for equivalent lengths.

For best performance, use no more than three  $90^\circ$  elbows. To calculate the length of the system you need, add the equivalent lengths of each vent piece used in the system. See the following examples:

# $3\frac{1}{4}$ " x 10" (8.3 x 25.4 cm) vent system = 73 ft (22.2 m) total




A. One  $3\frac{1}{4}$ " x 10" (8.3 x 25.4 cm) 90° elbow = 25 ft (7.6 m)

B. 1 wall cap = 40 ft (12.2 m)

C. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

# 6" (15.2 cm) vent system = 73 ft (22.2 m) total



A. Two 90° elbows = 20 ft (6.1 m)

B. 1 wall cap = 40 ft (12.2 m)

C. 1 rectangular-to-round transition piece = 5 ft (1.5 m)

D. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

If the existing vent is round, a rectangular-to-round transition piece must be used. In addition, a rectangular 3" (7.6 cm) extension vent between the damper assembly and rectangular-to-round transition piece must be installed to keep the damper from sticking.

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

31 of 41



# Whirtpool® 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

# Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic Stainless Steel	WRT541SZDM

Capacity					
Total Capacity	21 cu. ft.				
Refrigerator Capacity	15 cu. ft.				
Freezer Capacity	6 cu. ft.				
General Features & Properti	ies				
EZ Connect Icemaker Kit					
LED Interior Lighting					
ENERGY STAR® Certified					
Electronic Temperature Controls					
Freezer Temperature Controls					
Clear Door Bins					
Adjustable Door Bins					
Quiet Cooling					
Fingerprint Resistant					
Electrical Details					
Amps	6.5				
Volts 115					
Certifications					
ADA Compliant	Yes				
ENERGY STAR® Certified	Yes				

Technical Details	
TECHNICAL DECANS	
Refrigerator Type	Top-Freezer
Number of Doors	2
Number of Interior Refrigerator Shelves	3
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1
Number of Freezer Door Bins	2 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location	Freezer
Dispenser Type	N/A
Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear

# Key Features & Benefits

# Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

# Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

# **Humidity-Controlled Crispers**

Store fruits and vegetables in their ideal environment.





Reference Material **Dimension Guide** Use & Care Guide

**Energy Guide** Warranty

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

# 32 of 41



# **Top Mount Refrigerator**

### **PRODUCT MODEL NUMBERS**

WRT311FZD WRT511SZD WRT541SZD

**Electrical:** A 115-volt, 60-Hz, AC-only, 15-or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

**Water:** A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


**Reverse Osmosis Water Supply:** If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

### PRODUCT DIMENSIONS

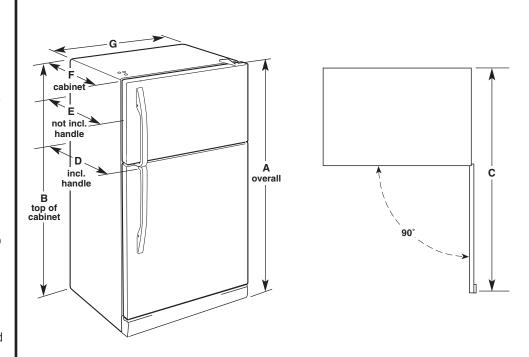

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	621/4" (158.1 cm)	32 <sup>7</sup> / <sub>8</sub> " (83.5 cm)	30 <sup>5</sup> / <sub>8</sub> " (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66½" (168.3 cm)	65½" (166.4 cm)	62½" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

# LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a  $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

33 of 41





### Available Finishes/Colours



YWFE515S0JB Black




YWFF515S0JS Stainless Steel



YWFE515S0JW White

### Manuals & Literature:





<u> Warranty</u>

# 5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

# YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

### **Top Features**

# FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

### Keep Warm setting

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Closed Door Broiling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Dimensions	
Depth	27 3/4
Height	36
Width	29 7/8

Configuration and Overview				
Range Type	Freestanding			
Fuel Type	Electric			
Size (IN,inches)	30			
Exterior				

Exterior	
Door Removable	Yes
Drawer Type	Storage Drawer
Oven Door	Glass Window
Oven Window Size	Extra Large
Handle Color	Stainless Steel
Handle Material	Metal

Exterior	
Handle Type	Reach-Through Handle
Features	
Hot Surface Indicator Light	Yes
Heating Element On Indicator Light	Yes
Power On Indicator Light	No
Griddle	NA
Automatic Convection	No

No

Conversion Temperature

Power Outage Compatible

Adjust

# CANADIAN APPLIANCE SOURCE LP


Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

# 34 of 41

# WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

# **Product Dimensions**



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46<sup>7</sup>/<sub>8</sub>" (119.1 cm) overall height (max.) with leveling legs screwed all the way in\*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in\*
- D. 297/8" (75.9 cm) width
- E. 255/16" (64.3 cm) depth back of range to front of cooktop\*\*
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

**IMPORTANT:** Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- \*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- \*\*Front of door and drawer may extend further forward depending on styling.

# **Cabinet Dimensions**

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

**IMPORTANT:** If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE\*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

\*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

# 35 of 41

# WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

**Electrical Requirements - Canada Only** 



**Electrical Shock Hazard** 

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection
120/240 V	120/208 V	Amps
8.8 - 16.5 KW 16.6 - 22.5 KW	7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50

<sup>\*</sup>The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.


# INSTALLATION INSTRUCTIONS

**Unpack Range** 

**Excessive Weight Hazard** 

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- **1.** Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

# 4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

# On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

<sup>\*</sup>If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

# 36 of 41

# WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

# **Install Anti-Tip Bracket**

# AWARNING

**Tip Over Hazard** 

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- 2. Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.



A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

# Floor Mounting



### **Wall Mounting**



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x  $1^5/8$ " (4.1 cm) screws provided.
- **6.** Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- 7. Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



**8.** Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

37 of 41





Stainless Steel

# Also available in:

White	WDF330PAHW
Black	WDF330PAHB

Capacity		
Total Place Settings	13	
General Features & Properties		
Heavy Cycle	Heavy Cycle	
High Temperature Wash Option		
Heated Dry Option		
ENERGY STAR® Certified		
Industry's Best Selling Dishwasher Brand <sup>†</sup>		
Designed, Engineered and Assembled in the U.S.A. with American Pride		
Electrical Details		
Amps	10	
Volts	120	
Hz	60	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Button
Number of Wash Cycles	3
Number of Options	4
dBA	55
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"

# Reference Material

**Dimension Guide** 

Install Guide

Use & Care Guide

**Energy Guide** 

Warranty

# Key Features & Benefits

# 1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.\*

# Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

# **Normal Cycle**

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.



<sup>\*</sup>Per IEC standards. \*\*Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. 

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

38 of 41




# **Undercounter Dishwasher**

# PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDF131PAH	WDF545PAF	

### DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

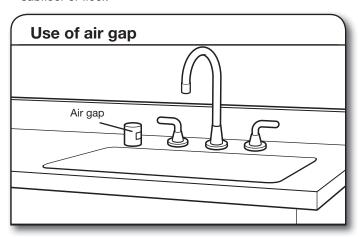

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

# WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- ³/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with ³/₄" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

**NOTE:** If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

# **ELECTRICAL REQUIREMENTS**

# You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

# If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



# If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.

Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

# PRODUCT AND CABINET OPENING DIMENSIONS — 23<sup>7</sup>/8" -(606 mm) — 25¹/₄" -(641 mm) — ³/₄" (19 mm) 30" (762 mm) 331/2" 301 (851 mm) min. with (762 mm) leveling legs removed **4**−3³/₄" (94 mm) 31/2" - 41/2" (88 mm - 106 mm) (533 mm) For 4" (100 mm) toe kick, height of cabinet opening is 341/2" (863 mm). A. Insulation may be compressed (not used on all models). B. Door handles may protrude forward of the face of the dishwasher, (varies by model). Check that all surfaces have no protrusions that would prohibit dishwasher installation. 101/2" NOTE: Shaded areas (864 mm) of cabinet walls show where utility -6<sup>3</sup>/<sub>4</sub>" (102 mm) (172 mm) connections may be installed. (76 mm (159 mm) 2<sup>1</sup>/<sub>4</sub>" (64 mm) 24" / (620 mm) (44 mm) 2" (51 mm) 24' (620 mm) D C. Measured from the lowest point on the underside of the countertop. May be reduced to 33<sup>1</sup>/<sub>2</sub>" (851 mm) by removing the wheels and perforated

area of insulation (blanket) on dishwasher.

D. Minimum, measured from narrowest point of opening.


Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

40 of 41

# WHIRLPOOL WASHER Model #: WFW5620HW

Whirlpool Brand Canada English | Washer and Dryers | Washers | Front Load Washers | WFW5820HW



5.2 cu. ft. I.E.C. Closet-Depth Front Load Washer with Load & Go™ Dispenser









Whirlpool'

5.2 cu. ft. I.E.C. Gloset-Depth Front Load Washer with Load & Go™ Dispenser

Model #: WFW5620HW

### Dimensions

Depth

80.17 cm, 31-9/16 in

Depth With Door Open 90 Degree

143.51 cm, 56-1/2 in

Minimum Height

98.11 cm, 38-5/8 in

Width

68.58 cm, 27.0 in

Appearance

LCD Touch Screen

No

Window

Yes

Details

Drum Material

Stainless Steel

Cycles and Options

Number of Wash Cycles

37

Electrical

Hz

60

Power Cord Included

Yes




Unit: 3192D-22, Phase: 3

Model: 20-2095 END ALT A The Forbes

# 41 of 41

# WHIRLPOOL DRYER Model #: YWED5620HW

Whitipool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW





7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls





7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620H

# Dimensions

THE STATE OF THE S	
Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Ventilation System	
Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear
Electrical	*
Hz	60
Power Cord Included	Yes

