# Sales Selection Sheet Checklist

LOT 3192D-24 Model: 20-1456 A The Hampton

PURCHASERS: AMAN VENDOR: Heath	IPREET BASSI/ wood Homes (Hu	uron) Limited		
*				
FINISHED BASEMENT COLD CELLAR				
	William College			
UPGRADED / MODIFIED ELEVA	TION			
CORNER UPGRADE				
REAR UPGRADE				
CEILING UPGRADE - SMOOTH MAIN FLOOR				
SECOND FLOOR				
BASEMENT				
ADDITIONAL ROUGH-INS	Name of Contract Agents and Contract Agents an			
200 AMP SERVICE	A STANDARD CONTRACTOR	A STANSON A		
WET BAR ROUGH-IN				э.
HUMIDIFIER				
✓ AIR CONDITIONING				
GAS ROUGH-IN		The state of the s		
STOVE				
DRYER				
BBQ  ADDITIONAL FIREDLACE	7			
ADDITIONAL FIREPLACE				
KITCHEN: HOODFAN VENTING 6 IN ROUND DUCT	SIZE	area de recessor de accompany		
7 IN ROUND DUCT				
FULL BASEMENT STAIRS:	N/A			
UPPER BASEMENT STAIRS:	All Oak			
LOWER BASEMENT STAIRS:	Carpet Grade			
MAIN STAIRS:	All Oak			
MEDIA STAIRS (if applicable):	N/A			
LOFT STAIRS (if applicable):	N/A			
MARCH 13/23 Signal	lite.	MARCH 13/23	BRENDA	LUKER
Date Purchaser:	1:0-		ecor Consultant:	
) on	y file	* Street	-	
Date Purchaser:		-03- 13 2000	mp	sol~
			eathwood Homes	(Huron) Limited
Locked Date:		Approved		

AMANPREET BASSI/ Project: Wallaceton Unit: 3192D-24, Phase: 3 Model: 20-1456 A The Hampton

Hall

2 of 579 4 O

Locked: Closed:

hen		
Cabinet Colour/Style	9156	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD***
Cabinet Hardware	7667	12881-HARDWARE ***STD***
Island Cabinet Colour/Style	9156	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Backsplash	1111	N/A *****
Backsplash Grout	1111	N/A *****
Backsplash Tile Pattern	1111	N/A *****
HoodFan	34	AV1308 Air King 30 STAINLESS STEEL UNDER CABINET POR RANGE HOOD **STD**
hen/Breakfast		
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

AMANPREET BASSI/ Project: Wallaceton Unit: 3192D-24, Phase: 3 Model: 20-1456 A The Hampton

Locked: Closed:

Flooring	9554	Red Oak Pearl-Vintage Engineered-SHALE-3/4 inch x 3 1/4 inch ***STD***
Comment		
Foyer		,
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Mud Room		
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Powder Room		
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***

AMANPREET BASSI/ Project: Wallaceton Unit: 3192D-24, Phase: 3 Model: 20-1456 A The Hampton

Flooring

579 Created: 2772026 09:26:47

Locked: Closed:

Comment		
Comment		·
		*
(5	<del>594-4-4(5</del>	73 177 181 181 1
Great Room		
CONTROL OF A CONTR	The second second second	
Flooring	9554	Red Oak Pearl-Vintage Engineered-SHALE-3/4 inch x 3 1/4
		inch ***STD***
Comment		
Comment		
Upper Hall		
	and the same of th	
Flooring	9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
Comment		
<u> </u>		
Finished Basement (Rec) Room/Ha		
Flooring	9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
		V
Comment		10 10 10 10 10 10 10 10 10 10 10 10 10 1
1		
L		n por vini se seconda de la mante de manda de la compansión de la compansi
Manda Dada ass		
Master Bedroom	CONTRACTOR BENEFIT	
Flooring	9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
, iceimig	[2.2.2.]	
Comment	111	
Comment		
Bedroom 2		
	AND THE PERSON NAMED IN	
Flooring	9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
Comment		
Bedroom 3		



DY 89418-MINOTAUR-BLACK ICE-40 oz Poly \*\*\*STD\*\*\*

AMANPREET BASSI/ Project: Wallaceton Unit: 3192D-24, Phase: 3 Model: 20-1456 A The Hampton 5ed: 25/202 09:26:41 0

Locked: Closed:

Comment		
er Ensuite		
Cabinet Colour/Style	9157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	7667	12881-HARDWARE ***STD***
Floor Tile	9255	TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***



AMANPREET BASSI/ Project: Wallaceton Unit: 3192D-24, Phase: 3 Model: 20-1456 A The Hampton 6cd: 2021 09:26:40

Locked: Closed:

lain Bathroom		
Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	7667	12881-HARDWARE ***STD***
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Tub Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***
Tub Wall Tile Grout	2226	Grout-(00) White ***STD***
Tub Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment	905-1985a	,
nished Basement Bathroom		43
Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	7667	12881-HARDWARE ***STD***
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD**

AMANPREET BASSI/ Project: Wallaceton Unit: 3192D-24, Phase: 3 Model: 20-1456 A The Hampton

Locked: Closed:

			-
Floor Tile Grout	2225	Grout-(27) Silver ***STD***	
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow	_
Shower Floor Tile	0001	White Matte-2 x 2 ***STD***	
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***	
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	
Shower Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***	
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***	
Shower Wall Tile Pattern	3070	HORIZONTAL STACKED ***STD***	
Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***	
Plumbing Fixture (Colour)  Comment	1737	Plumbing Fixtures-WHITE ***STD***	
eat Room Fireplace			
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***	
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***	P
Surround Opt.	1111	N/A *****	
Comment			

1711

Type

Carpet Grade Stairs \*\*\*OPT. FINISHED BASEMENT\*\*\*

AMANPREET BASSI/ Project: Wallaceton Unit: 3192D-24, Phase: 3 Model: 20-1456 A The Hampton



Locked: Closed:

Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pickets/Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing _pos
Carpet	9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
Custom Stain/Paint	1111	N/A *****
Comment		
asement Stairs Landing(s)		
Flooring	9059	Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth Unfinished Red Oak-Unfinished-3/4 inch x 3 1/4inch ***3***
Comment		
ain Stairs		2004 A 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Туре	1714	Oak Stairs ***STD MAIN STAIRS***
Colour	7940	Sambucca STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2? Square/Cap Post(s)-ALL OAK ***STD***
Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,riser
Custom Stain/Paint	1111	N/A *****
Comment		
ain Stairs Landing(s)		

9059

Flooring

Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth

ទៅត្រូវនា នៅ(នា

AMANPREET BASSI/ Project: Wallaceton Unit: 3192D-24, Phase: 3 Model: 20-1456 A The Hampton



Locked:

Closed:

	υπτιηιέπεα Kea Oak-υπτιηιέπεα-3/4 ind	cn x 3 1/4incn
Comment	-	
Throughout		Ā
RESOURCE SHOULD SHOULD SHOW THE SECURITIES OF TH	unuarional de la company de la	
Walls - Paint Colour	1717 22-Wall-WARM GREY ***STD***	
Underpad	1079 500 Series-Underpad ***STD***	
Thresholds	2232 Metal Thresholds ***STD***	
Switches and Plug	5796 Decora White Switches and Plugs ***S	TD***
Trim Size	8705 4 1/4 Baseboard and 2 3/4 Casings ***	STD***
Trim - Paint Colour	1716 Trim-WHITE ***STD***	
Comment		
Purchaser: AMANPREET BASSI	Date Decor Consultant	Fe67/23.  Date
Purchaser:	Date Wallaceton	-03- 13 2003 Date Approved

# 10 of 40



CONSTRUCTION SUMMARY

Lot: 3192D-24 Model: 20-1456 A The Hampton Project/Phase: Wallaceton / 3

Offer Worksheet	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes
Offer	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not entitled to a referral fee under Heathwood Homes Referral program.
Worksheet	Note:

Printed and Sent: 06-May-23

# construction summary of 40



Lot: 3192D-24 Model: 20-1456 A The Hampton Project/Phase: Wallaceton / 3

### **HARDWOOD**

1	nvoice	Qty.	Description
	1279	2	- PAINT - STAIN STAIR LANDING IN SAMBUCCA. LANDING OVER 25 SQ.FT. EACH
	314,351		
	13Mar23		
	**		HARDWOOD-Supply and Install smooth UNFINISHED pre-sanded red oak at stair landing(s)

### PAINTING

1 / 11/ 1						
Invoice	Qty. Description					
1279	2	- PAINT - STAIN STAIR LANDING IN SAMBUCCA. LANDING OVER 25 SQ.FT. EACH				
314,351						
13Mar23						
		HARDWOOD-Supply and Install smooth UNFINISHED pre-sanded red oak at stair landing(s)				

DisciplineMS.rpt 13dec21 Page 2 of 2

Printed and Sent: 06-May-23

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

12 of 40


# THE HAMPTON

ELEVATION A | 1,785 SQ. FT.

Includes 329 sq. ft. of Finished Lower Level

20-1456 ELEV. A WALLACETON

Sketch #1

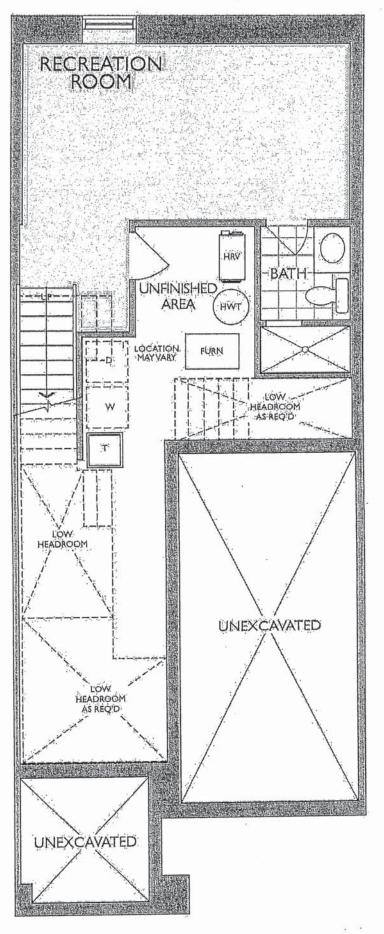

LOWER LEVEL ELEVATION A

AB.

Legal Plan Dec. 3, 2020

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

13 of 40

# THE HAMPTON


ELEVATION A | 1,785 SQ. FT.

Includes 329 sq. ft. of Finished Lower Level

20-1456 ELEV. A

WALLACETON EST. 1870

Sketch #2

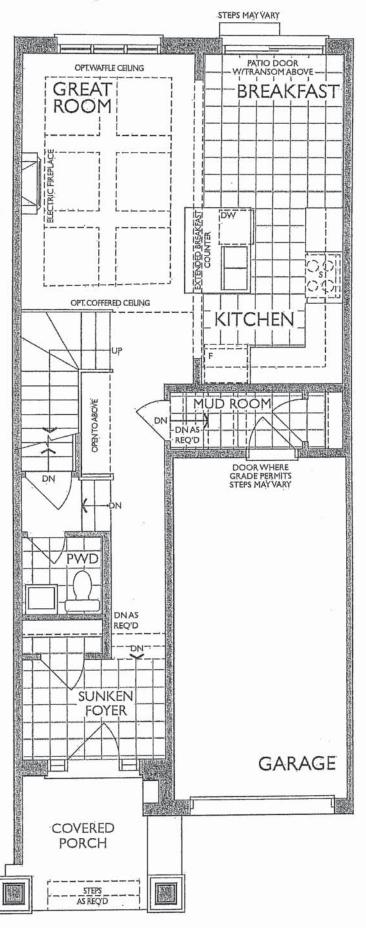

MAIN FLOOR ELEVATION A

Legal Plan Dec. 3, 2020

20-1456 ELEV. A

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 14 of 40


# THE HAMPTON

ELEVATION A | 1,785 SQ. FT.

Includes 329 sq. ft. of Finished Lower Level

WALLACETON

Sketch #3

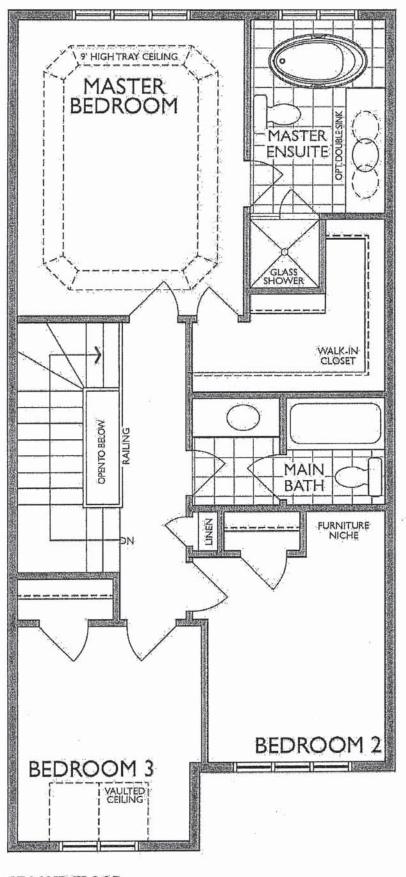

SECOND FLOOR ELEVATION A

Legal Plan Dec. 3, 2020

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton


15 of 40






NFAS NF17 Mantel - Cabinet



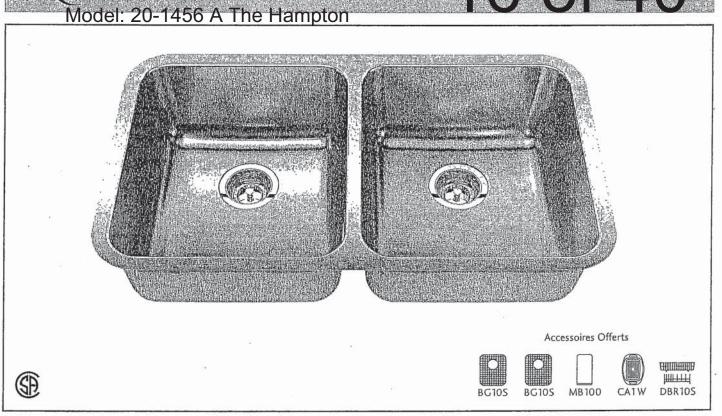

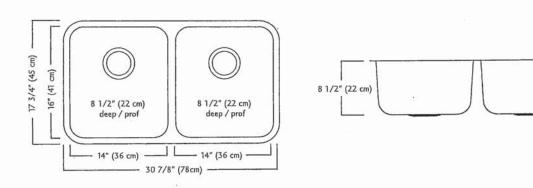

# ND1831UA/9 DONNÉES TECHNIQUES

Le modèle ND1831UA/9 est un évier à montage sous comptoir, à deux cuvettes (identiques), fabriqué par Franke Kindred Canada Limited dans de l'acier inoxydable de calibre 18. Le produit a un rebord à fini soyeux et des cuvettes à fini brossé linéaire. L'évier est revêtu d'un enduit sur toute la surface inférieure. Bondes d'évier à crépine-panier (3 1/2", 89 mm) comprises. L'évier fait l'objet d'une garantie limitée à vie.

- Dimensions hors-tout: 45 x 78 x 22 cm (17 3/4 x 30 7/8 x 8 1/2 po)
- Recommandé pour armoire d'un minimum de 91 cm (36 po)

Franke Kindred Canada Limitée C.P. 190, 1000 Kindred Road, Midland, Ontario, Canada L4R 4K9 Téléphone: 866-687-7465 Télécopieur: 800-361-8408



Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 17 of 40

FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking

Power Clean™ spray technology

Metal construction with various finishes identified by suffix

Quick connect installation

Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing

5360° rotating spout Faucet designed for handle to be mounted on right side only

**OPERATION** 

Lever style handle

Temperature controlled by 100° arc of handle travel
Operates with less than 5 lbs. of force
Operates in stream or spray mode in the pullout or retracted position

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge

STANDARDS

Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

Meets CalGreen and Georgia SB370 requirements


Complies with California Proposition 65 and with the Federal Safe Drinking

- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 😚 for lever handle

- Lifetime limited warranty against leaks, drips and finish defects to the
- original homeowner 10 year limited warranty when used in a multifamily installation 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

# Specifications




ALIGN™ Single Handle High Arc Pulldown Kitchen Faucet

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



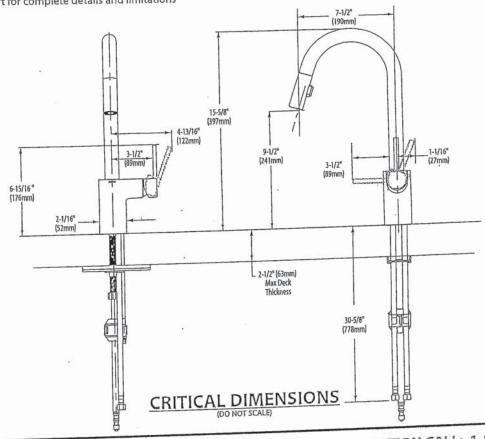

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Rev. 6/20



# Approject: Wallaceton Config. 3192D-24, Phase: 3 Apprier Free (Apprie Counter or Drop-in ONLY) Woodel: 20-1456 A The Hampton

18 PERTALSINK

BOULEVARD® PEDESTAL SINK

O641.800 Faucet holes on 8" (203mm) centers (Illustrated) STD 0641.400 Faucet holes on 4" (102mm) centers

- ☐ 0641.100 Center hole only
  - Classic styled rectangular pedestal lavatory
  - · Vitreous china
  - Rear overflow
  - · Supplied with mounting kit
  - Right Height® for greater comfort during use
  - Faucet ledge with large deck area (faucet not included)
  - Design coordinates with Boulevard® Toilet
  - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

#### Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

	0641.008	Pedestal	top-8"	(203mm)	centers
_				Carrier and a second	

- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

### Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep


## Compliance Certifications -

Meets or Exceeds the Following Specifications:

ASME A112.19.2 - 2008/CSA B45.1-08

### To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

© 2018 AS America Inc.

17

spec\_0641\_BoulevardPedSink Rev 2/18



<sup>\*</sup> See faucet section for additional models available

Unit: 3192D-24, Phase: 3


Model: 20-1456 A The Hampton

19 of 40

*Imerican* tandard

BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY) VIEW (ALL THREE CONFIGURATIONS) FINISHED WALL 19 (483m (13mm) HOLES FOR ANCHOR BOLTS ■ 32-1/4" (817mm 1-1/4" (32mm) O.D. WASTE 1-1/4" (32mm) O.D. TAILPIECE FINISHED FLOOR \_6-3/4" (170mm PEDESTAL SIDE SECTION -1/2mm (3/8")DIA BASE ANCHOR SCREW HOLES PEDESTAL CONFIGURATION (NOT ADA COMPLIANT)

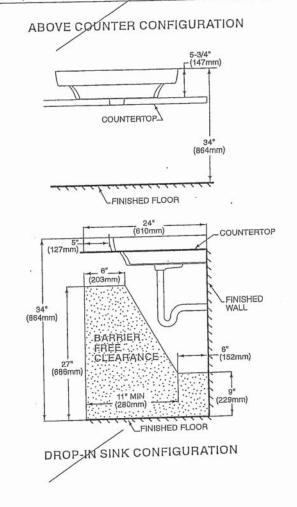

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ANSI A117.1 ACCESSIBLE AND USABLE
BUILDINGS AND FACILITIES - CHECK LOCAL CODES.
Top of circle in the second of the content of the Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

\* PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc. spec\_0641\_BoulevardPedSink Rev 2/18 J8

## American 24 Phase: 3 BARRWER ER 1456 A The Hampton

### COLONY COUNTERTOP SINK

- · Vitreous china
- · Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)

	0346	80
ш	0346	BU.

Faucet holes on 203mm (8") centres

0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

0346 001

Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes: 422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep

COMPLIANCE CERTIFICATIONS -Meets or exceeds the following Specifications: ASME A112.19.2M for Vitreous China Fixtures.

CAN/CSA B45 Series.

To Be Specified

☐ Colour: ☑ White ☐ Bone ☐ Silver Gray

Linen

Faucet\*:


BAS-198 -

Faucet Finish:

Supplies & Stops:

Trap 1-1/4" (32 mm):

\* See faucet section for additional models available

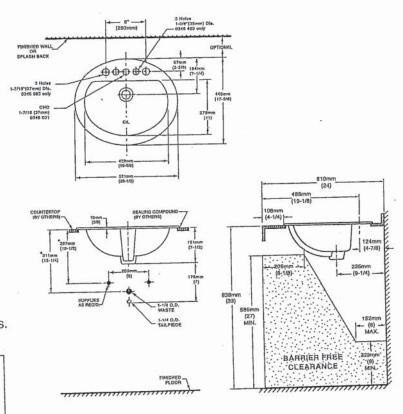

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.

FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of lixtures are nominal and may vary within the range of tolerances established by ANSI Standard Ar12.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

01/07

Unit: 3192D-24, Phase: 3


Model: 20-1456 A The Hampton

# 21 of 40

# American Standard

Style That Works Better

## **OVALYN**<sup>TM</sup> UNDERCOUNTER SINK VITREOUS CHINA

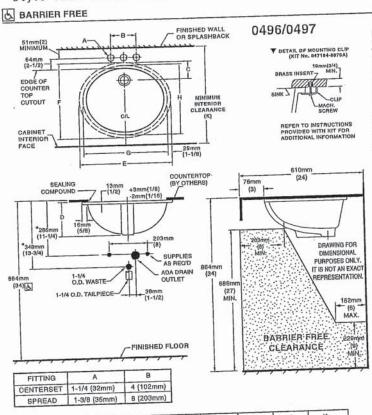

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P"
TRAP ARE SUGGESTED.

\* UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.

\* UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.

\* PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K).

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.


USE ENCLOSED TEMPLATE FOR COUNTERTOP CUTOUT


SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES -CHECK LOCAL CODES.

Countertop 864mm (34") from finished floor. Lavatory installed 76mm (3") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.






NOTES:
USE ENCLOSED TEMPLATE FOR COUNTER TOP CUTOUT.
FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE
ORDERED SEPARATELY.
\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P"
TRAP ARE SUGGESTED.

V UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K).
SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Countertop 864mm (34") from finished floor. Lavatory installed 51mm (2") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

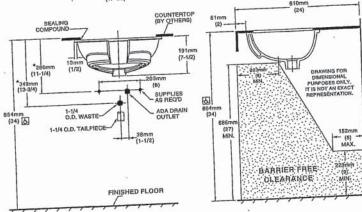

J54

Revised 2/08








DEIVII écifications

Model: 20-1456 A The Hampton de baignoires autoportantes en deux pièces

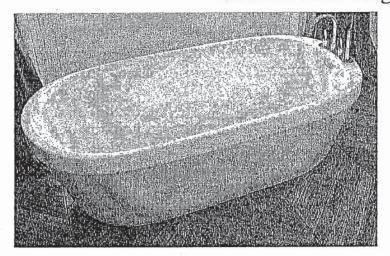

Baignoire de détente autoportante CF2007


en deux pièces 60 po x 32 po x 22 po

1524 mm x 813 mm x 559 mm


### CARACTÉRISTIQUES ET AVANTAGES DES PRODUITS


- Acrylique formé sous vide et renforcé de fibre de verre
- Fini très lustré résistant aux rayures, aux taches et à la décoloration
- Conception en deux parties d'installation facile
- Peuvent recevoir des robinets montés sur le tablier
- Comprend un vidage automatique intégré et un trop-plein rectangulaire
- Comprend les pieds réglables

### ENSEMBLE DE DEUX PIÈCES

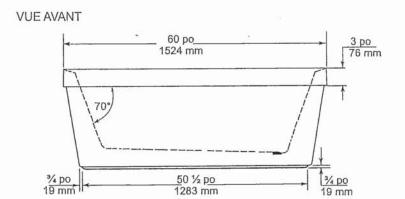





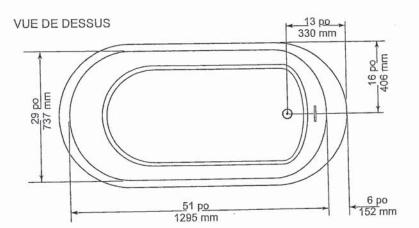

SPÉCIFICATIONS GÉNÉRALES Polds moyen Partle baignoire au bas 43 po x 20 po 1092 mm x 508 mm Capacité jusqu'au niveau du trop-plein 195 litres Profondeur d'eau entre l'orifice d'évacuation et le trop-plein Diamétre du drain 16 po 2 po 51 mm 2 ½ x ½ po 57 x 13 mm 3 ½ po 83 mm Ouverture du trop-pieln Dégagement du drain au plancher

NOTES: S'il vous plaît confirmer les dimensions actuels de votre produit pour garantir une identification correct. La baignoire doit être installée sur le plancher soutenue par les 5 pattes autonivelants. Ajuster si requis pour que la baignoire soit à niveau et obtenir un drainage approprié. Consulter les directives d'installations pour obtenir plus de renseignements.

IMPORTANT : Les dimensions des appareils sont nominales et peuvent varier de  $\pm\,\%$  po (6 mm). Le poids varie de  $\pm/-5$  ib (2.3 kg). Le dessin n'est pas à l'échelle. Ces dimensions peuvent être changées à la discrétion du fabricant.

Attestations de conformité - Se conforme aux spécifications suivantes ou les dépasse :

CAN/CSA - Série B45





60 Shorneliffe Rd., Toronto, Ontario M8Z 5K1 Téléphone: 416.231.9030 Télécopieur: 416.231.0929 www.mirolin.com

Service à la clientèle: 416.231.5790 Canada, É.-U.: 800.MIROLIN(647-6546) Télécopieur Canada: 800.463.2236

R0084162 25 Sep. 2018

© 2018 Mirolin Industries Corp.



Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 23 of 40

# American Standard

Style That Works Better

# FloWise™ DUAL FLUSH ELONGATED TOILET

VITREOUS CHINA

### FloWise™ DUAL FLUSH ELONGATED TOILET

#### 2476 216

- · Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- Elongated wash down bowl
- Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- Concealed trapway bowl
- Chrome-plated top mounted push button actuator
- · Easy to clean sanitary dam on bowl
- · Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

### Separate Component Parts:

- 3067 316 Elongated Bowl with Slow Close Seat
- 4035 216 Unlined Tank
- 2476 516 Same as above with Lined tank
  - 3067 316 Elongated Bowl
  - ☐ 4035 516 Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications: ASME A112.19.2M (and 19.6M)

- CAN/CSA B45 series

## To Be Specified

- Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS OF INTERPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

These measurements are subject to change or cancellation. No responsibility is assumed for these measurements are subject to change or cancellation.

i Standard ATIZ.19.2 its are subject to change or cancellation. No responsibility is assumed for use These measurements are subje of superseded or volded pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

	9		
rol-284		© 2008 American Standard	



08/08

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 24 of 40

# MOEN

#### DESCRIPTION

Metal construction with various finishes identified by suffix

16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted **OPERATION** 

Pivot action lever style handle

Temperature controlled through 180" degree arc of handle travel

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi CARTRIDGE

1225 cartridge design

Nonmetallic/nonferrous and stainless steel material

Can accommodate reversed piping and back to back Installations

Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9


Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

ADA for lever handle

#### WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser 5 year warranty if used in commercial installations

# Specifications



CHATEAU® Single-Handle Lavatory Faucet


with Metal Waste Assembly Model: L4625 series L4631BC Bulk Packed (12 per carton): L64624 series

with 50/50 Waste Assembly Bulk Packed (12 per carton): L64625 series

Less Waste Bulk Packed (12 per carton): L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



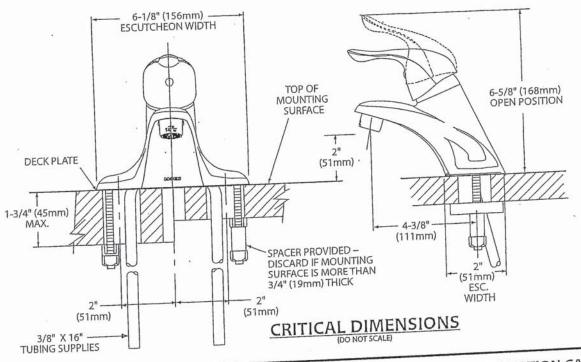

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Rev 8/15



Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 25 of 40

# MOEN

Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

Metal construction with various finishes identified by suffix includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

### **OPERATION**

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3^{\circ}$

#### FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi NH suffix models contain no showerhead

#### CARTRIDGE

- 1222 cartridge design
- Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

#### **STANDARDS**

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein EP suffix models are third party certified to WaterSense®
- ADA of for lever handle

6.5" (165mm) FSC. DIAM.

### WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser 5 year warranty if used in commercial installations

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE 7-1/2"

4-1/2" (114mm) WALL OPENING

# Specifications






# CHATEAU° POSI-TEMP° Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

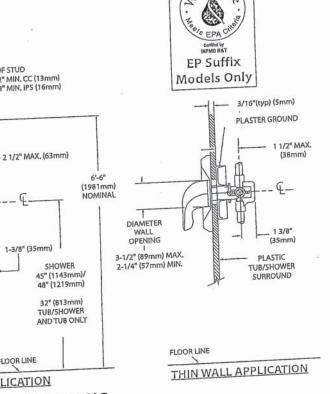

THICK WALL APPLICATION CRITICAL DIMENSIONS

1-3/8" (35

FACE OF STUD . 1/2" MIN, CC (13mm) 5/8" MIN, IPS (16mm

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 26 of 40

# MOEN

### DESCRIPTION

Metal construction with various finishes identified by suffix

### **OPERATION**

Lever style handles with hot and cold color indicator

Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

#### **STANDARDS**

Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein

ADA for lever handles


### WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original homeowner

10 year limited warranty when used in a multi-family installation

5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


# Specifications




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

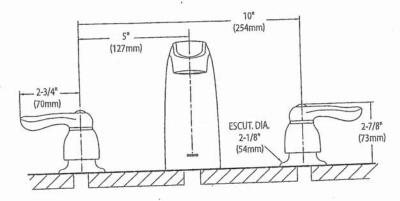



CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 27 of 40







180 CFM/7.0 Sones @ 0.10" SP. Horizontal 180 CFM/7.5 Sones @ 0.10" SP. Vertical

Dimensions

Overall bottom projection - 183/6"
Overall top projection -12"
Height - 6"
Available widths: 21", 24, 30", 36" & 42'

Hood Body

Stainless Steel: 24 gauge, grade 430 stainless steel.

Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.

Motor

2 speed, single coil, thermally protected, permanently lubricated. Rated 120 volts, 60 hz. Complete with 200°C lead wires.

Lighting

Single 60 watt cook light capacity (bulb not included).

Ducting Options


Horizontal ducting: 31/4"x10" (duct adapter and damper included). Vertical ducting: 31/4"x10" (duct adapter and damper included). Vertical ducting: 7" round (duct adapter and damper not included). Ductless: removable front vent (charcoal filter not included).

Fan Blade


One piece polymeric, electronically balanced blade. 65/8" diameter with 5 paddles.

Electrical connection

Hood top - 7/8" knockout hole for use with 1/2" cable clamp Hood back - 7/8" knockout hole for use with 1/2" cable clamp



## **AV SERIES**



Filters

UL rated, class 2 filter. Grease Filter: RF35 - 87/8"x103/8" (included). Charcoal Filter: RF34 (not included). Combo Grease/Charcoal: RF55 (not included).

Available Finishes

White, Biscuit, Almond, Black & Stainless Steel.

2. 1966年,1967年中,中国	STORESTS OF STR	Statio	c Pressure	(inches o	f w.g.)		Julius	Tun open		Apms
	0	0.05	0.1	0.15	0.2	0.25	@ ,1 SP	RPM	Watts	Apilla
Air Flow - CFM	U				181	147	7.5	2973	87.0	2.1
Vertical Ducting High	246	232	218	203			7.0	3024	87.0	2.1
Horizontal Ducting High	225	210	180	175	155	120	7.0	3024	07.0	4.77

PROJECT	ARCHITECT
LOCATION	MENGINEER 37 1900/989
CONTRACTOR (CAM)	YSUBMITTED BY. DATE
FAN MODEL CFM IN RPM WATTS AMPS	SONES OTY OPTIONAL EQUIPMENT & REMARKS
MUMBER MUMBER	





Air King: 820 Lincoln Avenue West Chester, Pennsylvania 19380-4466 Tel: (610) 692-7400 • 877-304-3785 Fax: (610) 696-8048 Canada: Brampton, Ontario Tel: 905-456-2033 Fax: (905) 456-1015

Updated 2-18

pecifications subject to change without notice.




Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 28 of 40



# Whirlpool 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

#### Also available in:

White	WRT541SZDW
Black	WRT541SZDB
_	

Monochromatic Stainless Steel	WRT541SZDM
Otalilless oteel	

Lapacity		
Total Capacity	21 cu. ft.	
Refrigerator Capacity	15 cu. ft.	
Freezer Capacity	6 cu. ft.	
General Features & Prope	erties	
EZ Connect Icemaker Kit	t .	

EZ Connect icemaker Kit	+31
LED Interior Lighting	
ENERGY STAR® Certified	
Electronic Temperature Contr	rols

Freezer Temperature Controls

Clear Door Bins	
Adjustable Door Bins	

Quiet Cooling	
Fingerprint Resista	ant

**ENERGY STAR® Certified** 

Electrical Details		
Amps	6.5	
Volts	115	
Certifications	Ÿ	
ADA Compliant	Yes	

#### **Technical Details** Refrigerator Type Top-Freezer Number of Doors 2 Number of Interior Refrigerator Shelves Number of Refrigerator 1 Fixed, 4 Adjustable Door Bins Number of Interior Freezer Shelves Number of Freezer Door Bins 2 Fixed LED Lighting Type Ice Maker Optional Ice Maker Location Freezer N/A Dispenser Type

Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top
	Allow extra 1" on rear

## Reference Material

**Dimension Guide** 

Use & Care Guide

**Energy Guide** 

Warranty

### Key Features & Benefits

### Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

### Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

### **Humidity-Controlled Crispers**

Store fruits and vegetables in their ideal environment.



GARAGE RIGHT

HINGES ON RIGHT HANDLE ON LEFT

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 29 of 40



# **Top Mount Refrigerator**

#### PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

#### PRODUCT DIMENSIONS

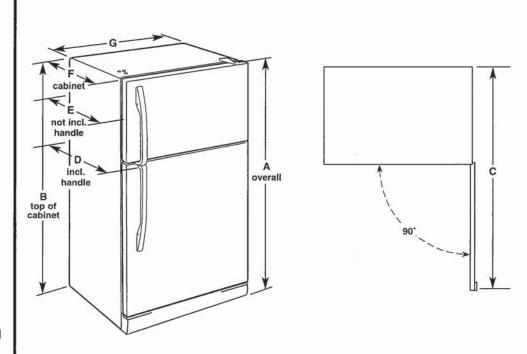

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66¼" (168,3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	327/8" (83.5 cm)	30%" (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

### LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a ½" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 30 of 40





#### Available Finishes/Colours

YWFE515S0JB

YWFE515S0JS Stainless Steel

YWFE515S0JW

#### Manuals & Literature:





Warranty

# 5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

### YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

### Top Features

FlexHeat™ Dual Radiant Element
Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep Warm setting

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

using this broiling tempe	rature management syste	em that helps prevent overheatin
Dimensions	10 particular 1	Exterior
Depth	27 3/4	Handle Type
Height	36	
Width	29 7/8	Features
Configuration and Ove	rview	Hot Surface Indicator Light
Range Type Fuel Type	Freestanding Electric	Heating Element On Indicator Light
Size (IN,inches)	30	Power On Indicator Light Griddle
Exterior	(4)	Automatic Convection Conversion Temperature
Door Removable	Yes	* Adjust
Drawer Type	Storage Drawer	Power Outage Compatible
Oven Door	Glass Window	
Oven Window Size	Extra Large	
Handle Color	Stainless Steel	

Metal

### CANADIAN APPLIANCE SOURCE LP

**公司并决定**分

Reach-Through Handle

No

NA No

No

Handle Material


Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 31 of 40

# WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

#### **Product Dimensions**



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46<sup>7</sup>/s\* (119.1 cm) overall height (max.) with leveling legs screwed all the way in\*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in\*
- D. 297/8" (75.9 cm) width
- E. 255/16" (64.3 cm) depth back of range to front of cooktop\*\*
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

**IMPORTANT:** Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- \*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- \*\*Front of door and drawer may extend further forward depending on styling.

#### **Cabinet Dimensions**

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

**IMPORTANT:** If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE\*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

\*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 32 of 40

# WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

**Electrical Requirements - Canada Only** 

## AWARNING



**Electrical Shock Hazard** 

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*	4.7 M-2.7 Maril 1. 15 Mari 24.2 A. 15.2 A. 2011	Specified Rating of Power Supply Cord Kit and Circuit Protection Amps	
120/240 V	120/208 V		
8.8 - 16.5 KW 16.6 - 22.5 KW	7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50	

- \*The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.
- \*\*If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/6" (3.5 cm) diameter connection opening.
- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

# INSTALLATION INSTRUCTIONS


Unpack Range

## AWARNING

**Excessive Weight Hazard** 

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- 1. Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

#### 4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

# On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 33 of 40

# WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket

# AWARNING



**Tip Over Hazard** 

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.

- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- Determine which mounting method to use: floor or wall.
  If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.



A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

#### Floor Mounting







Rear position

Front position

Diagonal (2 options)

### **Wall Mounting**



- Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x 1<sup>5</sup>/<sub>8</sub>" (4.1 cm) screws provided.
- Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



 Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.


Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 34 of 40



Capacity



Stainless Steel WDF330PAHS

### Also available in:

WDF330PAHW

Black

WDF330PAHB

Total Place Settings	13
General Features & Propert	ies
Heavy Cycle	
High Temperature Wash Op	otion
Heated Dry Option	
ENERGY STAR® Certified	
Industry's Best Selling Dish	nwasher Brand†
Designed, Engineered and U.S.A. with American Pride	
Electrical Details	
Amps	10
Volts	120
Hz	60
Certifications	173833
ENERGY STAR® Certified	Yes

	212
Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Button
Number of Wash Cycles	3
Number of Options	4
dBA'	55
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"

### Reference Material

**Dimension Guide** 

Install Guide

Use & Care Guide

**Energy Guide** 

Warranty

## Key Features & Benefits

### 1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.

### Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

### **Normal Cycle**

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.



<sup>\*</sup>Per IEC standards. \*\*Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are 

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 35 of 40




# **Undercounter Dishwasher**

#### PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDF131PAH	WDF545PAF	

### DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

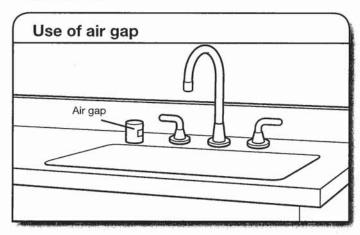

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

#### WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- 3/s" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with 3/4" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

**NOTE:** If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

### **ELECTRICAL REQUIREMENTS**

### You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

### If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



### If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
  - Constitution of the Consti
- Use a UL Listed/CSA Approved metallic strain relief.


Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Page 1 of 2 W10806908-D-WH 12/16

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

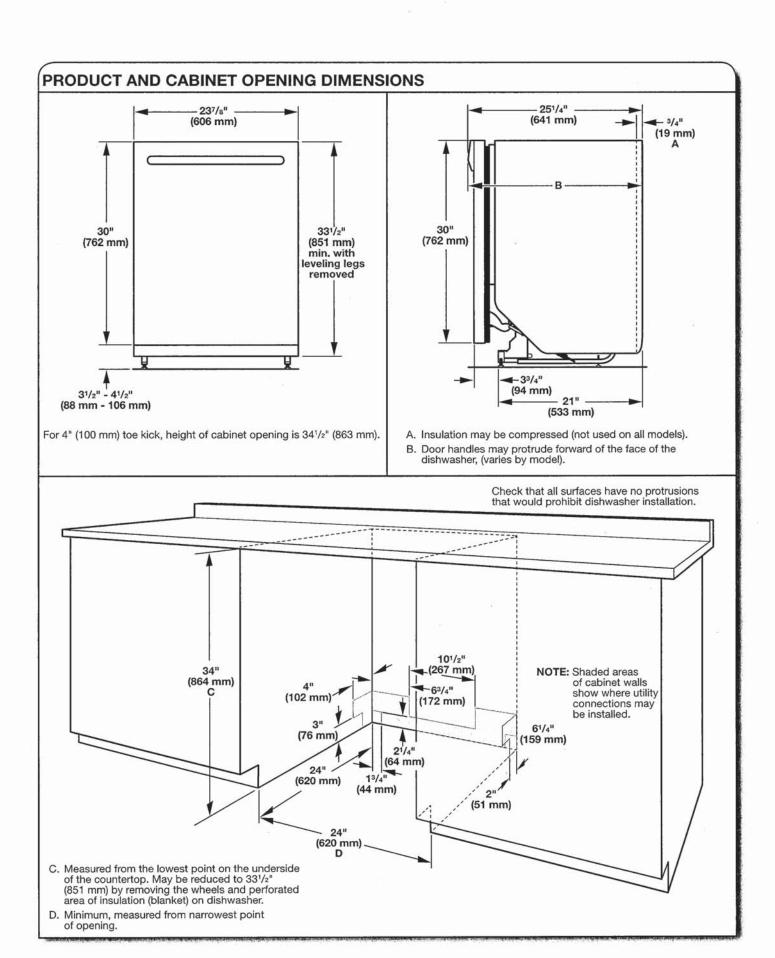

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Page 2 of 2 W10806908-D-WH 12/16

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 37 of 40

5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

Overview	Specifications	Reviews	You May Also Like	Help And Resources	Find In Store
	Maga		- CI	Key F	eatures
					ustomer Satisfaction in the J.D. Power 2020 Appliances Satisfaction Study
0				• 5.0 cu.	ft. I.E.C. Capacity
		A.A.		• ENERG	SY STAR® Certified
4 6000 0 200			E. S.	Intuitive	e Controls
· · ·		1		Sanitize	e Cycle with Oxi
	/		<b>7</b> /		
37				Color	
				White	
				in	
	-			()	

# **Specifications**

**Control Location** 

LCD Touch Screen

### Width: 6858.00, 27.0" Centimeters, Inches

### Depth: 8016.88, 31-9/16" Centimeters, Inches


Centimeters, I	nches	Centimeters, Inches	
Dimensions		Compatibility	
Capacity	4-3/10	Works With	No
Depth	8016.88 cm, 31-9/16 in	Options	
Gross Weight	97068688.00 kg, 214 lbs		
Net Weight	92532768.00 kg, 204 lbs	Number Of Washer Options	. 7
Width	6858.00 cm, 27.0 in	Features	
Appearance			
		Stackable	Yes
LCD Touch Screen Window	No Yes	Water Faucet	No
AAIIIdoM		Cycles	
Details			
		Number Of Wash Cycles	35
Advanced Vibration Control™	No	AND REPORTED TO SERVICE AND	
Dispense System	Delergent, Fabric Softener & Bleach	Exterior	
	No	Lid/Door Lock	Yes
Eco Monitor/Efficiency Monitor	NO	Lid/Door Swing	Left
Hoses Included	4ft 4in Drain Hose Included		
Internal Heater	No	Modifiers	
Maximum Spin Speed	1160	Delay Start	No
Out Of Balance Sensing	Yes	Number Of Rinse Options	2
Water Factor	3-1/5	Number Of Soil Levels	3
Cycles and Options		Number Of Spin Speeds	
		Number Of Wash/Rinse Temperatures	4
Number Of Wash Cycles	35	Pre Soak	Yes
Electrical		Temperature Selections	Hot, Cold, Cool, Warm
Power Cord Included	Yes		
Controls			
		ž	
Automatic Temperature Controls	Yes		


No

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 38 of 40

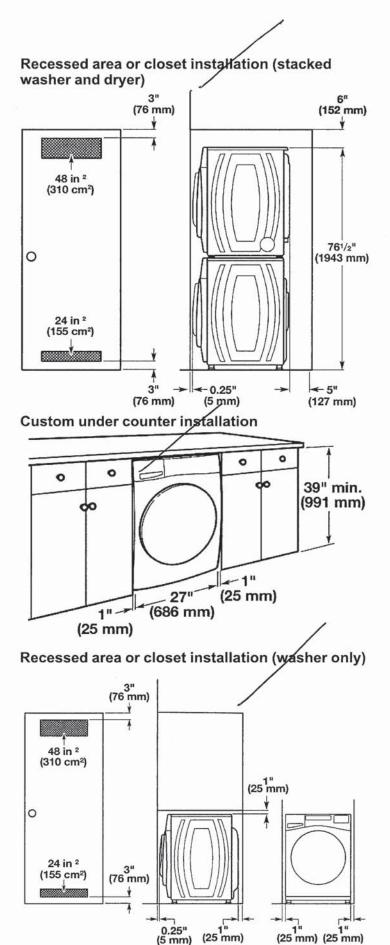

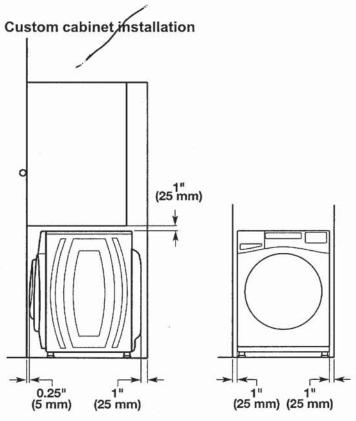


## **Drain System**

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of o leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

**IMPORTANT:** To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

### Floor standpipe drain system




Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts."

Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton


# 39 of 40

### Wall standpipe drain system

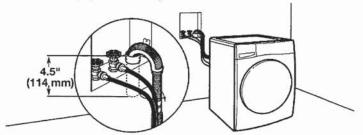


See requirements in "Floor standpipe drain system."


### Laundry tub drain system



Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

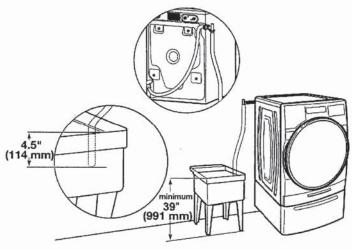

### Floor drain system

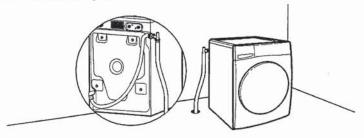

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

## **Electrical Requirements**

## AWARNING



**Electrical Shock Hazard** 

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

### **GROUNDING INSTRUCTIONS**

For a grounded, cord-connected appliance:

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

**WARNING:** Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

For a permanently connected appliance:

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

SAVE THESE INSTRUCTIONS


Unit: 3192D-24, Phase: 3

Model: 20-1456 A The Hampton

# 40 of 40

### WHIRLPOOL DRYER Model #: YWED5620HW

Whirlpool Brand Canada English | Washer and Dryers | Dryers | Electric Dryers | YWED5620HW



7.4 cu. ft. Front Load Electric

**Dryer with Intuitive Touch Controls** 



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

### **Dimensions**

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Ventilation System	3333
Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear
Electrical	
Hz	60
Power Cord Included	Yes