




1994 Mallard Rd
London, Ontario
N6H 5L8
Phone: 1(800) 930-0214
sales@bristolsinks.com | <https://www.bristolsinks.com/>

B926 Undermount Sink with 15mil Radius Corners

\$980.00 CAD

Single Bowl Undermount Sink with 15mil radius corners
Outside dimensions: 32 x 19 x 10"
Minimum Cabinet Size: 33"
Stainless Steel Single Bowl Sink
16 Gauge Type 304 Stainless Steel
Stone Guard undercoating over rubber pad
3 1/2" drain opening
Supplied with installation clip, template and strainer
cUPC certified



https://www.bristolsinks.com/index.php?route=product/product&product_id=114



VULCANO

Version

FPVUX30W6SS / VulcanoXL Wall
30" (76 cm) 600 CFM

Collection

Potenza

EAN code

8034122502670



Photograph is for information purposes only
May not correspond to the selected version

FEATURES

- Scotch brite stainless steel (AISI 304)
- Electronic control
- LED lighting
- Optional charcoal filter
- Labyrinth filter

OPTIONAL ACCESSORIES

- KACL.510#I
Extension H700 - Wall
- KACL.512#I
Extension H960 - Wall
- KACL.815
Protective cleaning cloths for stainless steel (box 10 pcs)

TECHNICAL FEATURES


- Installation type
Wall
- Dimensions
30 " / 76 "
- Finish
Scotch brite stainless steel (AISI 304)
- Motor
600 CFM
- Type of control
Electronic control
- Speed settings
4
- Lighting
Led 2x1,2 W - 3200 K
- Minimum distance
Gas hob: 24 in
Electric hob: 21 in


PACKAGING:WEIGHTS AND VOLUMES

- Gross weight
45 lbs
- Net weight
34 lbs
- Volume
11 ft³
- Packaging size
Length
40 in
Height
24 in
Depth
21 in

CONSUMPTION AND CONNECTION FEATURES


- Maximum consumption
430 W
- Voltage / Frequency
120V 60Hz
- Plug type
standard

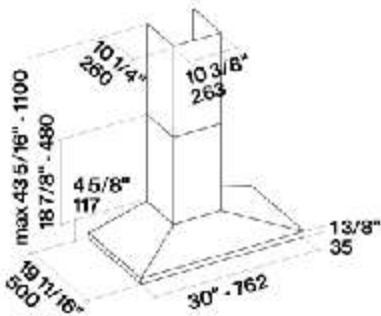

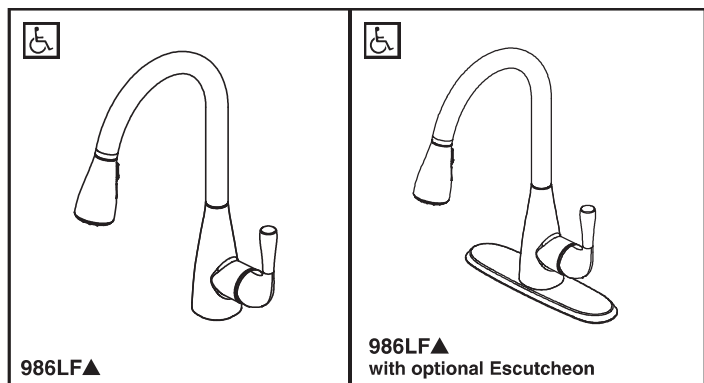

Submitted Model No.: _____

Specific Features: _____

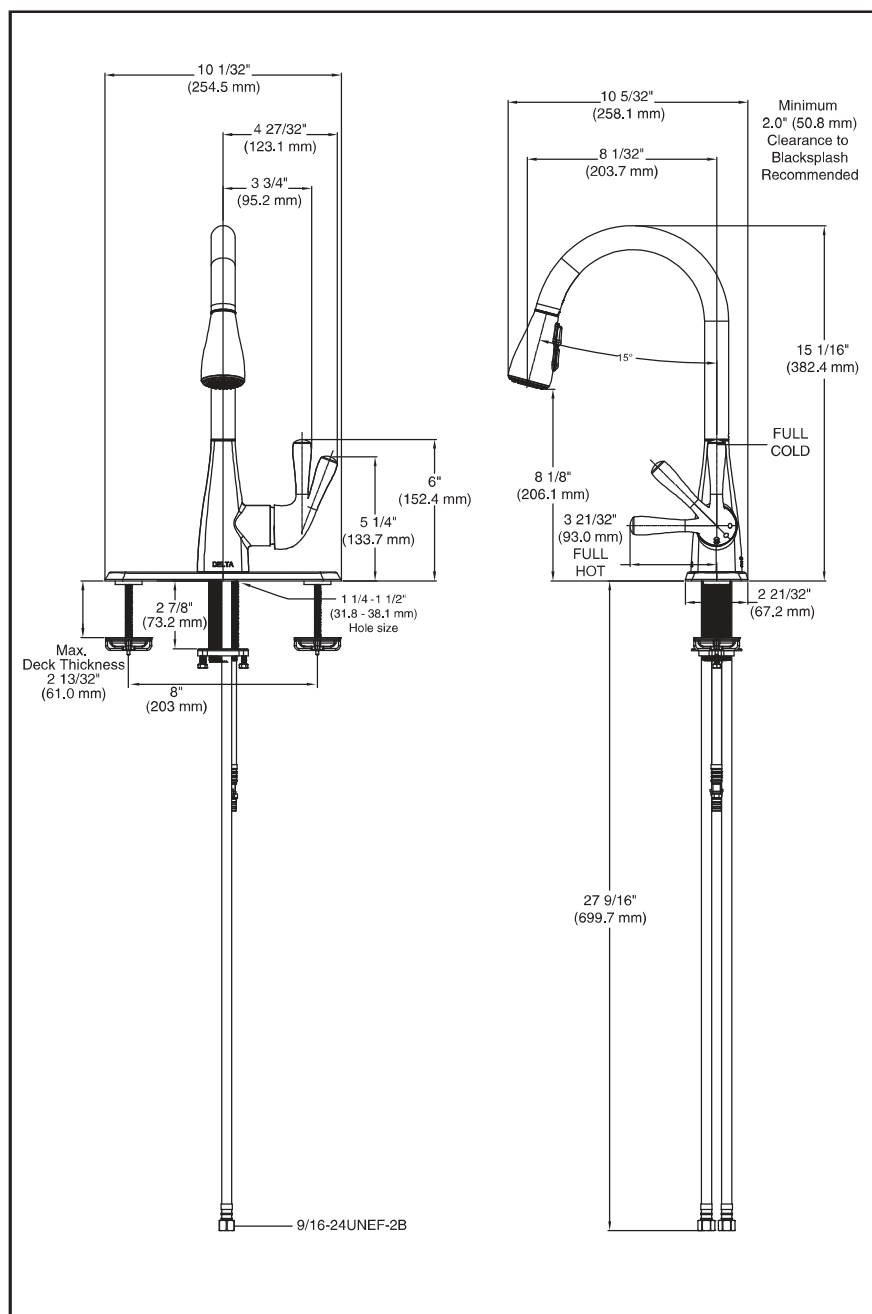

KITCHEN FAUCETS

- Marley™ Pull-Down Kitchen Faucet
- Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- Solid brass fabricated body.
- Single handle kitchen faucet.
- 8" centres with optional 10" long escutcheon (ordered separately).
- 15 1/16" (382.4 mm) high, 8 1/32" (203.7 mm) long spout, nestled in a metal hub, swings 360°.
- Pull-down spout operates in an aerated or spray mode via an easy push button.
- Touch-Clean® spray head.
- Quick Snap® hose installation.
- Spout is connected to valve body with a 59" (1499 mm) long hose.
- Ceramic cartridge.
- 30" (762 mm) flexible supply lines included.
- Standard with 9/16 - 24 UNF-2B (3/8" compression).
- Integral double check valves.
- Maximum flow rate 1.8 gpm @ 60 PSI.

WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLIES WITH:

- Complies to ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations.

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.specselect.com for finish options and product availability.



55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2015 Masco Corporation of Indiana