Sales Selection Sheet Checklist

1 of 42

LOT 694-1 Model: 20-2505 CRN B WORTHINGTON

PURCHASERS: SARFARAJ, RAHIMBHAI HOTELWALA/SABINABANU, SARFARAJ I

VENDOR: Heathwood Homes (Whitby) Limited

	OPTION	NAL LOWER LEVEL V	VITH BEDROOM 4 A	AND BATHROO	M
	WOB				
Υ		N MAIN			
		ED BASEMENT			
	COLD				
LIDOD					
		MODIFIED ELEVATION	PN		
Y		R UPGRADE			
Y		JPGRADE			
	SIDE UI	PGRADE			
		RADE - SMOOTH			
Y	MAIN F				
		D FLOOR			
	BASEM				
	LOWER	RLEVEL			
		ROUGH-INS			
Y		P SERVICE (STD 200	AMP TOWNS)		
		AR ROUGH-IN			
		FIER (STD in Singles			
Y	AIR CO	NDITIONING (SITE S	TD)		
GAS F	ROUGH-I	N			
Y	STOVE				
	DRYER				
	BBQ				
	ADDITIO	ONAL FIREPLACE			
KITCH	IEN: HO	ODFAN VENTING SIZ	ĽΕ		
Y	6 IN RO	UND DUCT			
	7 IN RO	OUND DUCT (STD FO	R TOWNS)		
FULL	BASEME	ENT STAIRS:	Paint Grade		
UPPE	R BASE	MENT STAIRS:	N/A		
LOWE	R LEVE	L STAIRS:	All Oak		
LOWE	R BASE	MENT STAIRS:	N/A		
MAIN	STAIRS:		All Oak		
MEDIA	A STAIRS	G (if applicable):	N/A		
LOFT	STAIRS	(if applicable):	N/A		
		2 Signature on file		June 16, 20	022 BRENDA LUKER
D	ate	Purchaser:		Date	Decor Consultant:
D	ate	Purchaser:			22 MARILYN ROSEN
				Date	Heathwood Homes (Whitby) Limited

SARFARAJ, RAHIMBHAI HOTELWALA/SABINABANU, SARFARAJ HOTELWALA

Project: Country Lane Unit: 694-1, Phase: 6

Model: 20-2505 CRN B WORTHINGTON

2 457 4 2 12:03: 16 2

Locked: Closed:

Kitchen			
Cabinet Colour/Style	0	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***	
Island Cabinet Colour/Style	0	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***	
Cabinet Hardware	2086	9677-HARDWARE ***STD***]
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***	
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***	
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD**	
Sink	9487	Plumbing-KINDRED Kitchen Sink Collection - Reginox ND1831 U/9-Double (equal size) Bowl Undermount Sink (or equivalent)-Stainless Steel	PG 18
Crumb Vac Color	9486	Vacuum-Crumb Vac (Dust Pan)-Silver	
HoodFan	9413	AVN-308CS-AVG 30 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN	28-29
Opt. Backsplash	1111	N/A *****	
Opt. Backsplash Grout	1111	N/A *****]
Opt. Backsplash Tile Pattern	1111	N/A *****	
Flooring	1111	TR.SP.WHITE.1313 SEMPRE White Matte 13	

- Purchasers have been advised: standard fridge opening is a minimum 37 $3/8 \times 73 \ 3/8$ inches. Ice Waterline Rough-In is included.

Grout-(27) Silver ***STD***

STANDARD SQUARE ***STD***

- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.

2225

3000

- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

Comment			

oyer		
Flooring	3000	TR.SP.WHITE.1313 SEMPRE White Matte 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

Floor Tile Grout

Floor Tile Pattern

SARFARAJ, RAHIMBHAI HOTELWALA/SABINABANU, SARFARAJ HOTELWALA Project: Country Lane Unit: 694-1, Phase: 6 Model: 20-2505 CRN B WORTHINGTON

Locked:

		Closed:	
Comment			
Powder Room			
Flooring	3000	TR.SP.WHITE.1313 SEMPRE White Matte 13	
Floor Tile Grout	2225	Grout-(27) Silver ***STD***	
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***	
Comment			
Dining Room			
Flooring	7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch	
Comment			
Great Room	7502	Red Oak Pearl-Vintage	
Flooring	7502	Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch	
Comment			
Great Room Fireplace			
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***	
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***	PG 17
Opt. Surround	1111	N/A *****	
- Purchasers have been advised: h	neat from the	FP can damage TV above a FP and items placed on mantle.	
Fireplace after closing.	ill not be liable	e for any damage on items placed and or installed above a	
Comment			
Main Hall			
Flooring	7502	Red Oak Pearl-Vintage	
Comment		Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch	
Page 2 of 7			

SARFARAJ, RAHIMBHAI HOTELWALA/SABINABANU, SARFARAJ HOTELWALA Project: Country Lane Unit: 694-1, Phase: 6 Model: 20-2505 CRN B WORTHINGTON

Study Niche		
Flooring	7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch
Comment		
Upper Hall	7500	Dad Oals David Vintaria
Flooring	7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch
Comment		
Master Bedroom		
Flooring	7502	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment		
Bedroom 2	7500	DV 00440 D 4 T. DI AQICIQE 40 D. I ***OTD ***
Flooring	7502	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
Comment		
Bedroom 3		
Flooring	7502	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
riconing	7 302	BY 65416 - Byllasty 16x-BEAGK 16E-46 621 Gly 61B
Comment		
Master Ensuite	_	
Cabinet Colour/Style	7502	Viking III-SIMCOE-NAVY BLUE-3DL ***STD***
,		
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Countries Edge		J
Floor Tile	1111	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Cravit	2225	Crout (27) Silver ***STD***
Floor Tile Grout Floor Tile Pattern	2225 3000	Grout-(27) Silver ***STD*** STANDARD SQUARE ***STD***
FIOOI THE FAILETT	3000	STANDARD SQUARE STD

SARFARAJ, RAHIMBHAI HOTELWALA/SABINABANU, SARFARAJ HOTELWALA Project: Country Lane Unit: 694-1, Phase: 6 Model: 20-2505 CRN B WORTHINGTON

Shower Wall Tile	5420	QT.SP.DGR.0810-Splendour-Dark Grey-8 inch x 10 inch
Onower wan inc	0420	***STD***
Chausay Wall Tila Craut	0006	C
Shower Wall Tile Grout Shower Wall Tile Pattern	2226 3090	Grout-(00) White ***STD*** VERTICAL STACKED ***STD***
Onower wan the rattern	0000	VERTICAL GIACINED
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow
0, 5, 7, 0	0000	White Matte-2 x 2 ***STD***
Shower Floor Tile Grout Shower Floor Tile Pattern	2226 3000	Grout-(00) White ***STD*** STANDARD SQUARE ***STD***
Shower Floor the Falleth	3000	STANDARD SQUARE STD
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
lain Bathroom		
lain Bathroom Cabinet Colour/Style	1737	Viking III-SIMCOE-NAVY BLUE-3DL ***STD***
Cabinet Colour/Style		
	1737	Viking III-SIMCOE-NAVY BLUE-3DL ***STD*** 4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
·		4924-38-Countertop-WHITE CARRARA-Wilsonart
Cabinet Colour/Style Countertop	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD***
Cabinet Colour/Style Countertop Countertop Edge	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A *****
Cabinet Colour/Style Countertop	8822 1111 2086	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ***** 9677-HARDWARE ***STD***
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware	8822	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A *****
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware Floor Tile	8822 1111 2086 2086	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ***** 9677-HARDWARE ***STD*** GE.BY.AZR.1313 New Byzantine Azzuro 13
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware	8822 1111 2086	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ***** 9677-HARDWARE ***STD***
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware Floor Tile Floor Tile Grout	8822 1111 2086 2086	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ***** 9677-HARDWARE ***STD*** GE.BY.AZR.1313 New Byzantine Azzuro 13 Grout-(27) Silver ***STD***
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware Floor Tile Floor Tile Grout	8822 1111 2086 2086	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ***** 9677-HARDWARE ***STD*** GE.BY.AZR.1313 New Byzantine Azzuro 13 Grout-(27) Silver ***STD***
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware Floor Tile Floor Tile Grout	8822 1111 2086 2086	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ***** 9677-HARDWARE ***STD*** GE.BY.AZR.1313 New Byzantine Azzuro 13 Grout-(27) Silver ***STD***
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware Floor Tile Floor Tile Grout	8822 1111 2086 2086	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ***** 9677-HARDWARE ***STD*** GE.BY.AZR.1313 New Byzantine Azzuro 13 Grout-(27) Silver ***STD***
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware Floor Tile Floor Tile Grout	8822 1111 2086 2086	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ****** 9677-HARDWARE ***STD*** GE.BY.AZR.1313 New Byzantine Azzuro 13 Grout-(27) Silver ***STD*** STANDARD SQUARE ***STD*** QT.SP.DGR.0810-Splendour-Dark Grey-8 inch x 10 inch
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware Floor Tile Floor Tile Grout Floor Tile Pattern	2086 2086 2086 2225 3000	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ***** 9677-HARDWARE ***STD*** GE.BY.AZR.1313 New Byzantine Azzuro 13 Grout-(27) Silver ***STD*** STANDARD SQUARE ***STD***
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware Floor Tile Floor Tile Grout Floor Tile Pattern	2086 2086 2086 2225 3000	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ***** 9677-HARDWARE ***STD*** GE.BY.AZR.1313 New Byzantine Azzuro 13 Grout-(27) Silver ***STD*** STANDARD SQUARE ***STD*** OQT.SP.DGR.0810-Splendour-Dark Grey-8 inch x 10 inch ***STD*** Grout-(00) White ***STD***
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware Floor Tile Floor Tile Grout Floor Tile Pattern Wall Tile	8822 1111 2086 2086 2225 3000	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ****** 9677-HARDWARE ***STD*** GE.BY.AZR.1313 New Byzantine Azzuro 13 Grout-(27) Silver ***STD*** STANDARD SQUARE ***STD*** OT.SP.DGR.0810-Splendour-Dark Grey-8 inch x 10 inch ***STD***
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware Floor Tile Floor Tile Grout Floor Tile Pattern Wall Tile Wall Tile Grout	8822 11111 2086 2086 2225 3000	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ***** 9677-HARDWARE ***STD*** GE.BY.AZR.1313 New Byzantine Azzuro 13 Grout-(27) Silver ***STD*** STANDARD SQUARE ***STD*** OQT.SP.DGR.0810-Splendour-Dark Grey-8 inch x 10 inch ***STD*** Grout-(00) White ***STD***
Cabinet Colour/Style Countertop Countertop Edge Cabinet Hardware Floor Tile Floor Tile Grout Floor Tile Pattern Wall Tile Wall Tile Grout	8822 11111 2086 2086 2225 3000	4924-38-Countertop-WHITE CARRARA-Wilsonart ***STD*** N/A ***** 9677-HARDWARE ***STD*** GE.BY.AZR.1313 New Byzantine Azzuro 13 Grout-(27) Silver ***STD*** STANDARD SQUARE ***STD*** OQT.SP.DGR.0810-Splendour-Dark Grey-8 inch x 10 inch ***STD*** Grout-(00) White ***STD***

SARFARAJ, RAHIMBHAI HOTELWALA/SABINABANU, SARFARAJ HOTELWALA Project: Country Lane Unit: 694-1, Phase: 6 Model: 20-2505 CRN B WORTHINGTON

6	4 57	7
Checked: 6/	6/2022 12:03:	6

	Opt. Shower Floor Tile	1111	N/A *****
	Opt. Shower Floor Tile Grout	1111	N/A *****
	Opt. Shower Floor Tile Pattern	1111	N/A *****
	•		
	Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****
	Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
	Comment		
_OW	rer Level Family Room and Hall Flooring	1111	N/A *****
	Tiooning	1111	
	Comment		
_ow	er Level Laundry Mud Room	_	
	Flooring	1111	N/A *****
	Floor Tile Grout	1111	N/A *****
	Floor Tile Pattern	1111	N/A *****
	Tiod Tio Tattom		1471
	Opt. Cabinet Colour/Style - Uppers	1111	N/A *****
	Opt. Cabinet Hardware - Uppers	1111	N/A *****
	Opt. Cabinet Colour/Style - Base	1111	N/A *****
	Opt. Cabinet Hardware - Base	1111	N/A *****
	Comment		
)n+	Lower Level Bedroom 4	_,	
JPI.	Flooring	1111	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
		[
	2		
	Comment		
Opt.	Lower Level Bedroom 4 Hallway		
	Flooring	1111	DY 89418 -Dynasty Tex-BLACK ICE-40 oz Poly***STD ***
	Comment		
age)	e 5 of 7		
-90			

SARFARAJ, RAHIMBHAI HOTELWALA/SABINABANU, SARFARAJ HOTELWALA Project: Country Lane Unit: 694-1, Phase: 6 Model: 20-2505 CRN B WORTHINGTON

Flooring	1111	GE.BY.AZR.1313 New Byzantine Azzuro 13
Flooring	1111	GL.BT.AZIX. 1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Opt. Cabinet Colour/Style - Uppers	1111	N/A *****
Opt. Cabinet Hardware - Uppers	1111	N/A *****
Opt. Cabinet Colour/Style - Base	1111	N/A *****
Opt. Cabinet Hardware - Base Comment	1111	N/A *****
t. Lower Level Bedroom 4 Bathroon Cabinet Colour/Style	n 1111	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***
Countertop	8827	4925K-07-Countertop-CALCUTTA MARBLE-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Floor Tile	2086	GE.BY.AZR.1313 New Byzantine Azzuro 13
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***
Wall Tile Grout	2226	Grout-(00) White ***STD***
Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Opt. Shower Floor Tile	1111	N/A *****
Opt. Shower Floor Tile Grout	1111	N/A *****
Opt. Shower Floor Tile Pattern	1111	N/A *****

SARFARAJ, RAHIMBHAI HOTELWALA/SABINABANU, SARFARAJ HOTELWALA Project: Country Lane Unit: 694-1, Phase: 6 Model: 20-2505 CRN B WORTHINGTON

Locked:	
Closed:	

Opt. Shower Jamb(s) ar	nd Sill(s)	1111	N/A *****
Plumbing Fixture (colou	` '	1737	Plumbing Fixtures-WHITE ***STD***
Comment			
ver Level and Main Stair	rs		
Type		1714	Oak Stairs ***STD MAIN STAIRS***
Colour		7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING ***99***
Handrail/Pickets/Posts	Туре	8148	Single Collar Alt. Plain w/ Shoes with 3 1/2" Square/Cap Post(s)-BLACK ***2***
Handrail/Pickets/Posts Colour Custom Stain/Paint		7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING ***99***
		1111	N/A *****
Landing(s)		9059	Red Oak-Vintage 3 1/4 inch Pre-Sanded Smooth Unfinished F Oak-Unfinished-3/4 inch x 3 1/4 in ***STD***
Opt. Carpet Runner		1111	N/A *****
Comment			
Type		1713	Paint Grade Stairs ***STD BASEMENT STAIR ***
Comment			
oughout			
Switches and Plug		5796	Decora White Switches and Plugs ***STD***
Thresholds		2232	Metal Thresholds ***STD***
Underpad		1079	500 Series-Underpad ***STD***
Trim Size		8705	4 1/4 Baseboard and 2 3/4 Casings ***STD***
Trim - Paint Colour		1716	Trim-WHITE ***STD***
Walls - Paint Colour Comment		1717	22-Wall-WARM GREY ***STD***

SARFARAJ, RAHIMBHAI HOTELWALA/SABINABANU, SARFARAJ HOTELWALA Project: Country Lane Unit: 694-1, Phase: 6 Model: 20-2505 CRN B WORTHINGTON

Locked: Closed:

Purchaser: SABINABANU, SARFARAJ HO Date **Country Lane Date Approved**

10 of 42 construction summary



Lot: 694-1

Model: 20-2505 CRN B WORTHINGTON Project/Phase: Country Lane / 6

ADMIN FEE

Invoice	Qty.	Description
1080	1	- FIVE THOUSAND DOLLARS (\$5000) DECOR DOLLARS (NO CASH VALUE)
16Nov22 NoCat		

APPLIANCES

Invoice	Qty.	Description
1080	1	- AVH-308CS-AVG 30 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN ***UPG***
342,360		
16Nov22		
		CABINETRY-delete stove uppers; ELECTRICAL-Notify; HEATING/AIR CONDITIONING-Duct Size remains 6
1205	1	KITCHEN - Five Appliances: SS Fridge, Stove, Dishwasher; White Front Loader Washer/Dryer - Townhomes
16Nov22 NoCat		

CABINETRY

Invoice	Qty.	Description
1080	1	- AVH-308CS-AVG 30 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN ***UPG***
342,360		
16Nov22		
**		CABINETRY-delete stove uppers; ELECTRICAL-Notify; HEATING/AIR CONDITIONING-Duct Size remains 6
1080	1	KITCHEN - CABINETRY-H05-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep
335,976		cabinet) (this is not a zero clearance enclosure) (standard heights and widths will be used) VIKING
16Nov22		SKETCH # 3
		DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify

DDWWATI

DRYW	DRYWALL		
Invoice	Qty.	Description	
1080	1	- Drywall - Smooth Ceilings - Main Floor - UPG	
337,752			
16Nov22			
		PAINTING-Notify	
1080	1	KITCHEN - CABINETRY-H05-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep	
335,976		cabinet) (this is not a zero clearance enclosure) (standard heights and widths will be used) VIKING	
16Nov22		SKETCH # 3	
**		DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify	

DisciplineMS.rpt 13dec21 Page 1 of 3

construction summary of 42



Lot: 694-1

Model: 20-2505 CRN B WORTHINGTON

Project/Phase: Country Lane / 6

ELECTRICAL

Invoice	Qty.	y. Description	
1080 335,596	1	GREAT ROOM - ELECTRICAL - SUPPLY AND INSTALL RECESSED PLUG ON EXISTING CIRCUIT	
		INSTALL OVER FIREPLACE APPROX 70" +/- FF SKETCH # 3	
1080 335,683 16Nov22	1	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * STANDARD 220V WILL STAY SKETCH # 3	
**		ELECTRICAL-Notify	
1080 342,360	1	- AVH-308CS-AVG 30 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN ***UPG***	
16Nov22 **		CABINETRY-delete stove uppers; ELECTRICAL-Notify; HEATING/AIR CONDITIONING-Duct Size remains 6	
1080 335,570	1	KITCHEN - ELECTRICAL - CEILING ROUGH-IN (CAPPED)	
16Nov22		INSTALL OVER ISLAND CENTRED SKETCH # 3	
1080 335,570	1	GREAT ROOM - ELECTRICAL - CEILING ROUGH-IN (CAPPED)	
16Nov22		USE EXISTING SWITCH SKETCH # 3	
1080 335,569	1	KITCHEN - ELECTRICAL - ADDITIONAL SWITCH	
16Nov22		FOR CAPPED CEILING OVER ISLAND SKETCH # 3	

FRAMING

Invoice	Otv.	Description
	Z-7.	2 coerspectors

1080 335,976	KITCHEN - CABINETRY-H05-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep cabinet) (this is not a zero clearance enclosure) (standard heights and widths will be used) VIKING
16Nov22 **	SKETCH # 3 DRYWAL-Notify: FRAMING-Modify Bulkhead: PAINTING-Notify

HEATING / AIR CONDITIONING

HEATI	HEATING / AIR CONDITIONING		
Invoice	Qty.	Description	
1080 335,683 16Nov22	1	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * STANDARD 220V WILL STAY SKETCH # 3 ELECTRICAL-Notify	
1080 342,360 16Nov22 **	1	- AVH-308CS-AVG 30 inch STAINLESS STEEL CHIMNEY WALL MOUNTED HOODFAN ***UPG*** CABINETRY-delete stove uppers; ELECTRICAL-Notify; HEATING/AIR CONDITIONING-Duct Size remains 6	

Page 2 of 3

construction summary of 42



Lot: 694-1

Model: 20-2505 CRN B WORTHINGTON

Project/Phase: Country Lane / 6

PAINTING

1 1 1 1 1 1	MILITAG	
Invoice	Qty.	Description
1080	1	- Drywall - Smooth Ceilings - Main Floor - UPG
337,752		
16Nov22		
**		PAINTING-Notify
1080 335,976	1	KITCHEN - CABINETRY-H05-66cm deep fridge enclosure (counter depth) with no walls ([2] 66cm deep gables and [1] 66cm deep cabinet) (this is not a zero clearance enclosure) (standard heights and widths will be used) VIKING
16Nov22		SKETCH # 3
**		DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify

DisciplineMS.rpt 13dec21 Page 3 of 3

Printed and Sent: 16-Nov-22

20-2505 CRN ELEV. B

OPT. BEDROOM 4


Model: 20-2505 CRN B WORTHINGTON

13 of 42

The Worthington

ELEVATION B: 2,546 SQ. FT. THE TRAILS OF COUNTRY LANE

Sketch #1

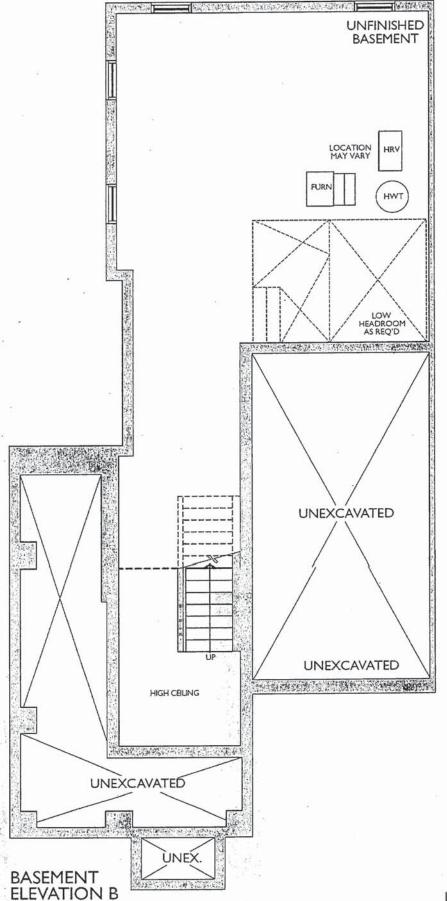

In.

20-2505 CRN ELEV. B

OPT. BEDROOM 4


Model: 20-2505 CRN B WORTHINGTON

14 of 42

The Worthington

ELEVATION B: 2,546 SQ. FT.
THE TRAILS OF
COUNTRY LANE

Sketch # 2

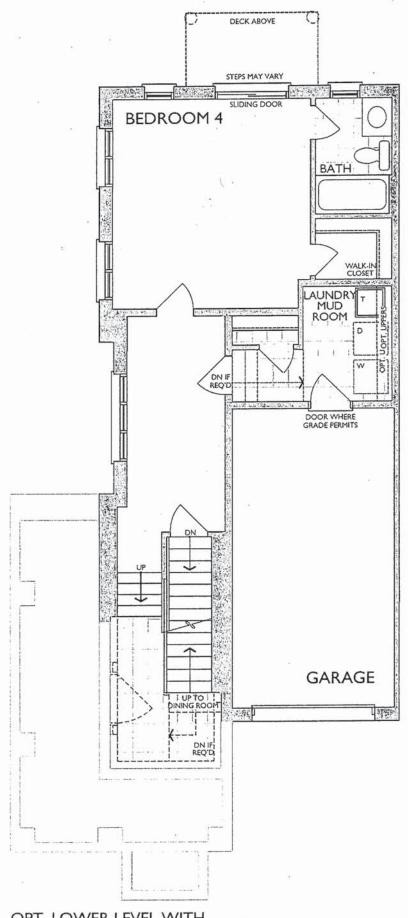

OPT. LOWER LEVEL WITH BEDROOM 4 AND BATH ELEVATION B

Gu

Model: 20-2505 CRN B WORTHINGTON

ELEVATION B

15 of 42

The Worthington

20-2505 CRN ELEV. B

OPT. BEDROOM 4

ELEVATION B: 2,546 SQ. FT.
THE TRAILS OF
COUNTRY LANE

Sketch # 3 **DECK GREAT ROOM** RECESSED PLUG. CAPPED CEILING ON CAPPED CEILING EXISTING SWITCHEO RUG OUTLET ON SEPARATE SWITCH DEEP FRIDGE KITCHEN CABINET & GABLES GAS STOVE OPT. COFFERED CEILING DN IFREQ'D COVERED PORCH DINING ROOM delete std ceramics install hardwood and match stain color at main stair landing MAIN LEVEL


Model: 20-2505 CRN B WORTHINGTON

16 of 42

The Worthington

ELEVATION B: 2,546 SQ. FT.
THE TRAILS OF
COUNTRY LANE

20-2505 CRN ELEV. B OPT. BEDROOM 4

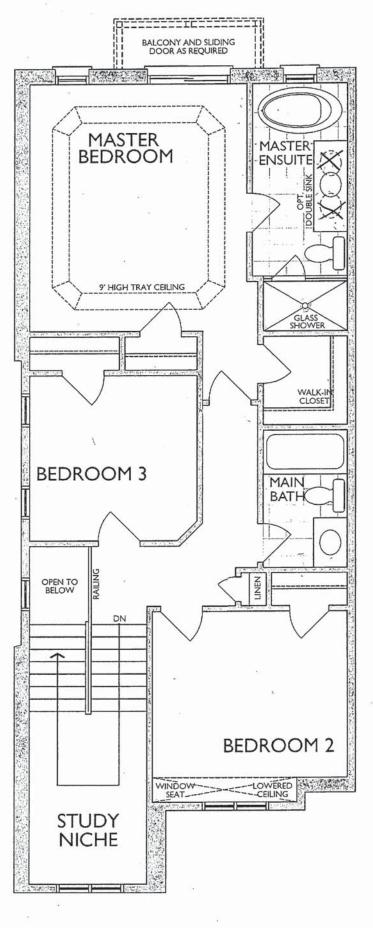

UPPER LEVEL ELEVATION B

Gr.

Project: Country Lane
Unit: 694-1, Phase: 6
Model: 20-2505 CRN B WORTHINGTON

17 of 42





NFAS NF17 Mantel - CABINET

Printed in Canada

Franke Kindred Canada Limited

Project: Country Lane Unit: 694-1, Phase: 6


Model: 20-2505 CRN B WORTHINGTON


18 of 42



ND1831UA/9







ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

MOEN

FAUCET DESCRIPTION

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking
 Power Clean™ spray technology
 Metal construction with various finishes identified by suffix

- Quick connect installation
- Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout
- Faucet designed for handle to be mounted on right side only

OPERATION

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

STANDARDS


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet**

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



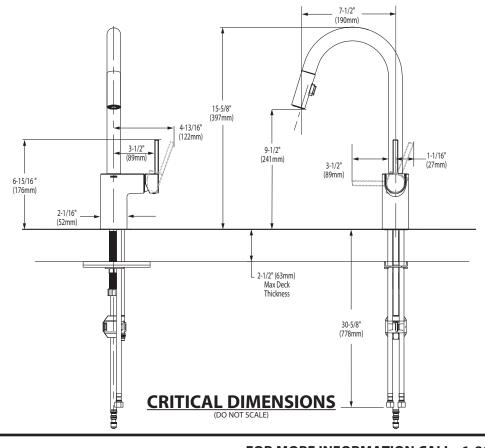

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20



b BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

BOULEVARD® PEDESTAL SINK VITREOUS CHINA

BOULEVARD® PEDESTAL SINK

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD • 0641.400 Faucet holes on 4" (102mm) centers

☐ 0641.100 Center hole only

- · Classic styled rectangular pedestal lavatory
- Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an **above counter** sink or a **drop-in** sink (with u-shaped cut out)

Nominal Dimensions:

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

Compliance Certifications -

Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS


^{*} See faucet section for additional models available

Model: 20-2505 CRN B WORTHINGTON



BOULEVARD® PEDESTAL SINK VITREOUS CHINA

barrier free (above counter or drop-in only) $\overline{\gamma}$ **TOP VIEW (ALL THREE CONFIGURATIONS)** FINISHED WALL - o (203mm) _ 24" _ (610mm) 1/2" DIA (13mm) HOLES FOR ANCHOR BOLTS DRAIN (178mm) 34" (864r 35-1/2" (902mm) 1-1/4" (32mm) O.D. WASTE *23-1/4" (591mm) 1-1/4" (32mm) O.D. TAILPIECE 27 (686 FINISHED FLOOR 9-1/2mm (3/8")DIA BASE ANCHOR SCREW HOLES ---6-3/4" (170mm) PEDESTAL SIDE SECTION PEDESTAL CONFIGURATION (NOT ADA COMPLIANT)

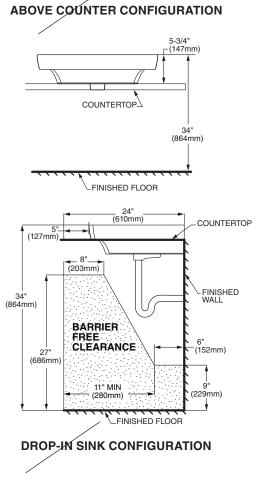

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Model: 20-2505 CRN B WORTHINGTON





BARRIER FREE

COLONY™ COUNTERTOP SINK

VITREOUS CHINA

COLONY COUNTERTOP SINK

- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)

☐ 0346 803 Y Faucet holes on 203 nm (6"), centres	\sim
OTD 0346 403 (Illustrated) Faucet holes on 102mm (4") centres	3
₩ <u>₽</u> 6346 661	ر ک


Centre hole only


Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")


Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep









COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen
- □ Faucet*:
- □ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198 .

^{*} See faucet section for additional models available

Model: 20-2505 CRN B WORTHINGTON



$DEMI^{\mathsf{M}}$ Product Specification Sheet

Two Piece Freestanding Collection

CF2007 Two Piece Freestanding Soaker


Size: 60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


TWO PIECE ASSEMBLY

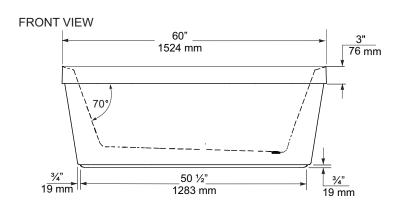

END VIEW



TOP VIEW

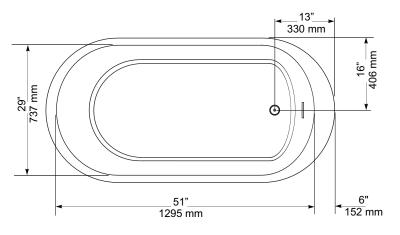

GENERAL SPECIFICATIONS

Average Weight	90 lb	41 kg
Bathing Well at bottom	43"x 20"	1092 x 508 mm
Capacity Drain to Overflow		195 litres
Water Depth Drain to Overflow	16"	406 mm
Drain Opening (dia.)	2"	51 mm
Overflow Opening	2 1/4"x 1/2"	57 x 13 mm
Drain to Floor Clearance	3 1/4"	83 mm

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary \pm %" (6 mm). Weight may vary \pm 5 lb (2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1 Telephone: 416.231.9030 Fax: 416.231.0929 www.mirolin.com Customer Service: 416.231.5790 Canada, U.S.A.: 800.MIROLIN(647-6546) Fax, Canada: 800.463.2236 R0084162 25 Sep. 2018

Model: 20-2505 CRN B WORTHINGTON

24 of 42

American Standard

Style That Works Better

FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


FloWise™ DUAL FLUSH ELONGATED TOILET

2476 216

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

Separate Component Parts:

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank



- ☐ 3067 316 Elongated Bowl
- **4035 516** Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are peripaid and may use within the prepare of the present IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by Anki Graindau A 112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284

© 2008 American Standard

Model: 20-2505 CRN B WORTHINGTON

MOEN[®]

DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted

OPERATION

- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel **FLOW**

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

 ADA for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

Specifications



CHATEAU® Single-Handle Lavatory Faucet

with Metal Waste Assembly


Model: L4625 series L4631BC **Bulk Packed (12 per carton):** L64624 series

with 50/50 Waste Assembly **Bulk Packed (12 per carton):** L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



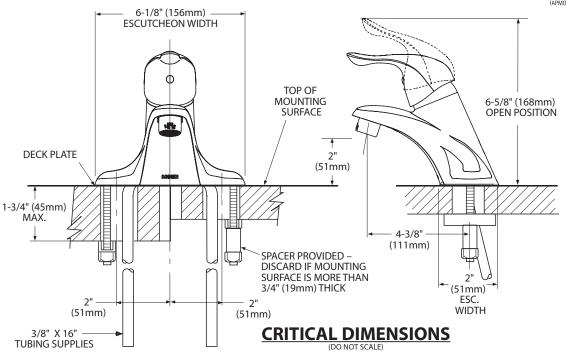

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev 8/15

Model: 20-2505 CRN B WORTHINGTON



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

OPERATION

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

STANDARDS

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

ADA (for lever handle

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects
- to the original consumer purchaser 5 year warranty if used in commercial installations

Specifications






CHATEAU° POSI-TEMP° Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim

(Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

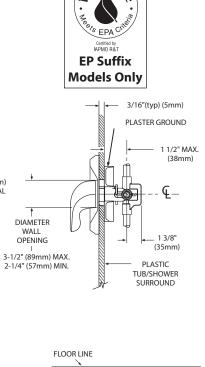

THIN WALL APPLICATION

6.5" (165mm) ESC. DIAM. 2 1/2" MAX. (63mm) 6'-6" (1981mm) NOMINAL 4-1/2" (114mm) WALL OPENING SHOWER 48" (1219mm) 32" (813mm) (133mm AND TUB ONLY FLOOR LINE **THICK WALL APPLICATION**

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

7-1/2" (190mm)

CRITICAL DIMENSIONS

— 1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

(DO NOT SCALE)

TL183sp: Rev. 5/13

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Model: 20-2505 CRN B WORTHINGTON

MOEN[®]

Specifications

DESCRIPTION

 Metal construction with various finishes identified by suffix OPERATION


- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

STANDARDS

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations




CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

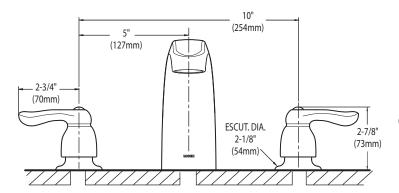



CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com


022X2019 SPC1269 50000112075 Released 00

Rev. 3/19

Project: Country Lane Project: Country Lane Unit: 694-1, Phase: 6 Model: 20-2505 CRN B WORTHINGTON

28 of 42








AVH-308CS 30" Wall mounted hood

AVH-308CS
29 1/2" (W) x 19 3/4" (D) x 3 1/4" (H)
201
Soft touch with LED display
2 bulbs, 3W LED (bulbs included)
860 CFM, 6-Speed
Speed 1, 2.4 sones
Speed 6, 6.2 sones
2 aluminium micro hole filters (included)
2 Stainless steel baffle filters (included)
6" Round (Top)
Ducted
For ceiling heights up to 9'0"
120V / 60Hz / 2.7 Amps
AD-884S (884mm, AVN-AVH compatible)
,
Parts and labour, in-home service


Model: 20-2505 CRN B WORTHINGTON

AVH-308CS/368CS

Dimensions

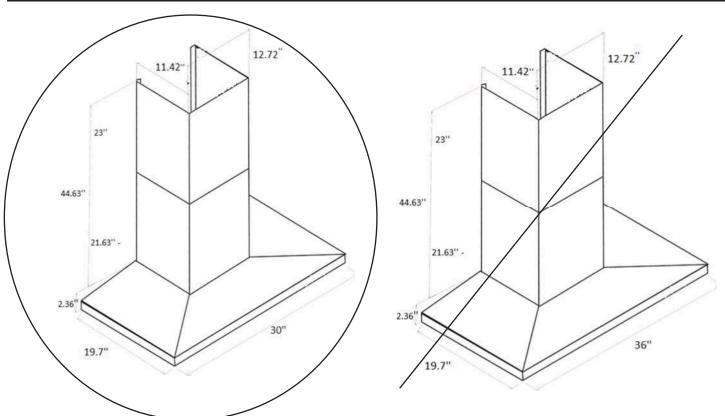

Installation



Α	Floor to ceiling height	variable
В	Floor to counter top height (standard)	36"
С	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	2.36"
Е	Chimney height	Max 44.63"

Duct transition 6" round top

The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.

Model: 20-2505 CRN B WORTHINGTON

30 of 42



Whirtpool® 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic Stainless Steel	WRT541SZDM

Capacity				
Total Capacity	21 cu. ft.			
Refrigerator Capacity	15 cu. ft.			
Freezer Capacity	6 cu. ft.			
General Features & Properti	es			
EZ Connect Icemaker Kit				
LED Interior Lighting				
ENERGY STAR® Certified				
Electronic Temperature Controls				
Freezer Temperature Controls				
Clear Door Bins				
Adjustable Door Bins				
Quiet Cooling				
Fingerprint Resistant				
Electrical Details				
Amps	6.5			
Volts	115			
Certifications				
ADA Compliant	Yes			
ENERGY STAR® Certified	Yes			

Technical Details			
Refrigerator Type	Top-Freezer		
Number of Doors	2		
Number of Interior Refrigerator Shelves	3		
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable		
Number of Interior Freezer Shelves	1		
Number of Freezer Door Bins	2 Fixed		
Lighting Type	LED		
Ice Maker	Optional		
Ice Maker Location	Freezer		
Dispenser Type	N/A		
Dimensions			
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"		
Depth with Door Open 90°	62-1/4"		
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear		
Reference Material			

Key Features & Benefits

Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

Humidity-Controlled Crispers

Store fruits and vegetables in their ideal environment.

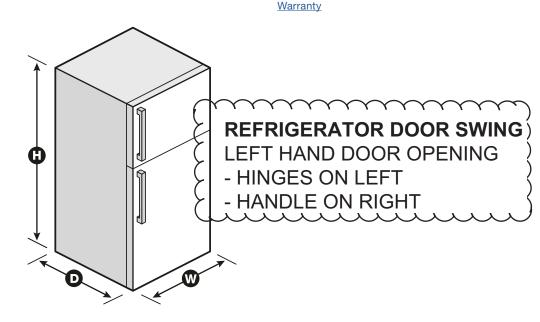

Dimension Guide Use & Care Guide

Energy Guide

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Model: 20-2505 CRN B WORTHINGTON

31 of 42



Top Mount Refrigerator

PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15-or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

PRODUCT DIMENSIONS

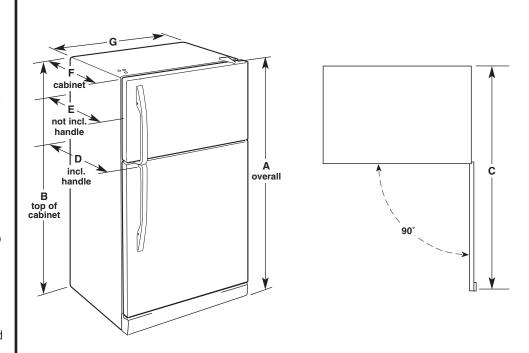

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	621/4" (158.1 cm)	32 ⁷ / ₈ " (83.5 cm)	30 ⁵ %" (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66½" (168.3 cm)	65½" (166.4 cm)	62½" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 20-2505 CRN B WORTHINGTON





Available Finishes/Colours



YWFE515S0JB Black



YWFF515S0JS Stainless Steel



YWFE515S0JW White

Manuals & Literature:





<u> Warranty</u>

5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

Top Features

FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep Warm setting

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Closed Door Broiling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

27 3/4
36
29 7/8

Configuration and Overview		
Range Type	Freestanding	
Fuel Type	Electric	
Size (IN,inches)	30	

Exterior	
Door Removable	Yes
Drawer Type	Storage Drawer
Oven Door	Glass Window
Oven Window Size	Extra Large
Handle Color	Stainless Steel
Handle Material	Metal


Exterior	
Handle Type	Reach-Through Handle
Features	
Hot Surface Indicator Light	Yes
Heating Element On	Yes

Heating Element On Yes Indicator Light Power On Indicator Light No
Power On Indicator Light No
Griddle NA
Automatic Convection No Conversion Temperature Adjust
Power Outage Compatible No

Model: 20-2505 CRN B WORTHINGTON

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Product Dimensions



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46⁷/₈" (119.1 cm) overall height (max.) with leveling legs screwed all the way in*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in*
- D. 29⁷/₈" (75.9 cm) width
- E. 25⁵/₁₆" (64.3 cm) depth back of range to front of cooktop**
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- *Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- **Front of door and drawer may extend further forward depending on styling.

Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Model: 20-2505 CRN B WORTHINGTON

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only

AWARNING



Electrical Shock Hazard

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

 Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection
120/240 V	120/208 V	Amps
8.8 - 16.5 KW 16.6 - 22.5 KW	7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50

^{*}The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

INSTALLATION INSTRUCTIONS


Unpack Range

AWARNING

Excessive Weight Hazard

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- 1. Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

^{**}If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.

Model: 20-2505 CRN B WORTHINGTON

35 of 42

WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Install Anti-Tip Bracket

AWARNING

Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.


- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- Determine which mounting method to use: floor or wall.
 If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.



A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

Floor Mounting



Wall Mounting



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two $\#12 \times 1^5/8$ " (4.1 cm) screws provided.
- **6.** Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

Model: 20-2505 CRN B WORTHINGTON

36 of 42





Stainless Steel

Also available in:

White	WDF330PAHV	
Black	WDF330PAHR	

Capacity		
Total Place Settings	13	
General Features & Properties		
Heavy Cycle		
High Temperature Wash Option		
Heated Dry Option		
ENERGY STAR® Certified		
Industry's Best Selling Dishwasher Brand [†]		
Designed, Engineered and Assembled in the U.S.A. with American Pride		
Electrical Details		
Amps	10	
Volts	120	
Hz	60	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Button
Number of Wash Cycles	3
Number of Options	4
dBA [*]	55
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
Defeces Material	

Reference Material

Dimension Guide

Install Guide

Use & Care Guide

Energy Guide

Warranty

Key Features & Benefits

1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.*

Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

Normal Cycle

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.



^{*}Per IEC standards. **Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

Model: 20-2505 CRN B WORTHINGTON

37 of 42




Undercounter Dishwasher

PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDF131PAH	WDF545PAF	

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

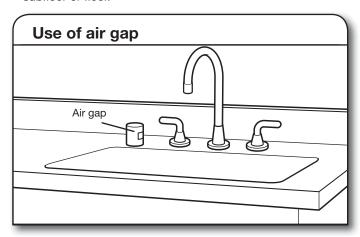

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- ³/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with ³/₄" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.

Model: 20-2505 CRN B WORTHINGTON

PRODUCT AND CABINET OPENING DIMENSIONS — 23⁷/8" -(606 mm) — 25¹/₄" -(641 mm) — ³/₄" (19 mm) 30" (762 mm) 331/2" 301 (851 mm) min. with (762 mm) leveling legs removed **4**−3³/₄" (94 mm) 31/2" - 41/2" (88 mm - 106 mm) (533 mm) For 4" (100 mm) toe kick, height of cabinet opening is 341/2" (863 mm). A. Insulation may be compressed (not used on all models). B. Door handles may protrude forward of the face of the dishwasher, (varies by model). Check that all surfaces have no protrusions that would prohibit dishwasher installation. 101/2" NOTE: Shaded areas (864 mm) of cabinet walls show where utility -6³/₄" (102 mm) (172 mm) connections may be installed. (76 mm (159 mm) 2¹/₄" (64 mm) 24" / (620 mm) (44 mm) 2" (51 mm) 24' (620 mm) D C. Measured from the lowest point on the underside of the countertop. May be reduced to $33^{1/2}$ " (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.


D. Minimum, measured from narrowest point of opening.

Model: 20-2505 CRN B WORTHINGTON

39 of 42

5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

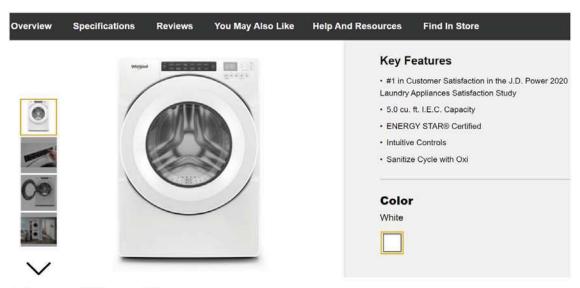

Specifications


Width: 6858.00, 27.0" Centimeters, Inches

Depth: 8016.88, 31-9/16" Centimeters, Inches


Capacity	4-3/10
Depth	8016.88 cm, 31-9/16 in
Gross Weight	97068688.00 kg, 214 lbs
Net Weight	92532768.00 kg, 204 lbs
Width Appearance	6858.00 cm, 27.0 in
LCD Touch Screen	No
Window	Yes
Details	
Advanced Vibration Control™	No
Dispense System	Detergent, Fabric Softener & Bleach
Eco Monitor/Efficiency Monitor	No
Hoses Included	4ft 4in Drain Hose Included
Internal Heater	No
Maximum Spin Speed	1160
Out Of Balance Sensing	Yes
Water Factor	3-1/5
Cycles and Options	
Number Of Wash Cycles	35
Electrical	
Power Cord Included	Yes
Controls	
Automatic Temperature Controls	Yes
	Front

Compatibility Works With No **Options** Number Of Washer Options **Features** Stackable Yes Water Faucet No Cycles Number Of Wash Cycles 35 Exterior Lid/Door Lock Yes Lid/Door Swing Left Modifiers Delay Start No Number Of Rinse Options Number Of Soil Levels 3 Number Of Spin Speeds Number Of Wash/Rinse Temperatures 4 Pre Soak Yes Temperature Selections Hot, Cold, Cool, Warm


Recessed area or closet installation (stacked washer and dryer)




Custom under counter installation



Recessed area or closet installation (washer only)

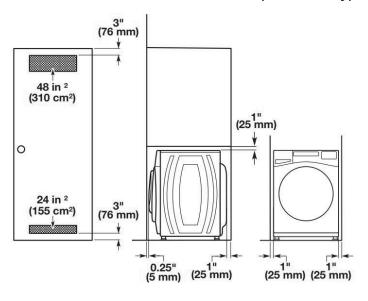

Custom cabinet installation

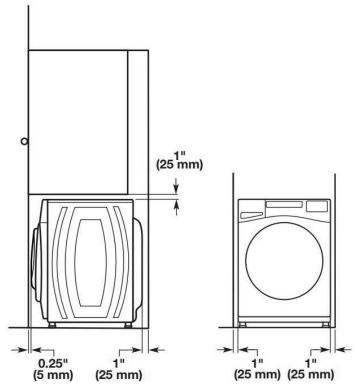


Drain System

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of o leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

IMPORTANT: To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

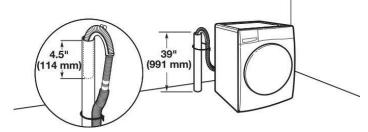


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts"

Model: 20-2505 CRN B WORTHINGTON


41 of 42

Wall standpipe drain system

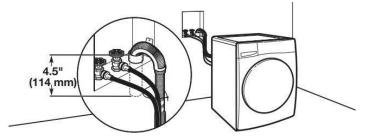


See requirements in "Floor standpipe drain system."


Laundry tub drain system

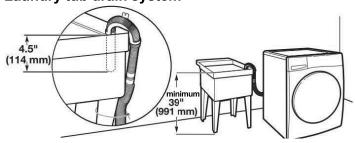

Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

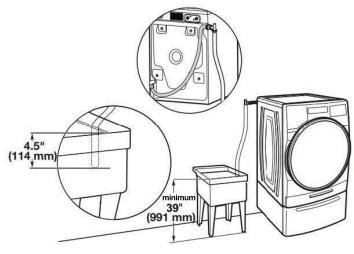

Floor drain system

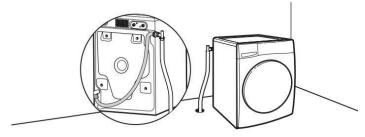

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

Electrical Requirements

AWARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

GROUNDING INSTRUCTIONS

For a grounded, cord-connected appliance:

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

WARNING: Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

For a permanently connected appliance:

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

SAVE THESE INSTRUCTIONS

Model: 20-2505 CRN B WORTHINGTON

42 of 42

WHIRLPOOL DRYER Model #: YWED5620HW



7.4 cu. ft. Front Load Electric **Dryer with Intuitive Touch** Controls



Power Cord Included

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dim	ensions

Dimensions	
Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
Lint Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Ventilation System	
Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear
Electrical	
Hz	60

Yes