

# CY917R | CLASSIC Collection

**Cyclone**<sup>®</sup>

Breathe Better

PWY2- 311- Hood Fan- Income Suite



## Undermount

Cyclone is proud to introduce the sleek and tasteful CY917. Enjoy a modern style fan without the fuss of a renovation. Features a single, centered fan that boasts 300 CFM of power. Elegant mesh filters are a breeze to remove and replace. A powerful machine in a small frame, well-suited to any size living space.



## Green Features



3 Speed Push Button  
Control Panel



Long-lasting  
LED Light bulbs



Grease  
Ring

Model	Colour	Ducting	Filters	Size	CFM
CY917R24W	White	6"	Mesh	24"	300
CY917R24B	Black	6"	Mesh	24"	300
CY917R24SS	Stainless Steel	6"	Mesh	24"	300
CY917R30W	White	6"	Mesh	30"	300
CY917R30B	Black	6"	Mesh	30"	300
CY917R30SS	Stainless Steel	6"	Mesh	30"	300

# CY917R | CLASSIC Collection

**Cyclone**<sup>®</sup>


Breathe Better

PWY2- 311- Hood Fan- Income Suite

## Features


- Undermount range hood
- 3 ¼" x 10" rectangular damper
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED light bulbs (2 x 1.5W GU10, 3000K)
- Aluminum mesh filters
- Hard-wire connection

CY917R24  
CY917R30

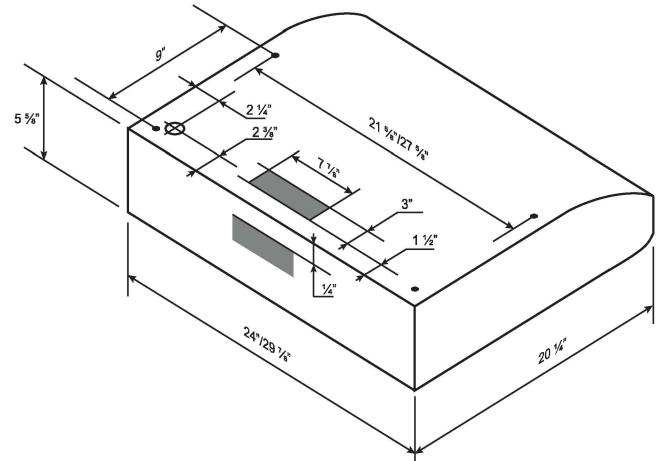

ISOMETRIC

CY917R24  
CY917R30

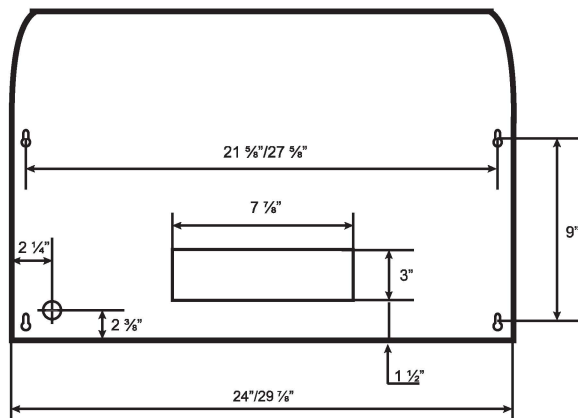

TOP

## Options

- Widths: 24", 30"
- Finishes: White, Black, Stainless Steel

**Note: 24" comes with two filters**

## Specifications

- |   |   |   |
|---|---|---|
| <ul style="list-style-type: none"> <li>▪ Air Flow Volume: 300 CFM</li> <li>▪ Electrical Connection: 120 V/60 Hz</li> <li>▪ Power Consumption: 240 Watts</li> <li>▪ Current: 2.0 Amps</li> </ul> | <ul style="list-style-type: none"> <li>▪ Fan Speed: 1350 RPM</li> <li>▪ Fan Type: Axial Blower</li> <li>▪ Finishes: White, Black, Stainless Steel</li> <li>▪ Ducting: 6" Round</li> </ul> | <ul style="list-style-type: none"> <li>▪ Noise Level: Min. 2 Sones<br/>Max. 4 Sones</li> <li>▪ Knock-out: 3 ¼" x 10"<br/>Rectangular<br/>(Top or Rear)</li> </ul> |
|---|---|---|





# 22 cu. ft. Side-by-Side Refrigerator

## WRS312SNH

PWY2- 311- Fridge- Income Suite



Monochromatic Stainless Steel  
WRS312SNHM

### Also available in:



White

WRS312SNHW



Black

WRS312SNHB

### Capacity

Total Capacity	22 cu. ft.
Refrigerator Capacity	15 cu. ft.
Freezer Capacity	7 cu. ft.

### General Features & Properties

Electronic Temperature Controls

Optional Icemaker

Frameless Glass Shelves

Adaptive Defrost

Humidity-Controlled Crispers

#1 Selling Appliance Brand in the U.S.A.\*

### Electrical Details

Amps	7.2
Volts	110

### Technical Details

Refrigerator Type	Side-by-Side
Number of Doors	2
Number of Interior Refrigerator Shelves	4
Number of Refrigerator Door Bins	2 Fixed, 3 Adjustable
Number of Interior Freezer Shelves	4
Number of Freezer Door Bins	4 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location	Freezer
Dispenser Type	No Dispenser

### Dimensions

Product Dimensions (H x W x D)	66-5/8" x 32-3/4" x 33-5/8"
Depth with Door Open 90°	49-5/16"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear

### Reference Material

[Dimension Guide](#)

[Install Guide](#)

[Energy Guide](#)

[Warranty](#)

### Key Features & Benefits

#### Adjustable Gallon Door Bins


Move these adjustable bins anywhere in the door for increased loading flexibility when and where you need it.

#### LED Interior Lighting

Keep food looking as good as it tastes. Light is cast inside the refrigerator so food looks like it's supposed to.

#### Hidden Hinges


Get a seamless look with door hinges that stay out of sight.

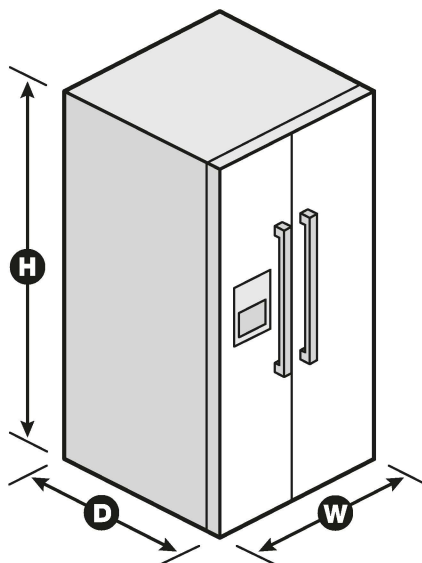

\*Based on 12-month average of unit sales. Refrigeration, Cooking, Dishwashers and Laundry appliances. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

## ELECTRIC RANGES

PWY2- 311- Range- Income Suite

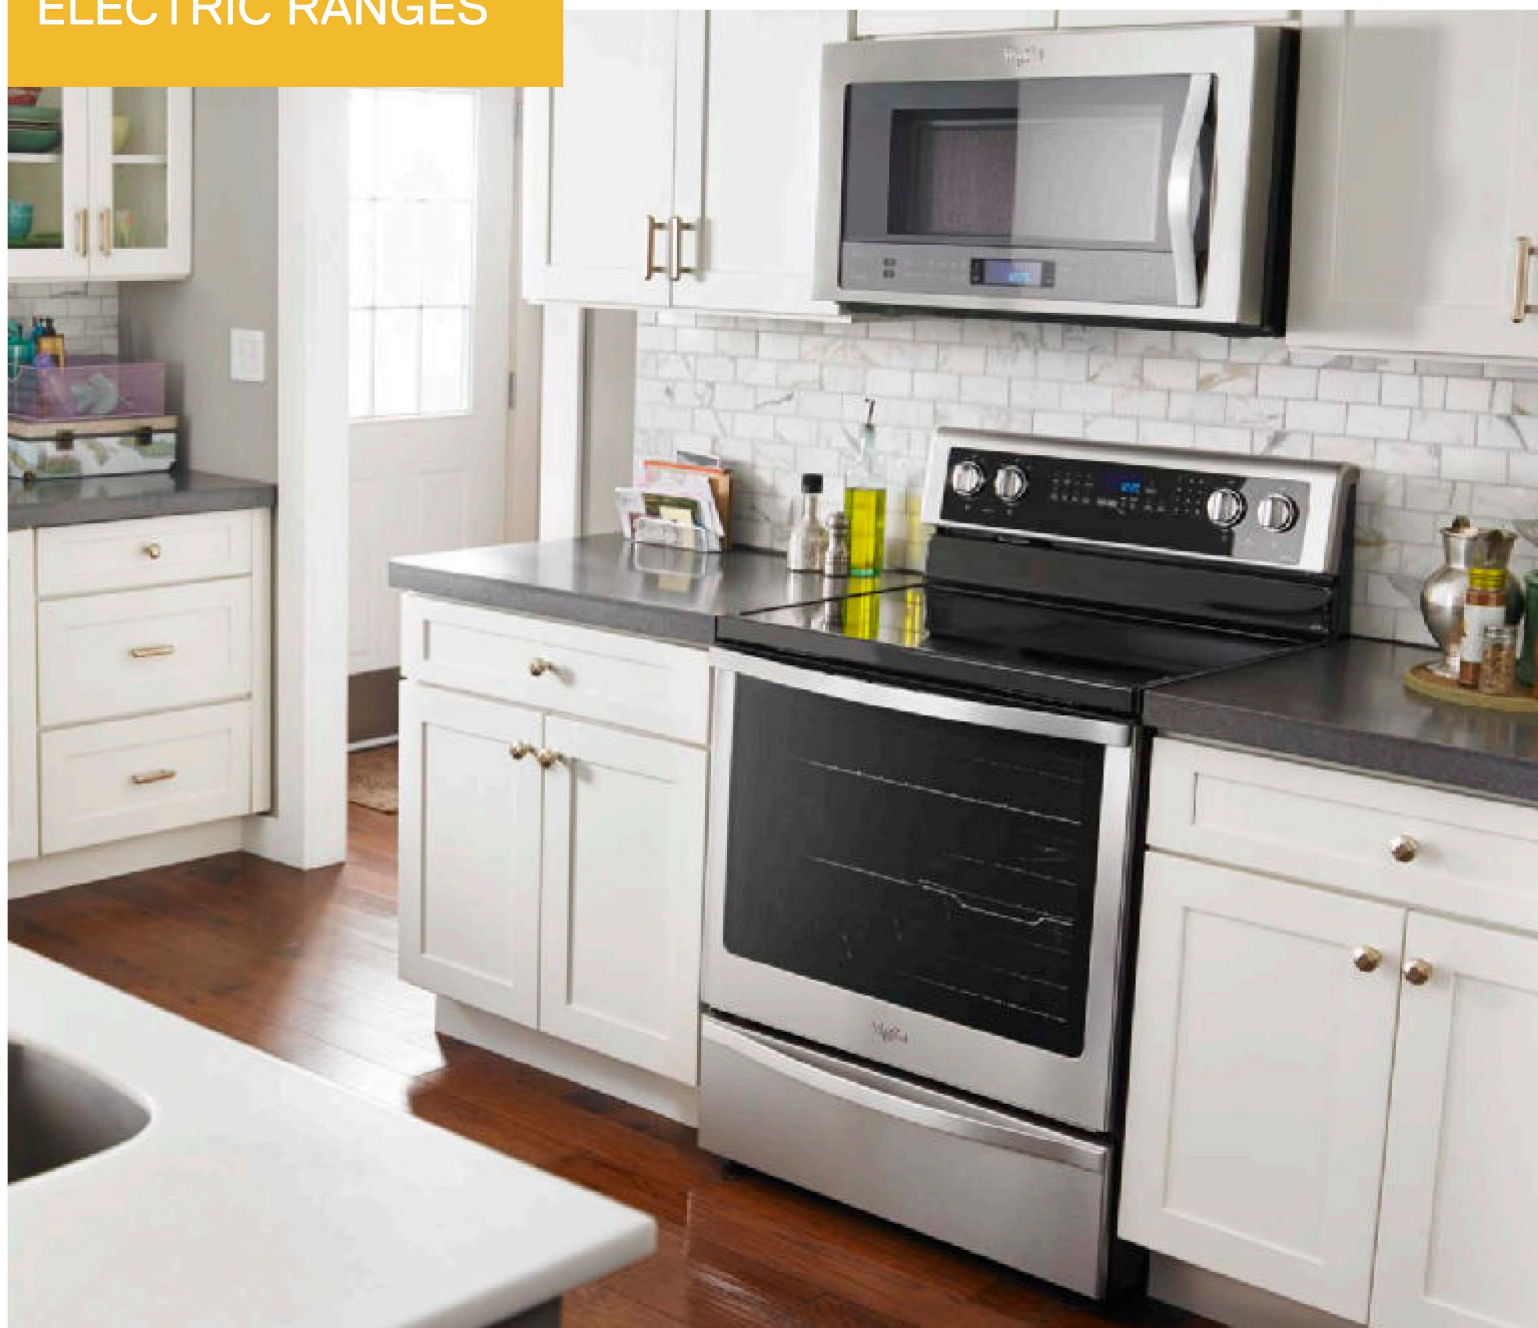

### FEATURING



#### **TimeSaver™ system**

The TimeSaver™ system's Frozen Bake Technology allows you to skip preheating for favorites like pizza, lasagna, chicken nuggets, fries or pies so you can cook frozen foods faster.\*



#### **HeatRight™ system**

The HeatRight™ system's True convection helps you to cook food faster\*\* with a rear fan and third heating element to circulate hot air over, under, and around food.



#### **QuickSelect™ system**

The QuickSelect™ system's FlexHeat™ triple radiant element is like having three elements in one. A 6" inner ring is great for smaller pots and pans, while 9" and 12" outer rings make room to heat larger cookware.

# Every day, care.™

From the #1 Selling Appliance brand in the USA†



# Electric Ranges

PWY2- 311- Range- Income Suite



## Available colors



**S**  
Stainless  
Steel




**H**  
White  
Ice



**E**  
Black  
Ice

## Product Dimensions

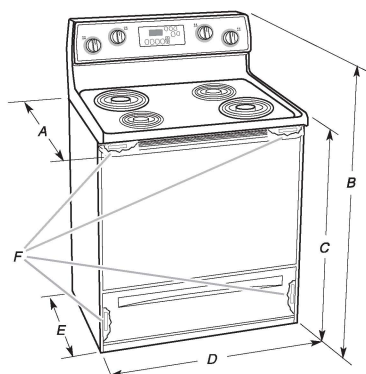

- A. 27 1/2" (70.5 cm) max. depth with handle
- B. 46 1/2" (119.1 cm) overall height (max.) with leveling legs screwed all the way in\*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in\*
- D. 29 1/2" (75.9 cm) width
- E. 25 1/2" (64.3 cm) depth - back of range to front of cooktop\*\*
- F. Model/serial rating plate (located on the frame behind a top corner of the door or either side of the drawer)

**IMPORTANT:** Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.

\*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.


\*\*Front of door and drawer may extend further forward depending on styling.

## Cabinet Dimensions

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

**IMPORTANT:** If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE\*
- D. 30 1/2" (76.5 cm) min. opening width
- E. Outlet - 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 5 1/2" (14.0 cm) max. from floor
- F. Cabinet door or hinges should not extend into the cutout

\*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

**WFE745HOF**

NEW

**30" Freestanding Range - 6.4 cu. ft.**



## TimeSaver™ system

- Frozen Bake™ Technology



## HeatRight™ system

- True Convection
- Convection Conversion
- Temperature Sensor



## QuickSelect™ system

- FlexHeat™ Triple Radiant Element
- FlexHeat™ Dual Radiant Element



## ReadySet™ system

- Rapid Preheat
- Keep Warm
- Delay Cook
- Warm Zone Element



## CompleteClean system

- AquaLift® Self-cleaning Technology
- Easy Wipe Ceramic Glass Cooktop
- Dishwasher-safe knobs

## ACCESSORIES & REPLACEMENT PARTS

- Part number 8273888A Anti-Tip Kit for Range
- Part number PT220 4' 3-Wire 40 amp Range Cord
- Part number PT400 4' 4-Wire 40 amp Range Cord
- Part number PT600 6' 4-Wire 40 amp Range Cord
- Part number 8171394RC 4' 4-Wire 40 amp Power Cord
- Part number 8171385RC 4' 3-Wire 40 amp Power Cord
- Part number 4378577 Brick Baking Stone
- Part number 4396923 Porcelain Broiler Pan & Grid
- Part number W10123240 Premium Broil Pan & Roasting Rack
- Part number 8009 Appliance Light Bulb - 40 Watt

**Whirlpool®**



# 51 dBA\* Top Control Dishwasher

## WDT710PAH

PWY2- 311- Dishwasher- Income Suite



Fingerprint-Resistant Stainless Finish  
WDT710PAHZ

### Also available in:



White

**WDT710PAHW**



Black

**WDT710PAHB**

### Capacity

Total Place Settings 13

### General Features & Properties

Normal Cycle

Heavy Cycle

Soak & Clean Cycle

High Temperature Wash Option

Heated Dry Option

Cycle Status Indicator

ENERGY STAR® Certified

Industry's Best Selling Dishwasher Brand†

Designed, Engineered and Assembled in the U.S.A. with American Pride

### Electrical Details

Amps 10

Volts 120

Hz 60

### Certifications

ENERGY STAR® Certified Yes

### Technical Details

Dishwasher Type Built-in

Control Location Hidden

Control Type Push Button

Number of Wash Cycles 5

Number of Options 5

dBA\* 51

Number of Racks 2

Tub Material Plastic

Wash System Filter

Wash System Type Removable Filter

Number of Wash Arms 3

### Dimensions

Product Dimensions (H x W x D) 34-1/2" x 23-7/8" x 24-1/2"

Depth with Door Open 90° 49-1/2"

### Reference Material

[Dimension Guide](#)

[Install Guide](#)

[Use & Care Guide](#)

[Energy Guide](#)

[Warranty](#)

### Key Features & Benefits

#### Sensor Cycle


Automatically get the right wash and dry settings for each load with two sensors that measure temperature, soil level and load size during prewash and the wash cycle.

#### 1-Hour Wash Cycle

Clean the dishes you need fast with a cycle that thoroughly takes care of plates, pans and glasses in just an hour.\*\*

#### Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

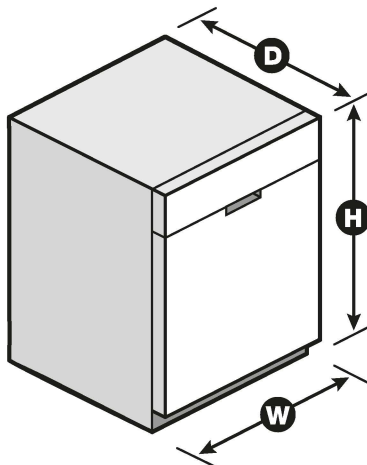

\*Per IEC standards. \*\*Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

## LG LAUNDRY

### Single Unit LG WashTower™ with Center Control™ 4.5 cu. ft. Front Load Washer and 7.4 cu. ft. Dryer

Ultra Large Capacity 4.5 cu.ft. Washer and 7.4 cu.ft. Dryer

Single Unit WashTower™ Design

Built-In Intelligence - AI Fabric Sensors/Smart Learner/Smart Pairing™

Advanced Washing & Drying - TurboWash™ 360°/Allergiene™ wash cycle/  
TurboSteam™


ThinQ® Technology / Proactive Customer Care

Tempered Glass Door

#### Enjoy new ways to control your home with LG smart appliances


- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle

**LG ThinQ®**



### PWY2- 311- Washer/Dryer- Income Suite

#### AVAILABLE COLORS



SUMMARY	Washer	Dryer
Type	Front Load Washer	Front Load Dryer
Capacity (cu.ft.)	4.5 cu. ft.	7.4 cu. ft.
Color	Black Steel (B), White (W)	
APPEARANCE	Washer	Dryer
Hard Buttons	Yes	
Touch Buttons	Yes	
Full Touch Electronic Control Panel with LED Display	Yes	
Unified Center Control	Yes	
Reversible Door	No	
ENERGY	Washer	Dryer
ENERGY STAR® Qualified	Yes	
CEE Tier	Tier2	-
IMEF	2.92	-
IWF	2.9	-
CEF	-	Electric: 3.94 Gas: 3.49
PROGRAMS	Washer	Dryer
No. of Programs	6	6
	Normal, Bedding, Delicates, Heavy Duty, Speed Wash, Downloaded	Normal, Bedding, Delicates, Heavy Duty, Speed Wash, Downloaded
OPTIONS	Washer	Dryer
No. of Options	10	9
	TurboWash®, Steam, Extra Rinse, Pre-wash, Sanitary, Tub Clean, Drum Light, Child Lock, Signal, Wi-Fi / Remote Start	Wrinkle Care, TurboSteam™, Reduce Static, Energy Saver, Steam Fresh*, Drum Light*, Child Lock*, Signal*, Wi-Fi* / Remote Start*
DETAILS	Washer	Dryer
No. of Wash/Rinse Temps	5	-
Wash/Rinse Temps	Hot, Warm/Hot, Warm, Cold/Warm, Cold	-
No. of Spin Speeds	5	-
Spin Speeds	High, Medium/High, Medium, Low, No Spin	-
Max RPM	1300	-
Water Levels	Load Sensing	-
No. of Soil Levels	5	-
Temperature Settings	-	High, Medium/High, Medium, Low/Medium, Low

Drying Levels	-	Very, More, Normal, Less, Damp
Manual Dry Times	-	60 min., 50 min., 40 min., 30 min., 20 min.
FABRIC CARE FEATURES	Washer	Dryer
AI DD	Yes	-
TurboWash™ 360 Technology	Yes	-
Steam Technology	Yes	-
Allergiene™ Cycle	Yes	-
Sanitary Cycle	Yes	-
SenseClean™ System	Yes	-
AI Dry	-	Yes
Sensor Dry	-	Yes
Precise Temperature Control with Variable Heater	-	Yes
Steam Technology	-	Yes (TurboSteam™)
CONVENIENCE FEATURES	Washer	Dryer
TrueBalance™ Anti-Vibration System	Yes	-
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	-
LoDecibel™ Quiet Operation	Yes	-
End of Cycle Signal	Yes	-
LoadSense	Yes	-
Child Lock	Yes	-
Auto Suds Removal	Yes	-
Leveling Legs	4 Adjustable Legs	-
Easy Loading TiTub™	Yes	-
Drum Light	Yes	-
Remaining Time Display/Status Indicator(s)	Yes	-
3 Minute Installation Check	-	Yes
LoDecibel™ Quiet Operation	-	Yes
End of Cycle Signal	-	Yes
Drum Light	-	Yes
FlowSense™ Duct Clogging Indicator	-	Yes
Wrinkle Care Option	-	Yes
Child Lock	-	Yes
Venting Option	-	Electric: 3 Way Venting / Gas: 2 Way Venting
4 Adjustable Legs	-	Yes
Remaining Time Display/Status Indicator(s)	-	Yes

ThinQ® TECHNOLOGY	Washer	Dryer
SmartDiagnosis™ (v3.0)		Yes
Wi-Fi		Yes
Remote Start and Cycle Monitor		Yes
Energy Monitoring		Yes
Tub Clean Coach	Yes	-
MOTOR AND AGITATOR	Washer	Dryer
Motor Type	Inverter Direct Drive Motor	-
Axis	Horizontal	-
MATERIALS AND FINISHES	Washer	Dryer
NeveRust™ Stainless Steel Drum	Yes	-
Cabinet	PCM	-
Control Panel	Plastic	-
Top Plate	Painted	-
NeveRust™ Stainless Steel Drum	-	Yes
Tub Rear	-	Painted
CERTIFICATION	Washer	Dryer
AAFA	Yes	-
POWER SOURCE	Washer	Dryer
Ratings	UL Listed	-
Electrical Requirements	120V, 10 Amps	-
Type	Electric	-
Ratings	-	CSA Listed
		120V, 15 Amps (Gas)
Electrical Requirements	-	240V 30 Amps (Electric)
Type	-	Gas / Electric
BTU Rating	-	10,000 Feet
LP Conversion Kit	-	383EEL3002D
Side Venting Kit	-	383EEL9001B
DIMENSIONS	Washer	Dryer
Product (WxHxD)	27" x 74 3/8" x 30 3/8"	
Depth with Door Open	55" D with door open	
Carton (WxHxD)	30 1/16" x 79 11/32" x 32"	
Weight (Product/Carton)		Electric: (326 lb / 361 lb) Gas: (329 lb / 364 lb)
LIMITED WARRANTY	Washer	Dryer
Parts and Labor	1 Year	1 Year
Direct Drive Motor	10 Years	-
Drum	3 Years	3 Years
UPC CODES	Washer	Dryer
WKEX200HBA (Black Steel)	048231028486	
WKGX201HBA (Black Steel)	048231029254	
WKEX200HWA (White)	048231028462	
WKGX201HWA (White)	048231029261	



## WHIRLPOOL 1.6 CU FT, 21.75 IN. COUNTERTOP MICROWAVE, 1100 WATTS

**\$ 259.97**

SKU: YWMC306B

VSN: YWMC30516HB

### Dimensions

Width: 21.75" (55.2 cm) Height: 13" (33.0 cm) Depth: 17.25" (43.8 cm)

This Whirlpool® countertop microwave delivers convenient features that are easy to use no matter who's doing the cooking. Sensor cooking automatically adjusts the cook time so there's no need to guess. The 1,200-watt microwave cooks food quickly and evenly and a recessed glass turntable makes room for larger items. From sides to snacks, enjoy fitting cooking into any schedule

### Unique Features

Sensor Cooking

1,200-Watt Cooking Power

Recessed Glass Turntable

Microwave Presets

Microwave Built-In Trim Kit (Optional)

Electronic Touch Controls



Add 30 Seconds Option

PWY2- 311- Microwave- Income Suite

### General Details

- Microwave Type: Countertop
- Oven Capacity: 1.6 cu. ft.
- Noise Level: n/a dB
- Max Power: 1200
- Control Panel: Electronic Touch
- Display Languages: English
- Turntable Type: Recessed
- Power Source: 1100
- In The Box: Manuals
- Care Instructions: <http://access.whirlpool.com/mr/getMediaType.do?mediaType=Use%20and%20Care&sku=YWMC30516HB&language=EN>

### Oven Details

- Lighting: Incandescent

### Cooking Details

- One-Touch Functions: Pizza, Popcorn, Potato, Soup
- Sensor Cooking: Yes
- Power Levels: 10

### Power Details

- Ventilation Type: Forced Air

### Installation Details

- Installation Requirements: See Installation Manuals
- Assembly Instructions URL: <http://access.whirlpool.com/mr/getMediaType.do?mediaType=Installation%20Instruction&sku=YWMC30516HB&language=EN>

### Safety

- See Installation Guide

### Additional Details

- Control Lock Mode
- 1.6 cu. ft. Capacity
- Dishwasher-Safe Turntable Plate

### Additional Dimensions

- Shipping Dimensions (W x D x H): 23.00 x 18.25 x 14.50
- Weight: 32 lbs.