


WRF535SWH FRENCH DOOR REFRIGERATOR



FINGERPRINT RESISTANT



Hide fingerprints and smudges with steel that easily wipes clean. Available in Black Stainless and Stainless Steel colors.

FULL-WIDTH, TEMPERATURE-CONTROLLED DRAWER



Store wide items like party platters and sheet cakes or preserve large amounts of meat and cheese at just the right temperature.

FRAMELESS GLASS SHELVES



Store more items on each shelf with wall-to-wall frameless glass shelves, which offer greater storage flexibility.

OTHER FEATURES

- Gallon door bins
- Humidity Controlled Crispers
- Accu-Chill™ temperature management system
- Adaptive defrost
- Interior water dispenser with EveryDrop™ water filtration
- FreshFlow™ produce preserver
- LED interior lighting



Black
(B)



White
(W)



Fingerprint Resistant
Stainless Steel (Z)



Fingerprint Resistant Black
Stainless Steel (V)

MODEL	WRF535SWHB	WRF535SWHW	WRF535SWHZ	WRF535SWHV
Max height (in)	70-1/8"	70-1/8"	70-1/8"	70-1/8"
Width (in)	35-5/8"	35-5/8"	35-5/8"	35-5/8"
Depth (in)	35-1/2"	35-1/2"	35-1/2"	35-1/2"

PWY2- 221





Whirlpool®

PWY2- 221

WDT750SAK

Whirlpool® Large Capacity Dishwasher with 3rd Rack

Dimensions: h: 34 1/2" w: 23 7/8" d: 24 1/2"

START THE CONVERSATION

How many dishes do you currently have in your kitchen sink?

THIS MODEL OFFERS:

3rd Rack

TOP FEATURES

3RD RACK

Free up space for more dishes in the racks below with easy loading for silverware, hard-to-fit utensils like tongs or even measuring cups and spoons.

ADJUSTABLE 2ND RACK

Make room for taller items like water bottles with easy-to-find adjusters that smoothly raise or lower the 2nd Rack..

VENT DRY

The Vent Dry System helps remove warm, humid air from the dishwasher.

DID YOU KNOW?

Over a 10% increase on third rack purchases over the last year**

DEMO

Tell your customers that they can Load more and run less with a 3rd Rack that makes extra rack space for hard-to-fit items.* They'll have fewer leftover dishes in the sink with space for long utensils and measuring cups above, plus features below that adjust to make room for large, taller items. Showcase this by talking through the bottom rack first: tell them that the 3 piece Silverware basket that adjusts to your needs. Then pull out the 2nd rack with adjustable tines, tell the it can now fit a large stock-pot & large water bottle. Finally go to the 3rd rack that fits silverware, hard-to-fit utensils like tongs and even measuring cups.

PWY2- 221



ALSO CONSIDER WDTA80SAKZ

RECOMMENDED PAIRINGS

Be sure to tune into your customers' shopping priorities to bundle products across categories.



WDT750SAKZ



WMH31017HS



WFG505M0BS



WRQA59CNKZ

1 OUT OF 5 KITCHEN APPLIANCE TRANSACTIONS INCLUDE MORE THAN ONE PRODUCT*

08/12/2020

**Source: Traqline thru FY 2019

©/TM © 2020 Whirlpool. All rights reserved. All other trademarks are owned by their respective companies.





part of the family

PWY2- 221



GE Profile Slate Slide-In Electric Convection Range (6.3 Cu. Ft.) - PCS940EMES

~~\$2,599.00~~

Sku: 15594007

Product Dimensions: Width: 30 Height: 29.5 Depth: 36.25

Preparing your favourite meal just got that much easier with this GE Profile Slide-In Electric Convection Range. Offering 6.3 cu. ft. of space to bake dishes of all shapes and sizes. This range features a baking drawer for additional cooking space, Chef Connect, and WiFi Connect.

Product Dimensions: Width: 30" Height: 29.5" Depth: 36.25"

Unique Features:

True European convection oven results in delicious baking and roasting outcomes without turning the pan

ChefConnect uses Bluetooth to sync clocks, OTR light and vent to elements.

PWY2- 221

The baking drawer heats up to 450° for additional cooking space.

Self Clean with Steam Clean option oven ensures hassle-free clean-up.

Wifi Connect allows oven control from anywhere with your smart device.

Capacity: 6.3 Cu. Ft.

Controls:

Cooktop Control Type: Knobs

Oven Control Type: Electronic Touch Control

Display: Yes

Smart Function: Chef Connect, WiFi Connect

Clock: Yes

Temperature Unit of Measure: Fahrenheit and Celsius

Cooking Complete Reminder Volume: Yes

Certified Sabbath Mode: Yes

Convenience Features:

Baking Drawer

Chef Connect

WiFi Connect

Cooking Capacity:

Main Oven: 5.3 cu. ft.

Baking Drawer: 1.0 cu. ft.

Cooktop Element Burners:

Left Front: 8" 2000W

Left Rear: 8" 2000W

Right Front: 6"/9"/12" 3000W

Right Rear: 6" 1500W

Centre (Warming Zone): 6" 120W

Cooktop Features:

5 Radiant Smoothtop Elements

8,620W Total Cooktop Power

Warming Zone

Tri Ring Power Boil Element

Indicator Lights

Melt Setting

Oven Elements:

Broiler Element Power: 8-Pass 4000W

Bake Element Power: 2850W Hidden

Convection Element: True European Convection ^
Convection Conversion: Yes

PWY2- 221

Oven Features:

Warm mode
Control Lock Capability
Remote Enable
Bake
Broil
Convection Bake
Convection Roast
Cancel/Off
Electronic Clock and Kitchen timer
True European Convection
8-Pass Broil Element
Hidden Bake
Settings Option
Self-Clean Oven
Steam Clean Option
Temperature Display
Delay Bake/Delay Start
Audible Preheat Signal
Auto Oven Shut-Off w/ Override
Meat Probe
Multi-Rack Baking
Certified Sabbath Mode
Light Self Clean Option
Automatic Self Clean Lock

Finish: Slate**Package Includes:** 2 Heavy Duty Self-Clean Oven Racks, 1 Full Extension Self-Clean Oven Rack**Product Details:**

Designer-Style Handle
Big View Oven Window
6 Oven Rack Positions

UPC: 067732153817**Warranty:** Limited 1-Year Entire Appliance (Parts and Labour)**Weight:** 212 lbs

The clean, contemporary shape of Glacier complements any kitchen design. Impressive LED lighting and superior smoke and odor removal are a mere introduction to everything this hood has to offer. The LED modules included with this hood are the latest in LED cooktop illumination technology specially designed to operate in the elevated temperatures of cooking - offering bright lighting and lasting up to 25 times as long as a standard bulb and greater reliability than typical replacement LED bulbs.

BCDF130SS



ALL OTHER HOODS



SIZE	BLACK STAINLESS	STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED FILTERS
30 in.	BCDF130BLS †	BCDF130SS	HPFAMM30 (Type "C2")	HPF30 (Type "Xc")
36 in.	BCDF136BLS †	BCDF136SS †	HPFAMM36 (Type "D2")	HPF36 (Type "Xd")
42 in.		BCDF142SS †	HPFAMM42 (Type "E2")	HPF42 (Type "Xe")

PWY2- 221

† Not available in Canada.

HVI PERFORMANCE

Duct Orientation	Size	Damper	Sones			CFM			
			Normal	Medium*	High	Normal	Medium*	High 0.25 in. w.g.	High 0.1 in. w.g.
Vertical - Rectangular	3¼ in. x 10 in.	Included	1.5	3.0	6.0	130	170	150	240
Horizontal - Rectangular	3¼ in. x 10 in.	Included	1.5	3.0	6.0	110	160	160	240
Round - Vertical	7 in.	Sold Separately	2.0	3.0	5.5	140	190	115	260

FEATURES

Max. Blower CFM**	375 CFM
Control type	3-speed Capacitive Touch
Delay off	no
Filter Clean Reminder	yes
Heat Sentry™	no
ADA Capable	yes
Lighting	2-level LED (included)
Grease Filters	Micro Mesh (Qty. 2)
Installation Hardware	EZ1 brackets
ENERGY STAR®	no
Recirculation	Non-ducted filters sold separately

AC INPUT

120 V, 60 Hz - 0.65 AMPS

OPTIONAL ACCESSORIES

7-in. Round Damper	BP87Q
Make-up Air Dampers	MD6TU, MD8TU and MD10TU
ADA Wiring Kit	HAWRK3



MOUNTING HEIGHT

18 in. to 24 in. from cooktop to bottom of hood

LIMITED WARRANTY

1-year
3-year (LED modules only)
(See installation manual for full warranty text.)

FOR INDOOR USE ONLY

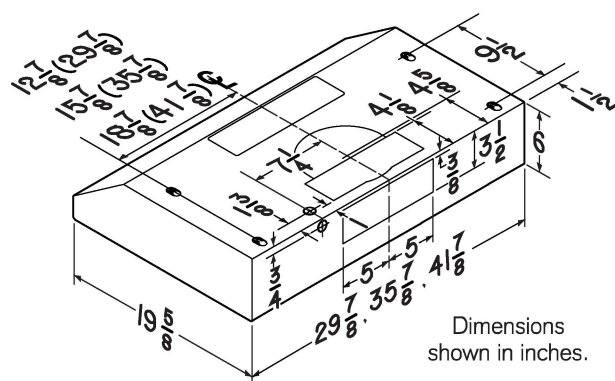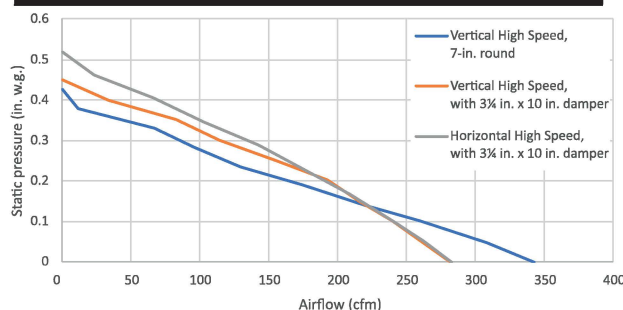

Dimensions shown in inches.

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in AMCA's state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.

* Where noted performance rating is not HVI certified but was established in accordance with HVI Standardized test procedure.

** Max. blower CFM indicates the performance of the hood blower in open air.

Broan-NuTone LLC

Venmar Ventilation ULC

926 West State Street, Hartford, WI 53027

550 Lemire Blvd., Drummondville, Québec Canada J2C 7W9

1 800-558-1711

1 877-896-1119

99045734J

www.Broan-NuTone.com

www.nutone.ca



4.3 cu. ft. Front Load Washer

WFW560CH

PWY2- 221



White
WFW560CHW

Capacity

Total 4.3 cu. ft.

General Features & Properties

Sanitize Cycle with Oxi

Quick Wash Cycle

Cold Wash Cycle

Presoak Option

Single Load Dispenser

Closet-Depth Fit

Smooth Wave Stainless Steel Wash Basket

Clean Washer with Affresh® Cycle

Laundry Pedestals

Electrical Details

Amps 15 or 20

Volts 120

Certifications

ADA Compliant Yes

ENERGY STAR® Certified Yes

Technical Details

Drum Material Stainless Steel

Control Location Front

Control Type Tap Touch

Number of Cycles 37

Washer Cycle Selections
Bulky Items
Clean Washer with affresh®
Cold Wash
Colors
Delicates
Drain & Spin
Heavy Duty
Normal
Quick Wash
Regular
Sanitize with Oxi
Towels
Whites
Wrinkle Control

Number of Options 7

Washer Option Selections
Control Lock
Extra Rinse

Dimensions

Product Dimensions (H x W x D)
38-5/8" x 27" x 31-9/16"

Depth with Door Open 90° 56-1/2"

Reference Material

[Install Guide](#)

[Use & Care Guide](#)

[Energy Guide](#)

[Warranty](#)

Key Features & Benefits

4.3 cu. ft. Capacity


Get plenty of room for bulky items with 4.3 cu. ft. capacity.

ENERGY STAR® Certified

ENERGY STAR® certified models exceed government standards to help conserve natural resources and save money on your utility bills

Intuitive Controls

Let the washer guide you to the right cycle combinations or customize up to 35 of your own to get the right type of fabric care for whatever you're washing.

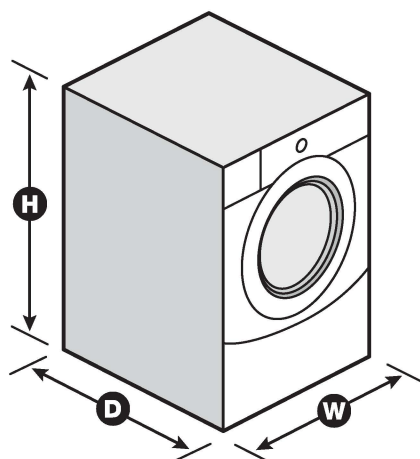

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.



Dimension Guide Whirlpool® Dryer with Intuitive Touch Controls - 7.4 cu. ft.

PWY2- 221

White

Available

YWED5620HW - Electric

WED5620HW - Electric



WGD5620HW - Gas




DETAILED PLANNING DIMENSIONS

WARNING: To reduce the risk of fire, electric shock, or injury to persons, read the IMPORTANT SAFETY INSTRUCTIONS and INSTALLATION INSTRUCTIONS, located in your appliance's Owner's Manual, before installing and operating this appliance.

Electrical Requirements		
Fuel Type	Electric	Gas
Minimum Circuit Amperage Rating	30 A	15 A
Maximum AMP Draw	24 A	6 A
Operating Voltage	240 V AC only 230 V AC only (Canada)	120 V AC only
Operating Frequency	60 Hz	

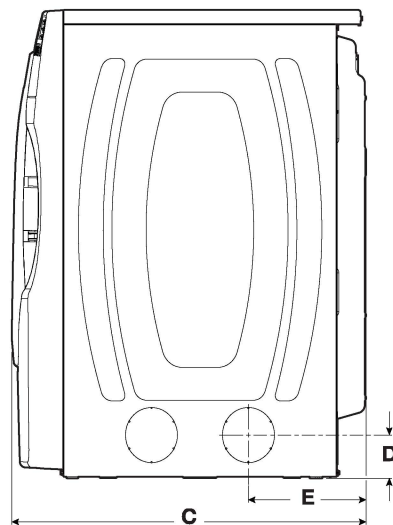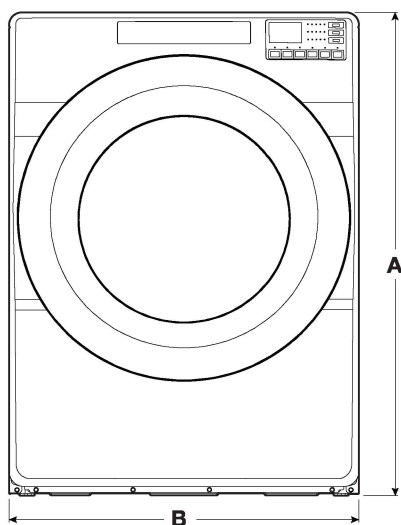

Product Dimensions					
		in (min)	in (max)	mm (min)	mm (max)
A	Height (with feet)	38 $\frac{1}{8}$	39	968	989
B	Width	27	-	686	-
C	Depth	30 $\frac{5}{8}$	-	778	-
D	Side Vent Height (feet min)	3 $\frac{1}{2}$	4 $\frac{3}{8}$	89	111
E	Side Vent (from back)	10 $\frac{3}{16}$	-	258	-

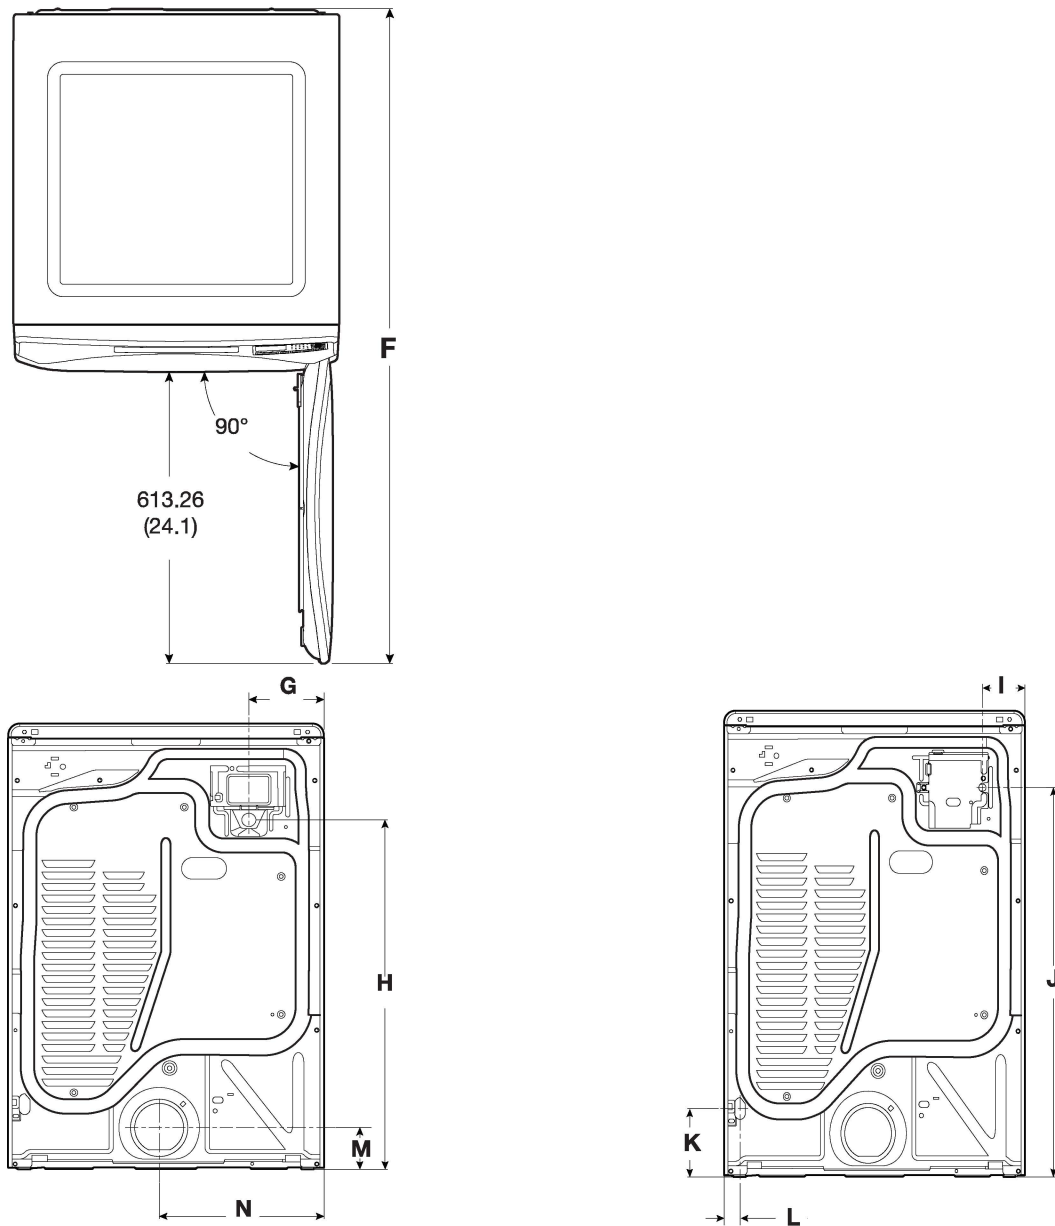


Product Dimensions					
		in (min)	in (max)	mm (min)	mm (max)
F	Depth with Door Open	54 ⁵ / ₁₆	-	1378	-
G	Strain Relief from Side (elec)	6 ³ / ₈	-	163	-
H	Strain Relief Height (elec)	29 ⁷ / ₈	30 ¹¹ / ₁₆	759	780
G	Power Cord from Side (Canadian)	6 ³ / ₈	-	163	-
H	Power Cord Height (Canadian)	29 ⁷ / ₈	30 ¹¹ / ₁₆	759	780
	Power Cord Length (Canadian)	53 ³ / ₈	-	1356	-
I	Power Cord from Side (gas)	3 ¹³ / ₁₆	-	96	-
J	Power Cord Height (gas)	31 ¹³ / ₁₆	32 ¹¹ / ₁₆	808	829
	Power Cord Length (gas)	72	-	1828	-
K	Gas Valve Height	5 ⁵ / ₈	6 ³ / ₈	142	163
L	Gas Valve from Side	1 ³ / ₈	-	36	-
M	Exhaust Duct Height	3 ¹ / ₂	4 ³ / ₈	90	111
N	Exhaust Duct from Side	14 ¹ / ₈	-	358	-

DETAILED PLANNING DIMENSIONS

Spacing for recessed area or closet installation

The dimensions shown are for the recommended spacing allowed.

- Additional spacing should be considered for ease of installation and servicing.
- Additional clearances might be required for wall, door, and floor moldings.
- Additional spacing of 1" (25 mm) on all sides of the dryer is recommended to reduce noise transfer.
- For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilations openings are acceptable.
- Companion appliance spacing should also be considered.

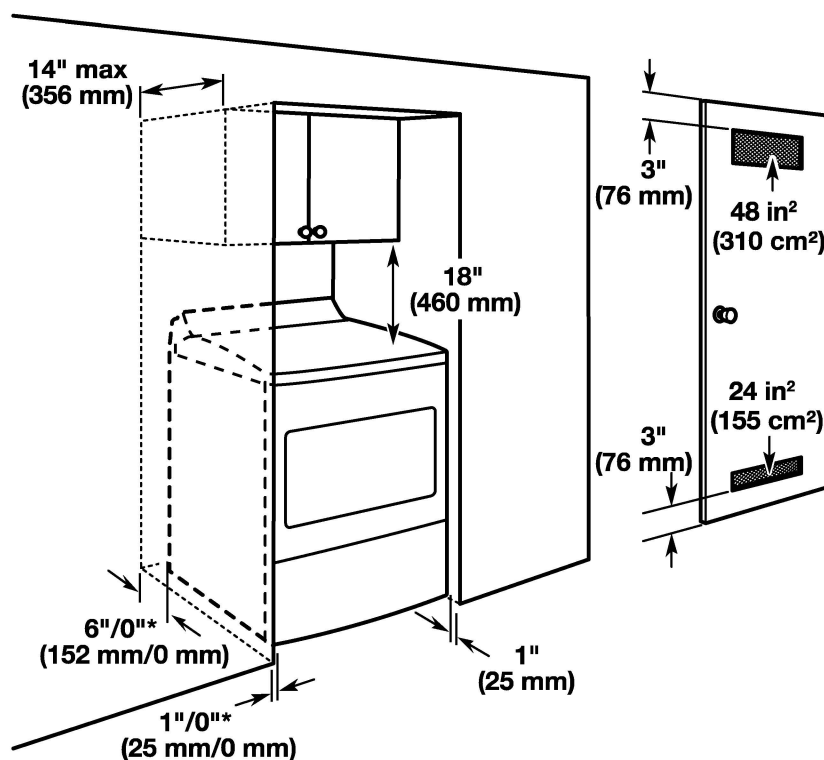

*Recommended/Minimum spacing