#### Sales Selection Sheet Checklist

Model: 20-2447 END A BARRINGTON

LOT 695-1

PURCHASERS: ALLY KASSAM/

**Heathwood Homes (Whitby) Limited VENDOR:** OPTIONAL DOUBLE SINKS IN MASTER ENSUITE VANITY **WOB DECK** FINISHED BASEMENT **COLD CELLAR** UPGRADED / MODIFIED ELEVATION **CORNER UPGRADE REAR UPGRADE** SIDE UPGRADE CEILING UPGRADE - SMOOTH MAIN FLOOR SECOND FLOOR **BASEMENT** LOWER LEVEL ADDITIONAL ROUGH-INS 200 AMP SERVICE (STD 200AMP TOWNS) WET BAR ROUGH-IN **HUMIDIFIER** AIR CONDITIONING (SITE STD) GAS ROUGH-IN STOVE **DRYER BBQ** ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE 6 IN ROUND DUCT 7 IN ROUND DUCT (STD FOR TOWNS) **FULL BASEMENT STAIRS:** Paint Grade **UPPER BASEMENT STAIRS:** N/A All Oak LOWER LEVEL STAIRS: LOWER BASEMENT STAIRS: N/A All Oak MAIN STAIRS: MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A **Decor Consultant: Date** -08- 17 2022 Date Purchaser: Date Heathwood Homes (Whitby) Limited

#### **Customer Colours**

ALLY KASSAM/

Project: Country Lane Unit: 695-1, Phase: 6

Model: 20-2447 END A BARRINGTON

Locked: Closed:

hen/Breakfast			
Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***	
Island Cabinet Colour/Style	9166	Viking III-CHARLESTON-ORCHID-3DL ***STD***	ļ
Cabinet Hardware	9151	12829 SB GOLD-HARDWARE ***2***	
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***	
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***	
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD***	
Sink	9493	Blanco Kitchen Sink Quatrus U 1 Maxi #401248 (32" x 18") Undermount 1 Bowl 9" Deep in Stainless Steel	PG 19
Crumb Vac Color	9482	Vacuum-Crumb Vac (Dust Pan)-White	
HoodFan	9904	YWMH31017HZ-Whirlpool Over-The-Range Microwave Hood Combination-SS-30 inch	PG 29-3
Opt. Backsplash	5721	QT.CD.ARW.0306.BR-Colour and Dimension Bright-Arctic White-3 x 6 ***1***	
Opt. Backsplash Grout	2226	Grout-(00) White ***STD***	
Opt. Backsplash Tile Pattern	3060	HORIZONTAL BRICK ***STD***	
Flooring	9255	TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13 ***STD***	
Floor Tile Grout	2225	Grout-(27) Silver ***STD***	
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***	

- Purchasers have been advised: standard fridge opening is a minimum 37  $3/8 \times 73 \ 3/8$  inches. Ice Waterline Rough-In is included.
- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

Comment	

Foyer		
Flooring	9255	TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13  ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***

### **Customer Colours** ALLY KASSAM/ Project: Country Lane Unit: 695-1, Phase: 6 Locked: Model: 20-2447 END A BARRINGTON Closed: Comment **Powder Room** TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13 9255 Flooring \*\*STD\*\*\* 2225 Grout-(27) Silver \*\*\*STD\*\*\* Floor Tile Grout STANDARD SQUARE \*\*\*STD\*\*\* Floor Tile Pattern 3000 1737 Plumbing Fixtures-WHITE \*\*\*STD\*\*\* Plumbing Fixture (Colour) Comment **Living Room** Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-3/4 inch x 3 1/4 inch \*\*\*STD\*\*\* 9058 Flooring Comment **Great Room** Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-3/4 inch x 3 1/4 inch \*\*\*STD\*\*\* Flooring 9058 Comment **Great Room Fireplace** 8865 Dimplex-Electric Fireplace-PF3033HL \*\*\*STD\*\*\* Туре NF 15-Paint Grade Mantle- Cabinet (Per Plan)-WHITE Mantle 9114 PG 18 \*\*\*STD\*\*\* N/A \*\*\*\*\* Opt. Surround 1111 - Purchasers have been advised: heat from the FP can damage TV above a FP and items placed on mantle. - Heathwood and its contractors will not be liable for any damage on items placed and or installed above a Fireplace after closing. Comment

Main Hall

Flooring

Comment

9058

Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-3/4 inch x 3 1/4 inch \*\*\*STD\*\*\*

#### **Customer Colours** ALLY KASSAM/ Project: Country Lane Unit: 695-1, Phase: 6 Locked: Model: 20-2447 END A BARRINGTON Closed: Upper Hall Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-3/4 inch x 3 1/4 inch \*\*\*STD\*\*\* Flooring 9058 Comment Master Bedroom DY 16320-Dynasty Tex-PAMPA BEIGE-40 oz Poly\*\*\*STD\*\*\* Flooring 9249 Comment Bedroom 2 9249 DY 16320-Dynasty Tex-PAMPA BEIGE-40 oz Poly\*\*\*STD\*\*\* Flooring Comment Bedroom 3 DY 16320-Dynasty Tex-PAMPA BEIGE-40 oz Poly\*\*\*STD\*\*\* Flooring 9249 Comment **Master Ensuite** Viking III-CHARLESTON-ORCHID-3DL \*\*\*STD\*\*\* Cabinet Colour/Style 9166 12801-HARDWARE \*\*\*STD\*\*\* Cabinet Hardware 2098 6698-46-Countertop-PALOMA POLAR ETCHINGS Countertop 8796 FINISH-Formica \*\*\*STD\*\*\* N/A \*\*\*\*\* Countertop Edge 1111 TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13 Floor Tile 9255 \*STD\*\*\* Floor Tile Grout 2225 Grout-(27) Silver \*\*\*STD\*\*\* STANDARD SQUARE \*\*\*STD\*\*\* Floor Tile Pattern 3000

Shower Wall Tile

Shower Wall Tile Grout

9020

2226

QT.WV.WHT.0810-Weave-White-8 x 10 \*\*\*STD\*\*\*

Grout-(00) White \*\*\*STD\*\*\*

#### **Customer Colours**

ALLY KASSAM/ Project: Country Lane Unit: 695-1, Phase: 6 Model: 20-2447 END A BARRINGTON

Locked: Closed:

Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***		
Shower Wall Tile Pattern	3090	VERTICAL STACKED STD		
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***		
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***		
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***		
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***		
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***		
Comment				
	20			
Main Bathroom				
Cabinet Colour/Style	9156	Viking III-SIMCOE-RAIN CLOUD-3DL ***STD***		
•				
Cabinet Hardware	2098	12801-HARDWARE ***STD***		
Countertop	8806	4987K-07-Countertop-LECHE VESTA-Wilsonart ***STD***		
Countertop Edge	1111	N/A *****		
Floor Tile	9255	TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13		
		***STD***		
Floor Tile Grout	2225	Grout-(27) Silver ***STD***		
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***		
•				
Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch		
		***STD***		
Wall Tile Grout	2226	Grout-(00) White ***STD***		
Wall Tile Pattern	3090	VERTICAL STACKED ***STD***		
	ĩ			
Opt. Shower Floor Tile	1111	N/A *****		
	1 5×5 5 5×			
Opt. Shower Floor Tile Grout	1111	N/A *****		
Opt. Shower Floor Tile Pattern	1111	N/A *****		

#### **Customer Colours**

ALLY KASSAM/
Project: Country Lane
Unit: 695-1, Phase: 6
Model: 20-2447 END A BARRINGTON

C	← <b>£</b> 499 <b>/</b>	
re red:	8/9/2022 09:34:1	

Locked: Closed:

Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
er Level Family Room and Hall	0040	DV 16220 Dymachy Tay DAMDA DEICE 40 on Daly ###CT
Flooring	9249	DY 16320-Dynasty Tex-PAMPA BEIGE-40 oz Poly***ST
Comment		
er Level Laundry Mud Room		
Flooring	9255	TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13  ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Opt. Cabinet Colour/Style - Uppers	1111	N/A *****
Opt. Cabinet Coloui/Otyle - Oppers		
Opt. Cabinet Hardware - Uppers Comment	1111	N/A ******
er Level Powder Room Cabinet Colour/Style	9166	Viking III-CHARLESTON-ÖRCHID-3DL ***STD***
Cabinet Hardware	2086	9677-HARDWARE ***STD***
Countertop	8830	1573-60-Countertop-FROSTY WHITE-Wilsonart ***ST
	1111	N/A *****
Countertop Edge		
Countertop Edge Flooring	9255	TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13 ***STD***
	9255 2225	
Flooring		***STD***
Floor Tile Grout	2225	***STD***  Grout-(27) Silver ***STD***

#### **Customer Colours** ALLY KASSAM/ Project: Country Lane Unit: 695-1, Phase: 6 Locked: Model: 20-2447 END A BARRINGTON Closed: Opt. Lower Level Bedroom 4 N/A \*\*\*\*\* 1111 Flooring Comment Opt. Lower Level Bedroom 4 Hallway N/A \*\*\*\*\* Flooring 1111 Comment Opt. Lower Level Bedroom 4 Laundry Mu N/A \*\*\*\*\* Flooring 1111 N/A \*\*\*\*\* Floor Tile Grout 1111 N/A \*\*\*\*\* Floor Tile Pattern 1111 N/A \*\*\*\*\* Opt. Cabinet Colour/Style - Uppers 1111 N/A \*\*\*\*\* Opt. Cabinet Hardware - Uppers 1111 Comment Opt. Lower Level Bedroom 4 Bathroom N/A \*\*\*\*\* Cabinet Colour/Style 1111 N/A \*\*\*\*\* Cabinet Hardware 1111 N/A \*\*\*\*\* Countertop 1111 N/A \*\*\*\*\* 1111 Countertop Edge N/A \*\*\*\*\* Floor Tile 1111 N/A \*\*\*\*\* 1111 Floor Tile Grout N/A \*\*\*\*\* Floor Tile Pattern 1111

Wall Tile 1111 N/A \*\*\*\*\*\*

#### **Customer Colours**

ALLY KASSAM/
Project: Country Lane
Unit: 695-1, Phase: 6
Model: 20-2447 END A BARRINGTON

	G	"		
CI	_	0	20	ŀ

Custom Stain/Paint  Landing(s)  9058  Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-inch x 3 1/4 inch ***STD***  Opt. Carpet Runner  Comment  Type  1713  Paint Grade Stairs ***STD BASEMENT STAIR ***  Comment  Switches and Plug  Switches and Plug  Thresholds  2232  Metal Thresholds ***STD***  Underpad  Trim Size  AND WILL VARY FROM FLOORING ***99***  Place of the properties of the part of			
Opt. Shower Floor Tile Opt. Shower Floor Tile Grout Opt. Shower Floor Tile Pattern Opt. Shower Floor Tile Pattern Opt. Shower Floor Tile Pattern Opt. Shower Jamb(s) and Sill(s) Plumbing Fixture (colour) Comment  Opt. Shower Jamb(s) and Sill(s) Plumbing Fixture (colour) Comment  Opt. Shower Jamb(s) and Sill(s) Plumbing Fixture (colour) Comment  Opt. Shower Jamb(s) and Sill(s) Plumbing Fixture (colour) Comment  Opt. Shower Jamb(s) and Sill(s) Plumbing Fixture (colour)  Type Opt. Shower Jamb(s) and Sill(s) Opt. Comment  Opt. Shower Jamb(s) and Sill(s) Opt. Carpet Runner  Introduction  Introduction Sill(s) Opt. Carpet Runner  Introduction  Introduction  Sasement Stairs  Type Introduction  Introduction  Sasement Stairs  Introduction  Sasement Stairs  Introduction  Sasement Stairs  Introduction	Wall Tile Grout	1111	N1/A *****
Opt. Shower Floor Tile         f1111         N/A *******           Opt. Shower Floor Tile Grout         f1111         N/A ********           Opt. Shower Floor Tile Pattern         f1111         N/A *********           Opt. Shower Jamb(s) and Sill(s)         f1111         N/A ********           Plumbing Fixture (colour)         f1111         N/A ********           Comment         f111         N/A ********           Type         f1712         Oak Stairs ***STD***           Colour         7919         Sussex (Dover) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING ***99***           Handrail/Pickets/Posts Type         f264         13/4 inch Square pickets with 3 1/2* Square/Cap Post(s)-ALL Oak ********           Handrail/Pickets/Posts Colour         7919         Sussex (Dover) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING ***99***           Custom Stain/Paint         f1111         N/A *******           Landing(s)         8058         Red Oak Pear-Virtage Engineered-DOVER/SUSSEX-Inch x 3 1/4 inch ***STD***           Opt. Carpet Runner         f1111         N/A *******           Comment         Faint Grade Stairs ***STD BASEMENT STAIR ****           Switches and Plug         5796         Decora White Switches and Plug ***STD***           Throsholds         232         Metal Thresholds ***STD***		30000	
Opt. Shower Floor Tile Grout Opt. Shower Floor Tile Pattern  Opt. Shower Jamb(s) and Sill(s) Plumbing Fixture (colour)  Comment  Ower Level and Main Stairs  Type  Colour F919 Sussex (Dover) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING ***99*** Handrail/Pickets/Posts Type  Handrail/Pickets/Posts Colour  F919 Sussex (Dover) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING ***99***  Handrail/Pickets/Posts Colour  F919 Sussex (Dover) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING ***99***  Handrail/Pickets/Posts Colour  F919 Sussex (Dover) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING ***99***  Custom Stain/Paint  Landing(s) B058 Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-inch x 3 1/4 inch ***STD***  Opt. Carpet Runner  Comment  Sissement Stairs  Type  1713 Paint Grade Stairs ***STD BASEMENT STAIR ***  Comment  Switches and Plug Thresholds  2232 Metal Thresholds ***STD***  Trim Size  8705  4 ½ Baseboard and 2 ½ Casings ***STD***  Trim Size			
Opt. Shower Floor Tile Grout Opt. Shower Floor Tile Pattern  Opt. Shower Jamb(s) and Sill(s) Plumbing Fixture (colour) Comment  Ower Level and Main Stairs  Type Colour Final Sussex (Dover) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING "**99"** Handrail/Pickets/Posts Type Handrail/Pickets/Posts Colour Custom Stain/Paint Landing(s) Opt. Carpet Runner  Comment  Description  Introduct  Switches and Plug Thresholds Underpad Tim Size  Final Stairs  Introduct  Intro	Ont. Shower Floor Tile	1111	N/A *****
Opt. Shower Floor Tile Pattern         1111         N/A *******           Opt. Shower Jamb(s) and Sill(s) Plumbing Fixture (colour)         1111         N/A *******           Comment         1111         N/A *******           Type Colour         7919         Sussex (Dover) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING ***99***           Handrail/Pickets/Posts Type         7654         1 3/4 inch Square pickets with 3 1/2* Square/Cap Post(s)-ALL OAK ***4***           Handrail/Pickets/Posts Colour         7919         Sussex (Dover) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING ***99***           Custom Stain/Paint         [1111         N/A *******           Landing(s)         9058         Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-inch x 3 1/4 inch ***STD***           Opt. Carpet Runner         [1111         N/A *******           Comment         [1111         N/A **********           A victors and Plug         5796         Decora White Switches and Plugs ***STD***           Thresholds         2232         Metal Thresholds ***STD***           Underpad         1079         600 Series-Underpad ***STD***           Trim Size         4 ½ Beseboard and 2 ½ Casings ***STD***		NO. 40 ACCUSA	
Opt. Shower Jamb(s) and Sili(s)  Plumbing Fixture (colour)  Comment			
Discrete	Opt. Shower Floor file Pattern	[1111	IN/A
Discription	Opt. Shower Jamb(s) and Sill(s)	1111	N/A *****
Dower Level and Main Stairs  Type			8 001 A
Type	and the second control of the second control		
Type			· · · · · · · · · · · · · · · · · · ·
Colour  T919 Sussex (Dover) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING ***99*** Handrail/Pickets/Posts Type  T654  T3/4 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***1***  Handrail/Pickets/Posts Colour  Custom Stain/Paint  Landing(s)  D9058  Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-inch x 3 1/4 inch ****STD****  Opt. Carpet Runner  Type  T1111  N/A *******  Paint Grade Stairs ****STD BASEMENT STAIR ****  Comment  Switches and Plug  Thresholds  Decora White Switches and Plugs ****STD****  Underpad  Torm Size  B705  4 1/4 Baseboard and 2 3/4 Casings ****STD****  Type  Trim Size  Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-inch x 3 1/4 inch ****STD****  Paint Grade Stairs ****STD BASEMENT STAIR ****  Decora White Switches and Plugs ****STD****  Metal Thresholds ****STD****  Trim Size  B705  4 1/4 Baseboard and 2 3/4 Casings ****STD****	tious palas sur experimentation communication de environmentation de environmentation de environmentation de e	1712	Oak Stairs ***STD***
AND WILL VARY FROM FLOORING ***99***  Handrail/Pickets/Posts Type  7654  1 3/4 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***1***  Handrail/Pickets/Posts Colour  Custom Stain/Paint  Landing(s)  9058  Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-inch x 3 1/4 inch ****STD****  Opt. Carpet Runner  1111  N/A *******  Comment  Type  1713  Paint Grade Stairs ***STD BASEMENT STAIR ***  Comment  Switches and Plug  5796  Decora White Switches and Plugs ***STD***  Underpad  1079  500 Series-Underpad ***STD***  Trim Size  8705  4 ½ Baseboard and 2 ¾ Casings ***STD****			
Handrail/Pickets/Posts Colour  7919 Sussex (Dover) STAIN TO COMPLIMENT HARDWOO AND WILL VARY FROM FLOORING ***99***  Custom Stain/Paint  Landing(s)  9058 Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-inch x 3 1/4 inch ***STD***  Opt. Carpet Runner  1111 N/A *******  Comment  Sement Stairs  Type 1713 Paint Grade Stairs ***STD BASEMENT STAIR ***  Comment  roughout  Switches and Plug 5796 Decora White Switches and Plugs ***STD***  Thresholds 2232 Metal Thresholds ***STD***  Underpad 1079 500 Series-Underpad ***STD***  Trim Size  8705 4 ½ Baseboard and 2 ½ Casings ***STD***	NT FORESTO		AND WILL VARY FROM FLOORING ***99***
Custom Stain/Paint  Interpretation of the stain of the st	Handrail/Pickets/Posts Type	7654	1 3/4 inch Square pickets with 3 1/2" Square/Cap Post(s)-ALL OAK ***1***
Landing(s)  9058  Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-inch x 3 1/4 inch ***STD***  Opt. Carpet Runner  1111  N/A ******  Comment  Type  1713  Paint Grade Stairs ***STD BASEMENT STAIR ***  Comment  Switches and Plug  5796  Decora White Switches and Plugs ***STD***  Thresholds  1079  Decora White Switches and Plugs ***STD***  Underpad  1079  500 Series-Underpad ***STD***  Trim Size  8705  4 1/4 Baseboard and 2 3/4 Casings ***STD***	Handrail/Pickets/Posts Colour	7919	
Inch x 3 1/4 inch ****STD***  Opt. Carpet Runner  Inch x 3 1/4 inch ****STD***  Inch x 3 1/4 inch ****STD BASEMENT STAIR ***  Inch x 3 1/4 inch ****STD BASEMENT STAIR ***  Inch x 3 1/4 inch ****STD BASEMENT STAIR ***  Inch x 3 1/4 inch ****STD BASEMENT STAIR ***  Inch x 3 1/4 inch ****STD BASEMENT STAIR ***  Inch x 3 1/4 inch ****STD BASEMENT STAIR ***  Inch x 3 1/4 inch ****STD BASEMENT STAIR ***  Inch x 3 1/4 inch ****STD BASEMENT STAIR ***  Inch x 3 1/4 inch ****STD BASEMENT STAIR ***  Inch x 3 1/4 inch ****STD BASEMENT STAIR ***  Inch x 3 1/4 inch ****STD BASEMENT STAIR ***  Inch x 3 1/4	Custom Stain/Paint	1111	N/A *****
Comment  Type 1713 Paint Grade Stairs ***STD BASEMENT STAIR ***  Comment  Switches and Plug 5796 Decora White Switches and Plugs ***STD***  Thresholds 2232 Metal Thresholds ***STD***  Underpad 1079 500 Series-Underpad ***STD***  Trim Size 8705 4 1/4 Baseboard and 2 3/4 Casings ***STD***	Landing(s)	9058	Red Oak Pearl-Vintage Engineered-DOVER/SUSSEX-3/4 inch x 3 1/4 inch ***STD***
Type 1713 Paint Grade Stairs ***STD BASEMENT STAIR ***  Comment  Switches and Plug 5796 Decora White Switches and Plugs ***STD***  Thresholds 2232 Metal Thresholds ***STD***  Underpad 1079 500 Series-Underpad ***STD***  Trim Size 8705 4 1/4 Baseboard and 2 3/4 Casings ***STD***	Opt. Carpet Runner	1111	N/A *****
Type 1713 Paint Grade Stairs ***STD BASEMENT STAIR ***  Comment  Switches and Plug 5796 Decora White Switches and Plugs ***STD***  Thresholds 2232 Metal Thresholds ***STD***  Underpad 1079 500 Series-Underpad ***STD***  Trim Size 8705 4 ¼ Baseboard and 2 ¾ Casings ***STD***	Comment		
Type 1713 Paint Grade Stairs ***STD BASEMENT STAIR ***  Comment  Switches and Plug 5796 Decora White Switches and Plugs ***STD***  Thresholds 2232 Metal Thresholds ***STD***  Underpad 1079 500 Series-Underpad ***STD***  Trim Size 8705 4 ¼ Baseboard and 2 ¾ Casings ***STD***			
Comment  Switches and Plug 5796 Decora White Switches and Plugs ***STD***  Thresholds 2232 Metal Thresholds ***STD***  Underpad 1079 500 Series-Underpad ***STD***  Trim Size 8705 4 1/4 Baseboard and 2 3/4 Casings ***STD***	and the first of the Anglicus III is a second first selection to the first in the first in the recent	2. 10. 10. 10. 10. 10. 10. 10. 10. 10. 10	
Switches and Plug 5796 Decora White Switches and Plugs ***STD***  Thresholds 2232 Metal Thresholds ***STD***  Underpad 1079 500 Series-Underpad ***STD***  Trim Size 8705 4 1/4 Baseboard and 2 3/4 Casings ***STD***	Гуре	1713	Paint Grade Stairs ***STD BASEMENT STAIR ***
Switches and Plug 5796 Decora White Switches and Plugs ***STD***  Thresholds 2232 Metal Thresholds ***STD***  Underpad 1079 500 Series-Underpad ***STD***  Trim Size 8705 4 1/4 Baseboard and 2 3/4 Casings ***STD***	Comment	<del> </del>	
Switches and Plug 5796 Decora White Switches and Plugs ***STD***  Thresholds 2232 Metal Thresholds ***STD***  Underpad 1079 500 Series-Underpad ***STD***  Trim Size 8705 4 1/4 Baseboard and 2 3/4 Casings ***STD***			
Thresholds         2232         Metal Thresholds ***STD***           Underpad         1079         500 Series-Underpad ***STD***           Trim Size         8705         4 1/4 Baseboard and 2 3/4 Casings ***STD***		5796	Decora White Switches and Plugs ***STD***
Underpad 500 Series-Underpad ***STD***  Trim Size 8705 4 1/4 Baseboard and 2 3/4 Casings ***STD***	· · · · · · · · · · · · · · · · · · ·		TOTAL STATE OF THE PROPERTY OF
Trim Size 4 1/4 Baseboard and 2 3/4 Casings ***STD***			
		,	
Trim - Paint Colour   1716	Trim - Paint Colour	1716	Trim-WHITE ***STD***

#### **Customer Colours**

ALLY KASSAM/
Project: Country Lane
Unit: 695-1, Phase: 6
Model: 20-2447 END A BARRINGTON

Locked:

Closed:

	(explorate trace of the property of the pro- to-september of the property of the last			- Ale voeral valetierere eine vale Louis august hand kunnelenster in te		
Walls - F	Paint Colour	1717	22-Wall-W	ARM GREY ***STD***		
Commer	nt					
Purchaser:	ALLY KASSAM	1	10/2012 Date	Decor Consultant	1 10-22 Date	, —
Purchaser:		D	Pate	Country Lane	-08- 1 7 2022 Date Approved	

# 10 of 45



CONSTRUCTION SUMMARY

Lot: 695-1 Model: 20-2447 END A BARRINGTON

**Project/Phase: Country Lane / 6** 

Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer? Townhomes
Worksheet	Note:
Offer	Five Thousand Dollars (\$5,000) at D?cor. (No Cash Value) - Townhomes
Worksheet	Note:
	Two Men and a Truck Credit of One Thousand Dollars (\$1000.00) for moving services only, Into your Heathwood Home (No Cash Value) The
	Credit is Non-Transferable and cannot be combined with any other offer.
Worksheet	Note.
0.00	
Offer	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not entitle to a
	referral fee under Heathwood Homes Referral program.
Worksheet	Note:

Printed and Sent: 09-Jun-23

# CONSTRUCTION SUMMARY Of 45



Lot: 695-1

**Model: 20-2447 END A BARRINGTON** 

Project/Phase: Country Lane / 6

#### **ADMIN FEE**

Invoice Qty. Description

#### **APPLIANCES**

Invoice	Qty.	Description
1140	1	- APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
335,505		
14Feb23		
		CABINETRY-Notify; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct Size change t

#### **CABINETRY**

Invoice	Qty.	Description
1140 335,505 14Feb23 **	1	- APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ  CABINETRY-Notify; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct Size change i
1140 342,668 14Feb23	1	KITCHEN - CABINETRY-H03-66cm deep fridge enclosure (counter depth) with (2) walls and (0) gabel VIKING  SKETCH # 3  DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1140 335,750 14Feb23 **	1	KITCHEN - PLUMBING - KITCHEN SINK UPGRADE - BLANCO KITCHEN SINK QUATRUS U 1 MAXI #401248 (32 INCH X 18 INCH ) UNDERMOUNT 1 BOWL 9 INCH DEEP IN STAINLESS STEEL -  CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink
1140 335,871 14Feb23 **	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING ONE ADDITIONAL STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 4 CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light
1140 335,964 14Feb23	1	- CABINETRY-G01-Upgrade hardware for kitchen in a CONDO, TOWNHOUSE & SEMI-DETACHED model (stacked upper hardware is an additional charge see line G04 if applicable) VIKING

#### **CERAMICS**

Invoice	Qty.	Description
1140 340,110 14Feb23	1	Kitchen Optional Backsplash - Ceramics - Upgrade 1 Tile - Kitchen Optional Backsplash - UPG
1140 340,214 14Feb23	1	Kitchen Optional Backsplash - Ceramics - Install in Specified Pattern - Kitchen Optional Backsplash - UPG

#### **DRYWALL**

Invoice	Qty.	Description
1140	1	KITCHEN - CABINETRY-H03-66cm deep fridge enclosure (counter depth) with (2) walls and (0) gabel VIKING
342,668		
14Feb23		SKETCH#3
**		DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify
1140	1	- Drywall - Smooth Ceilings - Main Floor - UPG
337,753		
14Feb23		
		PAINTING-Notify

DisciplineMS.rpt 13dec21 Page 2 of 4

Printed and Sent: 09-Jun-23

# 12 of 45 construction summary



Lot: 695-1

**Model: 20-2447 END A BARRINGTON** 

**Project/Phase: Country Lane / 6** 

#### ELECTRICAL

Invoice	Qty.	Description
1140 335,505	1	- APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ
14Feb23 **		CABINETRY-Notify; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct Size change (
1140 335,570	2	THROUGHOUT - ELECTRICAL - CEILING ROUGH-IN (CAPPED)
14Feb23		1 X TO BE INSTALLED IN THE CENTRE OF THE GREAT ROOM - USE EXISTING SWITCH PLUG 1X TO BE INSTALLED ABOVE THE BREAKFAST BAR- SWITCH TO BE TOGETHER WITH KITCHEN LIGHT SEE SKETCH # 3
1140 335,578	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS)
14Feb23		TO BE INSTALLED IN THE CENTRE OF THE GREAT ROOM FIRE PLACE 70'+- FROM FLOOR SEE SKETCH # 3
1140 335,871	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING ONE ADDITIONAL STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING
14Feb23 **		SKETCH # 4 CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light

#### **FRAMING**

Invoice	Qty.	Description
1140	1	VITCHEN CADINETDY 1102 (Comp door failes analogues (countage doub) with (2) walls and (0) cabal VIVINC
1140	1	KITCHEN - CABINETRY-H03-66cm deep fridge enclosure (counter depth) with (2) walls and (0) gabel VIKING
342,668		
14Feb23		SKETCH # 3
**		DRVWAL_Notify: FRAMING_Modify Rulkhead: PAINTING_Notify

#### **GRANITE**

Invoice	Qty.	Description
1140 335,750	_	KITCHEN - PLUMBING - KITCHEN SINK UPGRADE - BLANCO KITCHEN SINK QUATRUS U 1 MAXI #401248 (32 INCH X 18 INCH ) UNDERMOUNT 1 BOWL 9 INCH DEEP IN STAINLESS STEEL -
14Feb23 **		CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink

#### **HEATING / AIR CONDITIONING**

	ALTINIO / MIN CONDITION IN CO				
Invoice	Qty. Description				
1140 335,505	1	- APPLIANCES - WHIRLPOOL OTR SS - YWMH31017HZ			
14Feb23 **		CABINETRY-Notify; ELECTRICAL-delete std range hood; HEATING/AIR CONDITIONING-Duct Size change			
1140 335,680 14Feb23	1	- HEATING/AIR - ROUGH-IN GAS LINE FOR BBQ AT 2ND FLOOR UP TO 40 FT (QUICK CONNECT NOT INCLUDED); ELECTR ICAL OUTLET PRICED SEPARATELY IF REQUIRED (TOWNS) SKETCH # 3			

DisciplineMS.rpt 13dec21 Page 3 of 4

# CONSTRUCTION SUMMARY Of 45



Lot: 695-1

**Model: 20-2447 END A BARRINGTON** 

**Project/Phase: Country Lane / 6** 

#### **PAINTING**

Invoice	Qty.	Description		
1140	1	KITCHEN - CABINETRY-H03-66cm deep fridge enclosure (counter depth) with (2) walls and (0) gabel VIKING		
342,668				
14Feb23		KETCH # 3		
**		DRYWAL-Notify; FRAMING-Modify Bulkhead; PAINTING-Notify		
1140	1	- Drywall - Smooth Ceilings - Main Floor - UPG		
337,753				
14Feb23 **		PAINTING-Notify		

#### **PLUMBING**

Invoice	Qty.	Description
1140 335,750 14Feb23	_	KITCHEN - PLUMBING - KITCHEN SINK UPGRADE - BLANCO KITCHEN SINK QUATRUS U 1 MAXI #401248 (32 INCH X 18 INCH ) UNDERMOUNT 1 BOWL 9 INCH DEEP IN STAINLESS STEEL -
		CABINETRY-upgraded kitchen sink; GRANITE-upgraded kitchen sink
1140 335,871 14Feb23	1	MASTER ENSUITE - PLUMBING - OPTION FROM ONE SINK TO DOUBLE SINKS INCLUDING ONE ADDITIONAL STD CHATEAU FAUCET OVERMOUNT COLONY SINK ONE EXTRA VANITY LIGHT AND CABINET CONVERSION 2D VIKING SKETCH # 4
		CABINETRY-2D Convert Cabinetry Viking; ELECTRICAL-Additional Vanity Light

STRUCTURED WIRING				
Invoice	Qty.	Description		
1140 335,889	1	GREAT ROOM - STRUCTURED WIRING - RELOCATION OF TV		
14Feb23		RELOCATE STD. R/I CABLE TO BE INSTALLED IN THE CENTRE OF THE GREAT ROOM FIRE PLACE 70'+ - FROM FLOOR SEE SKETCH # 3		

DisciplineMS.rpt 13dec21 Page 4 of 4 Project: Country Lane Unit: 695-1, Phase: 6 Model: 20-2447 END A BARRINGTON


14 of 45

# The Barrington

### 20-2447 END ELEV. A

Sketch#1

ELEVATION A & B: 2,504 SQ. FT.
THE TRAILS OF
COUNTRY LANE

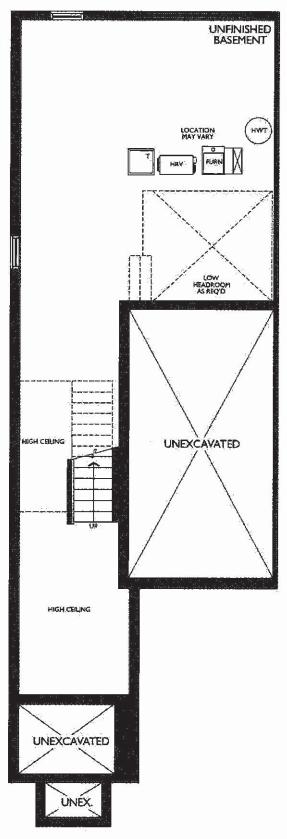

BASEMENT ELEVATION A & B END A.K.

Model: 20-2447 END A BARRINGTON

15 of 45


# The Barrington

20-2447 END ELEV. A

EV. A ELEVATION A & B: 2,504 SQ. FT.

THE TRAILS OF

Sketch #2 COUNTRY LANE

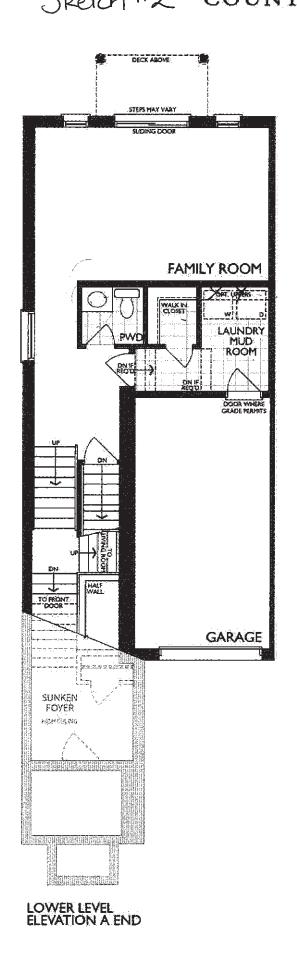

A.K.

Model: 20-2447 END A BARRINGTON

16 of 45

# The Barrington


ELEVATION A & B: 2,504 SQ. FT.

20-2447 END ELEV. A

Sketch #3

THE TRAILS OF COUNTRY LANE

1. EXTRA WALL INTERIOR **OUTLET ON EXISTING** CIRCUIT + 2. RELOCATE STD. R/I CABLE TO BE INSTALLED IN THE CENTRE OF THE GREAT ROOM FIRE PLACE 70'+-FROM FLOOR

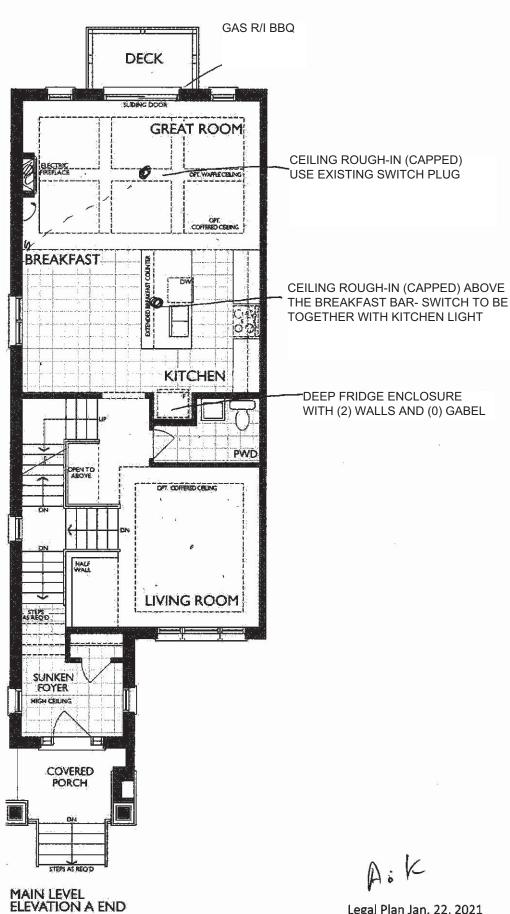


17 of 45 Model: 20-2447 END A BARRINGTON

# The Barrington

### 20-2447 END ELEV. A

Sketch # 4

ELEVATION A & B: 2,504 SQ. FT. THE TRAILS OF COUNTRY LANE

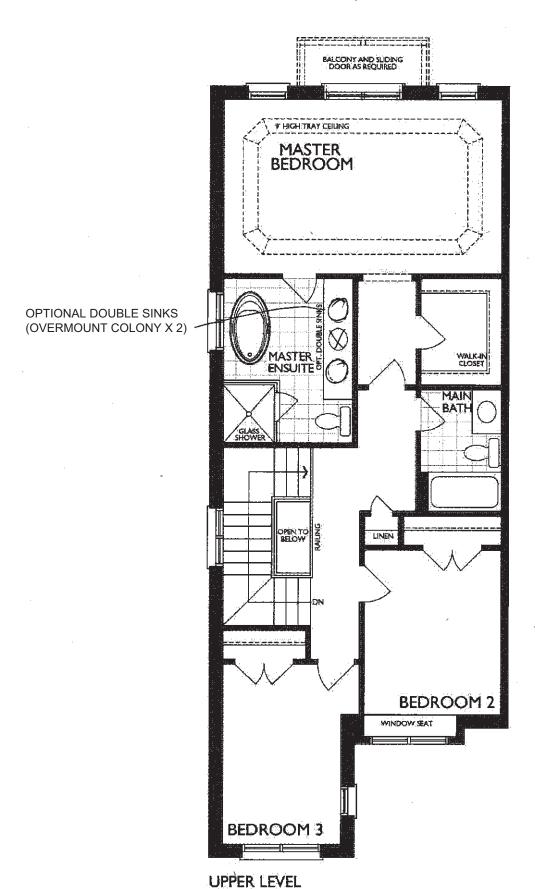

**ELEVATION A END** 

Project: Country Lane Unit: 695-1, Phase: 6 Model: 20-2447 END A BARRINGTON

18 of 45





NFAS NF15 Mantel

Model: 20-2447 END A BARRINGTON

# 19 of 45



#### Sink Specifications

Colour SKU brushed finish 401248

#### Design and planning tips

Min cabinet size: 36 in (915 mm)Bowl Depth: 9 in (230.0 mm)

#### Specifications:

Installation clips, Sink template, Installation instructions, 3  $\frac{1}{2}$ " (90 mm) stainless steel strainer

Depending on cabinet construction, a different cabinet size may be required. Consult the cabinet manufacturer.

Codes/Standards: ASME A112.19.3-2017/ CSA

B45.4-17

#### **Optional Accessories**

Elevated Grid 406346 Workstation 406344 CapFlow Strainer Cover 517666 Ash Cutting Board 406345 Sink Grid 402125

# 32" T A 18"

QUATRUS U 1 SUPER SINGLE

Stainless steel brushed finish

# 16 8 1 8 1 V

#### Warranty

Limited lifetime warranty on all sinks and faucets. One-year warranty on all accessories and soap dispensers.

#### Code/Standards Compliance

BLANCO sinks and faucets are third-party tested and certified to CSA, cUPC, ANSI/ASME, IAPMO and NSF standards and listed by applicable certification bodies. For more information on individual product listings, contact our office or listing organization.



Need support? Learn more by watching our sink & faucet How-to videos: https://www.blanco.com/ca-en/support/how-to-videos/how-to-videos-for-sinks/



BLANCO Canada Inc 100 Corporation Drive Brampton ON L6S 6B5 Tel & Fax

Tel: 905-494-2400 Toll free: 1-877-425-2626 Fax: 905-494-2425 Toll free: 1-877-825-2626

While BLANCO strives to provide accurate information, all images and dimensions in this document are intended for reference only and are subject to change at any time without notice. This document is not intended for use as an installation guide. For technical installation details, refer to installation instructions provided with the product. BLANCO assumes no responsibility for the use of superseded or voided specifications.

**Project: Country Lane** Unit: 695-1, Phase: 6 Model: 20-2447 END A BARRINGTON

20 of 45

### MOEN

#### **FAUCET DESCRIPTION**

- Reflex™ pulldown system offers smooth operation, easy movement and secure docking Power Clean™ spray technology Metal construction with various finishes identified by suffix

- Quick connect installation
- Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings
- High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout
- Faucet designed for handle to be mounted on right side only

#### **OPERATION**

- Lever style handle
- Temperature controlled by 100° arc of handle travel
- Operates with less than 5 lbs. of force
- Operates in stream or spray mode in the pullout or retracted position **FLOW**

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

#### **STANDARDS**


- Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372
- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

### Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet** 

Models: 7565 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



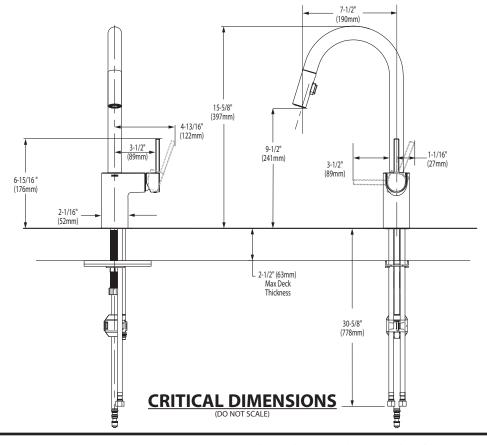

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20





#### BOULEVARD® PEDESTAL SINK VITREOUS CHINA

#### **BOULEVARD® PEDESTAL SINK**

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD • 0641.400 Faucet holes on 4" (102mm) centers

#### ☐ 0641.100 Center hole only

- Classic styled rectangular pedestal lavatory
- · Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

#### **Nominal Dimensions:**

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

#### Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

#### **Compliance Certifications -**

#### Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

#### To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS


<sup>\*</sup> See faucet section for additional models available



**BOULEVARD®** PEDESTAL SINK VITREOUS CHINA


**barrier free (above counter or drop-in only)** 

#### **TOP VIEW (ALL THREE CONFIGURATIONS)**

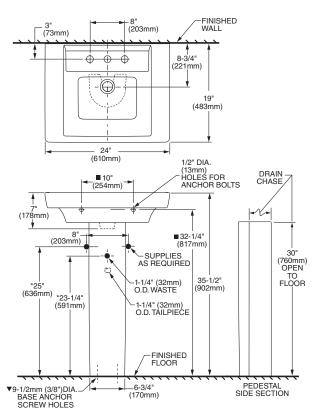

PEDESTAL CONFIGURATION (NOT ADA COMPLIANT)

#### **ABOVE COUNTER CONFIGURATION**

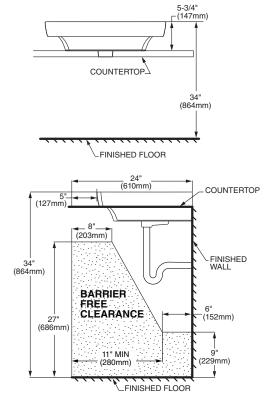

**DROP-IN SINK CONFIGURATION** 



ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Model: 20-2447 END A BARRINGTON





#### **BARRIER FREE**

#### **COLONY™ COUNTERTOP SINK**

VITREOUS CHINA

#### **COLONY COUNTERTOP SINK**

- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)

	0346	803
--	------	-----

Faucet holes on 203mm (8") centres

**0346 403 (Illustrated)** 

Faucet holes on 102mm (4") centres

0346 001


Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep



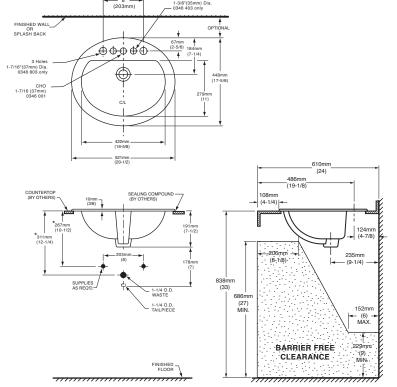

#### COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

#### To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen
- □ Faucet\*:
- □ Faucet Finish:
- Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.

SUPPLIED WITH SINK.

FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198 .

<sup>\*</sup> See faucet section for additional models available

Model: 20-2447 END A BARRINGTON

## 24 of 45



### DEMI™ **Product Specification Sheet**

### Two Piece Freestanding Collection

CF2007 Two Piece Freestanding Soaker


Size: 60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


#### TWO PIECE ASSEMBLY

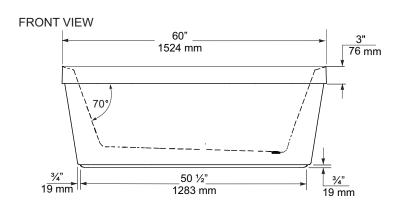

#### **END VIEW**



#### **TOP VIEW**

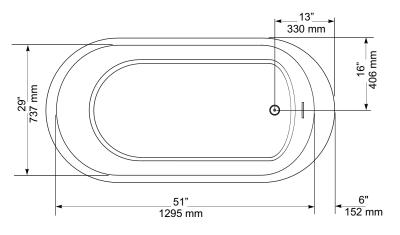

**GENERAL SPECIFICATIONS** 

Average Weight 90 lb 41 kg Bathing Well at bottom 43"x 20" 1092 x 508 mm 195 litres Capacity Drain to Overflow Water Depth Drain to Overflow 406 mm Drain Opening (dia.) 51 mm Overflow Opening 2 1/4"x 1/2" 57 x 13 mm Drain to Floor Clearance

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary  $\pm$  %" (6 mm). Weight may vary  $\pm$  5 lb ( 2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

**Compliance Certifications -**

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1 Telephone: 416.231.9030 Fax: 416.231.0929 Fax: 416.231.0929 www.mirolin.com

*Customer Service:* 416.231.5790 Canada, U.S.A.: 800.**MIROLIN**(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018

Model: 20-2447 END A BARRINGTON

## 25 of 45

### American Standard

Style That Works Better

#### FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


#### FloWise™ DUAL FLUSH ELONGATED TOILET

#### **2476 216**

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

#### **Separate Component Parts:**

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank



- ☐ 3067 316 Elongated Bowl
- **4035 516** Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


#### **Compliance Certifications -**Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

#### To Be Specified

- Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are perimenal and may use within the prepare of the present IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by Ankist damagna (112.19.2). These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

#### UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284

© 2008 American Standard

Model: 20-2447 END A BARRINGTON

## 26 of 45

### **MOEN**<sup>®</sup>

#### DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted

#### **OPERATION**

- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel **FLOW**

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

#### CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations


- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe
- Drinking Water Act

  ADA for lever handle

#### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

### Specifications



**CHATEAU® Single-Handle Lavatory Faucet** 

#### with Metal Waste Assembly Model: L4625 series L4631BC


**Bulk Packed (12 per carton):** L64624 series

with 50/50 Waste Assembly **Bulk Packed (12 per carton):** L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



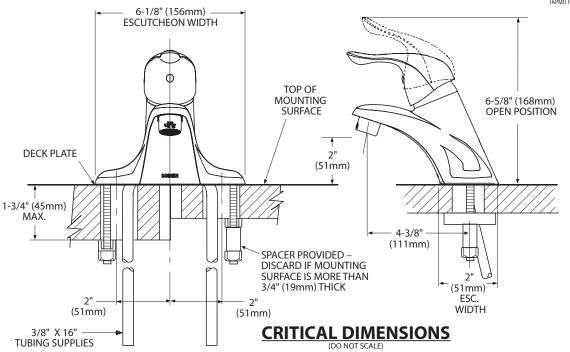

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev 8/15

Model: 20-2447 END A BARRINGTON

## 27 of 45



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

#### **OPERATION**

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

#### **CARTRIDGE**

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

#### **STANDARDS**

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

#### ADA ( for lever handle

6.5" (165mm) ESC. DIAM.

#### **WARRANTY**

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

4-1/2" (114mm)

WALL OPENING

(133mm

7-1/2" (190mm)

to the original consumer purchaser 5 year warranty if used in commercial installations

### **Specifications**






#### CHATEAU° POSI-TEMP° Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton)

TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

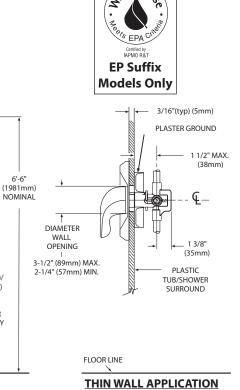

**THICK WALL APPLICATION CRITICAL DIMENSIONS** 

FLOOR LINE

— 1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

2 1/2" MAX. (63mm)

SHOWER

48" (1219mm) 32" (813mm)

AND TUB ONLY

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

Model: 20-2447 END A BARRINGTON

### **MOEN**<sup>®</sup>

#### **DESCRIPTION**

 Metal construction with various finishes identified by suffix OPERATION

- Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


#### **STANDARDS**

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

#### **WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


### Specifications




### CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

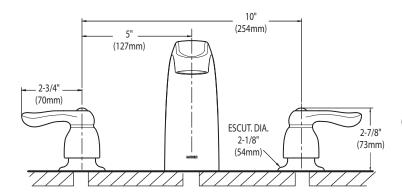



#### CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Model: 20-2447 END A BARRINGTON

## 29 of 45

#### WMH31017H

### **OVER-THE-RANGE MICROWAVE**



#### **DISHWASHER-SAFE TURNTABLE PLATE**



Clean up spills on the turntable by simply putting it in the dishwasher.

#### 2-SPEED, 300 CFM MOTOR CLASS\*



Match the right amount of ventilation to the dish being prepared and quickly get rid of cooking odors with two different fan speed settings.

#### **MICROWAVE PRESETS**



Get just the right amount of heat and time, whether you're cooking or defrosting, with specific preset options.

OTHER FEATURES  • Add 30 seconds option  • Electronic touch		White (W)	Black (B)	Fingerprint Resistaint Stainless Steel (Z)	Silver (S)
controls	MODEL	WMH31017HW	WMH31017HB	WMH31017HZ	WMH31017HS
<ul> <li>Adjustable cooktop lighting</li> </ul>	Max height (in)	17-1/8"	17-1/8"	17-1/8"	17-1/8"
iigi tui ig	Width (in)	29-15/16"	29-15/16"	29-15/16"	29-15/16"
	Depth (in)	15-9/16"	15-9/16"	15-9/16"	15-9/16"



<sup>\*</sup>Performance varies based on installation. ®/™ ©2018 Whirlpool. All rights reserved. 1/18. WC170107A

Model: 20-2447 END A BARRINGTON

# 30 of 45

#### VENTING DESIGN SPECIFICATIONS

This section is intended for architectural designer and builder/ contractor reference only.


- Vent materials needed for installation are not provided with microwave hood combination.
- We do not recommend using a flexible metal vent.
- To avoid possible product damage, be sure to vent air outside, unless using recirculation installation. Do not vent exhaust air into concealed spaces, such as spaces within walls or ceilings, attics, crawl spaces, or garages.

#### For optimal venting installation, we recommend:

- Using roof or wall caps that have backdraft dampers
- Using a rigid metal vent
- Using the most direct route by minimizing the length of the vent and number of elbows to provide efficient performance
- Using uniformly sized vents
- Using duct tape to seal all joints in the vent system
- Using caulking compound to seal exterior wall or roof opening around cap
- Not installing 2 elbows together for optimal hood


If venting through the wall, be sure that there is proper clearance within the wall for the damper to open fully.

If venting through the roof, and rectangular-to-round transition is used, be sure there are at least 3" (7.6 cm) of clearance between the top of the microwave oven and the transition piece. See "Rectangular-to-Round Transition" illustration.



#### **Rectangular-to-Round Transition**


NOTE: The minimum 3" (7.6 cm) clearance must exist between the top of the microwave oven and the rectangular to round transition piece so that the damper can open freely and fully.



- A. Roof cap
- B. 6" (15.2 cm) min. diameter round vent
- C. Elbow (for wall venting only)
- D. Wall cap
- E. 31/4" x 10" to 6" (8.3 x 25.4 cm to 15.2 cm) rectangular to round transition piece
- F. Vent extension piece, at least 3" (7.6 cm) high

#### **Recommended Standard Fittings**

The following length equivalents are for use when figuring vent length. See the examples in "Recommended Vent Length".



- A. Rectangular-to-round transition piece:  $3^{1/4}$ " x 10" to 6" = 5 ft (8.3 x 25.4 cm to 15.2 cm = 1.5 m)
- B. Roof cap: 31/4" x 10" = 24 ft (8.3 x 25.4 cm = 7.3 m) C. 90° elbow: 31/4" x 10" = 25 ft (8.3 x 25.4 cm = 7.6 m)
- D.  $90^{\circ}$  elbow: 6" = 10 ft (15.2 cm = 3 m)
- E. Wall cap:  $3\frac{1}{4}$ " x 10" = 40 ft (8.3 x 25.4 cm = 12.2 m)
- F.  $45^{\circ}$  elbow: 6'' = 5 ft (15.2 cm = 1.5 m)
- G. 90° flat elbow:  $3\frac{1}{4}$ " x 10" = 10 ft (8.3 x 25.4 cm = 3 m)

Model: 20-2447 END A BARRINGTON

31 of 45


#### **Recommended Vent Length**

The total length of the vent system including straight vent, elbow(s), transitions, and wall or roof caps must not exceed the equivalent of 140 ft (42.7 m) for either type of vent. See the "Recommended Standard Fittings" section for equivalent lengths.

For best performance, use no more than three 90° elbows. To calculate the length of the system you need, add the


To calculate the length of the system you need, add the equivalent lengths of each vent piece used in the system. See the following examples:

#### $3\frac{1}{4}$ " x 10" (8.3 x 25.4 cm) vent system = 73 ft (22.2 m) total



- A. One  $3\frac{1}{4}$ " x 10" (8.3 x 25.4 cm) 90° elbow = 25 ft (7.6 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

#### 6" (15.2 cm) vent system = 73 ft (22.2 m) total



- A. Two 90° elbows = 20 ft (6.1 m)
- B. 1 wall cap = 40 ft (12.2 m)
- C. 1 rectangular-to-round transition piece = 5 ft (1.5 m)
- D. 2 ft (0.6 m) + 6 ft (1.8 m) straight = 8 ft (2.4 m)

If the existing vent is round, a rectangular-to-round transition piece must be used. In addition, a rectangular 3" (7.6 cm) extension vent between the damper assembly and rectangular-to-round transition piece must be installed to keep the damper from sticking.

Model: 20-2447 END A BARRINGTON

# 32 of 45



# Whirtpool® 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

#### Also available in:

White	WRT541SZDW
Black	WRT541SZDB
Monochromatic Stainless Steel	WRT541SZDM

Capacity		
Total Capacity	21 cu. ft.	
Refrigerator Capacity	15 cu. ft.	
Freezer Capacity	6 cu. ft.	
General Features & Properti	es	
EZ Connect Icemaker Kit		
LED Interior Lighting		
ENERGY STAR® Certified		
Electronic Temperature Controls		
Freezer Temperature Controls		
Clear Door Bins		
Adjustable Door Bins		
Quiet Cooling		
Fingerprint Resistant		
Electrical Details		
Amps	6.5	
Volts	115	
Certifications		
ADA Compliant	Yes	
ENERGY STAR® Certified	Yes	

Technical Details	
Refrigerator Type	Top-Freezer
Number of Doors	2
Number of Interior Refrigerator Shelves	3
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1
Number of Freezer Door Bins	2 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location	Freezer
Dispenser Type	N/A
Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear

#### Reference Material

**Dimension Guide** 

Use & Care Guide

**Energy Guide** 

Warranty

#### Key Features & Benefits

#### Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

#### Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

#### **Humidity-Controlled Crispers**

Store fruits and vegetables in their ideal environment.



NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRT541SZDSPECSHEETV01.

Model: 20-2447 END A BARRINGTON

# 33 of 45



#### **Top Mount Refrigerator**

#### **PRODUCT MODEL NUMBERS**

WRT311FZD WRT511SZD WRT541SZD

**Electrical:** A 115-volt, 60-Hz, AC-only, 15-or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

**Water:** A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).


**Reverse Osmosis Water Supply:** If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

#### PRODUCT DIMENSIONS

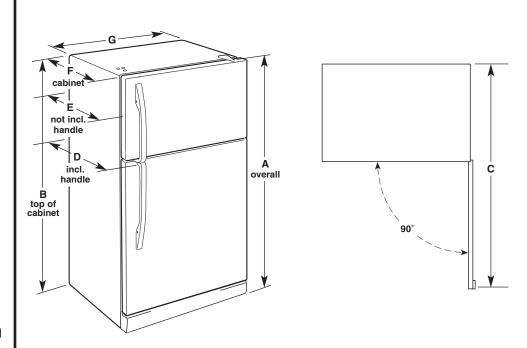

Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	621/4" (158.1 cm)	32 <sup>7</sup> / <sub>8</sub> " (83.5 cm)	30 <sup>5</sup> / <sub>8</sub> " (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	66½" (168.3 cm)	65½" (166.4 cm)	62½" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

#### LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a  $\frac{1}{2}$ " (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 20-2447 END A BARRINGTON





#### Available Finishes/Colours

YWFE515S0JB Black



YWFF515S0JS Stainless Steel



YWFE515S0JW White

#### Manuals & Literature:





**Use and Care** 

Warranty

### 5.3 cu. ft. Whirlpool® electric range with Frozen Bake<sup>™</sup> technology

#### YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

#### **Top Features**

#### FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

#### Keep Warm setting

Keep dishes from getting cold with this setting that delivers low heat to the oven.

Storage Drawer

Glass Window

Stainless Steel

Extra Large

Metal

Drawer Type

Handle Color

Handle Material

Oven Window Size

Oven Door

Closed Door Broiling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

**Exterior** 

Handle Type

Dimensions	
Depth	27 3/4
Height	36
Width	29 7/8

Configuration and Overview		
Range Type	Freestanding	
Fuel Type	Electric	
Size (IN,inches)	30	
Exterior		
Door Removable	Yes	

	напаіе
Features	
Hot Surface Indicator Light	Yes
Heating Element On Indicator Light	Yes
Power On Indicator Light	No
Griddle	NA
Automatic Convection Conversion Temperature Adjust	No
Power Outage Compatible	No

Reach-Through


CANADIAN	APPLIANCE	SOURCE	LP

Model: 20-2447 END A BARRINGTON

# 35 of 45

### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

#### **Product Dimensions**



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46<sup>7</sup>/<sub>8</sub>" (119.1 cm) overall height (max.) with leveling legs screwed all the way in\*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in\*
- D. 29<sup>7</sup>/<sub>8</sub>" (75.9 cm) width
- E. 25<sup>5</sup>/<sub>16</sub>" (64.3 cm) depth back of range to front of cooktop\*\*
- F. Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

**IMPORTANT:** Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- \*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- \*\*Front of door and drawer may extend further forward depending on styling.

#### **Cabinet Dimensions**

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

**IMPORTANT:** If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE\*
- D. 30" (76.2 cm) min. opening width
- E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet, 7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

\*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

 $30\ensuremath{^{"}}$  (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Model: 20-2447 END A BARRINGTON

### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

**Electrical Requirements - Canada Only** 

#### AWARNING



**Electrical Shock Hazard** 

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

 Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*		Specified Rating of Power Supply Cord Kit and Circuit Protection	
120/240 V	120/208 V	Amps	
8.8 - 16.5 KW 16.6 - 22.5 KW	7.8 - 12.5 KW 12.6 - 18.5 KW	40 or 50** 50	

<sup>\*</sup>The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

### **INSTALLATION INSTRUCTIONS**


**Unpack Range** 

#### AWARNING

**Excessive Weight Hazard** 

Use two or more people to move and install range. Failure to do so can result in back or other injury.


- 1. Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

#### 4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

### On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg

<sup>\*\*</sup>If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.

Model: 20-2447 END A BARRINGTON

# 37 of 45

### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

#### **Install Anti-Tip Bracket**

# AWARNING

**Tip Over Hazard** 

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.

Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.


Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.

- Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- 2. Determine which mounting method to use: floor or wall.


  If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- 3. Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.



A. 129/16" (31.9 cm) B. Bracket V-notch

 Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

#### Floor Mounting



#### **Wall Mounting**



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two  $\#12 \times 1^5/8$ " (4.1 cm) screws provided.
- **6.** Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



**8.** Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.

Model: 20-2447 END A BARRINGTON

## 38 of 45





Stainless Steel

#### Also available in:

White	WDF330PAHW
Black	WDF330PAHB

Capacity		
Total Place Settings	13	
General Features & Properti	es	
Heavy Cycle		
High Temperature Wash Option		
Heated Dry Option		
ENERGY STAR® Certified		
Industry's Best Selling Dishwasher Brand <sup>†</sup>		
Designed, Engineered and Assembled in the U.S.A. with American Pride		
Electrical Details		
Amps	10	
Volts	120	
Hz	60	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Button
Number of Wash Cycles	3
Number of Options	4
dBA <sup>*</sup>	55
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
D.C. 14.1.1.1	

#### Reference Material

**Dimension Guide** 

Install Guide

Use & Care Guide

**Energy Guide** 

Warranty

#### Key Features & Benefits

#### 1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour.\*

#### Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

#### **Normal Cycle**

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.



<sup>\*</sup>Per IEC standards. \*\*Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. 

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

Model: 20-2447 END A BARRINGTON




#### **Undercounter Dishwasher**

#### PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDF131PAH	WDF545PAF	

#### **DRAIN REQUIREMENTS**

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

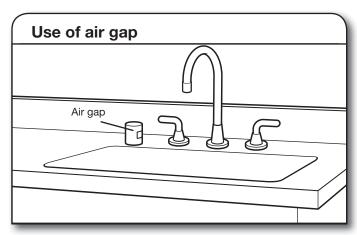

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

#### **WATER SUPPLY REQUIREMENTS**

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- ³/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with ³/₄" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

**NOTE:** If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

#### **ELECTRICAL REQUIREMENTS**

#### You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

#### If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



#### If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.

Model: 20-2447 END A BARRINGTON

40 of 45


#### PRODUCT AND CABINET OPENING DIMENSIONS — 23<sup>7</sup>/8" -(606 mm) — 25¹/₄" -(641 mm) — ³/₄" (19 mm) 30" (762 mm) 331/2" 301 (851 mm) min. with (762 mm) leveling legs removed **4**−3³/₄" (94 mm) 31/2" - 41/2" (88 mm - 106 mm) (533 mm) For 4" (100 mm) toe kick, height of cabinet opening is 341/2" (863 mm). A. Insulation may be compressed (not used on all models). B. Door handles may protrude forward of the face of the dishwasher, (varies by model). Check that all surfaces have no protrusions that would prohibit dishwasher installation. 101/2" NOTE: Shaded areas (864 mm) of cabinet walls show where utility -6<sup>3</sup>/<sub>4</sub>" (102 mm) (172 mm) connections may be installed. (76 mm (159 mm) 2<sup>1</sup>/<sub>4</sub>" (64 mm) 24" / (620 mm) (44 mm) 2" (51 mm) 24' (620 mm) D C. Measured from the lowest point on the underside of the countertop. May be reduced to 33<sup>1</sup>/<sub>2</sub>" (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher. D. Minimum, measured from narrowest point of opening.

Model: 20-2447 END A BARRINGTON

41 of 45

#### 5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

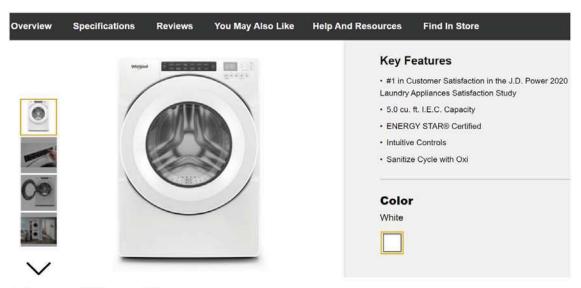

### **Specifications**

Width: 6858.00, 27.0" Centimeters, Inches

#### Depth: 8016.88, 31-9/16" Centimeters, Inches


Dimensions	
Capacity	4-3/10
Depth	8016.88 cm, 31-9/16 ir
Gross Weight	97068688.00 kg, 214 lbs
Net Weight	92532768.00 kg, 204 lbs
Width Appearance	6858.00 cm, 27.0 ir
LCD Touch Screen	No
Window	Yes
Details	
Advanced Vibration Control™	No
Dispense System	Detergent, Fabric Softener & Bleach
Eco Monitor/Efficiency Monitor	No
Hoses Included	4ft 4in Drain Hose Included
Internal Heater	No
Maximum Spin Speed	1160
Out Of Balance Sensing	Yes
Water Factor	3-1/5
Cycles and Options	
Number Of Wash Cycles	35
Electrical	
Power Cord Included	Yes
Controls	
Automatic Temperature Controls	Yes
Control Location	Front
LCD Touch Screen	No

#### Compatibility Works With No **Options** Number Of Washer Options **Features** Stackable Yes Water Faucet No Cycles Number Of Wash Cycles 35 Exterior Lid/Door Lock Yes Lid/Door Swing Left Modifiers Delay Start No Number Of Rinse Options Number Of Soil Levels 3 Number Of Spin Speeds Number Of Wash/Rinse Temperatures 4 Pre Soak Yes Temperature Selections Hot, Cold, Cool, Warm


Model: 20-2447 END A BARRINGTON

## 42 of 45


### Recessed area or closet installation (stacked washer and dryer)




#### **Custom under counter installation**

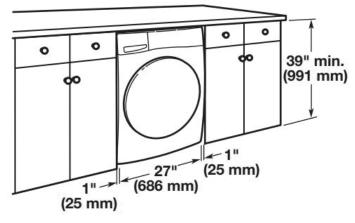

#### Recessed area or closet installation (washer only)

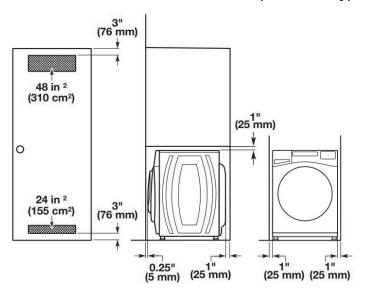

#### **Custom cabinet installation**

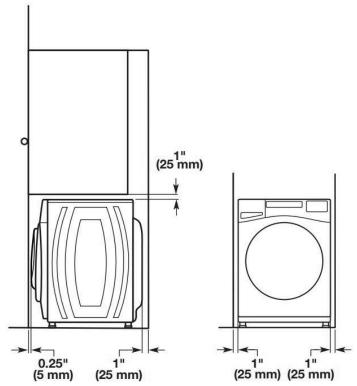


#### **Drain System**

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of o leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

**IMPORTANT:** To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

#### Floor standpipe drain system

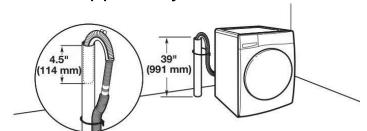


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts"

Model: 20-2447 END A BARRINGTON


# 43 of 45

#### Wall standpipe drain system

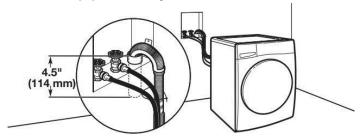


See requirements in "Floor standpipe drain system."


#### Laundry tub drain system



Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

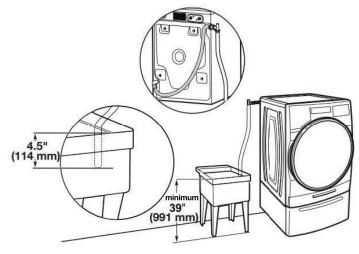

#### Floor drain system

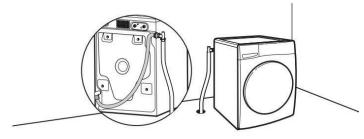

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

#### **Electrical Requirements**

#### AWARNING



#### **Electrical Shock Hazard**

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

#### **GROUNDING INSTRUCTIONS**

#### For a grounded, cord-connected appliance:

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

**WARNING:** Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

#### For a permanently connected appliance:

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

#### **SAVE THESE INSTRUCTIONS**

Model: 20-2447 END A BARRINGTON

44 of 45

#### WHIRLPOOL DRYER Model #: YWED5620HW



7.4 cu. ft. Front Load Electric **Dryer with Intuitive Touch** Controls



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

Dimensions	
Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycles and Options  Cycle Time Remaining	Yes
	Yes No
Cycle Time Remaining	
Cycle Time Remaining Lint Filter Indicator	No
Cycle Time Remaining Lint Filter Indicator Number of Dryer Cycles	No 36

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

#### Electrical

	Hz		60
--	----	--	----


Power Cord Included Yes

Model: 20-2447 END A BARRINGTON

# 45 of 45

#### WHIRLPOOL DRYER Model #: YWED5620HW

Wildipool Stand Carachellagion | Washerland Dryon | Dryon | Becario Dryon | YWED5520HV





7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls

leooΓ

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

ivlodel #: YWED5820HV

#### Dimensions

Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68,58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycle Time Remaining	Yes
List Filter Indicator	No
Number of Dryer Cycles	36
Number of Dryness Levels	3
Ventilation System	_
Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear
Electrical	
Hz.	60
Prover Cord included	Yes