# of 40

Sales Selection Sheet Checklist

32 Model: 25-2202 Elev A THE EMERALD

LOT

PURCHASERS: **REENA SHARMA** VENDOR: Heathwood Homes (Huron) Limited WOB DECK FINISHED BASEMENT COLD CELLAR UPGRADED / MODIFIED ELEVATION **CORNER UPGRADE REAR UPGRADE** SIDE UPGRADE CEILING UPGRADE - SMOOTH MAIN FLOOR SECOND FLOOR BASEMENT ADDITIONAL ROUGH-INS 200 AMP SERVICE (STD IN SINGLES) WET BAR ROUGH-IN **HUMIDIFIER** AIR CONDITIONING (SITE STD) GAS ROUGH-IN STOVE DRYER BBQ ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE **6 IN ROUND DUCT** 7 IN ROUND DUCT FULL BASEMENT STAIRS: **UPPER BASEMENT STAIRS:** All Oak Carpet Grade LOWER LEVEL STAIRS: MAIN STAIRS: All Oak MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A JULY 12 Date Decor Consultant: Date Purchaser: Date Heathwood Homes (Huron) Limited Locked Date: Approved

REENA SHARMA/ Project: Wallaceton Unit: 32, Phase: 1 Model: 25-2202 A THE EMERALD

Comment

Created: 6/20/2023 22:14:57

Locked: Closed:

| chen                         |      |  |          |
|------------------------------|------|--|----------|
| Cabinet Colour/Style         | 9164 | Viking II-GEORGIAN-MOONLIGHT-3DL ***STD***   |          |
| Island Cabinet Colour/Style  | 9164 | Viking II-GEORGIAN-MOONLIGHT-3DL ***STD***   |          |
| Cabinet Hardware             | 7672 | 135-HARDWARE ***STD***   | ╡        |
| Countertop                   | 9069 | MSI Quartz GROUP 1 ICED WHITE ***STD***  | ī        |
| Island Countertop            | 9069 | MSI Quartz GROUP 1 ICED WHITE ***STD***  |          |
| Countertop Edge              | 4010 | SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD*   | **       |
| Sink                         | 9487 | Plumbing-KINDRED Kitchen Sink Collection - Reginox ND1831 U/9-Double (equal size) Bowl Undermount Sink | PG 16    |
|                              |      | (or equivalent)-Stainless Steel  |          |
| HoodFan                      | 9393 | SCB51930-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS   | PG 27-28 |
| Opt. Backsplash              | 1111 | N/A *****  | -        |
| Opt. Backsplash Grout        | 1111 | N/A *****  |          |
| Opt. Backsplash Tile Pattern | 1111 | N/A *****  | ī        |

- Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8 inches. Ice Waterline Rough-In is included.
- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

| en/Breakfast       | THE PARTY OF THE P |   |
|--------------------|--|---|
| Flooring           | 5465   | TH.LY.WHT.1212.N Lily White 12 x 12 ***STD*** |
| Floor Tile Grout   | 2225   | Grout-(27) Silver ***STD***                   |
| Floor Tile Pattern | 3000   | STANDARD SQUARE ***STD***                     |
|                    |  |   |
| Comment            |  |   |

| Foyer       |      |  |
|-------------|------|--|
| Flooring    | 5465 | TH.LY.WHT.1212.N Lily White 12 x 12 ***STD***  |
| Page 1 of 8 |      | A Transmission of the second s |



REENA SHARMA/ Project: Wallaceton Unit: 32, Phase: 1 Model: 25-2202 A THE EMERALD

Created: 6/20/2023 22:14:57

Locked:

|                         |               |      | Closed:   |
|-------------------------|---------------|------|---|
|                         |               |      |   |
| Floor Tile Gr           | out           | 2225 | Grout-(27) Silver ***STD***                       |
| Floor Tile Pa           |               | 3000 | STANDARD SQUARE ***STD***                         |
|                         |               |      |   |
|                         |               |      |   |
|                         |               |      |   |
|                         |               |      |   |
| Comment                 |               |      |   |
|                         |               |      |   |
| 9                       |               |      |   |
| F                       |               |      |   |
| Powder Room             |               | 5.05 |   |
| Flooring                |               | 5465 | TH.LY.WHT.1212.N Lily White 12 x 12 ***STD***     |
|                         |               |      |   |
| Floor Tile Gr           | 7.3707        | 2225 | Grout-(27) Silver ***STD***                       |
| Floor Tile Pa           | ttern         | 3000 | STANDARD SQUARE ***STD***                         |
|                         |               |      |   |
|                         |               |      |   |
|                         |               |      |   |
|                         |               |      |   |
|                         | ture (Colour) | 1737 | Plumbing Fixtures-WHITE ***STD***                 |
| Opt. Vanity             |               | 1111 | N/A *****   |
| Opt. Vanty H            | ardware       | 1111 | N/A *****   |
| Opt. Vanity c           |               | 1111 | N/A *****   |
| an to the second of and |               |      |   |
| Comment                 |               |      |   |
|                         |               |      |   |
|                         |               |      |   |
| Landing in front        | of Garage     |      |   |
| Floor Tile              |               | 5465 | TH.LY.WHT.1212.N Lily White 12 x 12 ***STD***     |
|                         |               |      |   |
| Floor Tile Gro          | out           | 2225 | Grout-(27) Silver ***STD***                       |
| Floor Tile Pa           |               | 3000 | STANDARD SQUARE ***STD***                         |
| 1,00, 1,10, 0           |               | 0000 | O THIRD GOARCE OF D                               |
|                         |               |      |   |
|                         |               |      |   |
|                         |               |      |   |
| Comment                 |               |      |   |
| Comment                 |               |      |   |
|                         |               |      |   |
|                         |               |      |   |
| Dining Room             |               |      |   |
| Flooring                |               | 7498 | Red Oak Pearl-Vintage                             |
| Comment                 | 01            |      | Engineered-GRYPHON/IRONGATE-3/4 inch x 3 1/4 inch |
| Comment                 |               |      |   |
|                         |               |      |   |

Rs

REENA SHARMA/ Project: Wallaceton Unit: 32, Phase: 1 Model: 25-2202 A THE EMERALD

Created: 6/20/2023 22:14:57

Locked: Closed:

| Comment                              |             | Engineered-GRYPHON/IRONGATE-3/4 inch x 3 1/4 inch                               |
|--------------------------------------|-------------|---|
| Somment                              |             |   |
| t Doom Eivenlage                     |             |   |
| t Room Fireplace<br>Type             | 0000        | M. J. MEDOGG HIGEDIN  |
| Mantle                               | 8869        | Majestic MERC32 ***STD***   |
| wante                                | 8891        | NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE ***STD***                    |
| Opt. Surround                        | 1111        | N/A *****   |
| - Purchasers have been advised: he   | at from the | e FP can damage TV above a FP and items placed on mantle.                       |
| - Heathwood and its contractors will | not be liab | ole for any damage on items placed and / or installed above a                   |
| FP after closing.  Comment           |             |   |
| Comment                              |             |   |
| -                                    |             |   |
| Hall                                 |             |   |
| Flooring                             | 7498        | Red Oak Pearl-Vintage Engineered-GRYPHON/IRONGATE-3/4 inch x 3 1/4 inch ***8*** |
| Comment                              |             |   |
|                                      |             |   |
| r Hall                               |             |   |
| Flooring                             | 9505        | 84558-MINOTAUR-BEACH SHELL-40 oz Poly ***STD***                                 |
| Comment                              | 0.          |   |
|                                      |             |   |
| dry Room                             | _           |   |
| Floor Tile                           | 5465        | TH.LY.WHT.1212.N Lily White 12 x 12 ***STD***                                   |
|                                      |             |   |
| Floor Tile Grout                     | 2225        | Grout-(27) Silver ***STD***   |
| Floor Tile Pattern                   | 3000        | STANDARD SQUARE ***STD***   |
|                                      |             |   |
|                                      |             |   |
|                                      |             |   |
|                                      |             |   |
| Opt. Cabinet Colour/Style - Uppers   | 1111        | N/A *****   |
| Opt. Cabinet Hardware - Uppers       | 1111        | N/A *****   |
| ipal Bedroom and Walk-in Closets     |             |   |
| Flooring                             | 9505        | 84558-MINOTAUR-BEACH SHELL-40 oz Poly ***STD***                                 |
|                                      |             | ·   |
| Comment                              |             |   |

REENA SHARMA/ Project: Wallaceton Unit: 32, Phase: 1 Model: 25-2202 A THE EMERALD

Created: 6/20/2023 22:14:57

Locked: Closed:

| Bedroom 2  |      |   |
|--|------|---|
| Flooring   | 9505 | 84558-MINOTAUR-BEACH SHELL-40 oz Poly ***STD***                               |
| Comment  |      |   |
| Bedroom 3  |      |   |
| And the second section of the second section is a second section of the second | 0505 | 0.4550 1400074117 75-01-01-01-01-01-01-01-01-01-01-01-01-01-                  |
| Flooring   | 9505 | 84558-MINOTAUR-BEACH SHELL-40 oz Poly ***STD***                               |
| Comment  |      |   |
| Bedroom 4  |      |   |
| Flooring   | 9505 | 84558-MINOTAUR-BEACH SHELL-40 oz Poly ***STD***                               |
| Comment  |      |   |
| Principal Ensuite  |      |   |
| Cabinet Colour/Style   | 6257 | Viking III-MANCHESTER-ESPRESSO CL-MAPLE ***STD***                             |
| Cabinet Hardware   | 7672 | 135-HARDWARE ***STD***  |
| Countertop   | 9069 | MSI Quartz GROUP 1 ICED WHITE ***STD***                                       |
| Countertop Edge  | 4010 | SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD***                              |
|  |      |   |
| Floor Tile   | 5465 | TH.LY.WHT.1212.N Lily White 12 x 12 ***STD***                                 |
| Floor Tile Grout   | 2225 | Grout-(27) Silver ***STD***   |
| Floor Tile Pattern   | 3000 | STANDARD SQUARE ***STD***   |
|  |      |   |
| Shower Wall Tile   | 9021 | QT.WV.IVO.0810-Weave-Ivory-8 x 10 ***STD***                                   |
| Shower Wall Tile Grout   | 2226 | Grout-(00) White ***STD***  |
| Shower Wall Tile Pattern   | 3090 | VERTICAL STACKED ***STD***  |
|  | ,    |   |
| Shower Floor Tile  | 8661 | OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow<br>White Matte-2 x 2 ***STD*** |
| Shower Floor Tile Grout  | 2226 | Grout-(00) White ***STD***  |
| Shower Floor Tile Pattern  | 3000 | STANDARD SQUARE ***STD***   |
| Page 4 of 8  |      |   |

REENA SHARMA/ Project: Wallaceton Unit: 32, Phase: 1 Model: 25-2202 A THE EMERALD

Created: 6/20/2023 22:14:57

Locked:

| - |       |  |
|---|-------|--|
|   | losed |  |
|   | 10560 |  |
|   |       |  |

| Shower Jamb(s) and Sill(s)                                   | 8923         | Chaver lamb / Cill There - 14/1 '' +ttaThtt   |
|--|--------------|---|
| Plumbing Fixture (colour)                                    | 1737         | Shower Jamb / Sill-Thassos White ***STD***  |
| Comment Comment  | 1737         | Plumbing Fixtures-WHITE ***STD***   |
| 300  |              |   |
|  |              |   |
| Bath   |              |   |
| Cabinet Colour/Style   | 6257         | Viking III-MANCHESTER-ESPRESSO CL-MAPLE ***STD***   |
| Cabinet Hardware   | 7672         | 135-HARDWARE ***STD***  |
| Countertop   | 8796         | 6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***   |
| Countertop Edge  | 1111         | N/A *****   |
|  |              |   |
| Floor Tile   | 5465         | TH.LY.WHT.1212.N Lily White 12 x 12 ***STD***   |
| Floor Tile Grout   | 2225         | Grout-(27) Silver ***STD***   |
| Floor Tile Pattern   | 3000         | STANDARD SQUARE ***STD***   |
| Wall Tile  | 9021         | QT.WV.IVO.0810-Weave-Ivory-8 x 10 ***STD***   |
| Wall Tile Grout  | 2226         | Grout-(00) White ***STD***  |
| Wall Tile Pattern  | 3090         | VERTICAL STACKED ***STD***  |
|  | 9333         | VERTIFICATION OF THE PROPERTY |
| Opt. Shower Floor Tile                                       | 1111         | N/A *****   |
| Opt. Shower Floor Tile Grout                                 | 1111         | N/A *****   |
| Opt. Shower Floor Tile Pattern                               | 1111         | N/A *****   |
| Opt. Shower Jamb(s) and Sill(s)<br>Plumbing Fixture (colour) | 1111<br>1737 | N/A ***** Plumbing Fixtures-WHITE ***STD***   |
| iditioning i ixture (colour)                                 | 1/3/         | Fluitibility Fixtures-WHITE 51D   |



Viking III-MANCHESTER-ESPRESSO CL-MAPLE
\*\*\*STD\*\*\* Cabinet Colour/Style 6257 Page 5 of 8



REENA SHARMA/ Project: Wallaceton Unit: 32, Phase: 1 Model: 25-2202 A THE EMERALD

Page 6 of 8

Created: 6/20/2023 22:14:57

Locked: Closed:

|   | united to produce Vess |   |
|---|------------------------|---|
| Cabinet Hardware                                  | 7672                   | 135-HARDWARE ***STD***  |
| Countertop  | 8796                   | 6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***             |
| Countertop Edge                                   | 1111                   | N/A *****   |
| Floor Tile  | 5465                   | TH.LY.WHT.1212.N Lily White 12 x 12 ***STD***                                 |
| Floor Tile Grout                                  | 2225                   | Grout-(27) Silver ***STD***   |
| Floor Tile Pattern                                | 3000                   | STANDARD SQUARE ***STD***   |
|   |                        |   |
| Shower Wall Tile                                  | 9021                   | QT.WV.IVO.0810-Weave-Ivory-8 x 10 ***STD***                                   |
| Shower Wall Tile Grout                            | 2226                   | Grout-(00) White ***STD***  |
| Shower Wall Tile Pattern                          | 3090                   | VERTICAL STACKED ***STD***  |
| 01 51   |                        |   |
| Shower Floor Tile                                 | 8661                   | OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow<br>White Matte-2 x 2 ***STD*** |
| Shower Floor Tile Grout Shower Floor Tile Pattern | 2226<br>3000           | Grout-(00) White ***STD*** STANDARD SQUARE ***STD***                          |
|   |                        |   |
| Shower Jamb(s) and Sill(s)                        | 8923                   | Shower Jamb / Sill-Thassos White ***STD***                                    |
| Plumbing Fixture (colour)  Comment                | 1737                   | Plumbing Fixtures-WHITE ***STD***   |
| wer Level Recreation Room                         |                        |   |
| Flooring  | 9505                   | 84558-MINOTAUR-BEACH SHELL-40 oz Poly ***STD**                                |
| Comment   |                        |   |
| wer Level Bathroom                                |                        |   |
| Cabinet Colour/Style                              | 6257                   | Viking III-MANCHESTER-ESPRESSO CL-MAPLE ***STD***                             |
| Cabinet Hardware                                  | 7672                   | 135-HARDWARE ***STD***  |
| Countertop  | 8796                   | 6698-46-Countertop-PALOMA POLAR ETCHINGS<br>FINISH-Formica ***STD***          |
| Countertop Edge                                   | 1111                   | N/A *****   |

REENA SHARMA/ Project: Wallaceton Unit: 32, Phase: 1 Model: 25-2202 A THE EMERALD

Created: 6/20/2023 22:14:57

Locked: Closed:

| Floor Tile                 | 5465 | TH.LY.WHT.1212.N Lily White 12 x 12 ***STD***                                 |
|----------------------------|------|---|
| El . El . G .              |      |   |
| Floor Tile Grout           | 2225 | Grout-(27) Silver ***STD***   |
| Floor Tile Pattern         | 3000 | STANDARD SQUARE ***STD***   |
| Shower Wall Tile           | 9021 | QT.WV.IVO.0810-Weave-Ivory-8 x 10 ***STD***                                   |
| Shower Wall Tile Grout     | 2226 | Grout-(00) White ***STD***  |
| Shower Wall Tile Pattern   | 3090 | VERTICAL STACKED ***STD***  |
| Shower Floor Tile          | 0004 |   |
| Snower Floor Tile          | 8661 | OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow<br>White Matte-2 x 2 ***STD*** |
| Shower Floor Tile Grout    | 2226 | Grout-(00) White ***STD***  |
| Shower Floor Tile Pattern  | 3000 | STANDARD SQUARE ***STD***   |
| Shower Jamb(s) and Sill(s) | 8923 | Shower Jamb / Sill-Thassos White ***STD***                                    |
| Plumbing Fixture (colour)  | 1737 | Plumbing Fixtures-WHITE ***STD***   |
| Comment                    |      |   |

| ain Stairs                    |      |  |
|-------------------------------|------|--|
| Туре                          | 1714 | Oak Stairs ***STD MAIN STAIRS***   |
| Colour                        | 7912 | Irongate (Gryphon) STAIN TO COMPLIMENT<br>HARDWOOD AND WILL VARY FROM FLOORING |
| Handrail/Pickets/Posts Type   | 7652 | 1 5/16 inch Square pickets with 3 1/2 Square/Cap<br>Post(s)-ALL OAK ***STD***  |
| Handrail/Pickets/Posts Colour | 1728 | Oak Grade-Stain handrail,oak pickets,stringers,treads,risers                   |
| Custom Stain/Paint            | 1111 | N/A *****  |
| Landing(s)                    | 7498 | Red Oak Pearl-Vintage Engineered-GRYPHON/IRONGATE-3/4 inch x 3 1/4 inch        |
| Opt. Carpet Runner            | 1111 | N/A *****  |
| Comment                       |      |  |

| Lower Level Stairs |      |                     |
|--------------------|------|---------------------|
| Туре               | 1711 | Carpet Grade Stairs |
| Page 7 of 8        |      |                     |



DocuSign Envelope ID: FE64AE7D-B9AD-4783-9D6F-960EF904E850

**Customer Colours** 

Throughout

REENA SHARMA/ Project: Wallaceton Unit: 32, Phase: 1 Model: 25-2202 A THE EMERALD

Created: 6/20/2023 22:14:57

Locked: Closed:

| Colour                        | 9505   | 84558-MINOTAUR-BEACH SHELL-40 oz Poly ***STD***                              |
|-------------------------------|--------|--|
| Handrail/Pickets/Posts Type   | 9119   | Handrail only on closed walls (one or two sides per building code) ***STD*** |
| Handrail/Pickets/Posts Colour | 1729   | Carpet Grade-Stain handrail, pickets, stringers, nosing _pos                 |
| Custom Stain/Paint            | 1111   | N/A *****  |
| Landing(s)                    | 1111 _ | N/A *****  |
| Opt. Carpet Runner            | 1111   | N/A *****  |
| Comment                       |        |  |

| Switches   | s and Plug          | 5796  | Decora Whi  | te Switches and Plugs ***STI | )***         |
|------------|---------------------|-------|-------------|------------------------------|--------------|
| Thresho    | lds                 | 2232  | Metal Thres | holds ***STD***              |              |
| Underpa    | ad                  | 1079  | 500 Series- | Underpad ***STD***           |              |
| Trim Size  | е                   | 8705  | 4 1/4 Baseb | oard and 2 3/4 Casings ***ST | D***         |
| Trim - Pa  | aint Colour         | 1716  | Trim-WHITE  | E ***STD***                  |              |
| Walls - F  | Paint Colour        | 1717  | 22-Wall-WA  | RM GREY ***STD***            |              |
|            | DocuSigned by:      | 7/6/2 | 2023        | — DocuSigned by:             | /10/2023     |
| Purchaser: | Runa Shar           | na    | .023        | Solis                        |              |
|            | REENA SHARMABE8544B |       | Date        | Decor Consultant             | Date         |
|            |                     |       |             | _                            | STATE OF     |
| Purchaser: |                     |       |             | Mosen                        | -07- 12 2023 |

Date

Wallaceton

**Date Approved** 

# 10 of 40 construction summary



Lot: 32

Model: 25-2202 A THE EMERALD Project/Phase: Wallaceton / 1

| Offer Finished Lower Level with finished bathroom- 551 Sq Ft (The Emerald)            |           |
|---|-----------|
| Worksheet Note:   |           |
|   |           |
| Offer ADDED BY AMENDMENT - FIVE APPLIANCESI SS FRIDGE, STOVE, CHIMNEY HOOD FAN, DISHV | WASHER.   |
| WHITE FRONT LOADER WASHER/DRYER (SINGLES)   | VASIILIK. |
| Worksheet Note:   |           |
| WOLKSHOOL FLOW.   |           |

# construction summary of 40



Lot: 32 Model: 25-2202 A THE EMERALD

Project/Phase: Wallaceton / 1

### **ELECTRICAL**

| Invoice          | Qty. | Description  |
|------------------|------|--|
| 1504             | 1    | GREAT ROOM - ELECTRICAL - CEILING ROUGH-IN (CAPPED)                              |
| 12Jul23<br>NoCat |      | +/- TO BE CENTERED IN THE GREAT ROOM, ON EXISTING SWITCH SEE SKETCH # 2          |
| 1504             | 1    | KITCHEN - ELECTRICAL - CEILING ROUGH-IN (CAPPED) INCLUDING SWITCH                |
| 12Jul23<br>NoCat |      | +/- TO BE CENTERED ABOVE THE BREAKFAST COUNTER ON SEPARATE SWITCH SEE SKETCH # 2 |

Printed and Sent: 06-Sep-23

Project: Wallaceton
Unit: 32, Phase: 1
Model: 25-2202 A THE EMERALD


120f40

WALLACETON
EST. 1870

25-2202 ELEV. A

Sketch # 1

# Opt. Finished Lower Level

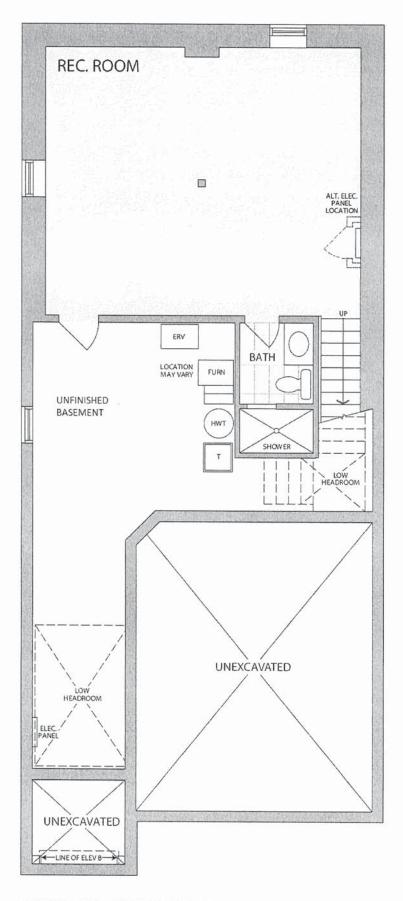

OPTIONAL FINISHED LOWER LEVEL ELEVATION A

<sup>\*</sup> Floor plan may vary due to grading conditions.

Unit: 32, Phase: 1
Model: 25-2202 A THE EMERALD F 13 of 40


WALLACETON

### 25-2202 ELEV. A

BREAKFAST COUNTER ON SEPARATE SWITCH

Skerch # 2

# Opt. Finished Lower Level

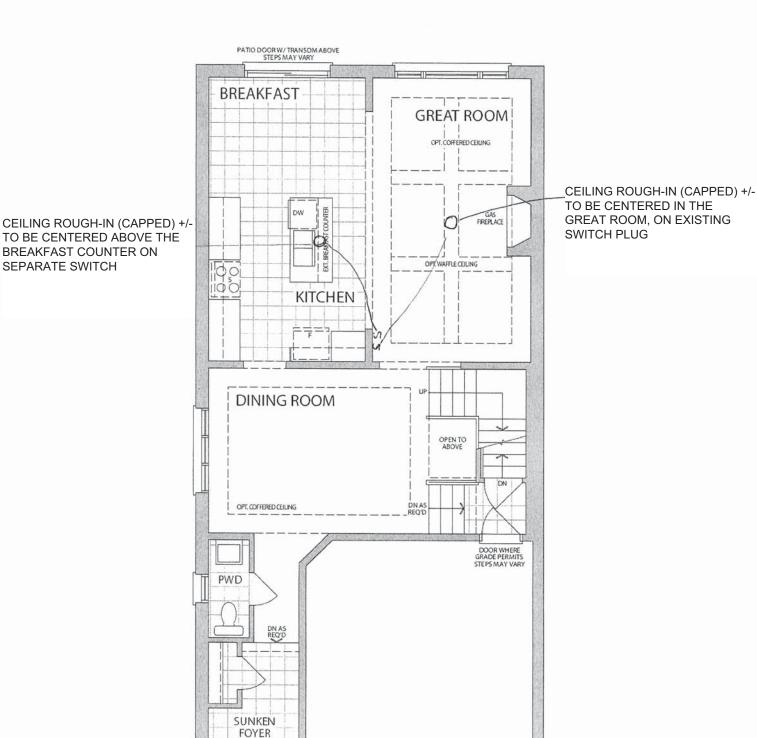

**GARAGE** 

MAIN LEVEL **ELEVATION A** 

COVERED


<sup>\*</sup> Floor plan may vary due to grading conditions.

Unit: 32, Phase: 1
Model: 25-2202 A THE EMERALD 1 14 of 40

WALLACETON

25-2202 ELEV. A Sketch # 3

### Opt. Finished Lower Level

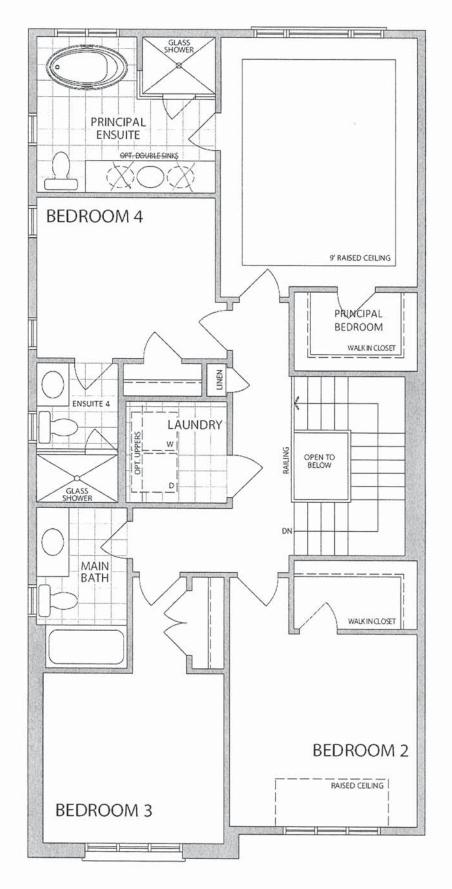

SECOND LEVEL **ELEVATION A** 

<sup>\*</sup> Floor plan may vary due to grading conditions.

Project: Wallaceton Unit: 32, Phase: 1 Model: 25-2202 A THE EMERALD

15 of 40





NFAS NF17 Mantel


Model: 25-2202 A THE EMERALD


16 of 40

(Reginox

ND1831UA/9







### ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

Plumbing Fixture / Kitchen Sinks 15410

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

Model: 25-2202 A THE EMERALD

# 17 of 40

There is more than 1 version of this model. Page down to identify the version you have.

#### FAUCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement Power Clean™ spray technology
Metal construction with various finishes identified by suffix
Duralock™ connect installation

Pulldown spray with 68" braided hose
Flexible supply lines with 3/8" compression fittings
High arc spout provides height and reach to fill or clean large
pots while pulldown wand provides the maneuverability for cleaning or rinsing
360° rotating spout
Faucet designed for handle to be mounted on right side only
FRATION

### **OPERATION**

Temperature controlled by 100° arc of handle travel
 Operates with less than 5 lbs. of force
 Operates in stream or spray mode in the pullout or retracted position

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge
 STANDARDS

Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372 Meets CalGreen and Georgia SB370 requirements

- Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow


ADA (5) for lever handle

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation

5 year limited warranty when used in a commercial installation



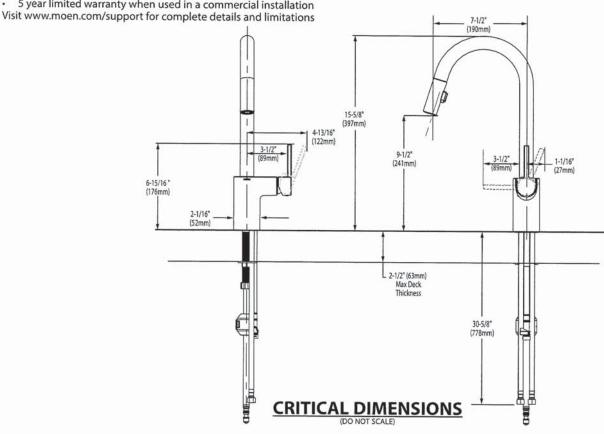

Specifications



ALIGN™ Single Handle High Arc **Pulldown Kitchen Faucet** 

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)

Model: 25-2202 A THE EMERALD



BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

### BOULEVARD® PEDESTAL SINK VITREOUS CHINA

### **BOULEVARD® PEDESTAL SINK**

- O641.800 Faucet holes on 8" (203mm) centers (Illustrated) STD 6641.400 Faucet holes on 4" (102mm) centers
  - ☐ 0641.100 Center hole only
    - Classic styled rectangular pedestal lavatory
    - Vitreous china
    - · Rear overflow
    - · Supplied with mounting kit
    - Right Height® for greater comfort during use
    - Faucet ledge with large deck area (faucet not included)
    - Design coordinates with Boulevard® Toilet
    - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

### **Nominal Dimensions:**

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

### Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

### **Compliance Certifications -**

Meets or Exceeds the Following Specifications:

ASME A112.19.2 - 2008/CSA B45.1-08

### To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

<sup>\*</sup> See faucet section for additional models available

# American Standard

BARRIER FREE

### **OVALYN<sup>TM</sup> UNDERCOUNTER SINK** VITREOUS CHINA

### OVALYN™ UNDERCOUNTER SINK

- · Classic oval undermount sink
- · Made from vitreous china
- · Front overflow
- Supplied with mounting kit (047194-0070A) and template
- ☐ 0495.221 Unglazed rim 435 x 359mm (17-1/8" x 14-1/8")
- 0495.300 Glazed underside

### Bowl size:

382mm (15-1/16") wide 306mm (12-1/16") front to back 140mm (5-1/2") deep

☐ 0496.221 Unglazed rim 489 x 413mm (19-1/4" x 16-1/4")

☐ 0496.300 Glazed underside

### Bowl size:

432mm (17") wide 356mm (14") front to back 140mm (5-1/2") deep

☐ 0497.221 Unglazed rim 546 x 441mm (21-1/2" x 17-3/8")

☐ 0497.300 Glazed underside

### Bowl size:

483mm (19") wide 391mm (15-3/8") front to back 140mm (5-1/2") deep

### **Compliance Certifications -**

Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series

### To Be Specified:

- ☐ Color: ☐ White ☐ Bone ☐ Linen
  - ☐ Silver ☐ Fawn Beige ☐ Black
- ☐ Faucet\*:
- ☐ Faucet Finish:
- □ Supplies: ☐ 1-1/4" Trap:

| 1114 |
|------|
|      |
| A    |
|      |
|      |
| 7    |
|      |
|      |
|      |
|      |
|      |
|      |
|      |
| 4    |
|      |
|      |
|      |

STD Master Ensuite Undermount SINGLES

SEE REVERSE FOR ROUGHING-IN DIMENSIONS


<sup>\*</sup> See faucet section for additional models available

Model: 25-2202 A THE EMERALD

20 of 40

# American Standard

### **OVALYN<sup>TM</sup>** UNDERCOUNTER SINK VITREOUS CHINA

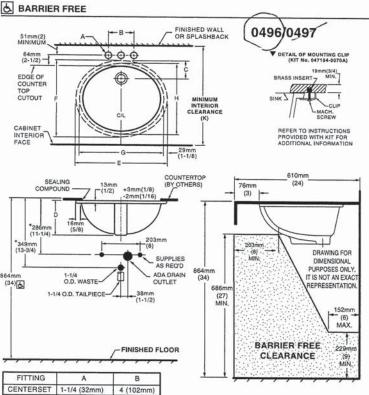

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P"
TRAP ARE SUGGESTED.


▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K).
FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
USE ENCLOSED TEMPLATE FOR COUNTERTOP CUTOUT
SEALING COMPOUND SUPPLIED BY OTHERS.


IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES -CHECK LOCAL CODES.
Countertop 864mm (34") from finished floor. Lavatory

installed 76mm (3") from front edge of countertop.
Countertop thickness to be 25mm (1") maximum.






NOTES:
USE ENCLOSED TEMPLATE FOR COUNTER TOP CUTOUT.
FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE
ORDERED SEPARATELY.
\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P"
TRAP ARE SUGGESTED.
▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K).
SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND **USABLE BUILDINGS AND FACILITIES -**CHECK LOCAL CODES.

Countertop 864mm (34") from finished floor. Lavatory installed 51mm (2") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

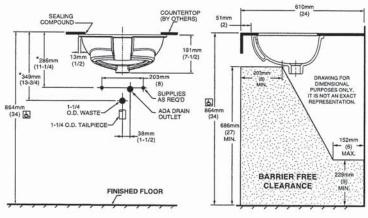

Model: 25-2202 A THE EMERALD

# American Standard



### **BARRIER FREE**

### **COLONY™** COUNTERTOP SINK

VITREOUS CHINA

### **COLONY COUNTERTOP SINK**

- · Vitreous china
- · Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)



Faucet holes on 203mm (8") centres

□ 0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

0346 001

Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep


### COMPLIANCE CERTIFICATIONS -Meets or exceeds the following Specifications:

- · ASME A112.19.2M for Vitreous China Fixtures.
- CAN/CSA B45 Series.

### To Be Specified

- □ Colour: □ White □ Bone □ Silver Gray
  - ☐ Linen
- ☐ Faucet\*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

<sup>((,)</sup> 

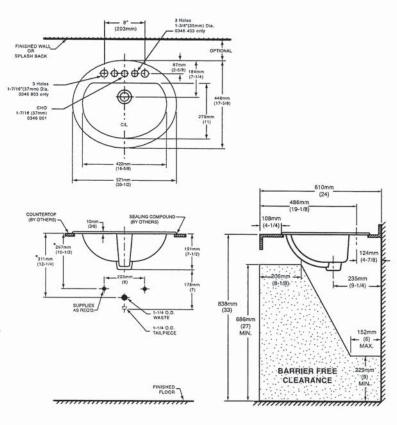

\*\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE FOR COUNTERTOP CUTOUT AND INSTALLATION INSTAUCTIONS USE TENTE STEE SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

<sup>\*</sup> See faucet section for additional models available

Model: 25-2202 A THE EMERALD

# 22 of 40



### DEMI™ **Product Specification Sheet**

### Two Piece Freestanding Collection

CF2007

Two Piece Freestanding Soaker

Size:


60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


# TWO PIECE ASSEMBLY

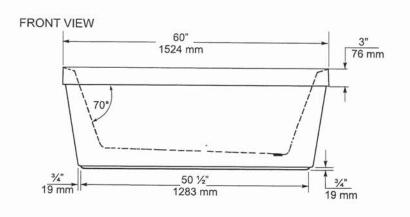

### **END VIEW**



TOP VIEW

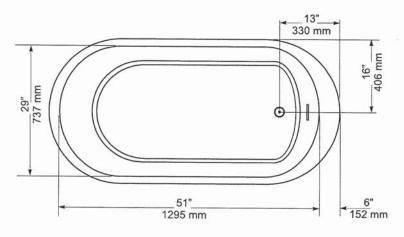

GENERAL SPECIFICATIONS Average Weight 90 lb 41 kg Bathing Well at bottom 1092 x 508 mm 43"x 20" Capacity Drain to Overflow 195 litres Water Depth Drain to Overflow 16" 406 mm Drain Opening (dia.) 51 mm

2 1/4"x 1/2"

3 1/4"

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary  $\pm$  ¼" (6 mm). Weight may vary  $\pm$  5 lb ( 2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

### Compliance Certifications -

Overflow Opening

Drain to Floor Clearance

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1 Telephone: 416.231.9030 Fax: 416.231.0929 Fax: 416.231.0929 www.mirolin.com

Customer Service: 416.231.5790 Canada, U.S.A.: 800.MIROLIN(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018

57 x 13 mm

83 mm

Model: 25-2202 A THE EMERALD

23 of 40

# American Standard

Style That Works Better

### FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


### FloWise™ DUAL FLUSH ELONGATED TOILET

### **2476 216**

- · Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- · Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- · 100% factory flush tested
- · 2 bolt caps

### **Separate Component Parts:**

- 3067 316 Elongated Bowl with Slow Close Seat
- ☐ 4035 216 Unlined Tank



- ☐ 3067 316 Elongated Bowl
- 4035 516 Lined Tank

Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


### Compliance Certifications -Meets or Exceeds the Following Specifications:


- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

### To Be Specified

- Colour: 020 White
- Supply with stop:







08/08

### NOTES:

NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2
These measurements are subject to change or cancellation. No recognibility is provided for

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

### UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

| TOI-284          |                          |  |
|------------------|--------------------------|--|
| Samuel Cime - ye | © 2008 American Standard |  |

Model: 25-2202 A THE EMERALD

# 24 of 40

# MOEN

There is more than 1 version of this model. Page down to identify the version you have.

#### DESCRIPTION

- Metal construction with various finishes identified by suffix
- Flexible supplies with 3/8" compression fittings
- Includes metal or 50/50 pop-up type waste assembly where noted

### **OPERATION**

- Pivot action lever style handle
- Temperature controlled through 100° degree arc of handle travel

#### FLOW

- · Water usage is limited to these maximum flow rates as indicated by the corresponding product markings
- ° 1.2 gpm max (4.5L/min) at 60 psi ° 1.5 gpm max (5.7L/min) at 60 psi

### CARTRIDGE

- 1255™ Duralast™ cartridge Nonmetallic/nonferrous and stainless steel material

### STANDARDS

- Third party certified to WaterSense®, ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- Certified to NSF 61/9 & 372
- Products marked with 1.2 gpm are compliant with California water efficiency regulations
- Complies with California Proposition 65 and with the Federal Safe
- Drinking Water Act

  ADA for lever handle

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

# Specifications



**CHATEAU®** Single-Handle Lavatory Faucet

### with Metal Waste Assembly


Model: L4625 series L4631BC Bulk Packed (12 per carton):

with 50/50 Waste Assembly Bulk Packed (12 per carton): L64625 series

L64624 series

### **Less Waste** Bulk Packed (12 per carton): L64600 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER

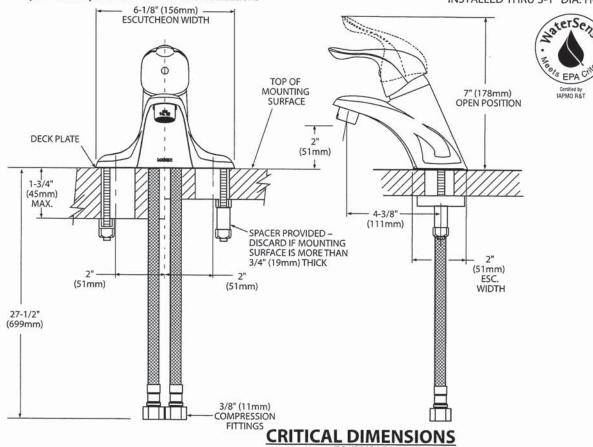

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Model: 25-2202 A THE EMERALD

# 25 of 40



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

#### **OPERATION**

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to ± 3°

#### FLOW

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi NH suffix models contain no showerhead

### CARTRIDGE

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

### **STANDARDS**

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein EP suffix models are third party certified to WaterSense®
- ADA ( for lever handle

6.5" (165mm ESC. DIAM.

### WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser

> 2"CC (51mm) 1 7/8" IPS (48m MAX WALL

FINISHED WALL LINE

TUB RIM

OF HANDLE ROTATION

5 year warranty if used in commercial installations

### Specifications






### CHATEAU' POSI-TEMP' Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

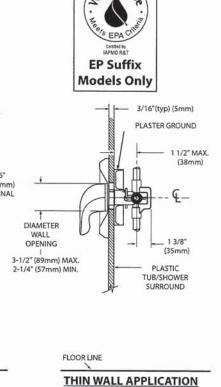

THICK WALL APPLICATION CRITICAL DIMENSIONS

FLOOR LINE

-FACE OF STUD

2 1/2" MAX. (63mm)

1-3/8" (35mm)

32" (813mm) TUB/SHOWER AND TUB ONLY

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

Model: 25-2202 A THE EMERALD

# 26 of 40

# **MOEN**<sup>®</sup>

### DESCRIPTION

Metal construction with various finishes identified by suffix

### OPERATION

- Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


### **STANDARDS**

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🖒 for lever handles

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


# Specifications




### **CHATEAU® Two-Handle Garden Tub Trim**

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

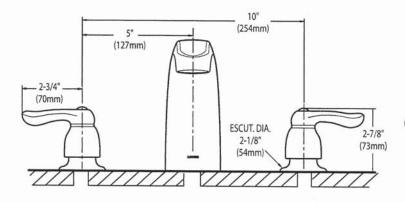



### **CRITICAL DIMENSIONS**

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN


www.moen.com

Model: 25-2202 A THE EMERALD

27 of 40

# SC(B)519 | ALITO Collection



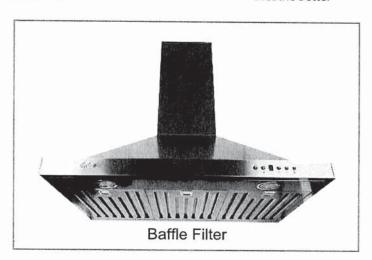

### Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

### **Green Features**



3 Speed Push Button Control Panel



Long-Lasting LED Lights



Time-Delay OFF Feature



Grease Cup



| Model Colour Ducting Filt | ers Size CFM |
|---------------------------|--------------|
|---------------------------|--------------|

| (SCB51930) | Stainless Steel | 6" | Baffle | ( 30" ) | 550 |
|------------|-----------------|----|--------|---------|-----|
| SCB51936   | Stainless Steel | 6" | Baffle | 36"     | 550 |

### Cyclone Range Hoods Inc.

Model: 25-2202 A THE EMERALD


# 28 of 40


# SC(B)519 | ALITO Collection



### **Features**

- · Wall mount range hood
- · 6" round duct adapter
- · Non-stick aluminum fan blades
- · 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- · Quick release aluminum mesh filters
- Standard chimney fits up to 9 ft. ceiling
- · Up to 9 minutes time-delay OFF feature
- Plug-in connection





### **Options**

· Filters:

SCB519 - Quick Release Stainless Steel Baffle Filters

Chimney Flues:

A1.CH10 - short (7'-8' ceilings)

A1.CH18 - standard (8'-9' ceilings)

A1.CH30 - extended (9'-11' ceilings)

Widths: 24", 30", 36"

### Specifications

· Air Flow Volume: 550 CFM

Electrical Connection: 120 V/60 Hz

Power Consumption: 300 Watts

Current: 2.5 Amps

Fan Speed: 1599 RPM

Fan Type: Centrifugal Blower

· Finishes: Stainless Steel

· Ducting: 6" Round

 Noise Level: Min. 2 Sones Max. 6 Sones



Model: 25-2202 A THE EMERALD

# 29 of 40



# Whirlpool 20 cu. ft. French Door Refrigerator WRF540CWH



Fingerprint-Resistant Stainless WRF540CWHZ

### Also available in:

| White  | WRF540CWHW |
|--|------------|
| Black  | WRF540CWHB |
| Fingerprint-<br>Resistant Black<br>Stainless | WRF540CWHV |

| Capacity                                       |                  |
|--|------------------|
| Total Capacity                                 | 20 cu. ft.       |
| Refrigerator Capacity                          | 14 cu. ft.       |
| Freezer Capacity                               | 6 cu. ft.        |
| General Features & Propert                     | ies              |
| Interior Water Dispenser w<br>Water Filtration | ith EveryDrop®   |
| Full-Width, Temperature-C                      | ontrolled Drawer |
| Frameless Glass Shelves                        |                  |
| Gallon Door Bins                               |                  |
| Accu-Chill™ Temperature M<br>System            | Management       |
| Adaptive Defrost                               |                  |
| FreshFlow™ Produce Prese                       | rver             |
| LED Interior Lighting                          |                  |
| Designed, Engineered and U.S.A.                | Assembled in the |
| Electrical Details                             |                  |
| Amps   | 20               |
| Volts  | 115              |
| Certifications                                 |                  |
| ENERGY STAR® Certified                         | Yes              |

| Technical Details                          |   |
|--|---|
| Refrigerator Type                          | French Door                             |
| Number of Doors                            | 3                                       |
| Number of Interior<br>Refrigerator Shelves | 5                                       |
| Number of Refrigerator<br>Door Bins        | 2 Fixed,<br>4 Adjustable                |
| Number of Interior<br>Freezer Shelves      | 1 Wire,<br>1 Plastic                    |
| Lighting Type                              | LED                                     |
| Ice Maker                                  | Factory<br>Installed                    |
| Ice Maker Location                         | Freezer                                 |
| Dispenser Type                             | Interior Water                          |
| Dimensions                                 |   |
| Product Dimensions<br>(H x W x D)          | 70-1/8" x<br>35-5/8" x<br>29 3/8"       |
| Depth with Door Open 90°                   | 43"                                     |
| Cutout Dimensions                          | Allow extra<br>1/2" on sides<br>and top |
|  | Allow extra 1"<br>on rear               |

Reference Material

**Dimension Guide** Use & Care Guide **Energy Guide** 

Warranty

### Key Features & Benefits

### Fingerprint Resistant


Resists fingerprints and smudges with an easy-to-clean finish.

### **Counter Depth Design**

Add additional kitchen space with styling that fits virtually flush with the countertop.

### **Humidity-Controlled Crispers**

Store fruits and veggies in their ideal environment.



NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRF540CWHSPECSHEETV01.

Model: 25-2202 A THE EMERALD


30 of 40




### French Door Bottom Mount Refrigerator

WRF532SMH, WRF540CWH, WRF535SMH

### PRODUCT DIMENSIONS



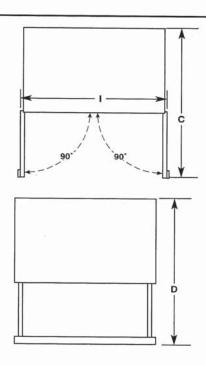

| Model Number         | WRF532SMH                        | WRF535SMH           | WRF540CWH                        |
|----------------------|----------------------------------|---------------------|----------------------------------|
| Model Size           | 22.1 cu. ft.                     | 25.2 cu. ft.        | 20.0 cu. ft.                     |
| Height - Overall "A" | 70½"                             | 701/8"              | 701/8"                           |
|                      | (178.1 cm)                       | (178.1 cm)          | (178.1 cm)                       |
| Height - Top of      | 68%"                             | 68%"                | 68%"                             |
| Cabinet "B"          | (174.9 cm)                       | (174.9 cm)          | (174.9 cm)                       |
| Depth - Doors Open   | 47½"                             | 481/s"              | 43"                              |
| 90° "C"              | (119.7 cm)                       | (122.2 cm)          | (109.2 cm)                       |
| Depth - Drawer       | 52½"                             | 521/8"              | 45%"                             |
| Open "D"             | (132.4 cm)                       | (132.4 cm)          | (115.3 cm)                       |
| Depth - With         | 34 <sup>1</sup> / <sub>2</sub> " | 351/2"              | 30 <sup>1</sup> / <sub>2</sub> " |
| Handles "E"          | (87.4 cm)                        | (89.9 cm)           | (77.5 cm)                        |
| Depth - Without      | 32"                              | 33"                 | 26 <sup>7</sup> / <sub>8</sub> " |
| Handles "F"          | (81.3 cm)                        | (83.8 cm)           | (68.3 cm)                        |
| Depth - Cabinet      | 281/s"                           | 291/ <sub>8</sub> " | 24 <sup>1</sup> / <sub>8</sub> " |
| Only "G"             | (71.3 cm)                        | (73.9 cm)           | (61.2 cm)                        |
| Width - Cabinet "H"  | 325/8"                           | 35%"                | 35%"                             |
|                      | (82.9 cm)                        | (90.5 cm)           | (90.5 cm)                        |
| Width - Door Open    | 40%"                             | 43%"                | 43%"                             |
| 90° "I"              | (102.6 cm)                       | (110.2 cm)          | (110.2 cm)                       |

### AWARNING



### **Electrical Shock Hazard**

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

**Electrical:** A 115 V, 60 Hz, AC only 15 A or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**NOTE:** Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

Water: A cold water supply with water pressure between 35 psi and 120 psi (241 kPa and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 psi and 120 psi (241 kPa and 827 kPa).

### Reverse Osmosis Water Supply:

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 psi to 60 psi (276 kPa to 414 kPa).


Model: 25-2202 A THE EMERALD



### French Door Bottom Mount Refrigerator

### **LOCATION REQUIREMENTS**

# Explosion Hazard Keep flammable materials and vapors, such as gasoline, away from refrigerator.



IMPORTANT: This refrigerator is designed only for indoor, household use only.

Failure to do so can result in death, explosion, or fire.

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave  $2\frac{1}{2}$ " (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 25-2202 A THE EMERALD



### **Front Control Electric Ranges**

### PRODUCT MODEL NUMBERS

WEC310S0L WEF515S0L WEE515SAL YWEE515S0L

#### **ELECTRICAL CONNECTION**

To properly install your range, you must determine the type of electrical connection you will be using and follow the instructions provided for it

- Range must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. The model/ serial/rating plate is located behind the oven door on the top righthand side of the oven frame.
- This range is manufactured with the neutral terminal connected to the cabinet. Use a 3-wire, UL listed, 40- or 50-amp power supply cord (pigtail). See the following Range Rating chart. If local codes do not permit ground through the neutral, use a 4-wire power supply cord rated at 250 volts, 40- or 50-amps and investigated for use with ranges.


| Range Rating*  |                | Specified Rating of<br>Power Supply Cord Kit<br>and Circuit Protection |  |
|----------------|----------------|--|--|
| 120/240 Volts  | 120/208 Volts  | Amps   |  |
| 8.8 - 16.5 KW  | 7.8 - 12.5 KW  | 40 or 50**   |  |
| 16.6 - 22.5 KW | 12.6 - 18.5 KW | 50   |  |

<sup>\*</sup>The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

A circuit breaker is recommended.

### PRODUCT DIMENSIONS

This manual covers several models. Your model may appear different from the models depicted. Dimensions given are maximum dimensions across all models.



- 13/16" (3.0 cm) height from cooktop to top of vent
- B. 297/8" (75.9 cm)
- C. Model/serial/rating plate (located behind the oven door on the top right-hand side of the oven frame)
- WEE515SAL: 34" (86.4 cm) height to top of cooktop edge with leveling legs screwed all the way in\*

  Other models: 36" (91.4 cm) height to top of cooktop edge with leveling legs screwed all the way in\*

  E. 28<sup>25</sup>/<sub>64</sub>" (72.1 cm) max. depth from front of console to back of range
- F. 291/64" (73.7 cm) max. depth from handle to back of range

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section of the Owner's Manual. Using the cooktop as a reference for leveling the range is not recommended.

\* Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.

If connecting to a 50-amp circuit, use a 50-amp rated cord with kit. For 50-amp rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.


Model: 25-2202 A THE EMERALD

33 of 40

### **CABINET DIMENSIONS**

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height. IMPORTANT: If installing a range hood or microwave hood combination above the range, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

Range may be installed next to combustible walls with zero clearance.

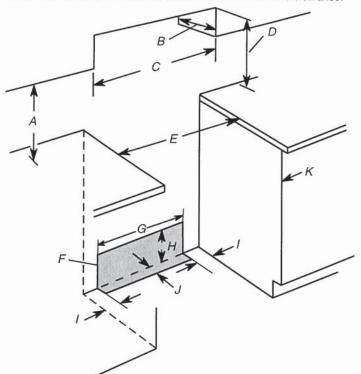

A. 18" (45.7 cm) upper side cabinet to countertop

B. 13" (33 cm) max. upper cabinet depth

C. 30" (76.2 cm) min. opening width

D. For minimum clearance to top of cooktop, see NOTE\*.

E. 30" (76.2 cm) min. opening width

The shaded area is recommended for installation of grounded outlet.

G. 13<sup>1</sup>/s" (33.3 cm) H. 7<sup>11</sup>/16" (19.5 cm) I. 4<sup>13</sup>/16" (12.2 cm) J. 3<sup>11</sup>/16" (9.4 cm)

K. Cabinet door or hinges should not extend into the cutout.

**NOTE:** 24" (61.0 cm) minimum when bottom of wood or metal cabinet is shielded by not less than  $^{1}/_{4}$ " (0.64 cm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper. 30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.

Model: 25-2202 A THE EMERALD

34 of 40



# Whirlpool 53 dBA\* Front Control Dishwasher WDF540PAD



Monochromatic Stainless Steel WDF540PADM

#### Also available in:

| White | WDF540PADW |  |
|-------|------------|--|
| Black | WDF540PADB |  |

| Capacity                     |                |  |
|------------------------------|----------------|--|
| Total Place Settings 15      |                |  |
| General Features & Propert   | ies            |  |
| Soil Sensor                  |                |  |
| In-Door Silverware Basket    |                |  |
| Sani Rinse Option            |                |  |
| Normal Cycle                 |                |  |
| Heavy Cycle                  |                |  |
| High Temperature Wash O      | ption          |  |
| Heated Dry Option            |                |  |
| ENERGY STAR® Certified       |                |  |
| Industry's Best Selling Dish | nwasher Brand† |  |
| Electrical Details           |                |  |
| Amps                         | 15             |  |
| Volts                        | 120            |  |
| Hz                           | 60             |  |
| Certifications               |                |  |
| ENERGY STAR® Certified       | Yes            |  |

| Technical Details                 |                                   |
|-----------------------------------|-----------------------------------|
| Dishwasher Type                   | Built-in                          |
| Control Location                  | Front                             |
| Control Type                      | Electronic                        |
| Number of Wash Cycles             | 5                                 |
| Number of Options                 | 5                                 |
| dBA'                              | 53                                |
| Number of Racks                   | 2                                 |
| Tub Material                      | Plastic                           |
| Wash System                       | Filter                            |
| Wash System Type                  | Removable<br>Filter               |
| Number of Wash Arms               | 3                                 |
| Dimensions                        |                                   |
| Product Dimensions<br>(H x W x D) | 34-1/2" x<br>23-7/8" x<br>24-1/2" |
| Depth with Door Open 90°          | 49-1/2"                           |

**Dimension Guide** Install Guide

Use & Care Guide

**Energy Guide** 

Warranty

### Key Features & Benefits

### Sensor Cycle


Automatically get the right wash and dry settings for each load with two sensors that measure temperature, soil level and load size during prewash and the wash cycle.

### 1-Hour Wash Cycle

Clean the dishes you need fast with a cycle that thoroughly takes care of plates, pans and glasses in just an hour."

### Cycle Memory

Quickly start your dishwasher with one button. It automatically remembers the last cycle you picked so it's stored and ready to go.



<sup>\*</sup>Per IEC standards. \*\*Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of unit sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. ®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF540PADSPECSHEETV01.

Model: 25-2202 A THE EMERALD

# 35 of 40




### PRODUCT MODEL NUMBERS

| WDF110PAB | WDF310PLA | WDF530PSY |
|-----------|-----------|-----------|
| WDF111PAB | WDF320PAD | WDF540PAD |
| WDF120PAF | WDF510PAY | WDF730PAY |
| WDF121PAF | WDF520PAD | WDT710PAY |
| WDF310PAA | WDF530PAY | WDT720PAD |
| WDF310PCA | WDF530PLY | WDT770PAY |

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.

If direct wiring dishwasher: Use flexible, armored,

or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for



If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit



instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.

(0,0) 00

Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90 elbow with 34 N.P.T. external pipe threads on one end. Do not solderwithin 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use 1/2" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

#### PRODUCT DIMENSIONS

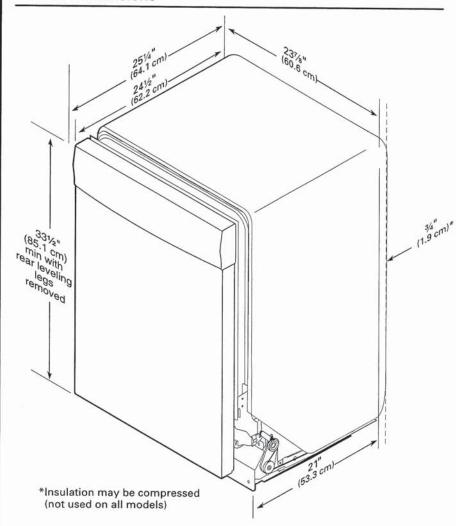


Model: 25-2202 A THE EMERALD

36 of 40

### CABINET CUTOUT DIMENSIONS

**NOTE**: Shaded areas of cabinet walls show where utility connections may be installed.

- \*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.
- \*\*Minimum, measured from narrowest point of opening.

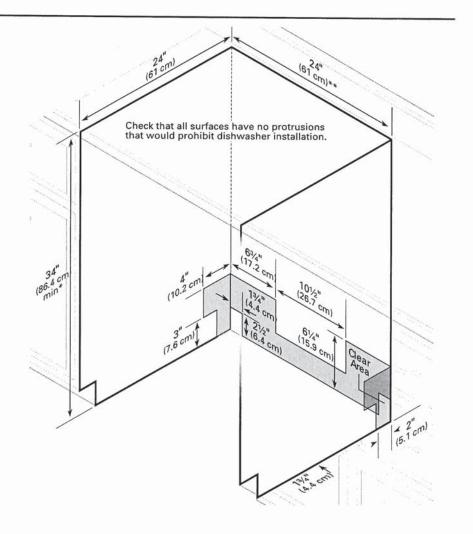

Model: 25-2202 A THE EMERALD

37 of 40

### 5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW



### **Specifications**

**Control Location** 

LCD Touch Screen

### Width: 6858.00, 27.0"

### Depth: 8016.88, 31-9/16"


| Centimeters,                   | Inches                           | Centimeters, Inches               |                       |
|--------------------------------|----------------------------------|-----------------------------------|-----------------------|
| Dimensions                     |                                  | Compatibility                     |                       |
| Capacity                       | 4-3/10                           | Works With                        | No                    |
| Depth                          | 8016.88 cm, 31-9/16 in           | Options                           |                       |
| Gross Weight                   | 97068688.00 kg, 214 lbs          | Options                           |                       |
| Net Weight                     | 92532768.00 kg, 204 lbs          | Number Of Washer Options          | 3                     |
| Width<br>Appearance            | 6858.00 cm, 27.0 in              | Features                          |                       |
|                                |                                  | Stackable                         | Yes                   |
| LCD Touch Screen               | No                               | Water Faucet                      | No                    |
| Window                         | Yes                              | Cycles                            |                       |
| Advanced Vibration Control™    |                                  | Number Of Wash Cycles             | 35                    |
| Dispense System                | No  Detergent, Fabric Softener & | Exterior                          |                       |
| Eco Monitor/Efficiency Monitor | Bleach                           | Lid/Door Lock                     | Yes                   |
| Hoses Included                 | 4ft 4in Drain Hose Included      | Lid/Door Swing                    | Left                  |
| Internal Heater                | No                               | Modifiers                         |                       |
| Maximum Spin Speed             | 1160                             | Delay Start                       | No                    |
| Out Of Balance Sensing         | Yes                              | Number Of Rinse Options           | 2                     |
| Water Factor                   | 3-1/5                            | Number Of Soil Levels             | 3                     |
| Cycles and Options             |                                  | Number Of Spin Speeds             | 4                     |
| Number Of Wash Cycles          | 35                               | Number Of Wash/Rinse Temperatures | 4                     |
|                                |                                  | Pre Soak                          | Yes                   |
| Electrical                     |                                  | Temperature Selections            | Hot, Cold, Cool, Warm |
| Power Cord Included            | Yes                              |                                   |                       |
| Controls                       |                                  |                                   |                       |
| Automatic Temperature Controls | Yes                              |                                   |                       |
|                                |                                  |                                   |                       |

Front


Model: 25-2202 A THE EMERALD

38 of 40


Recessed area or closet installation (stacked washer and dryer)

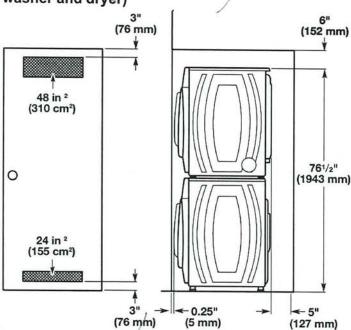


Custom under counter installation

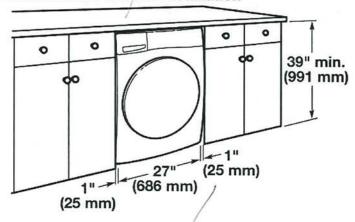

### Recessed area or closet installation (washer only)

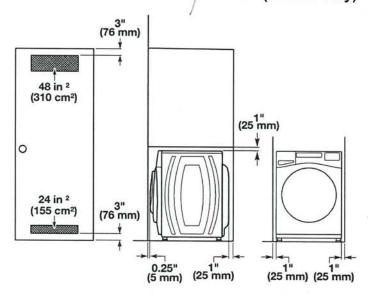

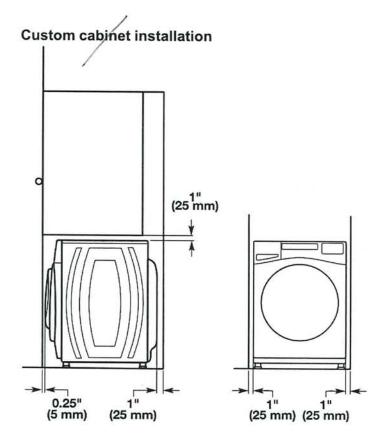


### **Drain System**

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of o leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

**IMPORTANT:** To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

### Floor standpipe drain system

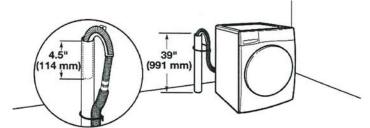


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts."

Model: 25-2202 A THE EMERALD


# 39 of 40

### Wall standpipe drain system

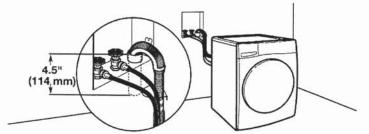


See requirements in "Floor standpipe drain system."


### Laundry tub drain system

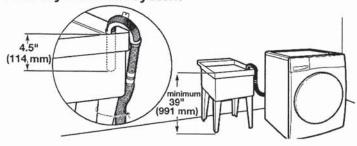

Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

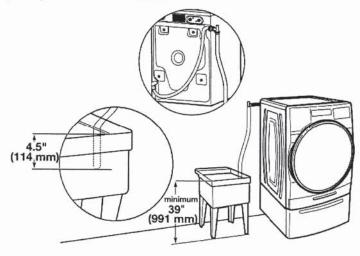

### Floor drain system

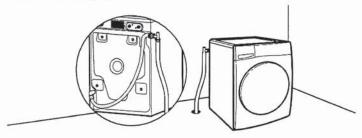

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

### **Electrical Requirements**

### AWARNING



**Electrical Shock Hazard** 

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

### **GROUNDING INSTRUCTIONS**

For a grounded, cord-connected appliance:

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

**WARNING:** Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

For a permanently connected appliance:

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

### SAVE THESE INSTRUCTIONS

40 of 40 Model: 25-2202 A THE EMERALD

### WHIRLPOOL DRYER Model #: YWED5620HW





7.4 cu. ft. Front Load Electric **Dryer with Intuitive Touch** Controls

7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

### Dimensions

| Depth                          | 78.74 cm, 31.0 in         |  |
|--------------------------------|---------------------------|--|
| Depth With Door Open 90 Degree | 138.43 cm, 54-1/2 in      |  |
| Height                         | 98.42 cm, 38-3/4 in       |  |
| Width                          | 68.58 cm, 27.0 in         |  |
| Configuration and Overview     |                           |  |
| Fuel Type                      | Electric                  |  |
| Cycles and Options             |                           |  |
| Cycle Time Remaining           | Yes                       |  |
| Lint Filter Indicator          | No                        |  |
| Number of Dryer Cycles         | 36                        |  |
| Number of Dryness Levels       | 3                         |  |
| Ventilation System             |                           |  |
| Long Vent                      | No                        |  |
| Maximum Vent Length            | 64                        |  |
| Venting Direction              | Left, Right, Bottom, Rear |  |
| Electrical                     |                           |  |
| Hz                             | 60                        |  |
| Power Cord Included            | Yes                       |  |