# Sales Selection Sheet Checklist

Model: 28-2590 C THE BRISTOL

LOT 3137

PURCHASERS: Vijay Kumar/Amita. **VENDOR: Heathwood Homes (Huron) Limited WOB DECK** FINISHED BASEMENT COLD CELLAR UPGRADED / MODIFIED ELEVATION **CORNER UPGRADE** REAR UPGRADE SIDE UPGRADE CEILING UPGRADE - SMOOTH MAIN FLOOR SECOND FLOOR **BASEMENT** ADDITIONAL ROUGH-INS 200 AMP SERVICE (STD IN SINGLES) WET BAR ROUGH-IN **HUMIDIFIER** AIR CONDITIONING (SITE STD) GAS ROUGH-IN STOVE DRYER **BBQ** ADDITIONAL FIREPLACE KITCHEN: HOODFAN VENTING SIZE **6 IN ROUND DUCT** 7 IN ROUND DUCT **FULL BASEMENT STAIRS:** Paint Grade UPPER BASEMENT STAIRS: N/A LOWER LEVEL STAIRS: N/A All Oak MAIN STAIRS: MEDIA STAIRS (if applicable): N/A LOFT STAIRS (if applicable): N/A DEC. 21 **Decor Consultant:** Date Purchase Date Purchaser: Heathwood Homes (Huron) Limited Approved ... Locked Date:

Vijay Kumar/Amita . Project: Wallaceton Unit: 3137, Phase: 3 Model: 28-2590 C THE BRISTOL

Locked:

Closed:

Kitchen	o di	
Cabinet Colour/Style	6247	Viking III-CAMDEN-SHALE GREY CL-MAPLE ***STD***
Island Cabinet Colour/Style	6247	Viking III-CAMDEN-SHALE GREY CL-MAPLE ***STD***
Cabinet Hardware	7672	135-HARDWARE ***STD***
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Island Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Countertop Edge	4005	DOUBLE MITRE 1 1/2 INCH ***UPG***

- Please note some islands may require a seam as per manufacturer and fabricator discretions.

Sink	9487	Plumbing-KINDRED Kitchen Sink Collection - Reginox ND1831 U/9-Double (equal size) Bowl Undermount Sink (or equivalent)-Stainless Steel	PG 18
HoodFan	9393	SCB51930-CYCLONE 30 inch CANOPY CHIMNEY HOODFAN-SS	PG 30-31
Backsplash	1111	N/A *****	
Backsplash Grout	1111	N/A *****	
Backsplash Tile Pattern	1111	N/A *****	

- Purchasers have been advised: standard fridge opening is a minimum 37 3/8 x 73 3/8 inches. Ice Waterline Rough-In is included.
- Standard stove opening is 30 inches and standard dishwasher opening is 24 inches. Any gas stove will require backsplash or stainless steel backing to avoid fire hazards.
- Purchasers acknowledge: Heathwood Homes and its contractors will not be responsible for any kitchen cabinet changes due to appliances dimension changes after sign-off.

Kitchen / Breakfast		
Flooring	9106	GE.MD.WHT.1818.MT Madison Series White Matte 18 X 18 Matte ***1***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment	21. 2611	

oyer		
Flooring	9106	GE.MD.WHT.1818.MT Madison Series White Matte 18 X 18 Matte ***1***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Dettern	3000	STANDADD SOLIADE ***STD***



# **Customer Colours** Vijay Kumar/Amita . Project: Wallaceton Unit: 3137, Phase: 3 Locked: Model: 28-2590 C THE BRISTOL Closed: rioor nie rauem S IANDARD SQUARE Comment Powder Room 9106 GE.MD.WHT.1818.MT Madison Series White Matte 18 X Flooring 18 Matte \*\*\*1\*\*\* Grout-(27) Silver \*\*\*STD\*\*\* Floor Tile Grout 2225 STANDARD SQUARE \*\*\*STD\*\*\* Floor Tile Pattern 3000 Plumbing Fixtures-WHITE \*\*\*STD\*\*\* Plumbing Fixture (Colour) 1737 Comment Mud Room / Laundry TR.ST.SRK.1313-Serpantine-Syrak/Charcoal-13x13 Flooring 8264 Grout-(19) Pearl Gray \*\*\*STD\*\*\* Floor Tile Grout 7704 STANDARD SQUARE \*\*\*STD\*\*\* 3000 Floor Tile Pattern N/A \*\*\*\*\* Opt. Cabinet Colour/Style - Uppers 1111 N/A \*\*\*\*\* Opt. Cabinet Hardware - Uppers 1111 VIKING III SIMCOE ORCHID 3DL \*\*\*UPG\*\*\* Cabinet Colour/Style - Base 9111 135-HARDWARE \*\*\*STD\*\*\* Cabinet Hardware - Base 7672 6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica \*\*\*STD\*\*\* Countertop 8796 N/A \*\*\*\*\* Countertop Edge 1111 Comment Main Hall

Red Oak Pearl-Vintage

Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch

7502

Flooring

Comment

Customer Colours		1 of 557 1 1	
Vijay Kumar/Amita .		Created: 12/9/2012 10:49:26	•
Project: Wallaceton Unit: 3137, Phase: 3		Locked:	
Model: 28-2590 C THE BRISTOL		Closed:	
Dining Room	7500	Dad Ook Bood Vintors	
Flooring	7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch	
Comment			
Great Room			
Flooring	7502	Red Oak Pearl-Vintage	
Comment		Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch	
Comment			
Great Room Fireplace			
Type	8869	Majestic MERC32 ***STD***	
Mantle	8891		PG 17
Surround (Opt.)	1111	N/A *****	
- Purchasers have been a	dvised: heat from the	FP can damage TV above a FP and items placed on mantle.	
closing.	actors will not be liab	le for any damage on items placed/@installed above a FP after	
Comment			
Upper Hall	0507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***	
Flooring	9507	DY 694 TO-WINO TAUK-BLACK ICE-40 02 Poly STD	
Comment	*		
Master Bedroom Flooring	9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***	
Flooring	3007	by source minto ment bentoning to serious	
Comment			
Bedroom 2			
Flooring	9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***	
Comment	46-		
<u> </u>			
Bedroom 3			(2)
Flooring	9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***	~



Vijay Kumar/Amita . Project: Wallaceton Unit: 3137, Phase: 3 Model: 28-2590 C THE BRISTOL


5	Of	557	1
Charge	1: 12/3/202	2 10:49:20	3

Locked:

CI	osed
----	------

droom 4	0507	DV 90449 MINOTALID DI ACVICE 40 07 Daly ***CTD***
Flooring	9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
Comment		
ester Ensuite	Territoria de la companione de la compan	THE THEORY IS NO CONTROL TO BE A SECTION.
Cabinet Colour/Style	9157	Viking III-SIMCOE-MOONLIGHT-3DL ***STD***
Cabinet Hardware	7672	135-HARDWARE ***STD***
Countertop	9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
Countertop Edge	4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD**
Floor Tile	5494	GE.NA.GRY.1313-New Albion-Grey-13 x 13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9020	QT.WV.WHT.0810-Weave-White-8 x 10 ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Flie Fattern	5555	
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
		The state of the s







Vijay Kumar/Amita . Project: Wallaceton Unit: 3137, Phase: 3 Model: 28-2590 C THE BRISTOL

Locked:

Closed:

Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***
Cabinet Hardware	7672	135-HARDWARE ***STD***
Countertop	8827	4925K-07-Countertop-CALCUTTA MARBLE-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Floor Tile	8261	TR.ST.BYZ.1313-Serpantine-Beyaz/White-13x13 ***ST
Floor Tile Grout	2222	Grout-(105) Driftwood ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	9022	QT.WV.TGR.0810-Weave-Tender Grey-8 x 10 ***STD*
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		

Cabinet Colour/Style	6265	Viking III-MANCHESTER-SHALE GREY CL-MAPLE ***STD***
Cabinet Hardware	7672	135-HARDWARE ***STD***
Countertop	8796	6698-46-Countertop-PALOMA POLAR ETCHINGS FINISH-Formica ***STD***
Countertop Edge	1111	N/A *****
Floor Tile	9255	TR.SP.WHITE.1313 SEMPRE White Matte 13 x 13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***





Vijay Kumar/Amita . Project: Wallaceton Unit: 3137, Phase: 3 Model: 28-2590 C THE BRISTOL

Locked: Closed:

THE CONTRACTOR OF THE SECOND S		SCALARISE CONTROL OF ACTION OF THE ACT OF TH
\A/- II <del></del>	0000	OTMATCH 0010 Moove Tonder Croy 9 x 10 ***CTD***
Wall Tile	9022	QT.WV.TGR.0810-Weave-Tender Grey-8 x 10 ***STD***
2000 200 also 100		
Wall Tile Grout	2226	Grout-(00) White ***STD***
Wall Tile Pattern	3000	STANDARD SQUARE ***STD***
NO. 121 No. 1 122 No. 1 12	20.11	
Opt. Shower Floor Tile	1111	N/A *****
Opt. Shower Floor Tile Grout	1111	N/A *****
Opt. Shower Floor Tile Pattern	1111	N/A *****
Opt. Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment	-	
	10	
ower Level Recreation Room (Opt.	Finisi	
Flooring	1111	N/A *****
Comment		
y allowance of the factor of		
L		
(1995)	200	
ower Level Bathroom (Opt. Finishe	d Bas	
Cabinet Colour/Style	1111	N/A *****
**************************************		
Cabinet Hardware	1111	N/A *****
	1111	N/A *****
Countertop	1111	
Countains Educ	4444	N/A *****
Countertop Edge	1111	IV/A
Floor Tile	1111	N/A *****
7 1001 1110	1111	7.5.1 0
		*
	4444	N/A *****
Floor Tile Grout	7777	N/A
Floor Tile Grout Floor Tile Pattern	1111 1111	N/A *****





Vijay Kumar/Amita . Project: Wallaceton Unit: 3137, Phase: 3

Snower Wall

Model: 28-2590 C THE BRISTOL

Locked: Closed:

Tile	1111	N/A *****
		27

Shower Wall Tile Grout

1111

N/A \*\*\*\*\*

Shower Wall Tile Pattern

1111

N/A \*\*\*\*\*\*

 Shower Floor Tile
 1111
 N/A \*\*\*\*\*\*

 Shower Floor Tile Grout
 1111
 N/A \*\*\*\*\*\*

 Shower Floor Tile Pattern
 1111
 N/A \*\*\*\*\*\*

Shower Jamb(s) and Sill(s)

Plumbing Fixture (colour)

1111

N/A \*\*\*\*\*\*

N/A \*\*\*\*\*\*

N/A \*\*\*\*\*\*\*

Type 1714
Colour 7922

Oak Stairs \*\*\*STD MAIN STAIRS\*\*\*

Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD
AND WILL VARY FROM FLOORING \*\*\*99\*\*\*

Handrail/Pickets/Posts Type 7652

1 5/16 inch Square pickets with 3 1/2? Square/Cap Post(s)-ALL OAK \*\*\*STD\*\*\*

Handrail/Pickets/Posts Colour 7922

Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING \*\*\*99\*\*\*

Custom Stain/Paint 1111

Red Oak Pearl-Vintage

Landing(s) 7502

Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch

Opt. Carpet Runner 1111

N/A \*\*\*\*\*

N/A \*\*\*\*\*

Comment

Lower Level Stairs	
Туре	1713
Colour	1111
I I - de iUDi de de ID - de Torre	4444

Paint Grade Stairs \*\*\*STD UNFINISHED BASEMENT STAIL
N/A \*\*\*\*\*\*

Handrail/Pickets/Posts Type 1111

N/A \*\*\*\*\*

Handrail/Pickets/Posts Colour 1111

N/A \*\*\*\*\* N/A \*\*\*\*\*

Landing(s) 1111

N/A \*\*\*\*\*

Opt. Carpet Runner

Custom Stain/Paint

N/A \*\*\*\*\*

1111

1111





Vijay Kumar/Amita . Project: Wallaceton Unit: 3137, Phase: 3 Model: 28-2590 C THE BRISTOL

Locked: Closed:

Comment		
roughout		·
Switches and Plug	5796	Decora White Switches and Plugs ***STD***
Thresholds	2232	Metal Thresholds ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Trim Size	8705	4 1/4 Baseboard and 2 3/4 Casings ***STD***
Trim - Paint Colour	1716	Trim-WHITE ***STD***

Purchaser:

Decor Consultant

Date

Purchaser:

Wallaceton

**Date Approved** 



# 10 of 44 construction summary



Model: 28-2590 C THE BRISTOL Project/Phase: Wallaceton / 3

Lot: 3137

Offer F Worksheet N	Five Appliances: SS Fridge, Stove, Chimney Hood Fan, Dishwasher: White Front Loader Washer/Dryer (Singles)  Note:
	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not
Worksheet N	entitled to a referral fee under Heathwood Homes Referral program.  Note:

DisciplineMS.rpt 13dec21 Page 1 of 2

Printed and Sent: 05-Sep-23

# construction summary of 44



Lot: 3137 Model: 28-2590 C THE BRISTOL Project/Phase: Wallaceton / 3

# **CERAMICS**

Invoice	Qty.	Description
1234 346,607 21Dec22	1	- CERAMICS - POWDER FLOOR - UPG 1
1234 346,608 21Dec22	1	- CERAMICS - FOYER FLOOR - UPG 1
1234 346,605 21Dec22	1	- CERAMICS - KITCHEN/BREAK - UPG 1

# ELECTRICAL

Invoice		Description Description
1234 314,340 21Dec22 **	1	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * SPECIFY IF STANDARD 220V WILL STAY OR BE RELOCATED STANDARD 240V 40AMP WILL STAY SKETCH # 3 ELECTRICAL-Notify
1234 345,787 21Dec22	1	GREAT ROOM - ELECTRICAL - CEILING ROUGH-IN (CAPPED)  CENTERED +/- IN GREAT ROOM ON EXISTING SWITCH SKETCH # 2
1234 314,224 21Dec22	1	KITCHEN - ELECTRICAL - CEILING ROUGH-IN (CAPPED) INCLUDING SWITCH  CENTERED +/- ABOVE BREAKFAST COUNTER SKETCH # 2
1234 314,232 21Dec22	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS)  CENTERED ABOVE FIREPLACE 70" +/- FROM FLOOR SKETCH # 2

# **GRANITE**

Invoice	Qty.	Description
1234	1	KITCHEN - GRANITE - KITCHEN / ISLAND - GROUP 1 WITH 1 ? IN SQUARE BUILT UP MITERED EDGE - UPG
346,706		
21Dec22		

# **HEATING / AIR CONDITIONING**

Invoice	Qty.	Description
1234 314,340 21Dec22	-	KITCHEN - HEATING/AIR - ROUGH-IN GAS LINE FOR GAS STOVE AT MAIN FLOOR (SEE SPECS) (HOOK-UP NOT INCLUDED) LEAVE STANDARD 120 VOLT ELECTRICAL OUTLET ON A SEPARATE CIRCUIT. * SPECIFY IF STANDARD 220V WILL STAY OR BE RELOCATED STANDARD 240V 40AMP WILL STAY SKETCH # 3 ELECTRICAL-Notify

DisciplineMS.rpt 13dec21 Page 2 of 2

Model: 28-2590 C THE BRISTOL

# 12 of 44

# THE BRISTOL


ELEVATION C | 2,598 SQ. FT.

706 sq. ft. of opt. finished Lower Level

28-2590 ELEV. C

Sketch #1

WALLACETON

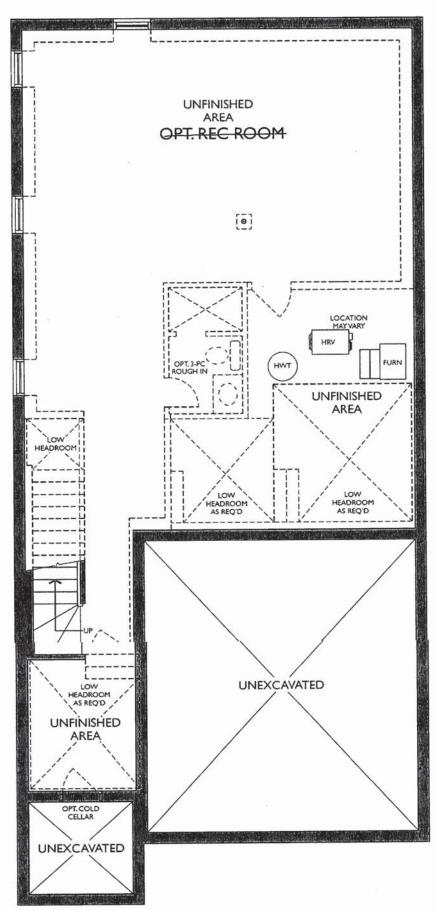

LOWER LEVEL ELEVATION B & C B W

Legal Plan Feb. 17, 2021

Model: 28-2590 C THE BRISTOL

# 13 of 44

# THE BRISTOL

ELEVATION C | 2,598 SQ. FT.


706 sq. ft. of opt. finished Lower Level

WALLACETON


Legal Plan Feb. 17, 2021

28-2590 ELEV. C

Sketch # 2

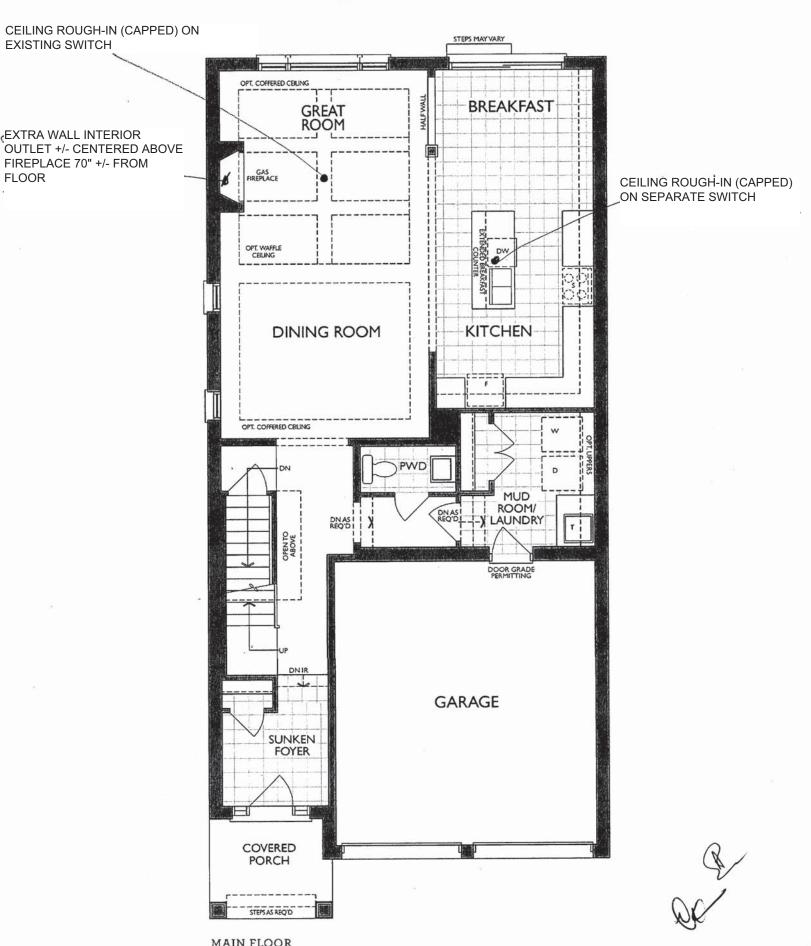

**ELEVATION B & C** 

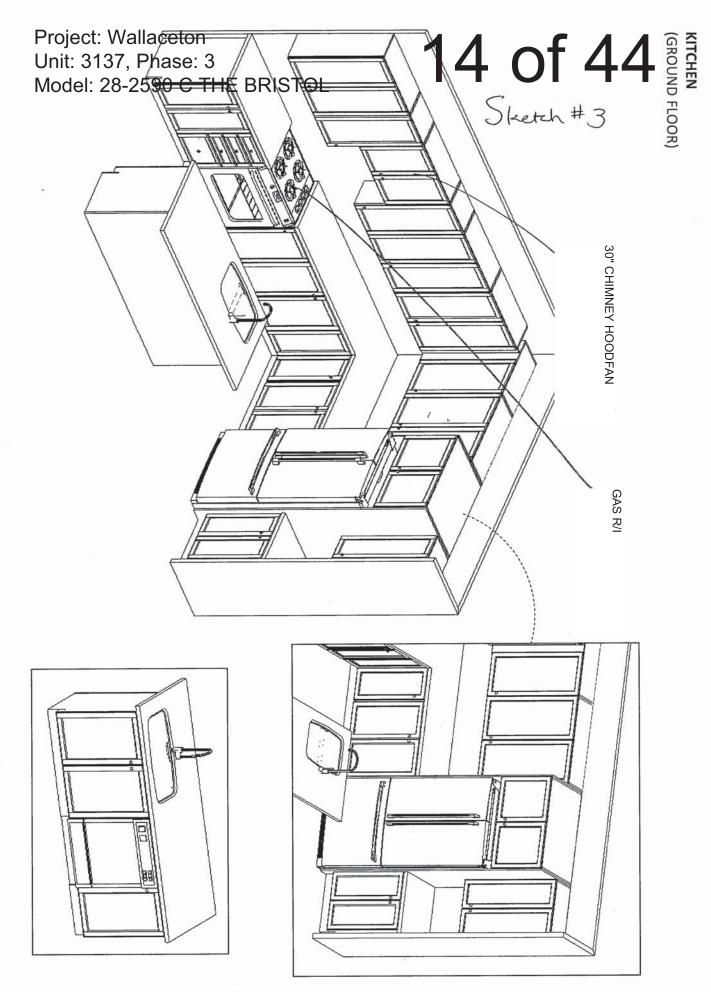







# N

Z

U

# H

# KITCHENS LIMITED

# **HEATHWOOD HOMES** 1350 Shawson Drive, Mississauga, ON L4W 1C5

WALLACETON, KITCHENER ON

MODEL: 28-2590 (3403)

# STANDARD CONTRACT INCLUDES:

- Appliance Openings
   Hood Opening: 30"W Builder hood
- Fridge Opening: 37 3/8 "W X 73 3/8"
- Stove Opening: 30" Freestanding Fridge cabinet & gables: 66cm Deep
- Dishwasher Opening: 24"

# Standard Kitchens Scope:

- 100cm H wall cabinets
- Std. Blumotion Hinges-soft close
- Std. Metabox Drawers- not soft close
- Min 40cm W drawer
- Base pie cut corner cabinets
- Backing on all cabinets
- Upgrade applied paneled fridge & Countertop by others dishwashers supply only (appliance

# Standard Vanity & Laundry Scope:

hardware by others)

- Powder by others, pedestal
- Master Ens. Top by others
- Remaining vanities inc. laminate top
- Std. Metabox Drawers- not soft close Std. Blum Hinges- not soft close
- Mains: Full height doors (top drawers Master Ens: Top drawers (Sink Full height
- added if Masters can't accommodate Optional laundry base & wall cabinets

Model: 28-2590 C THE BRISTOL

# 15 of 44

# THE BRISTOL


ELEVATION C | 2,598 SQ. FT.

706 sq. ft. of opt. finished Lower Level

WALLACETON

# 28-2590 ELEV. C

Sketch #4

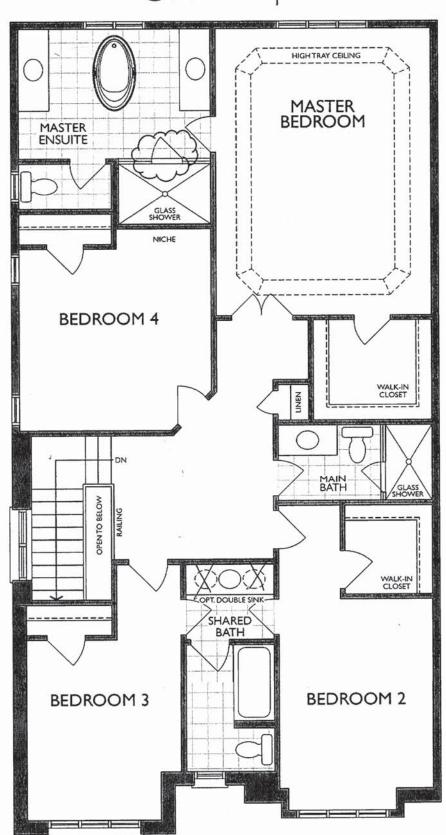



SECOND FLOOR ELEVATION C

Legal Plan Feb. 17, 2021

<sup>\*</sup> Master Ensuite Shower Door Swing Changed

Model: 28-2590 C THE BRISTOL

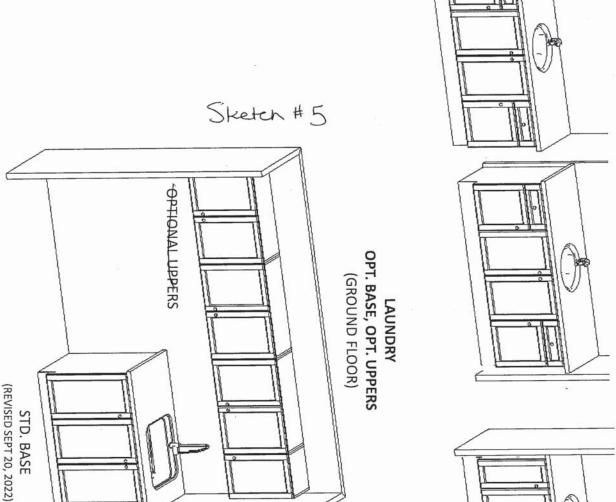

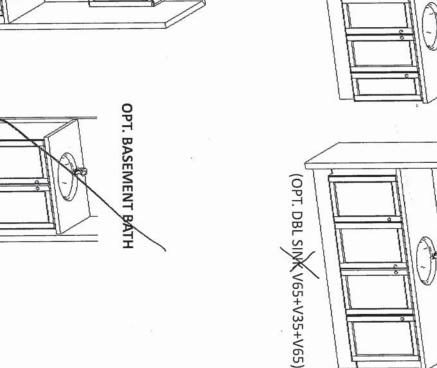







Z

U H H

# WALLACETON, KITCHENER ON **HEATHWOOD HOMES** MODEL: 28-2590 (3403) 1350 Shawson Drive, Mississauga, ON L4W 1C5

F44

MASTER ENSUITE (2<sup>ND</sup> FLR)

MAIN BATH (2<sup>ND</sup> FLR)

SHARED ENSUITE (2<sup>ND</sup> FLR)

# STANDARD CONTRACT INCLUDES:

# **Appliance Openings**

- Hood Opening: 30"W Builder hood
- Fridge Opening: 37 3/8 "W X 73 3/8"
- Stove Opening: 30" Freestanding Fridge cabinet & gables: 66cm Deep
- Dishwasher Opening: 24"

# Standard Kitchens Scope

- 100cm H wall cabinets
- Std. Blumotion Hinges-soft close
- Std. Metabox Drawers- not soft close
- Min 40cm W drawer
- Base pie cut corner cabinets Backing on all cabinets
- Countertop by others hardware by others) Upgrade applied paneled fridge & dishwashers supply only (appliance

# Standard Vanity & Laundry Scope:

- Powder by others, pedestal
- Master Ens. Top by others
- Std. Blum Hinges- not soft close Remaining vanities inc. laminate top Std. Metabox Drawers- not soft close
- Mains: Full height doors (top drawers Master Ens: Top drawers(Sink Full height
- added if Masters can't accommodate) Optional laundry base & wall cabinets

Project: Wallaceton Unit: 3137, Phase: 3 Model: 28-2590 C THE BRISTOL

17 of 44





NFAS NF17 Mantel


Model: 28-2590 C THE BRISTOL


# 18 of 44



# ND1831UA/9







# ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited

P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408

Model: 28-2590 C THE BRISTOL

# 19 of 44

# MOEN

### **FAUCET DESCRIPTION**

Reflex™ pulldown system offers smooth operation, easy movement and secure docking
Power Clean™ spray technology
Metal construction with various finishes identified by suffix

Quick connect installation

Pulldown spray with 68" braided hose Flexible supply lines with 3/8" compression fittings

High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing 360° rotating spout

Faucet designed for handle to be mounted on right side only

### **OPERATION**

Lever style handle

Temperature controlled by 100° arc of handle travel

Operates with less than 5 lbs. of force

• Operates in stream or spray mode in the pullout or retracted position **FLOW** 

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

• 1255™ Duralast™ cartridge

## **STANDARDS**


Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372

- Meets CalGreen and Georgia SB370 requirements Complies with California Proposition 65 and with the Federal Safe Drinking
- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA 🖒 for lever handle

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the
- 10 year limited warranty when used in a multifamily installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations

# Specifications




ALIGN™ **Single Handle High Arc Pulldown Kitchen Faucet** 

Models: 7565 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



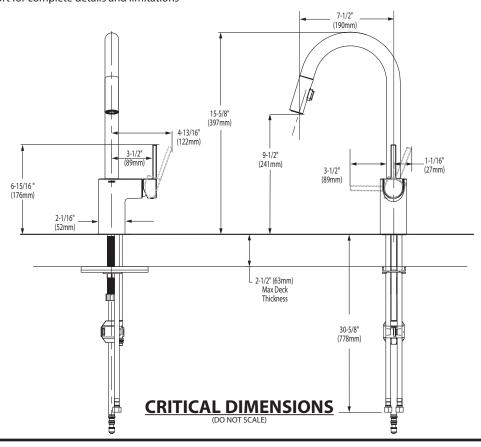

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 6/20



# BOULEVARD® PEDESTAL SINK VITREOUS CHINA

**BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)** 

## **BOULEVARD® PEDESTAL SINK**

☐ 0641.800 Faucet holes on 8" (203mm) centers (Illustrated)

STD • 0641.400 Faucet holes on 4" (102mm) centers

# ☐ 0641.100 Center hole only

- Classic styled rectangular pedestal lavatory
- Vitreous china
- Rear overflow
- Supplied with mounting kit
- Right Height® for greater comfort during use
- Faucet ledge with large deck area (faucet not included)
- Design coordinates with Boulevard® Toilet
- Basin has flat bottom to also allow use as an **above counter** sink or a **drop-in** sink (with u-shaped cut out)

## **Nominal Dimensions:**

24" x 19" x 35-1/2" (610 x 483 x 902mm)

- ☐ 0641.008 Pedestal top-8" (203mm) centers
- ☐ 0641.004 Pedestal top-4" (102mm) centers
- ☐ 0641.001 Pedestal top-center hole only
- ☐ 0010.000 Pedestal only

# Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

# **Compliance Certifications -**

# Meets or Exceeds the Following Specifications:

• ASME A112.19.2 - 2008/CSA B45.1-08

## To Be Specified:

- ☐ Color: ☐ White ☐ Linen
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- □ Nipple:



SEE REVERSE FOR ROUGHING-IN DIMENSIONS


<sup>\*</sup> See faucet section for additional models available

Model: 28-2590 C THE BRISTOL

21 of 44

# 4merican tandard

# **BOULEVARD®** PEDESTAL SINK

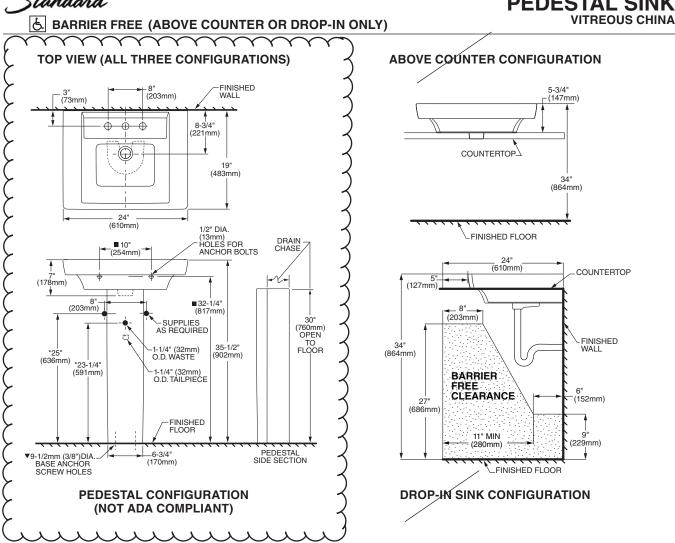

ABOVE COUNTER AND DROP-IN SINK CONFIGURATIONS MEET THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

Top of sink installed at 34" (864mm) height from finished floor. Sink installed 5" (127mm) minimum from front edge of countertop. Provide 27" (686mm) knee clearance area.

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAPS ARE SUGGESTED.

▼ PEDESTAL ANCHORING SCREWS NOT INCLUDED.

■ SUITABLE FOR REINFORCEMENT ONLY. ACTUAL DIMENSIONS MUST BE TAKEN FROM FIXTURE.

FITTING NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

INISTALL ATION INSTRICTIONS SUPPLIED WITH I AWATORY. INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2018 AS America Inc.

Model: 28-2590 C THE BRISTOL

22 of 44

## 2 X MASTER ENSUITE

# American Standard

Style That Works Better

**BARRIER FREE** 

# OVALYNTM UNDERCOUNTER SINK VITREOUS CHINA

## OVALYN™ UNDERCOUNTER SINK

- · Classic oval undermount sink
- Made from vitreous china
- Front overflow
- Supplied with mounting kit (047194-0070A) and template
- **□ 0495.221 Unglazed rim** 435 x 359mm

(17-1/8" x 14-1/8")

☐ 0495.300 Glazed underside

## Bowl size:

382mm (15-1/16") wide 306mm (12-1/16") front to back 140mm (5-1/2") deep

■ 0496.221 Unglazed rim

489 x 413mm (19-1/4" x 16-1/4")

☐ 0496.300 Glazed underside

## Bowl size:

432mm (17") wide 356mm (14") front to back 140mm (5-1/2") deep

☐ 0497.221 Unglazed rim

546 x 441mm (21-1/2" x 17-3/8")

☐ 0497.300 Glazed underside

## Bowl size:

483mm (19") wide 391mm (15-3/8") front to back 140mm (5-1/2") deep

# Compliance Certifications -

# Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series

# To Be Specified:

- □ Color: □ White □ Bone □ Linen □ Silver □ Fawn Beige □ Black
- ☐ Faucet\*:
- Faucet Finish:
- □ Supplies:
- ☐ 1-1/4" Trap:

© 2008 AS America Inc.

\* See faucet section for additional models available

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

— J53 — Revised 2/08


Model: 28-2590 C THE BRISTOL

# 23 of 44

# American Standard

Style That Works Better

# **OVALYN<sup>TM</sup>**

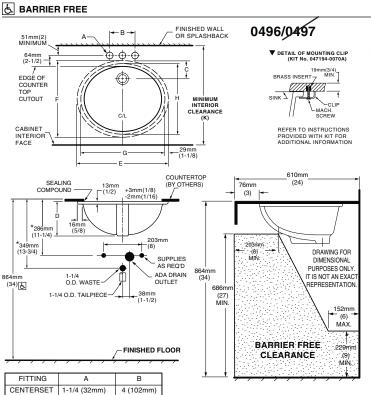

UNDERCOUNTER SINK **VITREOUS CHINA** 

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P"
TRAP ARE SUGGESTED.


▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K).
FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
USE ENCLOSED TEMPLATE FOR COUNTERTOP CUTOUT
SEALING COMPOUND SUPPLIED BY OTHERS.


**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES -CHECK LOCAL CODES.

Countertop 864mm (34") from finished floor. Lavatory installed 76mm (3") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.



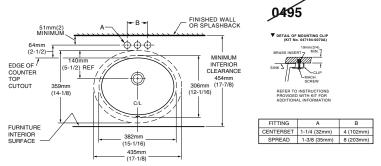


NOTES:
USE ENCLOSED TEMPLATE FOR COUNTER TOP CUTOUT.
FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE
ORDERED SEPARATELY.
\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P"
TRAP ARE SUGGESTED.
\* UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.
PLEASE NOTE MINIMUM INTERIOR CLEARANCE DIMENSION (K).
SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND **USABLE BUILDINGS AND FACILITIES -**CHECK LOCAL CODES.

Countertop 864mm (34") from finished floor. Lavatory installed 51mm (2") from front edge of countertop. Countertop thickness to be 25mm (1") maximum.

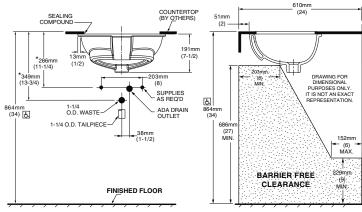

Model: 28-2590 C THE BRISTOL

# 24 of 44

# American Standard

# **BARRIER FREE**

# **COLONY™ COUNTERTOP SINK**

VITREOUS CHINA

# **COLONY COUNTERTOP SINK**


- · Vitreous china
- Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)


☐ 0346 803 → Faucet holes on 203 mm (6"), centres	$\mathcal{L}$
O346 403 (Illustrated) Faucet holes on 102mm (4") centres	3
₩ <u>₽</u> <del>0346 001</del>	Ĵ
Centre hole only	


Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:

422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep







# COMPLIANCE CERTIFICATIONS -

Meets or exceeds the following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

# To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen
- □ Faucet\*:
- □ Faucet Finish:
- Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. \* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

BAS-198 .

<sup>\*</sup> See faucet section for additional models available

Model: 28-2590 C THE BRISTOL

# 25 of 44



# DEMI™ **Product Specification Sheet**

# Two Piece Freestanding Collection

CF2007 Two Piece Freestanding Soaker


Size: 60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular overflow
- Includes levelling feet


# TWO PIECE ASSEMBLY

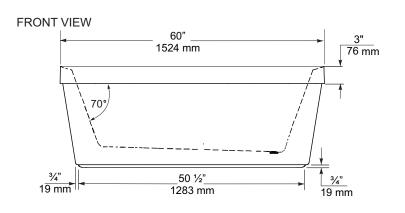

## **END VIEW**



## **TOP VIEW**

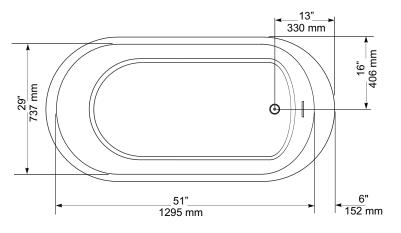

**GENERAL SPECIFICATIONS** 

Average Weight 90 lb 41 kg Bathing Well at bottom 43"x 20" 1092 x 508 mm 195 litres Capacity Drain to Overflow Water Depth Drain to Overflow 406 mm Drain Opening (dia.) 51 mm Overflow Opening 2 1/4"x 1/2" 57 x 13 mm Drain to Floor Clearance

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary  $\pm$  %" (6 mm). Weight may vary  $\pm$  5 lb ( 2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

**Compliance Certifications -**

Meets or Exceeds the following Specifications:

CAN/CSA - B45 Series





Fax: 416.231.0929 www.mirolin.com

*Customer Service:* 416.231.5790 Canada, U.S.A.: 800.**MIROLIN**(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018

Model: 28-2590 C THE BRISTOL

# 26 of 44

# American Standard

Style That Works Better

# FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA


## FloWise™ DUAL FLUSH ELONGATED TOILET

# **2476 216**

- Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- 100% factory flush tested
- · 2 bolt caps

# **Separate Component Parts:**

- ☐ 3067 316 Elongated Bowl with Slow Close Seat
- **4035 216** Unlined Tank



- **☐** 3067 316 Elongated Bowl
- **4035 516** Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


## **Compliance Certifications -**Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

## To Be Specified

- Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT. Dimensions of fixture are peripaid and may use within the prepare of the present IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

established by Ankist damagna (112.19.2). These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

# UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284

© 2008 American Standard

Model: 28-2590 C THE BRISTOL

# 27 of 44

# **MOEN**<sup>®</sup>

### DESCRIPTION

- Metal construction with various finishes identified by suffix
- 16" long 3/8" tubing connections Includes metal or 50/50 pop-up type waste assembly where noted **OPERATION**
- Pivot action lever style handle Temperature controlled through 180° degree arc of handle travel **FLOW**

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

## CARTRIDGE

- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Can accommodate reversed piping and back to back installations

- Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

  ADA for lever handle

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

# Specifications



**CHATEAU® Single-Handle Lavatory Faucet** 

# with Metal Waste Assembly Model: L4625 series


L4631BC **Bulk Packed (12 per carton):** L64624 series

with 50/50 Waste Assembly **Bulk Packed (12 per carton):** L64625 series

Less Waste **Bulk Packed (12 per carton):** L64600 series

**NOTE:** THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



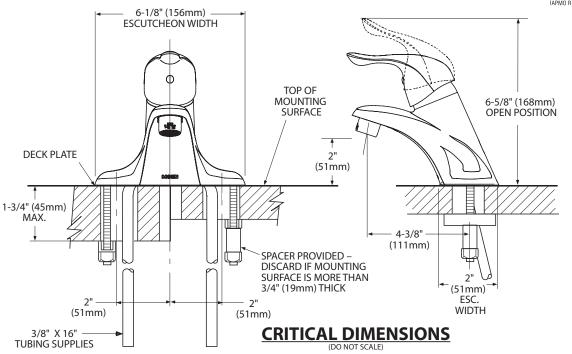

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev 8/15

Model: 28-2590 C THE BRISTOL

# 28 of 44



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

- Metal construction with various finishes identified by suffix
- Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

## **OPERATION**

- Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction
- Adjustable temperature limit stop to control maximum hot water temperature
- Pressure balancing mechanism maintains selected discharge temperature to  $\pm\,3^\circ$

- Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi
- NH suffix models contain no showerhead

## **CARTRIDGE**

- 1222 cartridge design Accommodates back to back installations
- Nonmetallic/nonferrous and stainless steel material

# **STANDARDS**

- Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein
- EP suffix models are third party certified to WaterSense®

# ADA ( for lever handle

6.5" (165mm) ESC. DIAM.

# **WARRANTY**

Lifetime limited warranty against leaks, drips and finish defects

2"CC (51mm) 1 7/8" IPS (48mm) MAX WALL

FINISHED WALL LINE

4-1/2" (114mm)

WALL OPENING

7-1/2" (190mm)

to the original consumer purchaser 5 year warranty if used in commercial installations

# **Specifications**






# CHATEAU° POSI-TEMP° **Single-Handle Tub/Shower Trim Kit**

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton)

TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

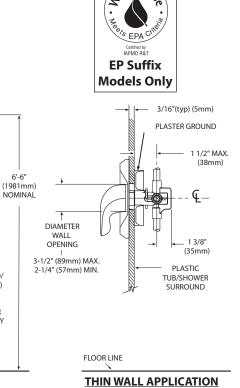

**THICK WALL APPLICATION CRITICAL DIMENSIONS** 

FLOOR LINE

— 1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

2 1/2" MAX. (63mm)

SHOWER

48" (1219mm) 32" (813mm) AND TUB ONLY

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

TL183sp: Rev. 5/13

Model: 28-2590 C THE BRISTOL

# 29 of 44

# **MOEN**<sup>®</sup>

## **DESCRIPTION**

 Metal construction with various finishes identified by suffix OPERATION

- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)


## **STANDARDS**

- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕒 for lever handles

# **WARRANTY**

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation Visit www.moen.com/support for complete details and limitations


# Specifications




# CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

**Valves:** 4792, 4793, 4794, 4796, 4797, 4798

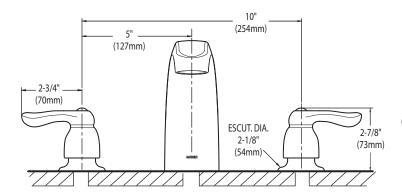



# CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN

www.moen.com

Rev. 3/19

Model: 28-2590 C THE BRISTOL

# 30 of 44

# SC(B)519 | ALITO Collection





# **Wall Mount**

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

# Green Features



3 Speed Push Button Control Panel



Long-Lasting LED Lights



Time-Delay OFF Feature



Grease Cup



Model Colour Ducting Filters	Size CFM
------------------------------	----------

	SCB51930	Stainless Steel	6"	Baffle	30"	550	
$\perp$	CCDE1026	Stainless Steel	6"	Pafflo	26"	550	
	3CD31330	Starriess Steel	0	Danie	50	550	

# Cyclone Range Hoods Inc.

Model: 28-2590 C THE BRISTOL


# 31 of 44


# SC(B)519 | ALITO Collection



# **Features**

- · Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- · Quick release aluminum mesh filters
- · Standard chimney fits up to 9 ft. ceiling
- · Up to 9 minutes time-delay OFF feature
- Plug-in connection

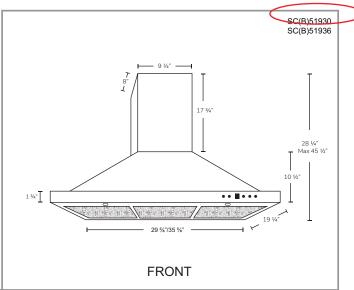



# **Options**

• Filters:

SCB519 - Quick Release Stainless Steel Baffle Filters

· Chimney Flues:

A1.CH10 - short (7'-8' ceilings)

A1.CH18 - standard (8'-9' ceilings)

A1.CH30 - extended (9'-11' ceilings)

Widths: 24", 30", 36"

# Specifications

Air Flow Volume: 550 CFM

Electrical Connection: 120 V/60 Hz

Power Consumption: 300 Watts

Current: 2.5 Amps

• Fan Speed: 1599 RPM

Fan Type: Centrifugal Blower

· Finishes: Stainless Steel

Ducting: 6" Round

Noise Level: Min. 2 Sones

Max. 6 Sones



Model: 28-2590 C THE BRISTOL

# 32 of 44



# Whiripool® 20 cu. ft. French Door Refrigerator WRF540CWH



Fingerprint-Resistant Stainless WRF540CWHZ

# Also available in:

White	WRF540CWHW
Black	WRF540CWHB
Fingerprint- Resistant Black	WRF540CWHV

Capacity		
Total Capacity	20 cu. ft.	
Refrigerator Capacity	14 cu. ft.	
Freezer Capacity	6 cu. ft.	
General Features & Properties		
Interior Water Dispenser with EveryDrop® Water Filtration		
Full-Width, Temperature-Controlled Drawer		
Frameless Glass Shelves		
Gallon Door Bins		
Accu-Chill™ Temperature Management System		
Adaptive Defrost		
FreshFlow <sup>™</sup> Produce Preserver		
LED Interior Lighting		
Designed, Engineered and Assembled in the U.S.A.		
Electrical Details		
Amps	20	
Volts	115	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details	
Refrigerator Type	French Door
Number of Doors	3
Number of Interior Refrigerator Shelves	5
Number of Refrigerator Door Bins	2 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1 Wire, 1 Plastic
Lighting Type	LED
Ice Maker	Factory Installed
Ice Maker Location	Freezer
Dispenser Type	Interior Water
Dimensions	
Product Dimensions (H x W x D)	70-1/8" x 35-5/8" x 29 3/8"
Depth with Door Open 90°	43"
	A.II

מווופווזוטווט	
Product Dimensions (H x W x D)	70-1/8" x 35-5/8" x 29 3/8"
Depth with Door Open 90°	43"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1" on rear
D. Conners Malarial	

# Reference Material

**Dimension Guide** 

Use & Care Guide

**Energy Guide** 

Warranty

# Key Features & Benefits

Stainless

# **Fingerprint Resistant**


Resists fingerprints and smudges with an easy-to-clean finish.

# **Counter Depth Design**

Add additional kitchen space with styling that fits virtually flush with the countertop.

## **Humidity-Controlled Crispers**

Store fruits and veggies in their ideal environment.



NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC. WRF540CWHSPECSHEETV01.

Model: 28-2590 C THE BRISTOL


33 of 44




# **French Door Bottom Mount Refrigerator**

WRF532SMH, WRF540CWH, WRF535SMH

# PRODUCT DIMENSIONS



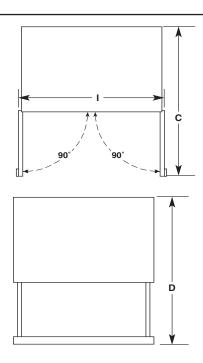

Model Number	WRF532SMH	WRF535SMH	WRF540CWH
Model Size	22.1 cu. ft.	25.2 cu. ft.	20.0 cu. ft.
Height - Overall "A"	701/8"	701/8"	701/8"
	(178.1 cm)	(178.1 cm)	(178.1 cm)
Height - Top of	68 <sup>7</sup> / <sub>8</sub> "	68½"	68%"
Cabinet "B"	(174.9 cm)	(174.9 cm)	(174.9 cm)
Depth - Doors Open	471/8"	481/8"	43"
90° "C"	(119.7 cm)	(122.2 cm)	(109.2 cm)
Depth - Drawer	521/8"	52½"	45¾"
Open "D"	(132.4 cm)	(132.4 cm)	(115.3 cm)
Depth - With	34 <sup>1</sup> / <sub>2</sub> "	35 <sup>1</sup> / <sub>2</sub> "	30 <sup>1</sup> / <sub>2</sub> "
Handles "E"	(87.4 cm)	(89.9 cm)	(77.5 cm)
Depth - Without	32"	33"	26 <sup>7</sup> / <sub>8</sub> "
Handles "F"	(81.3 cm)	(83.8 cm)	(68.3 cm)
Depth - Cabinet	28 <sup>1</sup> / <sub>8</sub> "	29 <sup>1</sup> / <sub>8</sub> "	24 <sup>1</sup> / <sub>8</sub> "
Only "G"	(71.3 cm)	(73.9 cm)	(61.2 cm)
Width - Cabinet "H"	325/8"	35½"	35½"
	(82.9 cm)	(90.5 cm)	(90.5 cm)
Width - Door Open	40%"	43%"	43%"
90° "I"	(102.6 cm)	(110.2 cm)	(110.2 cm)

# **AWARNING**



**Electrical Shock Hazard** 

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

**Electrical:** A 115 V, 60 Hz, AC only 15 A or 20 A fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**NOTE:** Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."

**Water:** A cold water supply with water pressure between 35 psi and 120 psi (241 kPa and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

**IMPORTANT:** The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 psi and 120 psi (241 kPa and 827 kPa).

# **Reverse Osmosis Water Supply:**

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 psi to 60 psi (276 kPa to 414 kPa).

Model: 28-2590 C THE BRISTOL



# **French Door Bottom Mount Refrigerator**

## **LOCATION REQUIREMENTS**


# AWARNING



### **Explosion Hazard**

Keep flammable materials and vapors, such as gasoline, away from refrigerator.

Failure to do so can result in death, explosion, or fire.



**IMPORTANT:** This refrigerator is designed only for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for a 1/2" (1.25 cm) space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave  $2\frac{1}{2}$ " (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.

**NOTE:** This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Model: 28-2590 C THE BRISTOL

Lot 3137

# 35 of 44

# LSGL6335\_

# **LG BUILDER**

# 6.3 cu. ft. Gas Slide-in Range

- · Built-in Air Fry
- InstaView<sup>™</sup> Window
- · ProBake Convection\*
- EasyClean" + Self Clean
- UltraHeat<sup>™</sup> 20k BTU Power Burner
- Slide-in Design
- 6.3 cu ft. Large Capacity
- Storage Drawer

COLOR AVAILABILITY

LG ThinQ® Technology (Wi-Fi)









■ LSGL6335F - PrintProof 5	Stainless Steel
S LSGL633SD - PrintProof	Black Stainless Steel
CAPACITY	
Oven Capacity	6.3 cu. ft.
Drawer Capacity	0.8 cu. ft.
OVEN FEATURES	
Convection System	ProBake Convection*
Oven Cooking Modes	Bake, Convection Bake, Convectior Roast, Broil High, Broil Low, Warm, Proof, Frozen Meal, Air Fry, Slow Cook
Air Sous Vide	No
Built-in Air Fry	Yes (Air Fry Tray Included)
Temperature Probe	No
Oven Racks	1 Offset, 1 Heavy Duty
Number of Rack Positions	7
Broil Element (BTU, NG / LP)	13,500 / 12,500
Bake Element (BTU, NG / LP)	19,000 / 17,000
Convection Conversion	Yes
EasyClean*	Yes
Self Clean	Yes
GoCook Smart Oven Light	Yes (1)
Door Lock	Yes
Automatic Safety Shut-Off	After 12 Hours
DRAWER FEATURES	
Туре	Storage

Cooktop Type	Sealed
Number of Burners	5
Burner BTU (NG / LP)	
Left Front	18,000 / 12,000
Left Rear	9,100 / 7,500
Center	10,000 / 10,000 (Oval)
Right Front	20,000 / 12,500 (UltraHeat*)
Right Rear	5,000 / 4,000
Cooktop Burner Grate Material	Cast fron
Continuous Grates	Yes
CONTROLS	165
Cooktop Control Type	Front Tilt-Control Knobs
country control type	(Weighted)
Oven Control Type	Glass Touch
Display	LED (White)
Language	English
Kitchen Timer	Yes
Timed Cook	Yes
Clock	12 Hr or 24 Hr (Option)
Temperature Unit of Measure	*F or *C
Cooking Complete Reminder Volume	High, Low, Off
Oven Control Lock	Yes
CONVENIENCE	
ADA Compliant	Yes
Sabbath Mode	Yes (Star-K-Certified)
SMART FEATURES	
Wi-Fi Enabled	Yes
ThinQ"	Yes
Proactive Customer Care	Yes
Voice Control	Amazon Alexa, Google Assistant
SmartDiagnosis <sup>~</sup>	Yes
Smart Recipe (3rd Party Recipe App)	Yes (Tovala, Innit, SideChef, Nestle and Kraft-Heinz)
	7/2

Model: 28-2590 C THE BRISTOL

# 36 of 44


# LSGL6335

# **LG BUILDER**

FINISHES AND APPEARANCE	CE
Fingerprint & Smudge Resistant Exterior	Yes
Cooktop Finish	Stanless Steel
Handle / Knobs	F - Stainless Steel Appearance D - Black Stainless Steel Appearance
Oven Door Feature	InstaView Window (WideView)
TECHNICAL SPECS	
Fuel Type	NG / LP
Required Power Supply	120V, 60Hz
Minimum Circuit Rating	15 Amp
Power Cord Type	3-Prong, Attached to Unit
Power Outlet Location	See Installation Diagram
Gas Supply Location	See Installation Diagram

INCLUDED ACCESSORIES	
1 1 Offset Rack, 1 Heavy Duty Rack Rear Filler Kit, EasyClean Kit (Spray	
OPTIONAL ACCESSORIES	
Slide-in Range Filler Kit (Side Gaps)	LSFL301S
Air Fry Rack	LRAL302S
DIMENSIONS / CLEARANCES / W	/EIGHTS
Product Dimensions (W x H x D w/Handle)	29 <sup>7</sup> / <sub>8</sub> " x 37 <sup>1</sup> / <sub>8</sub> " x 29 <sup>9</sup> / <sub>32</sub> "
Product Height to Cooking Surface	36"
Cutout Dimensions (W x H x D)	30" x 36" x 25"
Carton Dimensions (W x H x D)	32 ½" x 44" x 30 ½"
Approx. Weight (Product / Carton)	158 lbs. / 200 lbs.
LIMITED WARRANTY	

1 Year

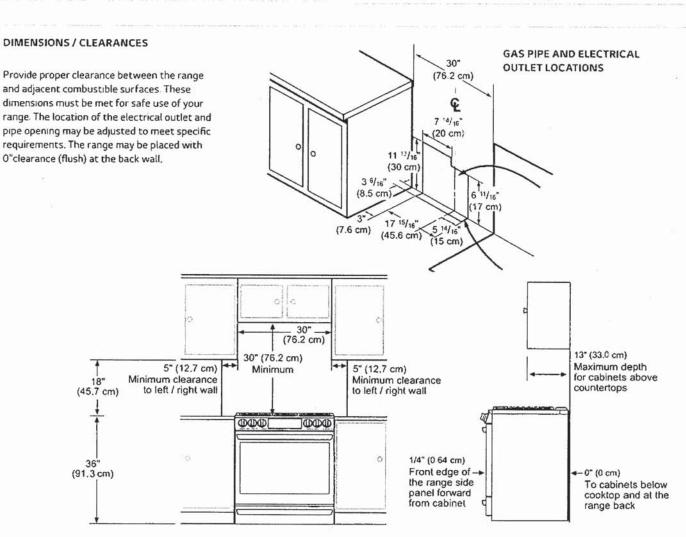

Parts and Labor


Model: 28-2590 C THE BRISTOL


# 37 of 44

LSGL6335

**LG BUILDER** 

## **DIMENSIONS / CLEARANCES**





### DIMENSIONS / CLEARANCES

A Width 30" (761.8 mm)

B Height 37 1/8" (943mm)

C Depth (Includes Door Handle) 29 9/32" (743.9 mm)

D Height (Excludes Vent Trim) 36" (913.0 mm)

E Depth (Includes only the product body that is loaded into the cabinet. Excludes door, drawer, and handles)

F Depth (Excludes Door Handle) 26 7/8" (683 mm)

H Depth when door is fully opened

Depth when drawer is fully

(Excludes handle) 48 <sup>5</sup>/<sub>8</sub>" (1235.9 mm)

3 of 3

38 7/<sub>16</sub>" (976.7 mm) 36 1/<sub>16</sub>" (916.2 mm)

LG Business Solutions

Model: 28-2590 C THE BRISTOL

# 38 of 44





Monochromatic Stainless Steel WDF540PADM

## Also available in:

White	WDF540PADW
Black	WDF540PADB

Capacity		
Total Place Settings	15	
General Features & Properties		
Soil Sensor		
In-Door Silverware Basket		
Sani Rinse Option		
Normal Cycle		
Heavy Cycle		
High Temperature Wash Option		
Heated Dry Option		
ENERGY STAR® Certified		
Industry's Best Selling Dishwasher Brand <sup>†</sup>		
Electrical Details		
Amps	15	
Volts	120	
Hz	60	
Certifications		
ENERGY STAR® Certified	Yes	

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Electronic
Number of Wash Cycles	5
Number of Options	5
dBA	53
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	3
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"
Reference Material	

# **Dimension Guide**

Install Guide

Use & Care Guide

**Energy Guide** 

Warranty

# Key Features & Benefits

# **Sensor Cycle**


Automatically get the right wash and dry settings for each load with two sensors that measure temperature, soil level and load size during prewash and the wash cycle.

# 1-Hour Wash Cycle

Clean the dishes you need fast with a cycle that thoroughly takes care of plates, pans and glasses in just an hour."

# **Cycle Memory**

Quickly start your dishwasher with one button. It automatically remembers the last cycle you picked so it's stored and ready to go.

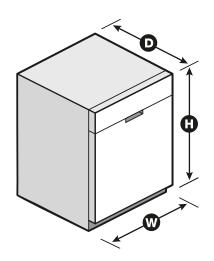

<sup>\*</sup>Per IEC standards. \*\*Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of unit sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. 

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF540PADSPECSHEETV01.

Model: 28-2590 C THE BRISTOL

# 39 of 44



### PRODUCT MODEL NUMBERS

WDF110PAB	WDF310PLA	WDF530PSY
WDF111PAB	WDF320PAD	WDF540PAD
WDF120PAF	WDF510PAY	WDF730PAY
WDF121PAF	WDF520PAD	WDT710PAY
WDF310PAA	WDF530PAY	WDT720PAD
WDF310PCA	WDF530PLY	WDT770PAY

Electrical Requirements: 120-volt, 60-Hz, AC only, 15- or 20-amp. fused electrical supply. Copper wire only. A time delay fuse or circuit breaker and separate circuit is recommended.


If direct wiring dishwasher: Use flexible, armored,

or nonmetallic, sheathed copper wire with grounding wire that meets the wiring requirements for

your home and local codes and ordinances. Use a UL listed or CSA approved conduit connector.

If connecting dishwasher with a power supply cord:

Use Power Supply Cord Kit (Part No. 4317824) marked for use with dishwashers. Follow the kit



instructions for installing the power supply cord. Power supply cord must plug into a grounded 3 prong, outlet, located in the cabinet next to the dishwasher opening. Outlet must meet all local codes and ordinances.



Water Supply Requirements: A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure. Water temperature must be 120°F (49°C) water at dishwasher. Use 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line (1/2" minimum plastic tubing is not recommended). Use a 90°elbow with ¾"N.P.T. external pipe threads on one end. Do not solderwithin 6" (15.2 cm) from water inlet valve.

Drain Requirements: A new drain hose is supplied with your dishwasher. If this is not long enough, use a new drain hose with a maximum length of 12' (3.7 m) (Part No. 3385556) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

Make sure to connect the drain hose to waste tee or disposer inlet above drain trap in house plumbing and (50.8 cm) minimum above the floor. It is recommended




that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.

Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

Use ½" (1.3 cm) minimum I.D. drain line fittings. If required, the air gap should be installed in accordance with the air gap installation instructions. When connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.

### PRODUCT DIMENSIONS

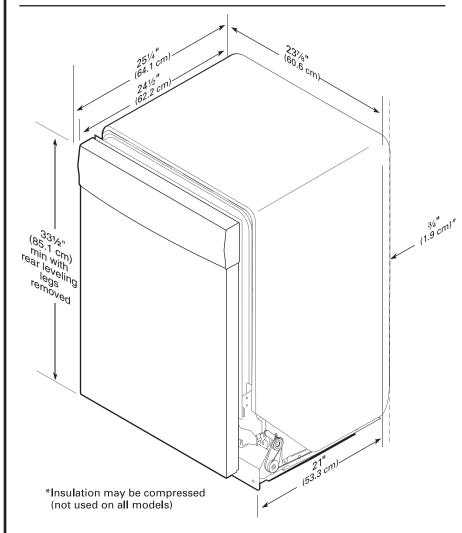


Project: Wallaceton Unit: 3137, Phase: 3 Model: 28-2590 C THE BRISTOL

40 of 44

## **CABINET CUTOUT DIMENSIONS**

**NOTE**: Shaded areas of cabinet walls show where utility connections may be installed.

- \*Measure from the lowest point on the underside of the countertop. May be reduced to 33½" (85.1 cm) by removing the rear leveling legs from dishwasher.
- \*\*Minimum, measured from narrowest point of opening.

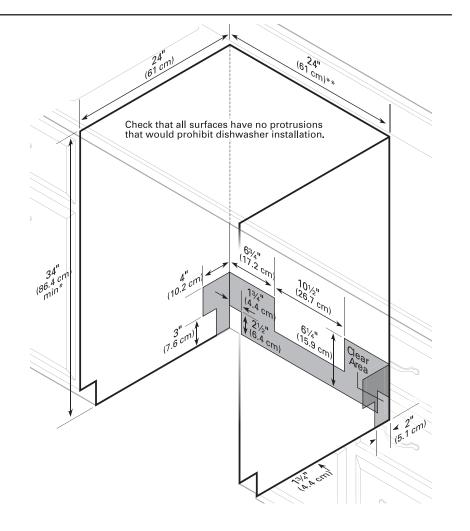

Model: 28-2590 C THE BRISTOL

41 of 44

# WHIRLPOOL DRYER Model #: YWED5620HW



7.4 cu. ft. Front Load Electric **Dryer with Intuitive Touch Controls** 



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

Model #: YWED5620HW

## Dimensions

Depth	78.74 cm, 31.0 in
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in
Height	98.42 cm, 38-3/4 in
Width	68.58 cm, 27.0 in
Configuration and Overview	
Fuel Type	Electric
Cycles and Options	
Cycles and Options  Cycle Time Remaining	Yes
	Yes No
Cycle Time Remaining	
Cycle Time Remaining Lint Filter Indicator	No

Long Vent	No
Maximum Vent Length	64
Venting Direction	Left, Right, Bottom, Rear

# Electrical

Hz	60


Power Cord Included

Model: 28-2590 C THE BRISTOL

42 of 44

## 5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

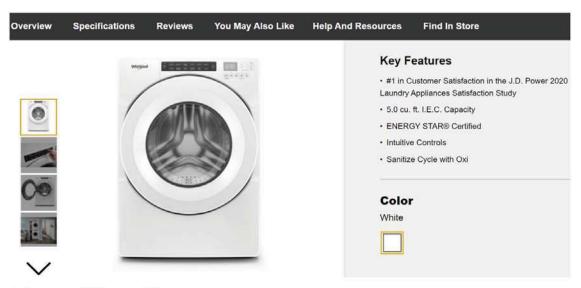

# **Specifications**

# Width: 6858.00, 27.0" Centimeters, Inches

# Depth: 8016.88, 31-9/16" Centimeters, Inches


Dimensions		
Capacity	4-3/10	
Depth	8016.88 cm, 31-9/16 in	
Gross Weight	97068688.00 kg, 214 lbs	
Net Weight	92532768.00 kg, 204 lbs	
width Appearance	6858.00 cm, 27.0 in	
LCD Touch Screen	No	
Window	Yes	
Details		
Advanced Vibration Control™	No	
Dispense System	Detergent, Fabric Softener & Bleach	
Eco Monitor/Efficiency Monitor	No	
Hoses Included	4ft 4in Drain Hose Included	
Internal Heater	No	
Maximum Spin Speed	1160	
Out Of Balance Sensing	Yes	
Water Factor	3-1/5	
Cycles and Options		
Number Of Wash Cycles	35	
Electrical		
Power Cord Included	Yes	
Controls		
Automatic Temperature Controls	Yes	
Control Location	Front	
LCD Touch Screen	No	

# Compatibility Works With No **Options** Number Of Washer Options **Features** Stackable Yes Water Faucet No Cycles Number Of Wash Cycles 35 Exterior Lid/Door Lock Yes Lid/Door Swing Left Modifiers Delay Start No Number Of Rinse Options Number Of Soil Levels 3 Number Of Spin Speeds Number Of Wash/Rinse Temperatures 4 Pre Soak Yes Temperature Selections Hot, Cold, Cool, Warm


Model: 28-2590 C THE BRISTOL

# 43 of 44


# Recessed area or closet installation (stacked washer and dryer)

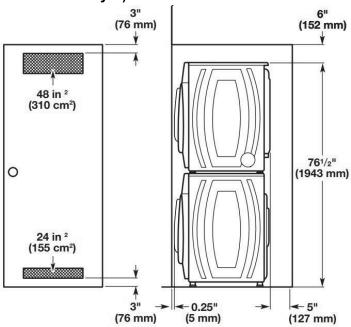


## **Custom under counter installation**

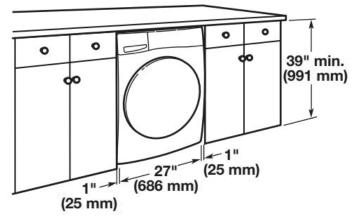

# Recessed area or closet installation (washer only)

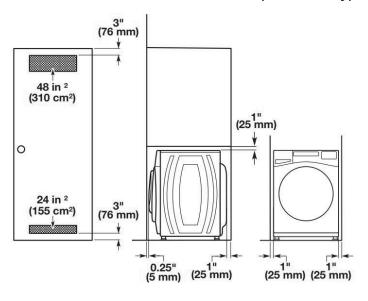

## **Custom cabinet installation**

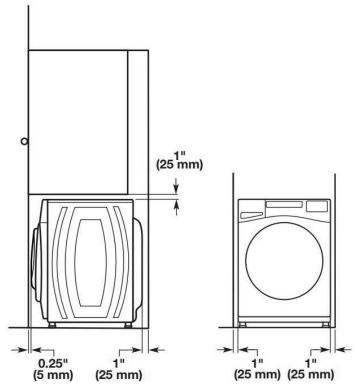


# **Drain System**

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of o leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

**IMPORTANT:** To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

## Floor standpipe drain system

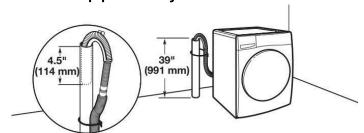


Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts"

Model: 28-2590 C THE BRISTOL


# 44 of 44

# Wall standpipe drain system

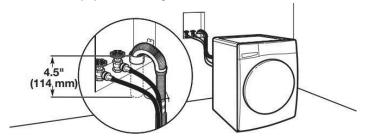


See requirements in "Floor standpipe drain system."


## Laundry tub drain system



Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.

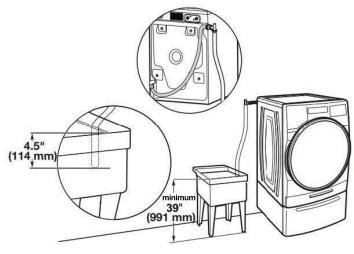

# Floor drain system

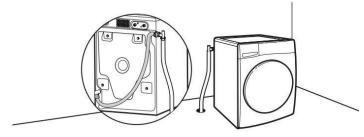

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

# **Electrical Requirements**

# AWARNING



**Electrical Shock Hazard** 

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

## **GROUNDING INSTRUCTIONS**

## For a grounded, cord-connected appliance:

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

**WARNING:** Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

## For a permanently connected appliance:

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

# SAVE THESE INSTRUCTIONS