

DV3 LOT 95 - APPLIANCE HANDLES FOR PANEL READY APPLIANCES



Modern Metal Pull - 873

This modern right-angled Richelieu pull gives a distinguished look to any interior décor and enhances the style of your kitchen and bathroom cabinets.

Product # BP873304900

Type Appliance pulls

Center to Center 305 mm

Finish Matte Black

Length - Overall Dimensions 324 mm

Width - Overall Dimensions 19 mm

Screw/Nail M6 (Included)

DS RB DS SB

DV3 LOT 95 - PRIMARY ENSUITE ROMAN TUB TRIM T4776-CZ

athroom / Bathing

STRYKE®

Four Hole Roman Tub Trim

MODEL#: T4776-CZ



Finish: Champagne Bronze



List Price*:

\$1,309.70

Rough Valve



Roman Tub with Handshower Rough
MODEL#: R4707

SHOW MORE OPTION

Base Part



Four Hole Roman Tub Trim
MODEL#: T4776-CZ

DS RB DS SB

Chat with an Expert

DV3 LOT 95 - PRIMARY ENSUITE VANITY FAUCETS 35776-CZMPU-DST

STRYKE®

Widespread Faucet

MODEL#: 35776-CZMPU-DST

- Backed by Delta Faucet's Lifetime Limited Warranty

Finish: Champagne Bronze



List Price*:

\$1,095.70




 

 Chat with an Expert

DV3 LOT 95 - KITCHEN SINK B317

Product Specification Sheet

Virtuo Granite Undermount Single Sink
B317 - B318 - B319 - B329 - B336

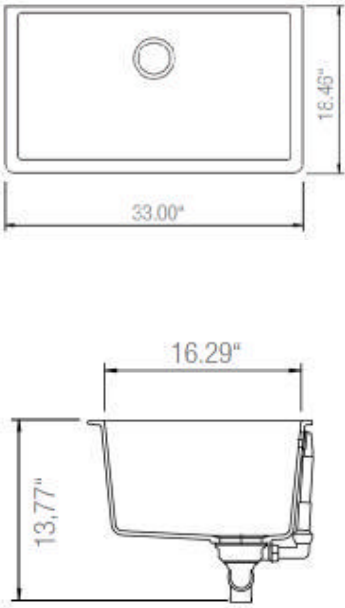

Colour Finish	Model No.	Description
Pearl Back	B317	• 33" x 18-1/2" x 9-1/4" Deep • 80% Quartz Content • 3 1/2" drain opening • Supplied with installation clips, template & strainers • CUPC certified
Coffee Brown	B318	
Slate Grey	B319	
Asphalt	B329	
Stone Taupe	B336	

- Available accessories
- Matching Strainer
 - Drying Rack
 - BG317/318/319/329/336 - Stainless Steel Grid



MAIN LOCATION

BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9

CONTACT

Tel: 1 (800) 930-0214
Fax: 1 (866) 310-7580
Email: sales@bristolsinks.com



DV3 LOT 95 - KITCHEN AND BUTLERS PANTRY BAR/PREP SINK FAUCET 940LF-BL

itchen / Faucets / Sink Faucets

KEELE

Single Handle Pull
Down Kitchen Faucet

MODEL#: 940LF-BL



Finish: **Matte Black**



List Price*:

\$631.40

Technology



MagnaTite®
Docking



Special
Features



Touch-
Clean®





 Chat with an Expert

DV3 LOT 95 - PRIMARY ENSUITE FREESTANDING TUB SAX BLACK SKIRT

Sax 60 x 32 AcrylX Freestanding Bathtub

Model number:	105797-000-002-125
---------------	--------------------

Dimensions: 60" x 32" x 24.875" Installation: FreeStanding Material: AcrylX™ Applied Acrylic



Standard Features:
• 2-piece bathtub – Transports and installs easily
• Above-the-Floor Rough (AFR) and F² Drain compatible
• MAAX innovative leveling legs for easy installation
• Faucet installation can be deck-mounted or floor-mounted
• Unique feature: maximized bathing well with comfortable backrest
• End drain

Standard Colors:



Certifications

MAAX products adhere to one or more of the following certifications:



MAAX

DS

RB

DS

SB


Sax 60 x 32 AcrylX Freestanding Bathtub

Model number:	105797-000-002-125		
---------------	--------------------	--	--

Dimensions: 60" x 32" x 24.875"

Installation: FreeStanding

Material: AcrylX™ Applied Acrylic

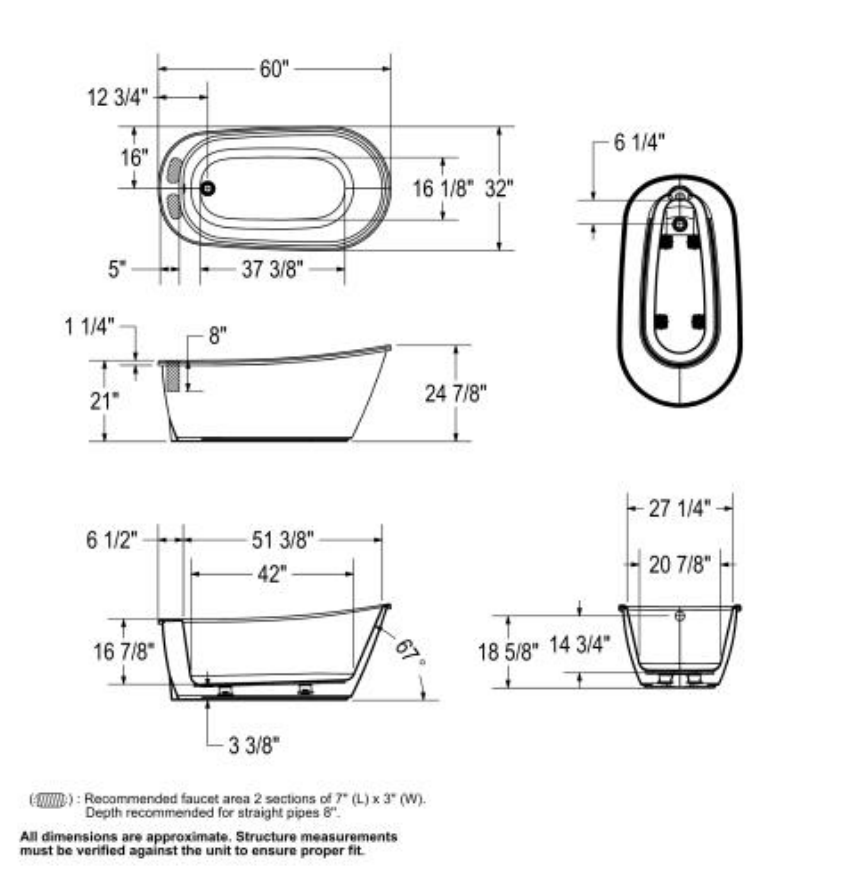

Dimensions
60 x 32 x 25 In. (1524 x 813 x 632 mm)
Water Capacity
44 gallons - 168 liters
Weight
130 lbs - 59 kg
Bathing Well
42 In. x 21 In. (1067 mm x 530 mm)
Deep Sump Height
14.75 In. - 375 mm
Deck Width
5 In. - 127 mm
Drain location:
End

Project:

Contractor:

Representative:

Date:

Tel:

Notes:



DV3 LOT 95 - BEDROOM #2 (IN-LAW) SHOWER DOORS HALO CHROME TRIM

Halo 56 1/2-59 x 78 3/4 in. 8mm Sliding Shower Door for Alcove Installation

Model number:	138997-900-084-000
---------------	--------------------

Dimensions:	59" x 59" x 83"	Installation:	Alcove	Material:
-------------	-----------------	---------------	--------	-----------



Standard Features:
• Glass panels 5/16 in. (8 mm) with a height of 78 3/4 in.
• Lotus easy clean protection for effortless maintenance;;
• Ball bearing roller technology for smooth and quiet opening
• Reversible shower door for left or right opening
• Also available in a corner configuration
• Available in 4 finishes: Chrome, Brushed Nickel, Dark Bronze, Matte Black
Product characteristics:
• Ball Bearing Roller System
• Bestseller
• Utile Compatible

Frame Finish(es):


Brushed Nickel


Chrome


Dark Bronze


Matte Black

Glass Pattern(s):


Clear

Certifications

MAAX products adhere to one or more of the following certifications:



MAAX

DS

RB

DS

SB

Halo 56 1/2-59 x 78 3/4 in. 8mm Sliding Shower Door for Alcove Installation

Model number:

138997-900-084-000

Dimensions:


59" x 59" x 83"

Installation:

Alcove

Material:

STANDARD

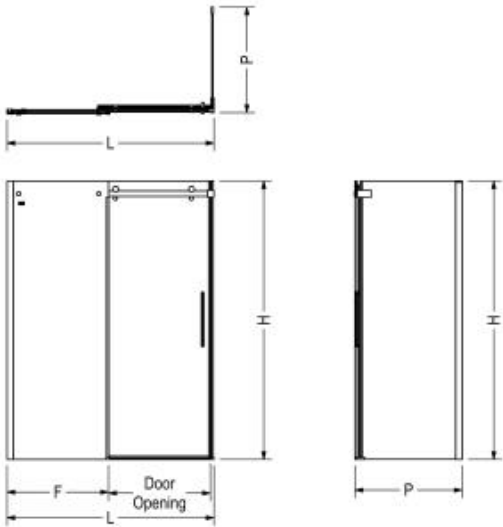

Code	Description	H	L Adjustable	F	P Adjustable	Door Opening	Wall Adjustment
138996	Halo 78 3/4" x 47"	78 3/4"	44 1/2" - 47"	22 1/2"	-	16 1/4" - 18 3/4"	1"
138997	Halo 78 3/4" x 59"	78 3/4"	56 1/2" - 59"	28 5/8"	-	22 1/8" - 24 5/8"	1"
139393	Return Panel 30"	78 3/4"	-	-	27 7/8"	-	1"
138998	Return Panel 32"	78 3/4"	-	-	29 7/8"	-	1"
139395	Return Panel 34"	78 3/4"	-	-	31 7/8"	-	1"
139396	Return Panel 36"	78 3/4"	-	-	33 7/8"	-	1"
139394	Return Panel 42"	78 3/4"	-	-	39 7/8"	-	1"

All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Project:

Contractor:

Representative:

Date:

Tel:

Notes:



DV3 LOT 95 - PRIMARY ENSUITE HANDSHOWER 55085-CZ




GRAIL®
Wall-Mount Hand Shower

MODEL#: 55085-CZ

- Backed by Delta Faucet’s Lifetime Limited Warranty
- Full body spray, ideal for every shower need
- Backed by Delta Faucet’s Lifetime Limited Warranty

Finish: **Champagne Bronze**

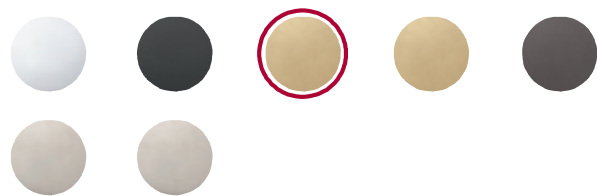

List Price*:

\$501.70

DS RB DS SB

DVS LOT 99 - MAIN BATHROOM (JACK&JILL) TUB DOORS CHROME TRIM

Halo 56 1/2-59 x 59 in. 8 mm Sliding Tub Door for Alcove Installation

Model number:	139398-900-084-000
---------------	--------------------

Dimensions: 59" x 59" x 59" Installation: Tub Door

Material:



Standard Features:

- Glass panels 5/16 in. (8 mm) with a height of 59 in.
- Lotus easy clean protection for effortless maintenance;;
- Ball bearing roller technology for smooth and quiet opening
- Reversible door allowing left or right opening for easy access to faucets
- 4 finishes: chrome, brushed nickel, dark bronze and matte black

Product characteristics:

- Ball Bearing Roller System
- Bestseller
- Utile Compatible

Frame Finish(es):



Brushed Nickel



Chrome



Dark Bronze



Matte Black

Certifications

MAAX products adhere to one or more of the following certifications:



Glass Pattern(s):



Clear



MAAX

Halo 56 1/2-59 x 59 in. 8 mm Sliding Tub Door for Alcove Installation

Model number:	139398-900-084-000
---------------	--------------------

Dimensions: 59" x 59" x 59"

Installation: Tub Door

Material:

STANDARD



Dimensions

59 x 59 x 59 In.
(1499 x 1499 x 1499 mm)

Weight

118 lbs - 53 1/2 kg

Code	Description	H	L Adjustable	F	Door Opening	Wall Adjustment
139398	Halo TUBDOOR 59" x 59"	59"	56 1/2" - 59"	28 5/8"	24 1/2"	1"

All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Project:

Contractor:

Representative:

Date:

Tel:

Notes:

MAAX

AVENAL TWO PIECE TOILET

4.8Lpf / 1.28GPF

4772HNNW Bowl

PRODUCT SPECS

- High efficiency toilet
- 4.8Lpf / 1.28Gpf
- Elongated bowl with concealed skirted trapway
- Vitreous china
- 16 5/8" Plus Height for greater comfort
- Chrome tank lever
- 12" (305mm) Rough-in
- 2" Fully glazed ball pass trapway
- 3" Flapper
- Siphon jet flush action
- Water surface: 8" x 5 3/4" (205mm x 145mm)
- Decorative soft white side caps included
- Slim smooth close toilet seat included

DIMENSIONS

402mm W x 722mm D x 797mm H
15 7/8" W x 28 3/8" D x 31 3/8" H

COMPLIANCE CERTIFICATIONS

- Meets or exceeds the following:
- IAPMO cUPC
 - US EPA WaterSense
 - ASME A112.19.2 / CSA B45.1
 - ANSI A117.1 ADA Guideline
 - MaP Tested 1000g
 - LEED Compliant

SHIPPING

Bowl:	
Cube	6.29
GW	100 lbs
Tank:	
Cube	1.69
GW	37 lbs



TO BE SPECIFIED


- Colour:
- Soft White

NOTES: The drawing below shows a rough-in at a minimum dimension of 305mm (12") from finished wall to C/L of outlet. Supply line not included with fixture and must be ordered separately.

Important: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

Products are designed to comply ADA/ANSI A117.1 Standard. It shall be the responsibility of the installer to comply with the local disability codes and standards prior to installing the product.

DV3 LOT 95 - POWDER ROOM, BEDROOM #2 ENSUITE (IN-LAW), MAIN BATHROOM (JACK&JILL), BEDROOM #4 ENSUITE AND PRIMARY ENSUITE


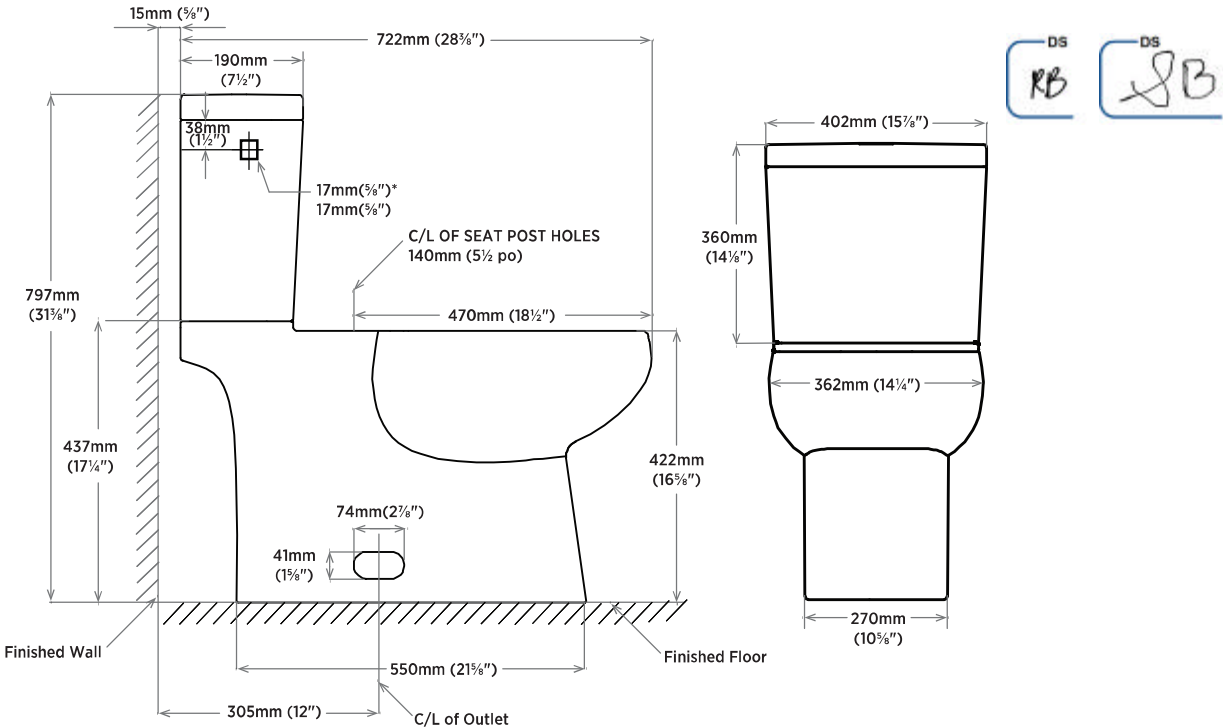


REVISED OCTOBER 2021

DVS LOT 75 - VANITY SINKS IN POWDER ROOM, BEDROOM #2 ENSUITE (IN-LAW),
BEDROOM #4 ENSUITE, MAIN BATHROOM (JACK&JILL) AND PRIMARY ENSUITE



B608 Porcelain Vanity Bowl

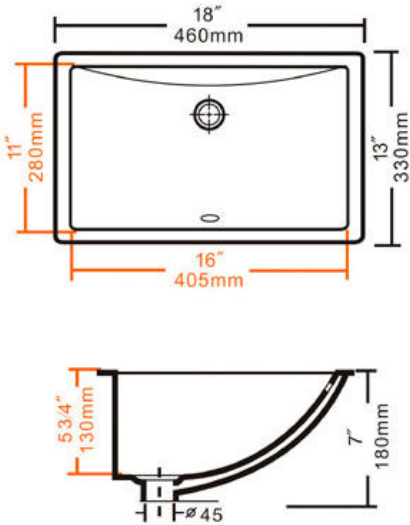

Colour Finish
Porcelain

Model No.
B608

- Description
- White Undermount Porcelain Sink
 - Outside Dimensions 18" x 13" x 7"
 - Inside Dimensions 16" x 11" x 5-3/4"
 - Minimum Cabinet Size: 20"
 - True Vitreous China
 - Cardboard Template Included
 - Mounting Clips Included
 - Limited Lifetime Warranty
 - cUPC Certified

Available accessories

- Pop Up Drain – No Overflow (Brushed Finish)
- Pop Up Drain – No Overflow (Chrome Finish)
- Pop Up Drain – Overflow (Brushed Finish)
- Pop Up Drain – Overflow (Chrome Finish)



MAIN LOCATION

BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9




CONTACT

Tel: 1(800) 930-0214
Fax: 1(866) 310-7580
Email: sales@bristolsinks.com

6H%>AF +' Ž 4GF>7DEB3@FDK 43D!BD7B E; @= 4%(

Product Specification Sheet

Virtuo Granite Sinks - Single Bowl
B306 - B307 - B308 - B328 - B335



Colour Finish	Model No.	Description
Pearl Black	B306	- Undermount granite single bowl sink 17-¾ x16-7/8" x 7-¾" Deep 80% quartz Content 3 1/2" drain opening - Supplied with installation clips, template & strainers - CUPC certified
Coffee Brown	B307	
Slate Grey	B308	
Asphalt	B328	
Stone Taupe	B335	

- Available accessories
- Matching Strainer
 - Drying Rack
 - BG306/307/308/328/335 - Stainless Steel Grid



MAIN LOCATION

BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9

CONTACT

Tel: 1 (800) 930-0214
Fax: 1 (866) 310-7580
Email: sales@bristolsinks.com



DV3 LOT 95 - AIR CONDITIONER GSXN3 13.4 SEER2 3.0 TON




GSXN3

ENERGY-EFFICIENT
SPLIT SYSTEM AIR CONDITIONER
UP TO 14.5 SEER2 / 1½ TO 5 TONS

Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data	4
Performance Data	18
Wiring Diagrams	19
Dimensions	21
Accessories	21

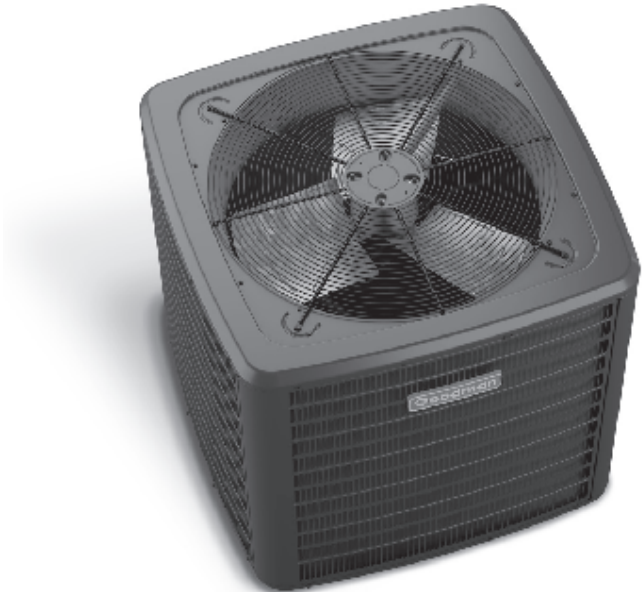

Standard Features

- Energy-Efficient Compressor
- Copper tube/ enhanced aluminum fin coil-5mm diameter
- Factory-installed filter drier
- Fully charged for 15’ of tubing length
- Service valves with sweat connections and easy-to-access gauge ports
- Contactor with lug connection
- Ground lug connection
- AHRI Certified
- ETL Listed

Cabinet Features

- Removable grille-style top design compliant with UL 60335-2-40
- Venturi for increased velocity of airflow
- Heavy-gauge galvanized-steel cabinet
- Attractive Architectural Gray powderpaint finish with 500-hour salt-spray approval
- Steel louver coil guard
- Rust-resistant coated screws
- Single-panel access to controls with space provided for field-installed accessories

10

YEAR

PARTS

LIMITED

WARRANTY*

COMPANY WITH

QUALITY SYSTEM

CERTIFIED BY DNV GL

= ISO 9001 =

COMPANY WITH

ENVIRONMENTAL SYSTEM

CERTIFIED BY DNV GL

= ISO 14001 =

* Complete warranty details available from your local dealer or at www.goodmanmfg.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Quebec.

DS

RB

DS

SB

NOMENCLATURE

		G	S	X	N	3	N	36	1	0	**						
		1	2	3	4	5	6	7,8	9	10	11,12						
Brand		G Goodman® Brand								Engineering							
Major/Minor Revisions																	
A- Initial Release																	
										B- 1st Revision							
Product Category		S Split System								Variation							
Unit Type										Electrical							
1 208/230 V, 1 Phase, 60 Hz																	
X Condenser										Nominal Capacity							
Z Heat Pump																	
Feature																	
N Value										18-1.5 Ton							
H Enhanced										42- 3.5 Tons							
B Classic										24- 2.0 Tons							
C Premium										48- 4.0 Tons							
30- 2.5 Tons										60- 5.0 Tons							
M Multi-Family										36- 3.0 Tons							
V Ultimate																	
SEER2										Sales Region							
13.4- 13.7 = 3										N North							
16.6- 17.5 = 7										S Southeast & North							
13.8- 14.5 = 4										0 All Regions							
17.6- 18.5 = 8																	
14.6- 15.5 = 5																	
18.6- 19.5 = 9																	
15.6- 15.5 = 6																	
19.6 + = 0																	

PRODUCT SPECIFICATIONS

	GSXN3 N1810A*	GSXN3 N2410A*	GSXN3 N3010A*	GSXN3 N3610A*	GSXN3 N4210A*	GSXN3 N4810A*	GSXN3 N6010A*
CAPACITIES							
Nominal Cooling (BTU/h)	18,000	24,000	30,000	36,000	42,000	48,000	60,000
Decibels (dBA)	73.0	73.0	76.0	71.0	70.0	74.0	74.0
COMPRESSOR							
RLA	6.1	8.4	12.1	14.1	17.7	18.5	25.6
LRA	35.1	41.2	55	87.4	110.2	124	150
Stage	Single	Single	Single	Single	Single	Single	Single
Type	Rotary	Rotary	Rotary	Scroll	Scroll	Scroll	Scroll
CONDENSER FAN MOTOR							
Motor Type	PSC	PSC	PSC	PSC	PSC	PSC	PSC
Horsepower (RPM)	1/8	1/8	1/6	1/6	1/6	1/4	1/4
FLA	0.70	0.70	0.95	0.95	0.95	1.30	1.30
REFRIGERATION SYSTEM							
Refrigerant Line Size ¹							
Liquid Line Size ("O.D.)	3⁄8"	3⁄8"	3⁄8"	3⁄8"	3⁄8"	3⁄8"	3⁄8"
Suction Line Size ("O.D.)	1⁄4"	1⁄4"	1⁄4"	1⁄8"	1 1⁄8"	1 1⁄8"	1 1⁄8"
Refrigerant Connection Size							
Liquid Valve Size ("O.D.)	3⁄8"	3⁄8"	3⁄8"	3⁄8"	3⁄8"	3⁄8"	3⁄8"
Suction Valve Size ("O.D.) ^{4 5}	1⁄4"	1⁄4"	1⁄4"	1⁄4"	1⁄8"	1⁄8"	1⁄8"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	65	71	78	71	115	120	130
ELECTRICAL DATA							
Voltage (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity ²	8.3	11.2	16.1	18.6	23.1	24.4	33.3
Max. Overcurrent Protection ³	15	15	25	30	40	40	50
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1⁄2" or 3⁄4"	1⁄2" or 3⁄4"	1⁄2" or 3⁄4"	1⁄2" or 3⁄4"	1⁄2" or 3⁄4"	1⁄2" or 3⁄4"	1⁄2" or 3⁄4"
EQUIPMENT WEIGHT (LBS)							
	117	125	128	153	188	215	227
SHIP WEIGHT (LBS)							
	130	138	143	168	203	235	247

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with ARI Standard 210/240. For other line set lengths or sizes, refer to the Installation Instructions and/or the Long Line Set Applications guide.

² Installer will need to supply 1⁄4" to 3⁄8" adapters for suction line connections.

³ Installer will need to supply 3⁄8" to 1 1⁄8" adapters for suction line connections.

⁴ Unit is factory charged with refrigerant for 15' of 3⁄8" liquid line. System charge must be adjusted per the Final Charge Adjustment procedure found in the Installation Instructions.

⁵ Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

⁶ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

Notes
Always check the S&R plate for electrical data on the unit being installed.