### Sales Selection Sheet Checklist

Model: 20-1606 B The Grassfield

PURCHASERS: PARMINDER PAL SINGH/HARMANDEEP SINGH MAHAL

Heathwood Homes (Huron) Limited

LOT 3192C-18

VENDOR:

1 of 40

FINISHED BASEMENT COLD CELLAR	
UPGRADED / MODIFIED ELEVATION  CORNER UPGRADE	
REAR UPGRADE	
CEILING UPGRADE - SMOOTH	
MAIN FLOOR SECOND FLOOR BASEMENT	
ADDITIONAL ROUGH-INS	
<ul><li> 200 AMP SERVICE</li><li> WET BAR ROUGH-IN</li><li> HUMIDIFIER</li><li>✓ AIR CONDITIONING</li></ul>	
GAS ROUGH-IN	Miles College Programming College Coll
STOVE DRYER BBQ ADDITIONAL FIREPLACE	
KITCHEN: HOODFAN VENTING SIZE	
☐ 6 IN ROUND DUCT  7 IN ROUND DUCT	
FULL BASEMENT STAIRS:  UPPER BASEMENT STAIRS:  LOWER BASEMENT STAIRS:  MAIN STAIRS:  MEDIA STAIRS (if applicable):  LOFT STAIRS (if applicable):  N/A  N/A	
APRIL 28/23 Signatures  Date Purchaser: on file	APRIL 28/23 SONIA SHARIF  Date Decor Consultant:
11 0	03- 2 8 2003 Mages
Date Purchaser:	Date Heathwood Homes (Huron) Limited
Locked Date:	

PARMINDER PAL SINGH/HARMANDEEP SINGH MAHAL

Project: Wallaceton Unit: 3192C-18, Phase: 3 Model: 20-1606 B The Grassfield

Foyer

2 617 4 0

6265	Viking III-MANCHESTER-SHALE GREY CL-MAPLE ***STD***
9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
4010	SINGLE POLISHED STRAIGHT EDGE 3/4 INCH ***STD***
7667	12881-HARDWARE ***STD***
6265	Viking III-MANCHESTER-SHALE GREY CL-MAPLE ***STD***
9069	MSI Quartz GROUP 1 ICED WHITE ***STD***
1111	N/A *****
1111	N/A *****
1111	N/A *****
	1
34	AV1308 Air King 30 STAINLESS STEEL UNDER CABINET RANGE HOOD **STD**
9106	GE.MD.WHT.1818.MT Madison Series White Matte 18 X 18 Matte ***1***
2225	Grout-(27) Silver ***STD***
3000	STANDARD SQUARE ***STD***
	9069 4010 7667 6265 9069 1111 1111 1111 34 9106

PARMINDER PAL SINGH/HARMANDEEP SINGH MAHAL Project: Wallaceton Unit: 3192C-18, Phase: 3 Model: 20-1606 B The Grassfield

	<b>大型</b>	
Flooring	9106	GE.MD.WHT.1818.MT Madison Series White Matte 18 X 18 Matte ***1***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Laundry Room		
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
Mud Room  **********************************		
Flooring	9435	TH.CT.DGR.1212.MT-Construct-Dark Grey Matte-12 x 12 STD ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Comment		
		140
Powder Room		VIS
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***

PARMINDER PAL SINGH/HARMANDEEP SINGH MAHAL Project: Wallaceton Unit: 3192C-18, Phase: 3 Model: 20-1606 B The Grassfield

Floor Tile Gro	out	2225	Grout-(27) Silver ***STD***
Floor Tile Pat	tern	3000	STANDARD SQUARE ***STD***
Plumbing Fix	ture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment			
Hall			
Flooring		9106	GE.MD.WHT.1818.MT Madison Series White Matte 18 X 18 Matte ***1***
Grout		2225	Grout-(27) Silver ***STD***
Floor Tile Pat	tern	3000	STANDARD SQUARE ***STD***
Great Room	COMMINIST SERVICE PROSE (\$1,000 COMMINISTER AND ACCUSED AND ACCUSED AND ACCUSED ACCUSED ACCUSED ACCUSED ACCUSED		
Flooring		7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch
Comment		444	
Upper Hall			
Flooring		9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
Comment	T		
Finished Baseme	nt (Rec) Room/Hall		M.S
Flooring	ener i sentre finanza en de mon el como en el como en el como como en el como de como en el como en el como en	9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
Comment			

PARMINDER PAL SINGH/HARMANDEEP SINGH MAHAL Project: Wallaceton Unit: 3192C-18, Phase: 3 Model: 20-1606 B The Grassfield

		: 4	e e e e e e e e e e e e e e e e e e e
Master Bedroom		HIGH AND COM	
Flooring		9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
Comment			
Bedroom 2			
Flooring		9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
Comment			
Bedroom 3			
Flooring		9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
Comment			
		12	
<u> </u>			
Master Ensuite			
Cabinet Cole	our/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***
Countarian		8806	4987K-07-Countertop-LECHE VESTA-Wilsonart ***STD***
Countertop		8800	430712-00ulitertop-ELOTIE VEGTA-Villagiliari GTB
Countertop	Edge	1111	N/A *****
Cabinet Har	dware	7672	135-HARDWARE ***STD***
Floor Tile		9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***
Flacutile O	rout	2225	Grout-(27) Silver ***STD***
Floor Tile Gi			
Floor Tile Pa	attern	3000	STANDARD SQUARE ***STD***
			V.S
Shower Floo	or Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow
			White Matte-2 x 2 ***STD***

PARMINDER PAL SINGH/HARMANDEEP SINGH MAHAL Project: Wallaceton Unit: 3192C-18, Phase: 3 Model: 20-1606 B The Grassfield

Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***
Shower Jamb(s) and Sill(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment	271	
Main Bathroom		
Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***
Countertop	8806	4987K-07-Countertop-LECHE VESTA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	7672	135-HARDWARE ***STD***
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***

PARMINDER PAL SINGH/HARMANDEEP SINGH MAHAL Project: Wallaceton Unit: 3192C-18, Phase: 3 Model: 20-1606 B The Grassfield

Main Bathroom Tile Pattern	3090	VERTICAL STACKED ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
Finished Basement Bathroom		
Cabinet Colour/Style	9111	Viking III-SIMCOE ORCHID 3DL ***STD***
Countertop	8806	4987K-07-Countertop-LECHE VESTA-Wilsonart ***STD***
Countertop Edge	1111	N/A *****
Cabinet Hardware	7672	135-HARDWARE ***STD***
Flooring	9071	GE.BY.AZR.1313 New Byzantine Azzuro 13x13 ***STD***
Floor Tile Grout	2225	Grout-(27) Silver ***STD***
Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Floor Tile	8661	OD.ON.SWT.0202.MT.N-Ontario Series Mosaic-Snow White Matte-2 x 2 ***STD***
Shower Floor Tile Grout	2226	Grout-(00) White ***STD***
Shower Floor Tile Pattern	3000	STANDARD SQUARE ***STD***
Shower Wall Tile	5411	QT.SP.WHT.0810-Splendour-White-8 inch x 10 inch ***STD***
Shower Wall Tile Grout	2226	Grout-(00) White ***STD***
Shower Wall Tile Pattern	3090	VERTICAL STACKED ***STD***

PARMINDER PAL SINGH/HARMANDEEP SINGH MAHAL

Project: Wallaceton Unit: 3192C-18, Phase: 3 Model: 20-1606 B The Grassfield 8 617 4 0 Created: 3/10/2023 11:26:17

Shower Jamb(s)	8923	Shower Jamb / Sill-Thassos White ***STD***
Plumbing Fixture (Colour)	1737	Plumbing Fixtures-WHITE ***STD***
Comment		
eat Room Fireplace		
Туре	8865	Dimplex-Electric Fireplace-PF3033HL ***STD***
Mantle	8891	NF-17-Paint Grade Mantle- Cabinet (Per Plan)-WHITE  ***STD***
Surround Opt.	1111	N/A *****
Comment		
sement Stairs		
Туре	1711	Carpet Grade Stairs ***OPT. FINISHED BASEMENT***
Colour	9507	89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Post Type	9119	Handrail only on closed walls (one or two sides per building code) ***STD***
Handrail/Pickets/Post Colours	1729	Carpet Grade-Stain handrail, pickets, stringers, nosing _pos
Carpet	9507	DY 89418-MINOTAUR-BLACK ICE-40 oz Poly ***STD***
Custom Stain/Paint	1111	N/A ****
Comment		
sement Stairs Landings (Upper an	nd Lov	11.5
Flooring	7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch ***3***
Comment		

PARMINDER PAL SINGH/HARMANDEEP SINGH MAHAL Project: Wallaceton Unit: 3192C-18, Phase: 3 Model: 20-1606 B The Grassfield

Main Stairs		
Туре	1714	Oak Stairs ***STD MAIN STAIRS***
Colour	7922	Eclipse (Pewter) STAIN TO COMPLIMENT HARDWOOD AND WILL VARY FROM FLOORING ***99***
Carpet Runner	1111	N/A *****
Handrail/Pickets/Posts Type	7652	1 5/16 inch Square pickets with 3 1/2? Square/Cap Post(s)-ALL OAK ***STD***
Handrail/Pickets/Posts Colour	1728	Oak Grade-Stain handrail,oak pickets,stringers,treads,risers
Custom Stain/Paint	1111	N/A *****
Comment	<del></del>	
Main Stairs Landing(s)		
Flooring	7502	Red Oak Pearl-Vintage Engineered-PEWTER/ECLIPSE-3/4 inch x 3 1/4 inch
Comment	£	
Throughout		
Walls - Paint Colour	1717	22-Wall-WARM GREY ***STD***
Underpad	1079	500 Series-Underpad ***STD***
Thresholds	2232	Metal Thresholds ***STD***
Switches and Plug	5796	Decora White Switches and Plugs ***STD***
Trim Size	8705	4 1/4 Baseboard and 2 3/4 Casings ***STD***
Trim - Paint Colour	1716	Trim-WHITE ***STD***
Comment		W.S
Purchaser: PARMINDER PAL SING		Date Decor Consultant Date

PARMINDER PAL SINGH/HARMANDEEP SINGH MAHAL

Project: Wallaceton Unit: 3192C-18, Phase: 3 Model: 20-1606 B The Grassfield

Locked: Closed:

Purchaser:

HARMANDEEP SINGH MAHAL

Date

**Date Approved** 

# construction summary of 40



Lot: 3192C-18 **Model: 20-1606 B The Grassfield** 

Project/Phase: Wallaceton / 3

Offer	Five Appliances: SS Fridge, Stove, Dishwasher: White Front Loader Washer/Dryer - Townhomes
Worksheet	Note:
	The Purchaser(s) acknowledge that they have NOT been referred by an existing Heathwood Homeowner and therefor are not
	entitled to a referral fee under Heathwood Homes Referral program.
Worksheet	Note:

DisciplineMS.rpt 13dec21 Page 1 of 2

Printed and Sent: 23-Nov-23

# construction summary of 40



Lot: 3192C-18

Model: 20-1606 B The Grassfield Project/Phase: Wallaceton / 3

### **CERAMICS**

Invoice	Qty.	Description
1333 348,249 28Apr23	1	KITCHEN / BREAKFAST - CERAMICS - KITCHEN / BREAKFAST - FLOOR - UG 1
1333 348,246 28Apr23	1	MAIN HALL - CERAMICS - MAIN HALL - FLOOR - UG 1
1333 348,244 28Apr23	1	FOYER - CERAMICS - FOYER - FLOOR - UG 1

ELECT	TDIA	
ELECT Invoice		Description
1333 345,787	1	GREAT ROOM - ELECTRICAL - CEILING ROUGH-IN (CAPPED)
28Apr23		+/- TO BE CENTERED IN GREAT ROOM ON EXISTING SWITCH SKETCH # 2
1333 314,224	1	KITCHEN - ELECTRICAL - CEILING ROUGH-IN (CAPPED) INCLUDING SWITCH
28Apr23		+/- TO BE CENTERED ABOVE BREAKFAST COUNTER ON SEPARATE SWITCH SKETCH # 2
1333 314,232	1	GREAT ROOM - ELECTRICAL - EXTRA WALL INTERIOR OUTLET ON EXISTING CIRCUIT (DOES NOT INCLUDE KITCHEN OUTLETS)
28Apr23		+/- TO BE CENTERED ABOVE FIREPLACE, +/- 70" FROM FLOOR SKETCH # 2

DisciplineMS.rpt 13dec21

Page 2 of 2

Printed and Sent: 23-Nov-23

Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

13 of 40


### THE GRASSFIELD

ELEVATION B | 1,986 SQ. FT.

Includes 380 sq. ft. of Finished Lower Level

20-1606 ELEV. B

Sketch#1 WALLACETON

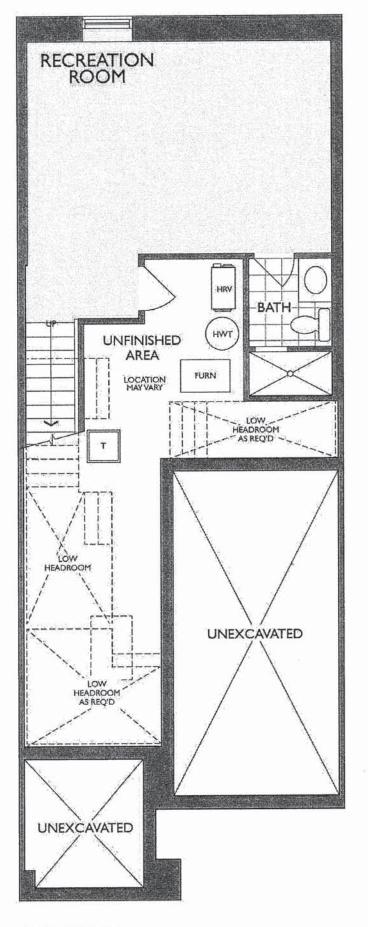



LOWER LEVEL ELEVATION A & B

Legal Plan Dec. 3, 2020

Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield


14 of 40

### THE GRASSFIELD


ELEVATION B | 1,986 SQ. FT.

Includes 380 sq. ft. of Finished Lower Level


20-1606 ELEV. B

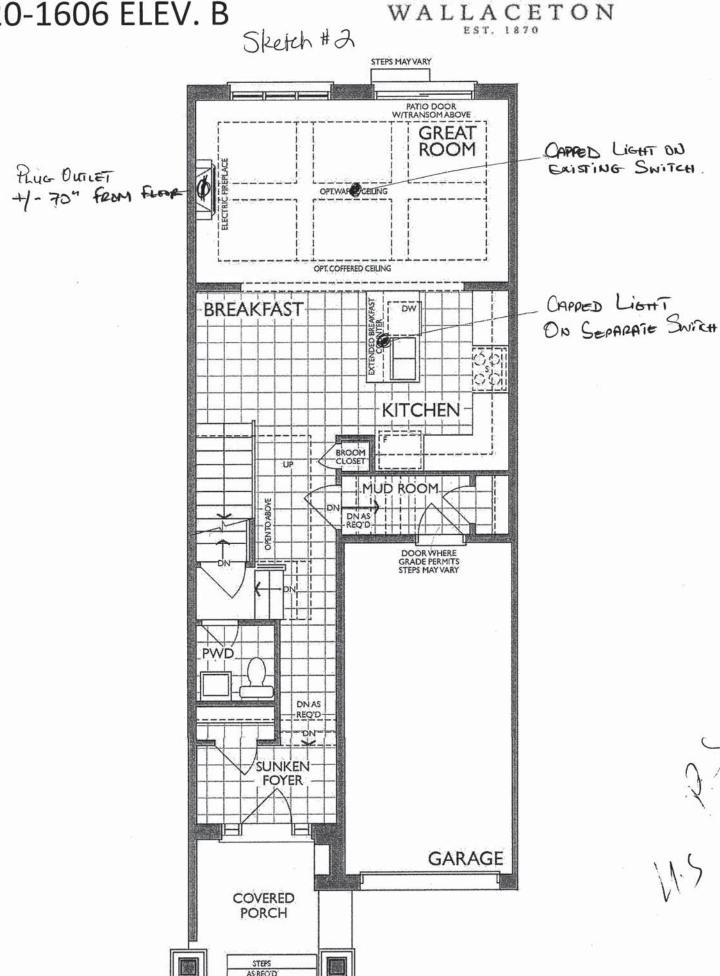

MAIN FLOOR **ELEVATION B**  Legal Plan Dec. 3, 2020

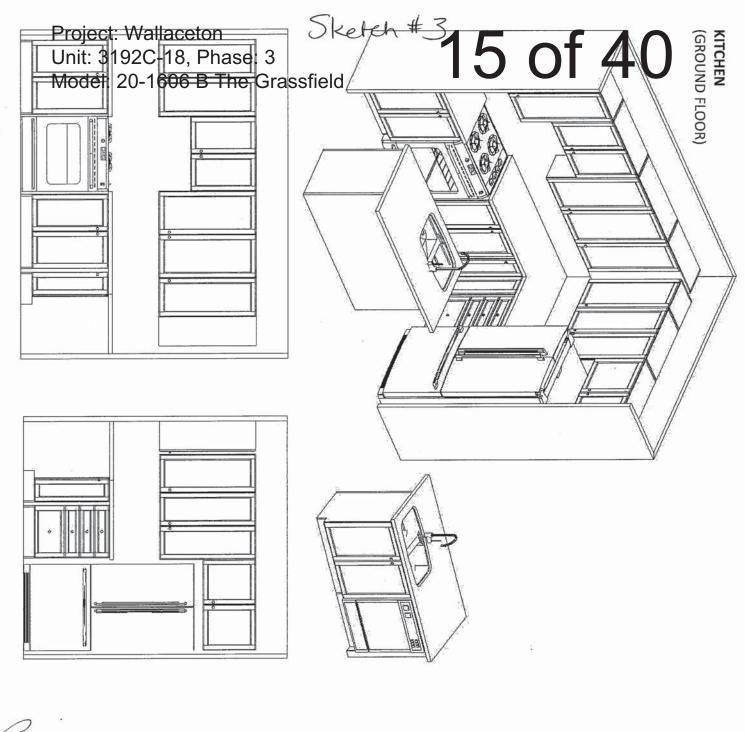





WALLACETON, KITCHENER ON

MODEL: 20-1606 (2003)

**HEATHWOOD HOMES** 

KITCHENS LIMITED 1350 Shawson Drive, Mississauga, ON L4W 1C5

N 


Z


U į,

STANDARD CONTRACT INCLUDES:


Appliance Openings







# MAIN BATH



# Standard Kitchens Scope

Stove Opening: 30" Freestanding 30cm deep cabinet over fridge

Dishwasher Opening: 24"

Fridge Opening: 37 3/8 "W X 73 3/8" H

Hood Opening: 30"W Std. hood

- 100cm H wall cabinets
- Std. Blumotion Hinges-soft close
- Std. Metabox Drawers- not soft close
- Min 40cm W drawer
- Base pie cut corner cabinets
- Backing on all cabinets Countertop by others
- Upgrade applied paneled fridge & hardware by others) dishwashers supply only (appliance

# Standard Vanity & Laundry Scope:

- Powder by others, pedestal
- All vanities include laminate counter
- Std. Blum Hinges- not soft close Tandem Box Drawers-soft close
- doors at sink) Master Ensuite: Top drawers (Full height
- Mains: Full height doors (top drawers Optional laundry base & wall cabinets added if Masters can't accommodate)

Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

16 of 40

### THE GRASSFIELD


ELEVATION B | 1,986 SQ. FT.


Includes 380 sq. ft. of Finished Lower Level

20-1606 ELEV. B

WALLACETON

Sketch #4

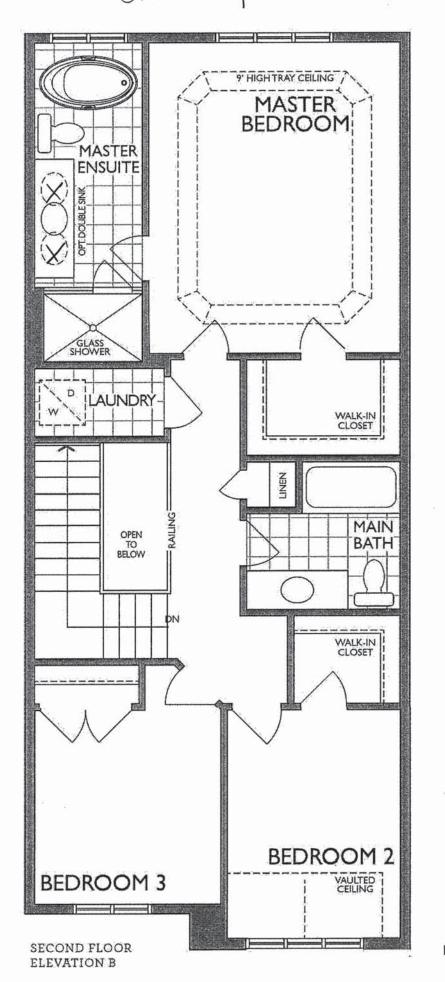



Legal Plan Dec. 3, 2020

Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

17 of 40





NFAS NF17 Mantel







Model: 20-1606 B The Grassfield


18 of 40

ND1831UA/9

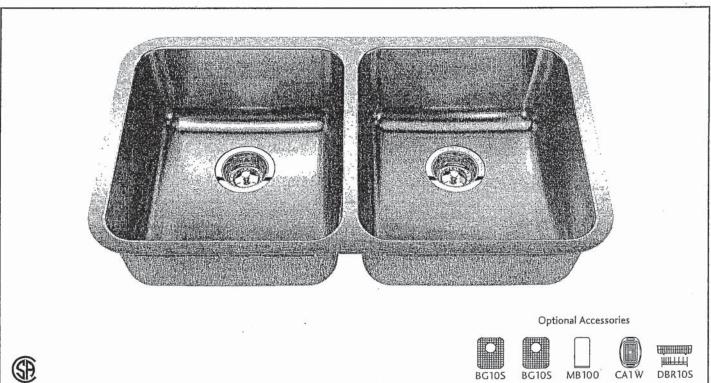







### ND1831UA/9 SPECIFICATION

Model ND1831UA/9 is a double (two equal size) bowl undermount sink manufactured by Franke Kindred Canada Limited from 18 gauge stainless steel. Product has silk finished rims and linear brush finished bowls. Sink is fully undercoated. Basket strainer waste fittings (3 1/2", 89 mm) are included. Sink is backed with a limited lifetime warranty.

- O.D. 17 3/4" x 30 7/8" x 8 1/2" (45 x 78 x 22 cm)
- Recommended for minimum 36" cabinet

Franke Kindred Canada Limited P.O. Box 190, 1000 Franke Kindred Road, Midland, Ontario, Canada, L4R 4K9 Phone: 866-687-7465 Fax: 800-361-8408





Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

### 19 of 40

### MOEN

#### **FAUCET DESCRIPTION**

UCET DESCRIPTION

Reflex™ pulldown system offers smooth operation, easy movement and secure docking

Power Clean™ spray technology

Metal construction with various finishes identified by suffix

Quick connect installation

Pulldown spray with 68" braided hose

Flexible supply lines with 3/8" compression fittings

High arc spout provides height and reach to fill or clean large pots while pulldown wand provides the maneuverability for cleaning or rinsing or rinsing
360° rotating spout
Faucet designed for handle to be mounted on right side only

#### **OPERATION**

Temperature controlled by 100° arc of handle travel
 Operates with less than 5 lbs. of force
 Operates in stream or spray mode in the pullout or retracted position
 FLOW

Flow is limited to 1.5 gpm (5.7 L/min) max at 60 psi

CARTRIDGE

1255™ Duralast™ cartridge

**STANDARDS** 

Third party certified to IAPMO Green, ASME A112.18.1/CSA B125.1 and all applicable requirements therein including NSF 61/9G & 372
Meets CalGreen and Georgia SB370 requirements
Complies with California Proposition 65 and with the Federal Safe Drinking


- The backflow protection system in the device consists of two independently operating check valves, a primary and a secondary which prevent backflow
- ADA ( for lever handle

### WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- 10 year limited warranty when used in a multifamily installation 5 year limited warranty when used in a commercial installation

Visit www.moen.com/support for complete details and limitations

### Specifications




ALIGN™ Single Handle High Arc Pulldown Kitchen Faucet

Models: 7565 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THROUGH 1 HOLE, 1-1/2" (38mm) MIN. DIA. (OPTIONAL 3-HOLE ESCUTCHEON 141002 AVAILABLE)



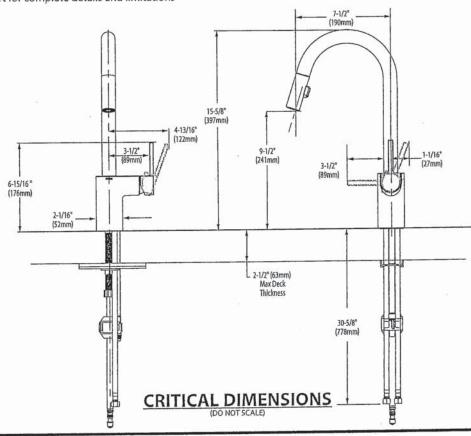

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com





Rev. 6/20

Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

20 of 40



BARRIER FREE (ABOVE COUNTER OR DROP-IN ONLY)

### BOULEVARD® PEDESTAL SINK VITREOUS CHINA

### **BOULEVARD® PEDESTAL SINK**

O641.800 Faucet holes on 8" (203mm) centers (Illustrated) STD 0641.400 Faucet holes on 4" (102mm) centers

- ☐ 0641.100 Center hole only
  - · Classic styled rectangular pedestal lavatory
  - · Vitreous china
  - Rear overflow
  - · Supplied with mounting kit
  - Right Height® for greater comfort during use
  - · Faucet ledge with large deck area (faucet not included)
  - Design coordinates with Boulevard® Toilet
  - Basin has flat bottom to also allow use as an above counter sink or a drop-in sink (with u-shaped cut out)

### **Nominal Dimensions:**

24" x 19" x 35-1/2" (610 x 483 x 902mm)

0641.008	Pedestal	top-8"	(203mm)	centers
0641.004	Pedestal	top-4"	(102mm)	centers
0641.001	Pedestal	top-ce	nter hole	only
0010.000	Pedestal	only		

### Bowl sizes:

17" (432mm) wide, 12-1/2" (318mm) front to back, 5" (127mm) deep

### Compliance Certifications -

Meets or Exceeds the Following Specifications:

ASME A112.19.2 - 2008/CSA B45.1-08

<b>的。在2016年</b> 中	
<b>维持外部并且接受性的</b> 基础的	36-60-00 2014-24-6 15-30-14 16-20-20-20-20-20-20-20-20-20-20-20-20-20-

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

10	Re	5	oec	ITI	е	a:
_	-		-		**	

- □ Color: □ White □ Linen
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:
- ☐ Nipple:

© 2018 AS America Inc.

spec\_0641\_BoulevardPedSink Rev 2/18





<sup>\*</sup> See faucet section for additional models available

Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 21 of 40

### American Standard

& BARRIER FREE

### **COLONY™** COUNTERTOP SINK

VITREOUS CHINA

### COLONY COUNTERTOP SINK

- · Vitreous china
- · Self-rimming
- · Front overflow
- · Supplied with template
- Faucet deck (Faucet shown not included)



Faucet holes on 203mm (8") centres

. 0346 403 (Illustrated)

Faucet holes on 102mm (4") centres

0346 001

Centre hole only

Nominal Dimensions: 521 x 448mm (20-1/2" x 17-5/8")

Bowl sizes:


422mm (16-5/8") wide, 279mm (11") front to back, 143mm (5-5/8") deep


COMPLIANCE CERTIFICATIONS -Meets or exceeds the following Specifications:

- · ASME A112.19.2M for Vitreous China Fixtures.
- · CAN/CSA B45 Series.

### To Be Specified

- ☐ Colour: ☐ White ☐ Bone ☐ Silver Gray ☐ Linen
- ☐ Faucet\*:
- ☐ Faucet Finish:
- ☐ Supplies & Stops:
- ☐ Trap 1-1/4" (32 mm):
- \* See faucet section for additional models available

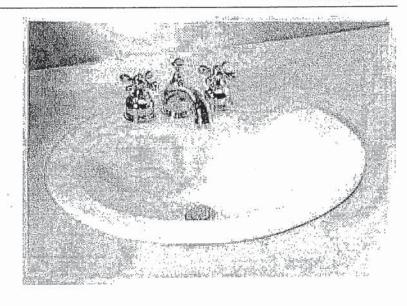

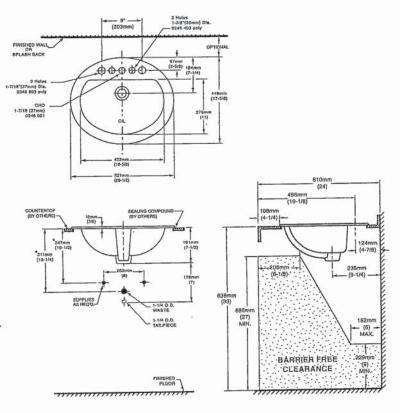

NOTES:

\* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE
SUPPLIED WITH SINK.
FAUCETS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of lixtures are nominal and may vary within the range of tolerances
established by ANSI Standard A112.19.2.
These measurements are subject to change or cancellation. No responsibility is assumed for use
of supersadad or volded pages.

of superseded or voided pages.

BAS-198 -© 2000 American Standard Inc.

01/07

Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 22 of 40



### DEMI™ Product Specification Sheet

### Two Piece Freestanding Collection

CF2007

Two Piece Freestanding Soaker

Size:


60" x 32" x 22"

1524 mm x 813 mm x 559 mm




- Vacuum formed acrylic reinforced with fiberglass
- Scratch, stain and fade resistant high gloss finish
- Installation friendly two piece design
- Accepts deck mounted faucet
- Includes integral pop up drain and rectangular
- Includes levelling feet


### TWO PIECE ASSEMBLY

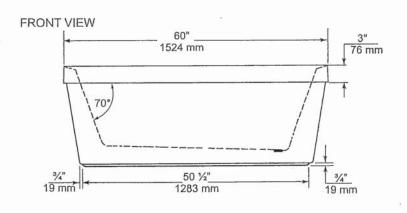

### **END VIEW**



### TOP VIEW

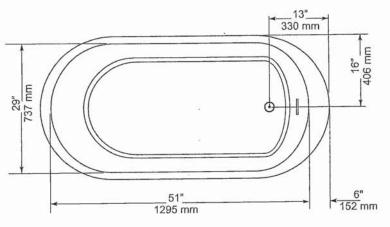

GENERAL SPECIFICATIONS 90 lb Average Weight

43"x 20" Bathing Well at bottom Capacity Drain to Overflow 16" Water Depth Drain to Overflow 2" Drain Opening (dia.)

2 1/4"x 1/2" Overflow Opening Drain to Floor Clearance 3 1/4"

NOTES: Please confirm measurements on actual product to ensure proper identification. Bathtub to be installed on the floor supported by 5 self levelling feet. Adjust if required to level the bathtub for adequate drainage. Refer to installation instructions for additional information.

IMPORTANT: Dimensions of fixtures are nominal and may vary  $\pm$  ¼" (6 mm). Weight may vary  $\pm$  5 lb ( 2.3 kg). Drawing is not to scale. These measurements are subject to change at manufacturer's discretion.

Compliance Certifications -Meets or Exceeds the following Specifications:
• CAN/CSA - B45 Series





mirolin. 60 Shorncliffe Rd., Toronto, Ontario M8Z 5K1
Telephone: 416.231.9030 Fax: 416.231.0929 Fax: 416.231.0929 Customer Service: 416.231.5790 Canada, U.S.A.: 800.MIROLIN(647-6546) Fax, Canada: 800.463.2236

R0084162 25 Sep. 2018

1092 x 508 mm

195 litres

406 mm

57 x 13 mm

51 mm

83 mm







Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 23 of 40

### American Standard

Style That Works Better

### FloWise™ DUAL FLUSH **ELONGATED TOILET**

VITREOUS CHINA

### FIoWise™ DUAL FLUSH ELONGATED TOILET

### 2476 216

- · Vitreous china
- · Low-consumption Dual Flush Full flush 6.0 Lpf/1.3 gpf, Partial flush 3.0 Lpf/0.66 gpf.
- · Elongated wash down bowl
- · Internal trapway fully-glazed, 2-1/4" (57mm) ballpass
- · Concealed trapway bowl
- · Chrome-plated top mounted push button actuator
- · Easy to clean sanitary dam on bowl
- Includes Elongated Slow Close Seat
- · 100% factory flush tested
- · 2 bolt caps

### Separate Component Parts:

- 3067 316 Elongated Bowl with Slow Close Seat
- 4035 216 Unlined Tank
- 2476 516 Same as above with Lined tank
  - ☐ 3067 316 Elongated Bowl
  - 4035 516 Lined Tank


Nominal Dimensions: 794 x 432 x 765mm (31-1/4" x 17" x 30-1/8")


### Compliance Certifications -Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M)
- · CAN/CSA B45 series

To Be Specified

- Colour: 020 White
- Supply with stop:





NOTES:
THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12")
FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
\* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2
These measurements are subject to change or cancellation. No separativity to the standard of the standar

established by ANSI Standard A112.19.2
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

### UPGRADED VALUE ADDED FEATURES AT NO EXTRA CHARGE

TOI-284 © 2008 American Standard

08/08





Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 24 of 40

### MOEN

#### DESCRIPTION

· Metal construction with various finishes identified by suffix

· 16" long 3/8" tubing connections

Includes metal or 50/50 pop-up type waste assembly where noted OPERATION

· Pivot action lever style handle

Temperature controlled through 180° degree arc of handle travel

FLOW

Flow is limited to 1.5 gpm max (5.7L/min) at 60 psi

CARTRIDGE

1225 cartridge design

Nonmetallic/nonferrous and stainless steel material

Can accommodate reversed piping and back to back installations

STANDARDS

 Third party certified to WaterSense®, CSA B-125.1, ASME A112.18.1 and all applicable requirements referenced therein including NSF61/9

 Complies with California Proposition 65 and with the Federal Safe Drinking Water Act

Drinking Water Act

ADA for lever handle

#### WARRANTY

 Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser

5 year warranty if used in commercial installations

### Specifications



CHATEAU® Single-Handle Lavatory Faucet


with Metal Waste Assembly Model: L4625 series L4631BC Bulk Packed (12 per carton): L64624 series

with 50/50 Waste Assembly Bulk Packed (12 per carton): L64625 series

<u>Less Waste</u>
Bulk Packed (12 per carton):
L64600 series

NOTE: THIS FAUCET IS DESIGNED TO BE INSTALLED THRU 3-1" DIA. HOLES, 2" ON CENTER



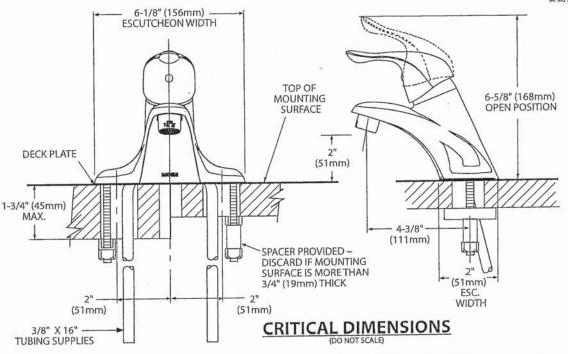

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com



MS

Rev 8/15

Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 25 of 40



Buy it for looks. Buy it for life.®

There is more than 1 version of this model. Page down to identify the version you have.

#### DESCRIPTION

Metal construction with various finishes identified by suffix

Includes non-metalic showerhead, arm, flange and non-metalic diverter tub spout

#### **OPERATION**

Handle operates counterclockwise through a 270° arc with off at 6 o'clock and maximum hot at the 9 o'clock position. Shut off in clockwise direction

Adjustable temperature limit stop to control maximum hot water temperature

Pressure balancing mechanism maintains selected discharge temperature to  $\pm 3^{\circ}$ 

Showerhead is limited to 2.5 gpm (9.5 L/min) at 80 psi

EP suffix models are limited to 1.75 gpm (6.6 L/min) at 80 psi NH suffix models contain no showerhead

#### CARTRIDGE

1222 cartridge design Accommodates back to back installations

Nonmetallic/nonferrous and stainless steel material

Third party certified to meet ASME A112.18.1/CSA B125.1 and all applicable requirements referenced therein

EP suffix models are third party certified to WaterSense®

ADA (a) for lever handle

### WARRANTY

Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser

2"CC (51mm) 1 7/8" IPS (48m MAX WALL

4-1/2" (114m PENING

DIRECTION OF HANDLE ROTATION

FINISHED WALL LINE

5 year warranty if used in commercial installations

### **Specifications**






### CHATEAU' POSI-TEMP' Single-Handle Tub/Shower Trim Kit

Models: TL181 series - valve trim only (Bulk Packed 12 per carton) TL182 series - shower trim only (Bulk Packed 12 per carton) TL183 series - tub/shower trim (Bulk Packed 12 per carton)

Valves: 62300 series 2500 series

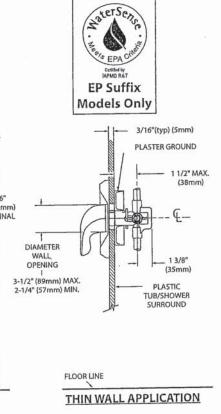

THICK WALL APPLICATION CRITICAL DIMENSIONS

FLOOR LINE

FACE OF STUD

1/2" MIN. CC (13mm) 5/8" MIN. IPS (16mm)

2 1/2" MAX. (63mm)

SHOWER 45" (1143mm)/ 48" (1219mm)

32" (813mm) TUB/SHOWER AND TUB ONLY

(DO NOT SCALE)

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com







Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 26 of 40

### MOEN®

### DESCRIPTION

· Metal construction with various finishes identified by suffix

#### OPERATION

- · Lever style handles with hot and cold color indicator
- Rotate hot side handle counterclockwise to open (clockwise to close) and the cold side handle (clockwise to open) and (counterclockwise to close)

#### **STANDARDS**


- Third party certified to: ASME A112.18.1/CSA B-125.1, and all applicable requirements referenced therein
- ADA 🕙 for lever handles

### WARRANTY

Rev. 3/19

- Lifetime limited warranty against leaks, drips and finish defects to the original homeowner
- · 10 year limited warranty when used in a multi-family installation
- 5 year limited warranty when used in a commercial installation
   Visit www.moen.com/support for complete details and limitations


### Specifications




### CHATEAU® Two-Handle Garden Tub Trim

Models: T994 series

Valves: 4792, 4793, 4794, 4796, 4797, 4798

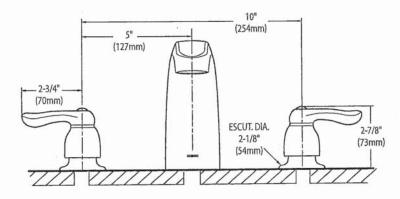



M.5 C.

CRITICAL DIMENSIONS

FOR MORE INFORMATION CALL: 1-800-BUY-MOEN www.moen.com

Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

27 of 40







180 CFM/7.0 Sones @ 0.10" SP. Horizontal 180 CFM/7.5 Sones @ 0.10" SP. Vertical

Dimensions

Overall bottom projection - 183/8"
Overall top projection -12"
Height - 6"
Available widths: 21", 24(, 30")36" & 42"

Hood Body

Stainless Steel: 24 gauge, grade 430 stainless steel.

Painted: 23 gauge cold rolled commercial grade (CRCQ) steel, auto welded, coated with a baked enamel finish.

#### Motor

2 speed, single coil, thermally protected, permanently lubricated. Rated 120 volts, 60 hz. Complete with 200  $^{\circ}$ C lead wires.

#### Lighting

Single 60 watt cook light capacity (bulb not included).

### Ducting Options


Horizontal ducting: 31/4"x10" (duct adapter and damper included). Vertical ducting: 31/4"x10" (duct adapter and damper included). Vertical ducting: 7" round (duct adapter and damper not included). Ductless: removable front vent (charcoal filter not included).

### Fan Blade


One piece polymeric, electronically balanced blade. 65/8" diameter with 5 paddles.

### Electrical connection

Hood top - 7/8" knockout hole for use with 1/2" cable clamp Hood back - 7/8" knockout hole for use with 1/2" cable clamp



### **AV SERIES**



### Filters

UL rated, class 2 filter. Grease Filter: RF35 - 87/8"x103/8" (included). Charcoal Filter: RF34 (not included). Combo Grease/Charcoal: RF55 (not included).

### Available Finishes

White, Biscuit, Almond, Black & Stainless Steel.

보이 시작으로 하나 되는 것을 했다.	F. Francisco		EXPA	NDED	PERFO	RMANO	) = 10 d. 1. (10			
		Stati		(inches o			Sones	Fan Speed	Power	10
Air Flow - CFM	0	0.05	0.1	0.15	0.2	0.25	@ .1 SP	RPM	Watts	Apms
Vertical Ducting High	246	232	218	203	181	147	7.5	2973	87.0	2.1
Horizontal Ducting High	225	210	180	175	155	120	7.0	3024	87.0	2.1

PROJECT							ARCHITEC	T	#
LOCATION	1				3.55		ENGINEER	ART THE STATE	
CONTRAC	TOR						SUBMITT	ED BY	DATE
FAN NUMBER	MODEL Number	CFM	IN W.C.	RPM	WATTS	AMPS	SONES	QTY	OPTIONAL EQUIPMENT & REMARKS





Air King: 820 Lincoln Avenue West Chester, Pennsylvania 19380-4466 Tel: (610) 692-7400 • 877-304-3785 Fax: (610) 696-8048

Canada: Brampton, Ontario Tel: 905-456-2033 Fax: (905) 456-1015

Specifications subject to change without notice

62




Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 28 of 40



# Whirlpool 21 cu. ft. Top-Freezer Refrigerator WRT541SZD



Fingerprint-Resistant Stainless WRT541SZDZ

#### Also available in:

-	
1	VA/ILIA
1 1	White

WRT541SZDW



WRT541SZDB



WRT541SZDM

Capacity	
Total Capacity	21 cu, ft.
Refrigerator Capacity	15 cu. ft.
Freezer Capacity	6 cu. ft.
General Features & Propert	ies
EZ Connect Icemaker Kit	
LED Interior Lighting	
ENERGY STAR® Certified	
Electronic Temperature Co	entrols
Freezer Temperature Cont	rols
Clear Door Bins	
Adjustable Door Bins	
Quiet Cooling	
Fingerprint Resistant	
Electrical Details	
Amps	6.5
Volts	115
Certifications	
ADA Compliant	Yes
ENERGY STAR® Certified	Yes

Technical Details	
Refrigerator Type	Top-Freezer
Number of Doors	2
Number of Interior Refrigerator Shelves	3
Number of Refrigerator Door Bins	1 Fixed, 4 Adjustable
Number of Interior Freezer Shelves	1
Number of Freezer Door Bins	2 Fixed
Lighting Type	LED
Ice Maker	Optional
Ice Maker Location	Freezer
Dispenser Type	N/A
Dimensions	
Product Dimensions (H x W x D)	66-1/4" x 32-3/4" x 34"
Depth with Door Open 90°	62-1/4"
Cutout Dimensions	Allow extra 1/2" on sides and top Allow extra 1"

on rear

### **Reference Material**

Dimension Guide

Use & Care Guide

**Energy Guide** 

Warranty

### Key Features & Benefits

### Frameless Glass Shelves


Store more items on wall-to-wall shelves for greater storage flexibility.

### Flexi-Slide™ Bin

Make space for tall items with the bin that quickly and easily moves side to side.

### **Humidity-Controlled Crispers**

Store fruits and vegetables in their ideal environment.



GARAGE RIGHT HINGES ON RIGHT HANDLES ON LEFT

NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXC, WRT541SZDSPECSHEETV01.





Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 29 of 40



### **Top Mount Refrigerator**

### PRODUCT MODEL NUMBERS

WRT311FZD WRT511SZD WRT541SZD

Electrical: A 115-volt, 60-Hz, AC-only, 15or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.


NOTE: Before performing any type of installation, cleaning, or removing a light bulb, turn the control (Thermostat, Refrigerator or Freezer Control depending on the model) to OFF and then disconnect the refrigerator from the electrical source. When you are finished, reconnect the refrigerator to the electrical source and reset the control (Thermostat, Refrigerator or Freezer Control depending on the model) to the desired setting. See "Using the Controls."


Water: A cold water supply with water pressure between 30 and 120 psi (207 and 827 kPa) is required to operate ice maker and water dispenser. If you have questions about your water pressure, call a licensed, qualified plumber.

IMPORTANT: The pressure of the water coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 and 827 kPa).

Reverse Osmosis Water Supply: If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).


#### PRODUCT DIMENSIONS





Model Number	Model Size	Reversible Door	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Door Open 90° "C"	Depth - With Handles "D"	Depth - Without Handles "E"	Depth - Cabinet Only "F"	Width - Cabinet "G"
WRT311FZD	20.5 cu. ft.	Yes	66¼" (168.3 cm)	65½" (166.4 cm)	621/4" (158.1 cm)	32%" (83.5 cm)	30%" (77.8 cm)	28½" (72.4 cm)	32¾" (83.2 cm)
WRT511SZD WRT541SZD	21.3 cu. ft.	Yes	661/4" (168.3 cm)	65½" (166.4 cm)	62¼" (158.1 cm)	34" (86.4 cm)	32½" (82.3 cm)	28½" (72.4 cm)	32¾" (83.2 cm)

### LOCATION REQUIREMENTS



To ensure proper ventilation for your refrigerator, allow for a ½" (1.25 cm) space on each and between overhead cabinets and refrigerator top. Allow at least 1" (2.5 cm) between back of cabinet and the wall. If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2" (5 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Ref. W10674106 10/29/14





Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 30 of 40





#### Available Finishes/Colours



YWFE515S0JB Black



YWFE515S0JS Stainless Steel

YWFE515S0JW White

#### Manuals & Literature:



Installation Instructions



Use and Care





### 5.3 cu. ft. Whirlpool® electric range with Frozen Bake™ technology

### YWFE515S0JS

This Whirlpool® electric range with a dual element stove top helps you get dinner to the table. Skip preheating for favorites like pizza with Frozen Bake™ technology. This self cleaning oven also prevents cooked food from getting cold with the Keep Warm setting. Closed door broiling helps keep the kitchen comfortable.

### Top Features

FlexHeat™ Dual Radiant Element

Get two elements in one with a 6" inner ring that's great for smaller pots and pans and a 9" expandable outer ring that makes room for larger cookware.

Frozen Bake™ technology
Skip preheating and cook frozen favorites like pizza in fewer steps with preprogrammed settings that automatically adjust cooking times for you.

Keep Warm setting
Keep dishes from getting cold with this setting that delivers low heat to the oven.

Oven Window Size Handle Color

Handle Material

Closed Door Broiling
Maintain the optimal cooking temperature for food while still keeping the kitchen comfortable and cool using this broiling temperature management system that helps prevent overheating.

Dimensions		EXI
Depth	27 3/4	Har
Height	36	
Width	29 7/8	Fea
Configuration and Ov	erview	Hot
Range Type	Freestanding	Hea
Fuel Type	Electric	Ind
Size (IN,inches)	30	Pov
Exterior		Aut
Door Removable	Yes	Adj
Drawer Type	Storage Drawer	Po
Oven Door	Glass Window	PANAGRAI

Extra Large

Metal

Stainless Steel

Exterior	
Handle Type	Reach-Through Handle
Features	
Hot Surface Indicator Light	Yes
Heating Element On Indicator Light	Yes
Power On Indicator Light	No
Griddle	NA
Automatic Convection Conversion Temperature Adjust	No
Power Outage Compatible	No



### CANADIAN APPLIANCE SOURCE LP

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice. Dimensions are for

planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.


Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 31 of 40

### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

#### **Product Dimensions**



- A. 273/4" (70.5 cm) max. depth with handle
- B. 46<sup>7</sup>/<sub>8</sub>" (119.1 cm) overall height (max.) with leveling legs screwed all the way in\*
- C. 36" (91.4 cm) cooktop height (max.) with leveling legs screwed all the way in\*
- D. 29<sup>7</sup>/<sub>8</sub>" (75.9 cm) width
- E. 255/16" (64.3 cm) depth back of range to front of cooktop\*\*
- Model/serial/rating plate (located on the frame behind a top corner of the door or either side of the drawer)

IMPORTANT: Range must be level after installation. Follow the instructions in the "Level Range" section. Using the cooktop as a reference for leveling the range is not recommended.


- \*Range can be raised approximately 1" (2.5 cm) by adjusting the leveling legs.
- \*\*Front of door and drawer may extend further forward depending on styling.

### **Cabinet Dimensions**

Cabinet opening dimensions shown are for 25" (64.0 cm) countertop depth, 24" (61.0 cm) base cabinet depth and 36" (91.4 cm) countertop height.

IMPORTANT: If installing a range hood or microwave hood combination above the cooking surface, follow the range hood or microwave hood combination installation instructions for dimensional clearances above the cooktop surface.

A freestanding range may be installed next to combustible walls with zero clearance.



- A. 13" (33.0 cm) max. upper cabinet depth
- B. 30" (76.2 cm) min. opening width
- C. For minimum clearance to top of cooktop, see NOTE\*
- D. 30" (76.2 cm) min. opening width

  E. Outlet 8" (20.3 cm) to 22" (55.9 cm) from either cabinet,
  7" (17.8 cm) max. from floor.
- F. Cabinet door or hinges should not extend into the cutout.

\*NOTE: 24" (61.0 cm) minimum when bottom of wood or metal cabinet is covered by not less than 1/4" (6.4 mm) flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" (0.4 mm) stainless steel, 0.024" (0.6 mm) aluminum or 0.020" (0.5 mm) copper.

30" (76.2 cm) minimum clearance between the top of the cooking platform and the bottom of an uncovered wood or metal cabinet.



Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 32 of 40

### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

Electrical Requirements - Canada Only

### AWARNING



**Electrical Shock Hazard** 

Electrically ground range.

Failure to do so can result in death, fire, or electrical shock.

If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path is adequate and wire gauge are in accordance with local codes.

Be sure that the electrical connection and wire size are adequate and in conformance with CSA Standard C22.1, Canadian Electrical Code, Part 1 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

Canadian Standards Association 178 Rexdale Blvd. Toronto, ON M9W 1R3 CANADA

Check with a qualified electrical installer if you are not sure the range is properly grounded.

Range Rating*	*	Specified Rating of Power Supply Cord Kit and Circuit Protection
120/240 V	120/208 V	Amps

\*The NEC calculated load is less than the total connected load listed on the model/serial/rating plate.

\*\*If connecting to a 50 A circuit, use a 50 A rated cord with kit. For 50 A rated cord kits, use kits that specify use with a nominal 13/8" (3.5 cm) diameter connection opening.

- A time-delay fuse or circuit breaker is recommended.
- This range is equipped with a CSA International Certified Power Cord intended to be plugged into a standard 14-50R wall receptacle. Be sure the wall receptacle is within reach of range's final location.



Do not use an extension cord.

### INSTALLATION INSTRUCTIONS

Unpack Range


### AWARNING

**Excessive Weight Hazard** 

Use two or more people to move and install range.

Failure to do so can result in back or other injury.


- Remove shipping materials, tape and film from range.
- 2. Remove oven racks and parts package from inside oven.
- 3. Do not remove the shipping base at this time.



A. Shipping base

### 4. On Ranges Equipped with a Storage Drawer:


Remove the storage drawer. See the "Storage Drawer" section. Use a 1/4" (6.4 mm) drive ratchet to lower the rear leveling legs one-half turn. Use a wrench or pliers to lower front leveling legs one-half turn.



- A. 1/4" (6.4 mm) drive ratchet
- B. Rear leveling leg
- C. Wrench or pliers
- D. Front leveling leg

### On Ranges Equipped with a Warming Drawer or Premium Storage Drawer:

On ranges equipped with a warming drawer or premium storage drawer, the rear legs cannot be accessed by removing the warming drawer or premium storage drawer. It will be necessary to adjust the rear legs from outside the range. Use wrench or pliers to lower the front and rear leveling legs one half turn.



- A. Rear leveling leg
- B. Wrench or pliers
- C. Front leveling leg





Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 33 of 40

### WHIRLPOOL 30" (76.0 CM) FREESTANDING ELECTRIC RANGES Model YWFE515S0JS

### Install Anti-Tip Bracket



Tip Over Hazard

A child or adult can tip the range and be killed.

Install anti-tip bracket to floor or wall per installation instructions.


Slide range back so rear range foot is engaged in the slot of the anti-tip bracket.

Re-engage anti-tip bracket if range is moved.

Do not operate range without anti-tip bracket installed and engaged.

Failure to follow these instructions can result in death or serious burns to children and adults.

- 1. Remove the anti-tip bracket from where it is taped inside the storage drawer or warming drawer.
- Determine which mounting method to use: floor or wall. If you have a stone or masonry floor, you can use the wall mounting method. If you are installing the range in a mobile home, you must secure the range to the floor.
- Determine and mark centerline of the cutout space. The mounting can be installed on either the left-side or right-side of the cutout. Position mounting bracket against the wall in the cutout so that the V-notch of the bracket is 129/16" (31.9 cm) from centerline as shown.




A. 129/16" (31.9 cm) B. Bracket V-notch

Drill two 1/8" (3 mm) holes that correspond to the bracket holes of the determined mounting method. See the following illustrations.

### Floor Mounting








Front position

Diagonal (2 options)

### **Wall Mounting**



- 5. Using the Phillips screwdriver, mount anti-tip bracket to the wall or floor with the two #12 x  $1^5/_8$ " (4.1 cm) screws provided.
- Move range close enough to opening to allow for final electrical connections. Remove shipping base, cardboard or hardboard from under range.
- Move range into its final location, making sure rear leveling leg slides into anti-tip bracket.



8. Move range forward onto shipping base, cardboard or hardboard to continue installing the range using the following installation instructions.





Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

### 34 of 40



# Whirlpool 55 dBA\* Front Control Dishwasher



Stainless Steel WDF330PAHS

### Also available in:

( ) White

WDF330PAHW

Black

WDF330PAHB

Capacity	
Total Place Settings	13
General Features & Propert	ies
Heavy Cycle	
High Temperature Wash O	ption
Heated Dry Option	
ENERGY STAR® Certified	to garanta and a says
Industry's Best Selling Dis	hwasher Brand <sup>†</sup>
Designed, Engineered and U.S.A. with American Pride	
Electrical Details	A PARTIE
Amps	10
Volts	120
Hz	60
Certifications	Authorization (Children
CEL TILICOTIONS	

Technical Details	
Dishwasher Type	Built-in
Control Location	Front
Control Type	Push Buttor
Number of Wash Cycles	3
Number of Options	4
dBA*	55
Number of Racks	2
Tub Material	Plastic
Wash System	Filter
Wash System Type	Removable Filter
Number of Wash Arms	2
Dimensions	
Product Dimensions (H x W x D)	34-1/2" x 23-7/8" x 24-1/2"
Depth with Door Open 90°	49-1/2"

Reference Material **Dimension Guide** 

Install Guide

Use & Care Guide

**Energy Guide** 

Warranty

### Key Features & Benefits

### 1-Hour Wash Cycle


Clean dishes in half the time so your plates, pans and glasses are thoroughly cleaned up and taken care of in just an hour."

### Soil Sensor

Determines how dirty dishes are and adjusts the Normal cycle as needed to make sure dishes come out clean.

### **Normal Cycle**

Use for normal amounts of food soil to clean up leftover messes from your day-to-day meals.





<sup>\*</sup>Per IEC standards. \*\*Compared to Normal cycle with lightly soiled loads. †Based on 12-month average of sales. TraQline 2018. NOTE: Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. ®/™ © 2020. All rights reserved. Printed in the U.S.A. D200052XXA. WDF330PAHSPECSHEETV01.

Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

# 35 of 40




### **Undercounter Dishwasher**

### PRODUCT MODEL NUMBERS

WDF110PAB	WDF320PAD	WDT710PAH
WDF111PAB	WDF330PAH	WDT720PAD
WDF120PAF	WDF331PAH	WDT730PAH
WDF121PAF	WDF520PAD	WDT735PAG
WDF130PAH	WDF540PAD	WDT735PAH
WDF131PAH	WDF545PAF	

### DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

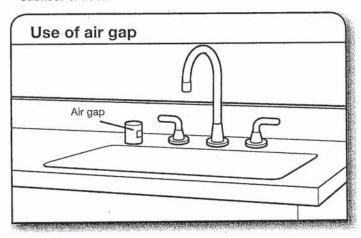

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

### WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with 3/4" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

**NOTE:** If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

### **ELECTRICAL REQUIREMENTS**

### You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

### If Connecting Dishwasher with a Power Cord:

- Use a UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



### If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.

■ Use a UL Listed/CSA Approved metallic strain relief.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice. Page 1 of 2 W10806908-D-WH 12/16






Unit: 3192C-18, Phase: 3


Model: 20-1606 B The Grassfield

# 36 of 40

### PRODUCT AND CABINET OPENING DIMENSIONS



For 4" (100 mm) toe kick, height of cabinet opening is 341/2" (863 mm).



- A. Insulation may be compressed (not used on all models).
- B. Door handles may protrude forward of the face of the dishwasher, (varies by model).

Check that all surfaces have no protrusions that would prohibit dishwasher installation. 101/211 NOTE: Shaded areas of cabinet walls show where utility connections may be installed. (267 mm) 34" (864 mm) 4" (102 mm) 63/4" (172 mm) 61/4" (76 mm 21/4" (64 mm) 13/4" (44 mm) (620 mm) (51 mm) (620 mm) C. Measured from the lowest point on the underside of the countertop. May be reduced to 331/2" (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher. D. Minimum, measured from narrowest point of opening.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

Page 2 of 2 W10806908-D-WH 12/16






Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

37 of 40

5.0 cu.ft I.E.C. Closet-Depth Front Load Washer with Intuitive Controls

Model: WFW560CHW

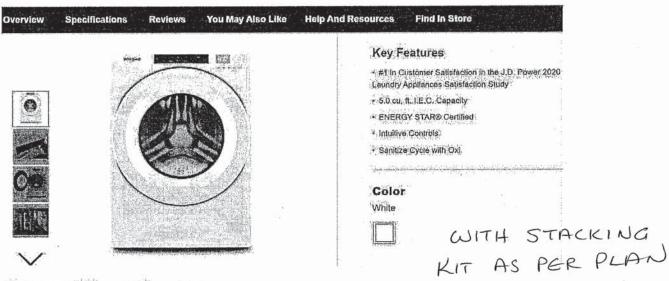

### **Specifications**

Width: 6858,00, 27.0" Centimeters, Inches Depth: 8016.88, 31-9/16" Centimeters, Inches

Capacity	4-3/10	
Depth	8016.88 cm, 31-9/16 in	
Gross Weight	97058688.00 kg, 214 lbs	
Net Weight	92532768.00 kg, 204 lbs	
Width	8858.00 cm, 27,0 in	
Appearance	Particle Transferretorialistic Cataly (417-7777)	
LCD Touch Screen	No	
Window	Yes	
Details		
Advanced Vibration Control <sup>34</sup>	No	
Dispense System	Delorgent, Fabric Softener & Bleach	
The state of the property of the state of th	Dieda	
Eco Monitor/Efficiency Monitor	No	
Hoses included	41. 4in Drain Hose Included	
Internal Heater	Ņo	
Maximum Spin Speed	1160	
Out Of Balance Sensing	Ýes	
Water Factor	3-115	
Cycles and Options		
Number of Wash Cycles	35	
Electrical		
Power Cord Included	Yes	
Controls	2.5	
Automatic Temperature Controls	Yes	
Automade Jemperature compois		

Compatibility	G.
Works With	No
Options	
Number Of Washer Options	7
Features	
Stackable	Yes
Water Faucet	No
Cycles	
Number Of Wash Cycles	35
Exterior	
Lid/Door Lock	Yes
Lid/Door Swing	Left
Modifiers	
Delay Start	Nộ
Number Of Rinse Options	2
Number Of Soil Levels	.3
Number Of Spin Speeds	
Number Of Wash/Rinse Temperatures	4
Pre Saak	Yes
Temperature Selections	Hot, Cold, Cool, Warm






Unit: 3192C-18, Phase: 3


Model: 20-1606 B The Grassfield

# 38 of 40


Recessed area or closet installation (stacked \ washer and dryer)

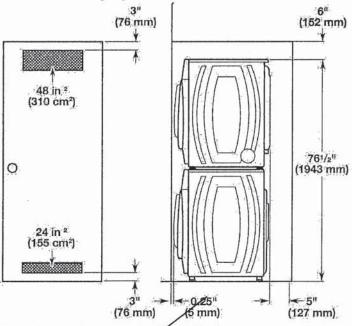



Custom under counter installation



Recessed area or closet installation (washer only)

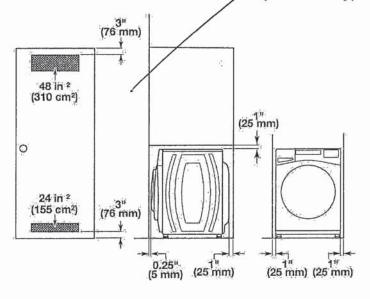






### **Drain System**

It is the responsibility of the installer to install and secure the drain hose in to the provided plumbing/drain in a manner that will avoid the drain hose coming out of o leaking from the plumbing/drain.

Drain system can be installed using a floor drain, wall standpipe, floor standpipe, or laundry tub. Select the method you need.

**IMPORTANT:** To avoid siphoning, only 4.5" (114 mm) of drain hose should be inside standpipe. Always secure drain hose with cable tie.

Floor standpipe drain system

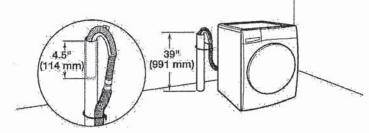

Minimum diameter for a standpipe drain: 2" (51 mm). Minimum carry-away capacity: 17 gallons (64 L) per minute. A 1/4" (6 mm) diameter to 1" (25 mm) diameter Standpipe Adapter Kit is available; refer to the Quick Start Guide for online ordering information. Top of standpipe must be at least 39" (762 mm) high; install no higher than 96" (2.4 m) from bottom of washer. If you have an overhead sewer and need to pump higher than 96" (2.4 m), a sump pump and associated hardware are needed. See "Alternate Parts."

(,)




11

Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield


# 39 of 40

### Wall standpipe drain system

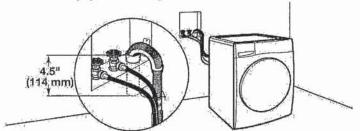


See requirements in "Floor standpipe drain system."


### Laundry tub drain system



Minimum capacity: 20 gallons (76 L). Top of laundry tub must be at least 39" (991 mm) from the floor; install no higher than 96" (2.4 m) from bottom of washer.



### Floor drain system

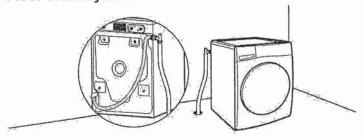

Floor drain system requires a Siphon Break Kit, 2 Connector Kits, and an Extension Drain Hose that may be purchased separately; refer to the Quick Start Guide for online ordering information. Minimum siphon break height: 28" (710 mm) from bottom of washer. (Additional hoses may be needed.)

### **Electrical Requirements**

### AWARNING



**Electrical Shock Hazard** 

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

- A 120 V, 60 Hz, AC only, 15 or 20 A, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit breaker serving only this appliance be provided.
- This washer is equipped with a power supply cord having a 3-prong grounding plug.
- To minimize possible shock hazard, the cord must be plugged into a mating, 3-prong, grounding-type outlet, grounded in accordance with local codes and ordinances. If a mating outlet is not available, it is the personal responsibility and obligation of the customer to have the properly grounded outlet installed by a qualified electrician.
- If codes permit and a separate ground wire is used, it is recommended that a qualified electrician determine that the ground path is adequate.
- Do not ground to a gas pipe.
- Check with a qualified electrician if you are not sure the washer is properly grounded.
- Do not have a fuse in the neutral or ground circuit.

### **GROUNDING INSTRUCTIONS**

For a grounded, cord-connected appliance:

This appliance must be grounded. In the event of a malfunction or breakdown, grounding will reduce the risk of electric shock by providing a path of least resistance for electric current. This appliance is equipped with a cord having an equipment-grounding conductor and a grounding plug. The plug must be plugged into an appropriate outlet that is properly installed and grounded in accordance with all local codes and ordinances.

WARNING: Improper connection of the equipment-grounding conductor can result in a risk of electric shock. Check with a qualified electrician or serviceman if you are in doubt as to whether the appliance is properly grounded. Do not modify the plug provided with the appliance: If it will not fit the outlet, have a proper outlet installed by a qualified electrician.

For a permanently connected appliance:

This appliance must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the appliance.

SAVE THESE INSTRUCTIONS






Unit: 3192C-18, Phase: 3

Model: 20-1606 B The Grassfield

40 of 40

### WHIRLPOOL DRYER Model #: YWED5620HW

Whistpool Brand Canada English | Washer and Drivers | Drivers | Electric Drivers | YWED5520HW





7.4 cu. ft. Front Load Electric
Dryer with Intuitive Touch
Controls

WITH STACKING RIT AS PER PLIAN



7.4 cu. ft. Front Load Electric Dryer with Intuitive Touch Controls

to the same processes to be same a market of the colored and the same and the same and the colored the same and

Madel #: YWED5620FIW

### Dimensions

Depth	78.74 cm, 31.0 in	
Depth With Door Open 90 Degree	138.43 cm, 54-1/2 in	
Height	98.42 cm, 38-3/4 in	
Width	68.58 cm, 27.0 in	
Configuration and Overview		
Fuel Type	Electric	
Cycles and Options	32,227	
Cycle Time Remaining	Yes	
Lint Filter Indicator	No	
Number of Dryer Cycles	36	
Number of Dryness Levels	3	
Ventilation System		
Long Vent	No in the second of the second	
Maximum Vent Length	64	
Venting Direction	Left, Right, Bottom, Rear	
Electrical		
Hz	60	
Power Cord Included	Yes	



