



APPLIANCE CHECKLIST

It may seem early to be thinking about appliances, but they are an important part of your kitchen design and may require upgrades to your HVAC, plumbing and electrical plans. It's important that we are provided with your appliance information during the structural and foundation part of the Design Process, so that these upgrades can be included on your invoice, if required.

ITEM	BRAND	MODEL NUMBER
FRIDGE	CAFE	CVE28DP4NW2
DISHWASHER	CAFE	CDT888P4VW2
RANGE	CAFE	C2Y366P4TW2
Type: Gas <input checked="" type="checkbox"/> Electric <input type="checkbox"/> Induction <input type="checkbox"/> Electrical: 30 Amp <input checked="" type="checkbox"/> 40 Amp <input type="checkbox"/> 50 Amp <input type="checkbox"/>		Waterline Required <input type="checkbox"/>
WALL OVEN	NA	
Type: Gas <input type="checkbox"/> Electric <input type="checkbox"/> Electrical: 30 Amp <input type="checkbox"/> 40 Amp <input type="checkbox"/>		Waterline Required <input type="checkbox"/>
WARMING DRAWER	NA	
Electrical: 15 Amp <input type="checkbox"/> Other: Specify		
COOKTOP	NA	
Type: Gas <input type="checkbox"/> Electric <input type="checkbox"/> Induction <input type="checkbox"/> Electrical: 15 Amp <input type="checkbox"/> 40 Amp <input type="checkbox"/> 50 Amp <input type="checkbox"/>		
BUILT IN MICROWAVE	NO MICROWAVE	
Electrical: 15 Amp <input type="checkbox"/> 30Amp <input type="checkbox"/> 240 Volt <input type="checkbox"/> 120 Volt <input type="checkbox"/>		
MICROWAVE TRIM KIT	NA	
OTR MICROWAVE	NA	
WASHING MACHINE	LG	WM6500HBA
DRYER	LG	DLEX6500B
Type: Gas <input type="checkbox"/> Electric <input checked="" type="checkbox"/> Stacked <input type="checkbox"/>		
OTHER: HOODFAN	CYCLONE	BX21534
OTHER: BAR FRIDGE	CAFE	CCP06BP4PW2
OTHER:		

Hood Fans must be purchased through Phoenix Homes, and will require an upgrade to a make up air system for any hood fans above 300CFM. Standard hood fan vent pipe is 6".


A make up air system is a required upgraded for all gas stoves/cooktops.

Any changes from the standard kitchen plan and/or standard electrical, plumbing and electrical specifications/plans may be subject to additional fees.


Community: DIAMONDDVIEW (3)

Lot #: 82

Purchaser Signature:

DocuSigned by:

 A9DE73C592724B9...

Purchaser Signature:


Signed by:

 8B91053C9BAA4A3...

Café™ Beverage Center

CCP06BP4PW2 / CCP06BP3PD1 / CCP06BP2PS1

C A F É

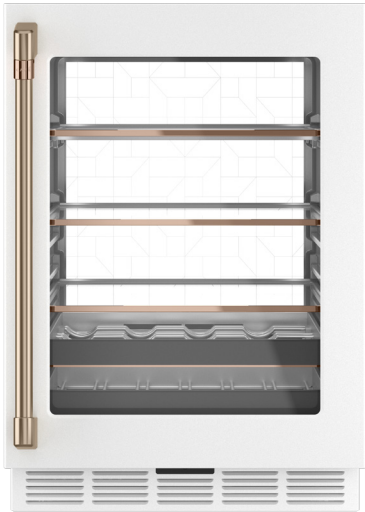DISTINCT BY DESIGN™



CCP06BP4PW2
Matte White with Brushed
Bronze handles

ALSO
AVAILABLE IN



CCP06BP2PS1
Stainless Steel with
Brushed Stainless
handles



CCP06BP3PD1
Matte Black with
Brushed Stainless
handles

FEATURES

Control Type	Electronic
Interior Lighting	LED / LED Light Wall
Leveling System	Leveling Legs
Defrost Type	Automatic
Sabbath Mode	Yes

CAPACITY

Total Capacity (cubic feet)	5.1 cu ft
-----------------------------	-----------

WEIGHTS & DIMENSIONS

Approximate Shipping Weight	147 lb
Net Weight	137 lb
Depth Without Handle	23 3/8 in
Overall Depth	26 in
Overall Height	34 1/8 in
Overall Width	23 3/4 in



FEATURES & BENEFITS

- Total Capacity: 5.1 Cu. Ft.
- Capacity: 126 Cans/14 Bottles
- ADA Compliant: Yes
- Energy Star: Yes
- BI capable: Yes
- Door Type: Glass
- Reversible Door: Yes
- Handle: Yes
- Shelf Type: 3 Spill Proof/3 Glass/2 Wine Racks
- Smart Capable: Yes
- Freezer: No
- Control Type: Electronic
- Internal Lighting: LED Light Wall
- Triple Pane Glass Door: The triple pane glass door improves temperature stability, reduces condensation and enhances energy efficiency compared to a double pane glass door.

DS Initial

Café™ Beverage Center


CCP06BP4PW2 / CCP06BP3PD1 / CCP06BP2PS1



WARRANTY

Warranty notes	See written warranty for full details
Labor warranty	Limited 1-year entire appliance
Parts warranty	Limited 1-year entire appliance
Parts warranty	Limited 5-year sealed refrigerating system

DIMENSIONS

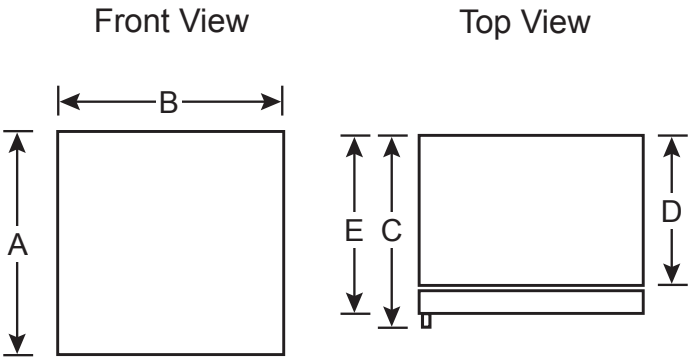

Overall Dimensions	Height (in.) A	34 1/8
	Width (in.) B	23 3/4
	Depth (in.) C	26
	Case Depth Without Door (in.) D	21 3/4
	Depth Without Handle (in.) E	23 3/8

ADDITIONAL ACCESSORIES



CXQW1H1PPBZ
Brushed Bronze
(Standard on Matte White)



CXQW1H1PPSS
Brushed Stainless
(Standard on Matte Black and Stainless Steel)



CXQW1H1PPBT
Brushed Black



CXQW1H1PPCU
Brushed Copper



CXQW1H1PPFB
Flat Black



CXQW1H1PPCG
Brushed Brass

Café™ CustomFit Stainless Interior Built-In Dishwasher with Hidden Controls

CDT888P4VW2/CDT888P3VD1/CDT888P2VS1

C A F É

DISTINCT BY DESIGN™



ALSO AVAILABLE IN

- CDT888P3VD1
Matte Black with
Brushed Stainless handles
- CDT888P2VS1
Stainless Steel with
Brushed Stainless handles

CDT888P4VW2
Matte White with Brushed
Bronze handles



FEATURES & BENEFITS

Luminous LED Lights – Shine bright with uniform LED lighting throughout this well-lit dishwasher for simplified loading and unloading.

39 dBA Dishwasher – Enjoy a peaceful kitchen while delivering a powerful wash thanks to this super-silent 39 dBA dishwasher.

CustomFit Top Rack with Ultra Wash – Load your way in this dishwasher with a customizable top rack. The CustomFit Top Rack can be configured to maximize flexibility. In addition, the Ultra Wash Zone uses powerful jets to target stuck-on food on silverware, spatulas, ramekins and lids.

CustomFit Basket with Ultra Wash – Load more than just silverware in this flexible basket with dedicated wash jets below. The CustomFit Basket holds all your silverware, 9" tall stemware and reusable straws, so items that were hand-washed before can safely be washed in the dishwasher.

CustomFit Lid Caddy – Cup lids and blender blades can easily dry thanks to the CustomFit Lid Caddy. It is designed to hold items at the perfect position for cleaning and restricts water from pooling, so pieces come out clean and dry after every wash.

Smart Features Powered by SmartHQ™ – Built-in WiFi and the SmartHQ™ app make it easy to control and monitor your smart dishwasher from anywhere. You can also conveniently access the latest features like Favorites, which allows you to access your favorite cycles with a single button.

Smart Assist – Smart Assist makes it simple for you to unlock optimal wash and dry performance. Innovative dishwasher sensors and intelligent machine learning enhance and improve cycles over time.

Ultra Wash & Dry – This ultra-wash and dry dishwasher ensures table-ready dishes. Ranging from gentle for delicate stemware to intense for pots and pans, flexible wash options ensure that dishes get full coverage and the right amount of pressure for an ideal clean.

Dual Convection Ultra Dry with Hidden Heat – Expect precision cleaning and superior dryness on fine china, dinnerware and plastics in this ultra-wash and dry dishwasher. The Dual Convection Ultra Dry with Hidden Heat ensures that every item is fully dried, even dishwasher-safe plastics.

Customizable Dishwasher Handles – Choose from six unique Café handle finishes to complement the rest of your kitchen thanks to this dishwasher with customizable hardware.

4 Bottle Wash Jets – This dishwasher with 4 bottle wash jets ensures a deep clean for tall items, narrow glasses, jars and more. In the upper rack, each of the jets directs water and detergent inside to effectively wash hard-to-reach areas.

Silverware Wash – Powerful jets in the top rack and CustomFit basket work in unison using targeted washing action to clean even the most stuck-on foods from silverware, cooking utensils and more.

Presoak + Sanitize – Save time with a high-temperature cycle that steams and sanitizes. Loosen tough soils before the wash cycle begins without the need to pre-rinse or soak. Plus, a sanitization cycle reduces 99.999% of bacteria on dishes.

Leak Defense with Active Flood Protect – Leak Defense with Active Flood Protect senses and prevents potential overflows. A powerful water sensor alerts and guides you through the new Smart Assist feature if even a small amount of water leaks below the unit.

Wash Zones – Wash a true half load in the upper or lower rack whenever you need to in this dishwasher with loading flexibility. Just choose your wash zone: upper or lower. The feature works in combination with most cycles, saving you time and conserving energy.

Smooth-Glide Adjustable Middle Rack – Load your dishwasher your way thanks to an adjustable middle rack. Easily move it up and down to fit bottles, large platters and other items as tall as 10.5".

Middle and Lower Rack Fold-Down Tines – Two rows of adjustable tines in both the middle and lower rack allow you to load the way you want. Sixteen different tine positions offer the ultimate customization to fit all of your items.

Flush Installation – Cabinet-depth flush installation ensures your dishwasher blends in with the design of your kitchen without sacrificing space for dishes inside.

Piranha™ Hard Food Disposer – The Piranha™ Hard Food Disposer lets you use your dishwasher without pre-rinsing. Its stainless steel impellers rotate to pulverize food particles and an anti-jamming design make sure wash arms stay unclogged.

FEATURES

Style	Built-In
Tub and Door Liner	Stainless Steel
Tub Type	Tall Tub
Control Type	Top Controls; Cap Touch Controls; 12 Touchpads
Dishwasher Control Features	Audible End-of-Cycle Signal; Cycle Countdown with Bi-Color LED Status Light on door; Cycle Progress Indicators; Clean/ Sanitized/Smart Assist/WiFi/Remote Enabled; Last Cycle Memory; Fingerprint Resistant
Wash System	3-Level; 800 Series
Wash System Features	90+ Spray Jet Wash System; Automatic HotStart; Automatic Temperature Control; Bottle Jets (4); Deep Clean Silverware Jets; Drain Pump; Hard Food Disposer with removable filter; Hidden Heater; Lower Wash Arm; Middle Wash Arm; Side Jets; Variable Speed Dual Pumps and Motors
Sensor	Clean Sensor
Wash Arms	3rd Rack; 4 Wash Levels; Bottle Jets; Deep Clean Silverware Jets; Lower; Middle; Upper; CustomFit Basket with Ultra Wash Jets
Water Filtration System	100% Filtration with Hard Food Disposer and Removable Filter
Dispenser	Rinse Aid with Indicator and Adjustment; Electronic Low Rinse Aid Sensor
Number of Cycles	5
Dishwasher Cycles	Auto Wash; Cascade Platinum Plus (on app); Cookware; Express; Gentle; Normal
Number of Options	15
Dishwasher Options	1/2 Load (on app); Bottle Wash (on app); Delay Start 1-12 Hr.; Favorites (on app); Heated Dry Off; Hi-Temp Wash; Lock Controls; Normal Dry; Presoak + Sanitize (Certified to NSF Standard 184); Sabbath Mode; Silverware Wash; Start/Cancel; Ultra Dry; WiFi/Remote Enabled; Favorites on Machine and App
Rack Features	Adjustable Upper Rack; Ball-Tipped Tines; Cafe Flex Silverware Basket; Full Extension Slides – Middle; CustomFit Lid Caddy
Racking Material	Nylon
Rack Color	Black Pearl
Number of Place Settings	Up to 16
Upper Rack	1 Rack handle; 1/2 fixed tines, 1/2 fold down tines; Ball-Tip Tines; Fixed tines with Bottle Jets; Lid Manager; Premium Height Adjustable; Smooth Glide Middle Rack
Lower Rack	Ball-Tip Tines; 1/2 fixed tines, 1/2 fold down tines
Additional Protection	Active Flood Protect; Leak Defense with Active Flood Protect
Dishwasher Drying Features	Dual Convection Ultra Dry; Ultra/Normal/Off; Dual Fan Assist
Cutlery Tray	CustomFit Top Rack with Ultra Wash
Floor Protection	Leak Defense with Active Flood Protect; Leak Pan with Sensor
Leveling System	3 Point Leveling
Latch	Pull with Handle
Showroom Power Mode	Yes
WiFi Connect	Built-In
Exterior Style	Traditional
Racking System	Full 3rd Rack

ECONOMICAL/QUIET

Quiet Package	39 dBA
Quiet Features	Quiet Water Valve; Sealed Toe Kick; Tub Collar Trim
Motor Type	Variable Speed
Outer Wrap	Full-wrap Blanket; Bitumen
Door Insulation	Insulation; Mastic

WEIGHTS & DIMENSIONS

Cabinet Width	24 in
Approximate Shipping Weight	137 lb
Net Weight	124 lb
Overall Height	34 in
Height w/Legs Retracted - Minimum Height	33-3/8 in
Height w/Legs Extended - Maximum Height	34-5/8 in
Overall Depth	24 in
Overall Width	23-3/4 in

DS Initial

APPEARANCE

Door Style	Long Door with Top Controls
Installation	Side Installation or Top Installation Included; Built-Up Floor Capable; Flush Cabinet Installation
Door Appearance	Full-length flat door

Café™ CustomFit Stainless Interior Built-In Dishwasher with Hidden Controls

CDT888P4VW2/CDT888P3VD1/CDT888P2VS1




TECHNICAL DETAILS

Calrod Heater Watts	1200/400
Power Connection	Optional cord kit (GPFCORD - WX09X70910, WX09X70911)
Volts/Hertz/Amps	120 V; 60 Hz; 10.8 A


WARRANTY

Parts warranty	Limited 1-year entire appliance
Labor warranty	Limited 1-year entire appliance
Warranty notes	See written warranty for full details

DIMENSIONS

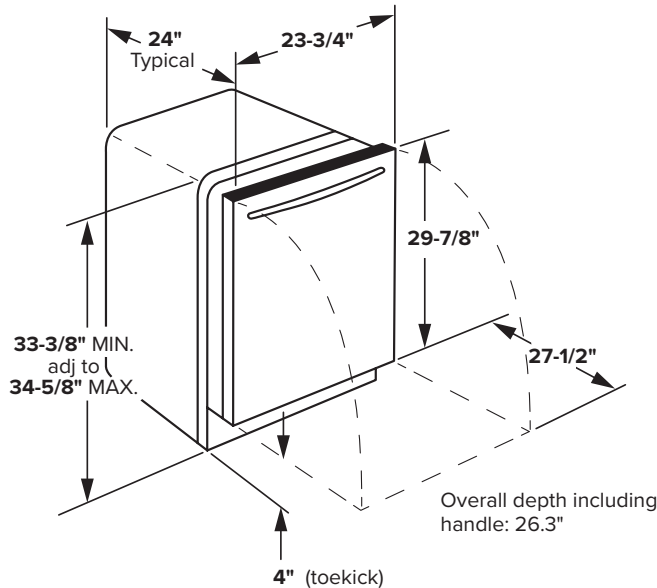

INSTALLATION DIMENSIONS

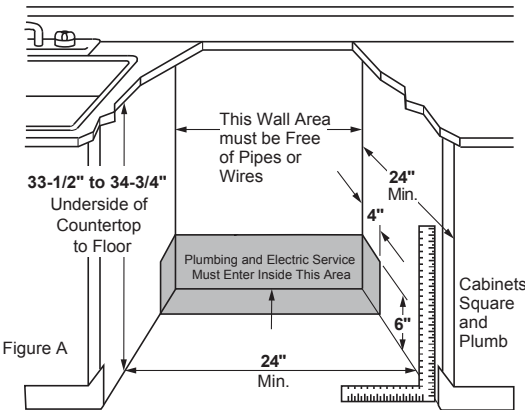

ADDITIONAL ACCESSORIES



CXADTH1PVB ACC
Brushed Black
Handle Kit



CXADTH1PVBZ ACC
Brushed Bronze
Handle Kit
(Standard on
Matte White)



CXADTH1PVCU ACC
Brushed Copper
Handle Kit



CXADTH1PVSS ACC
Brushed SS
Handle Kit
(Standard on
Matte Black and
Stainless Steel)



CXADTH1PVCG ACC
Brushed Brass
Handle Kit



CXADTH1PVFB ACC
Flat Black
Handle Kit

Café™ ENERGY STAR® 27.6 Cu. Ft. 4- Door
French-Door Refrigerator

CVE28DP4NW2 / CVE28DP2NS1 / CVE28DP3ND1



CVE28DP4NW2
Matte White with
Brushed Bronze handles



ALSO
AVAILABLE IN



CVE28DP2NS1
Stainless Steel
with Brushed
Stainless handles



CVE28DP3ND1
Matte Black
with Brushed
Stainless handles

FEATURES & BENEFITS

Enjoy the flexibility of a **Convertible Drawer with Soft Freeze** with settings as low as 23 degrees or as high as 42 degrees, and keep items organized with sliding glass dividers

Relish the bright, uniform light of an **LED light wall** that spans the back wall of the refrigerator, illuminating the fresh food section so every item is easy to find

Effortlessly fill containers with filtered water by simply pressing the **AutoFill** button which uses sensors to dispense the perfect amount every time

Keep your produce fresher thanks to a **Humidity Control System with two distinct bins**—a sealed high-humidity bin that preserves leafy green vegetables longer and a vented bin that provides the perfect environment for fruits

Easily pull out a slim, **full-width tray** to accommodate gourmet pizzas and other frozen, uniquely shaped items

Receive alerts on your smart device whenever your refrigerator's internal temperature dips below normal, thanks to **built-in WiFi connectivity** that helps you keep foods party-platter ready

From produce to packaged goods, keep any food fresh with **TwinChill™ evaporators** that create separate climates in the fresh food and freezer sections

Spend more time filling and less time fumbling thanks to the **Integrated Dispenser Design**, which senses your proximity and automatically illuminates, so you never have to compromise on function and fashion

APPEARANCE

Exterior design	Bowed flat top
Handle	Café™
Handle design	Café Pro
Hidden door hinge(s)	Yes

FEATURES

Configuration	French-door & Double drawer
WiFi connect	Built-in
Connected capabilities	Amazon Alexa; The Google Assistant; IFTTT
Temperature management features	Turbo Cool setting; Multiflow air system
Temperature management system	TwinChill™ evaporators
Defrost type	Frost Guard
Control type	Electronic temperature controls
Dispenser	Large stainless steel; Cubes, crushed ice and chilled water
Dispenser features	Hands-free AutoFill; Door alarm; LED dispenser light; Water filter indicator light
Icemaker	Space saving ice
Water filtration	GE water filtration 6 month; XWF; Water filter indicator light
Filter location	Left wall
Fresh food cabinet drawers	2 total; 2 adjustable humidity drawers
Fresh food cabinet shelves	4 glass split; 1 Quick Space shelf
Fresh food door bins	6 total; 2 with gallon storage; 1 adjustable
Fresh food door features	Dairy compartment
Fresh food features	LED light wall; Deli pan
Freezer door bins	3 (2 adjustable tilt-out)
Freezer storage baskets	2 full-width
Freezer features	Interior lighting - LED; Turbo Freeze; Freezer drawer with full-extension slides
Exterior style	Free-standing
Leveling system	2 point front adjustable
Performance features	Easily removable door gaskets; Sabbath Mode capable
Center drawer features	Convertible drawer; 6 temperature settings (Soft Freeze, Meats, Beverages, Snacks, Wine, Lock); 2 Tuck Away glass dividers; Full-extension slides

CAPACITY

Total capacity (cubic feet)	27.6 cu. ft.
Fresh food capacity	15.47 cu. ft.
Freezer capacity	8.44 cu. ft.
Convertible drawer capacity	3.65 cu. ft.

WEIGHTS & DIMENSIONS

Overall depth	36-3/4 in.
Overall height	69-7/8 in.
Overall width	35-5/8 in.
Case depth without door	29 in.
Depth with door open 90°	48-3/8 in.
Depth without handle	34-1/4 in.
Height to top of hinge	69-3/4 in.
Height to top of case	68-5/8 in.
Width w/door open 90 degrees incl. handle	44-7/8 in.
Back air clearances	2 in.
Side air clearances	1/8 in.
Top air clearances	1 in.
Approximate shipping weight	425 lb.
Net weight	390 lb.

DS Initial

Café™ ENERGY STAR® 27.6 Cu. Ft. 4- Door French-Door Refrigerator


CVE28DP4NW2 / CVE28DP2NS1 / CVE28DP3ND1




WARRANTY

Parts warranty	Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
Labor warranty	Limited 1-year entire appliance; Limited 5-year sealed refrigerating system
Warranty notes	See written warranty for full details


DIMENSIONS

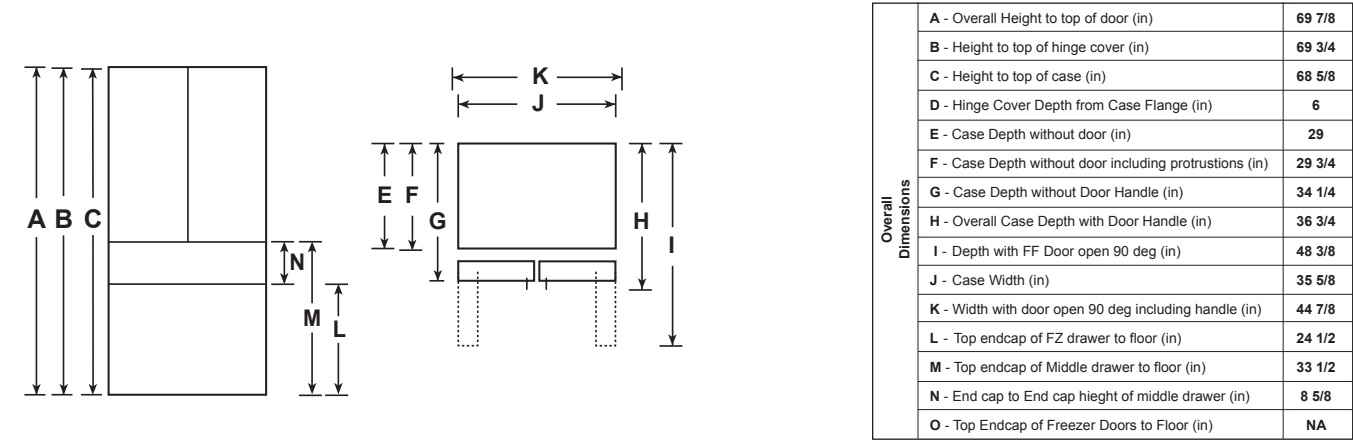


ADDITIONAL ACCESSORIES




CXQB4H4PNBZ
Brushed Bronze
4 handles
(Standard on Matte White)



CXQB4H4PNSS
Brushed Stainless
4 handles
(Standard on Matte Black and Stainless Steel)



CXQB4H4PNBT
Brushed Black
4 handles



CXQB4H4PNCU
Brushed Copper
4 handles

Café™ 36" Smart Dual-Fuel Commercial-Style Range with 6 Burners (Natural Gas)

C2Y366P2TS1 / C2Y366P3TD1 / C2Y366P4TW2



ALSO AVAILABLE IN



C2Y366P2TS1
Stainless Steel with Brushed Stainless handle and knobs



C2Y366P3TD1
Matte Black with Brushed Stainless handle and knobs



FEATURES & BENEFITS

Versatile Cooktop - The versatile cooktop on this commercial-style range features an entire arsenal of burners that give you the right amount of heat and control to perfectly cook anything from delicate sauces to expertly seared meats.

Caterer Oven - A large capacity oven fits a full-size catering pan and has three racks, large 8-pass bake and broil elements for even heat coverage and Precision Oven modes to help guarantee results for meals of any size.

Color-Matched Manifold with LCD Control - Get a coordinated look with a manifold that matches the range's finish and an LCD control panel that provides information like oven and probe temperatures and cooking time for perfect cooking results.

Superior Heat Distribution - The industry-exclusive Inspiral burner swirls the cooktop flame under cookware to more evenly spread heat from the center to the edges.

Multi-Ring Burner - A versatile burner offers different-sized flame rings on a single burner element, so it's like having multiple burners in one.

Two Griddle Burners - Cook more at once with two 12,000-BTU powerful burners that can be used together or separately with an optional griddle grill accessory.

Two High-Heat Burners - Boil water quickly with two 18,000-BTU Power Boil burners that give you more cooking power.

Three Baking Racks - Cook more at once with two enamel low-profile racks and one partially extended rack.

WIFI ENABLED FEATURES

Built-in WiFi - This smart oven features WiFi connection so you can control oven functions with the SmartHQ app on your smart device.

Precision Oven Modes - Simplify the cooking process with precision oven modes that automatically track progress, make time and temperature adjustments, and work with the SmartHQ™ app.

Precision Temperature Probe - An innovative temperature probe that helps you achieve the perfect level of doneness for oven favorites.

No-Preheat Air Fry - Cook healthier, crispier versions of your favorite foods in less time, thanks to an air fryer right in your oven that doesn't require preheating, a basket or a special tray.

FEATURES

Configuration	6 Burners
Cooking Technology	Convection
Oven Cleaning Type	Self-Clean with Steam Clean Option
Burner - Left Front	21,000 BTU Multi-ring Burner
Burner - Left Rear	18,000 BTU
Burner - Right Front	10,000 BTU
Burner - Right Rear	18,000 BTU
Burner - Center	12,000 BTU Front / 12,000 BTU Rear
Cooktop Burner Type	Sealed
Cooktop Surface	Porcelain-Enamel Gray
Dishwasher Safe Knobs	Yes
Control Location	Front controls
Control Type	Digital Temperature Display with Timer Display
Valves (Degree of Turn)	270
WiFi Enabled Features	Remote Oven Control Remote Notifications Clock Sync Scan-to-Cook Voice Control Precision Cooking Modes No Preheat Air Fry Meat Probe (App-Based func) Clock Set
Connected Integrations	Amazon Alexa DiGiorno Drop IFTTT Innit Sonos The Google Assistant
Range Control Features	Audible Preheat Signal Auto Oven Shut-Off Auto Self Clean Chef Connect Delay Clean Option Electronic Timer Front Controls In-Oven Broiling Oven "ON" Light Self-Clean Cool Down Time Display Temperature Probe
Oven Cooking Modes	Convection Bake Multi/Single Rack Convection Broil Hi/Lo Convection Roast Proof Warming
Oven Features	8-Pass Broil Element
Cooktop Burner Grate Features	Continuous Grates
Cooktop Burner Grate Material	Heavy Cast
Cleaning Time	Variable with Delay Clean Option
Self-Clean Oven Door Lock	Automatic
Oven Rack Features	1 Self-Clean Roller Rack 2 Self-Clean Flat Oven Racks 5 Rack Positions
Fuel Type	240V Electric and Natural Gas
Ignition System	Electronic w/Auto Reignition
Leveling System	4 Leveling Legs
Style	Commercial
Lower Oven Features	Dual element broil Hidden bake
Cooking System	True Convection with Reverse Air

CAPACITY

Total Capacity (cubic feet)	5.75 cu ft
-----------------------------	------------

DS Initial

Café™ 36" Smart Dual-Fuel Commercial-Style Range with 6 Burners (Natural Gas)

C2Y366P2TS1 / C2Y366P3TD1 / C2Y366P4TW2



ACCESSORIES

LP Conversion Kit	Included
Griddle	High Altitude Natural Gas: WB28X39728 High Altitude LP: WB28X39729
Backsplash	UX12BS36PSS, 12" backsplash UXADBS36PSS, 36" backsplash with shelf

WEIGHTS & DIMENSIONS

Cabinet Opening	36 in
Depth with Door Open	43 7/8 in
Approximate Shipping Weight	462 lb
Net Weight	417 lb
Overall Height	35-1/4 in
Height to Cooking Surface (in.)	35-1/4 - 36-3/4
Overall Width	35-7/8 in
Cabinet Width	36 in
Overall Depth	28-1/4
Depth Without Handle	26-7/8 in
Oven Interior Dimensions (W x H x D) (in.)	28-1/4 x 16-3/8 x 21-3/8

APPEARANCE

Color Appearance	Matte White
Cooktop Burner Grate Color	Matte Black
Oven Door Features	Big Clear View Oven Window
Handle Design	Café
Control Knobs	Brushed Bronze; Dishwasher Safe; Commercial-Style

POWER / RATINGS

Amp Rating at 208V	30
Amp Rating at 240V	30
Bake/Broil Wattage - Main Oven	2650/3000W
Top Burner BTU Rating - LP (000's BTU's)	(1) 18.0; (2) 15.0; (2) 12.0; (1) 9.1
Top Burner BTU Rating - Nat. Gas (000's BTU's)	(1) 21.0; (2) 18.0; (2) 12.0; (1) 10.0
Volts/Hertz/Amps	240V; 30A
Power Connection	Power Cord - Included
Convection Wattage	2500W

WARRANTY

Parts warranty	Limited 1-year entire appliance
Labor warranty	Limited 1-year entire appliance
Warranty notes	See written warranty for full details

DIMENSIONS AND INSTALLATION

Electrical Requirements: Ranges must be hooked up to a 208/240V, 60Hz properly grounded dedicated circuit protected by a 30-amp circuit breaker or time-delay fuse.

Gas Pressure Regulator: You must use the gas pressure regulator supplied with this range. For proper operations the inlet pressure to the regulator should be as follows:

Natural Gas:
Minimum pressure: 6" of Water Column
Maximum pressure: 13" of Water Column

Propane (LP) Gas:
Minimum pressure: 11" of Water Column
Maximum pressure: 13" of Water Column
See installation instructions for more details

Optional Backsplash Accessories: The range requires a 12" minimum clearance to a vertical combustible surface at the rear. A backsplash is required for installations with less than 12" clearance. The following backsplash accessories are available, or a custom, non-combustible backsplash can be used.

Order one with a 36"-wide range backsplash
UX12BS36PSS – 12" backsplash
UXADBS36PSS – 30"-36" adjustable-height backsplash with warming shelf

NOTE: Commercial-style ranges offer a number of choices in size and cooktop configurations. All commercial-style ranges are factory set for natural gas. Conversion kits are included with the range. High Altitude Natural Gas: WB28X39728; High Altitude LP: WB28X39729 are also available. The kits must be installed by a qualified service technician at additional cost.


Installation Information: Before installing, consult installation instructions packed with product or online at geappliances.com for current dimensional data.

A suitable 36" or wider vent hood is required for installation over ranges with a grill and recommended for all other ranges. Advance Planning: Refer to dimensional drawings for appropriate placement and necessary clearances when planning the installation.

- Advance Planning:** Refer to dimensional drawings for appropriate placement and necessary clearances when planning the installation.
- Working areas adjacent to the range should have 18" minimum clearance between countertop and cabinet bottom.
 - Clearance between range and side wall or combustible material must be at least 12" on each side.
 - Installation must conform with local codes. In the absence of local codes, the range must comply with the National Fuel Gas Code, ANSI Z223.1-1990.

WARNING: Installations without a hood require 48" minimum to combustibles. A custom hood installation with exposed horizontal combustible surfaces must have an Auto-On feature. Refer to hood installation instructions for specific hood clearances.

The surface of the entire back wall above the range and below the hood must be covered with a non-combustible material such as metal, ceramic tile, brick, marble or other stone.

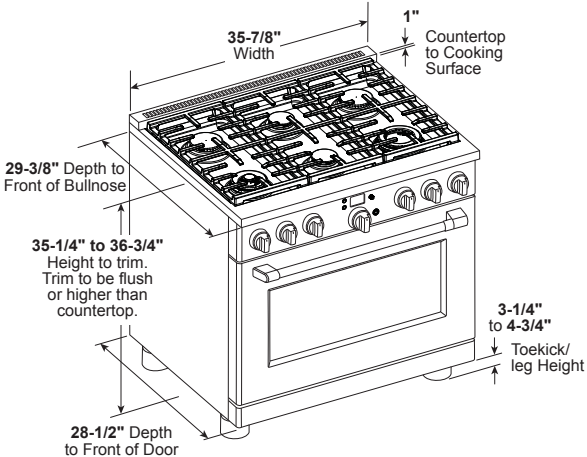

Café™ 36" Smart Dual-Fuel Commercial-Style Range with 6 Burners (Natural Gas)


C2Y366P2TS1 / C2Y366P3TD1 / C2Y366P4TW2

CAFÉ



DISTINCT BY DESIGN™

DIMENSIONS AND INSTALLATION

UTILITY LOCATIONS

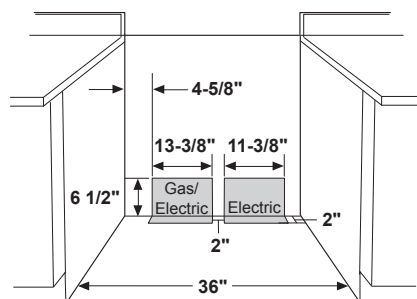

SIDE VIEW WITH BACKSPLASH

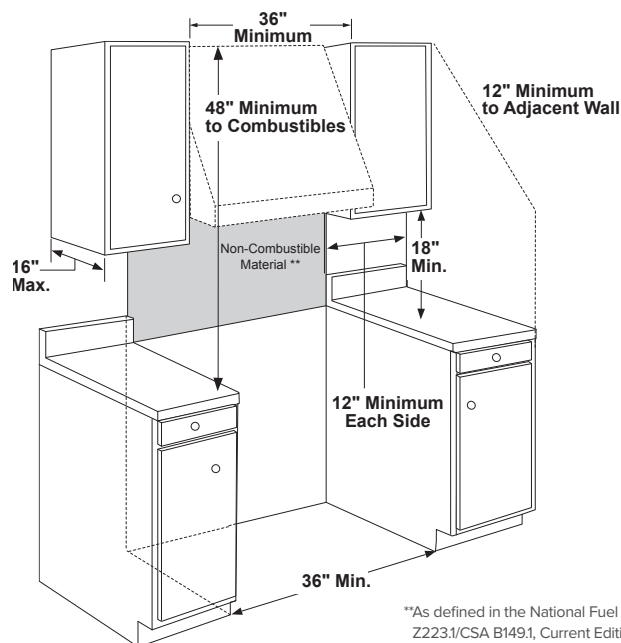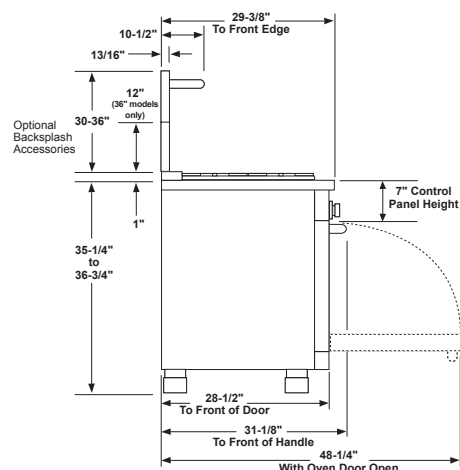

**As defined in the National Fuel Gas Code (ANSI Z223.1/CSA B149.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1/CSA 1.1 scope and are not certified by CSA. Clearances less than 12" must be approved by local codes and/or the authority having jurisdiction.

ADDITIONAL CLEARANCES

Allow 12" minimum clearance to an adjacent wall on each side. Working areas adjacent to the rangetop should have 18" minimum clearance between countertop and the bottom of the wall cabinet.

ADDITIONAL ACCESSORIES



CXPR6HKPTBZ
Brushed Bronze
1 handle, 8 knobs
(standard on Matte White)



CXPR6HKPTSS
Brushed Stainless
1 handle, 8 knobs
(standard on Matte Black)



CXPR6HKPTBT
Brushed Black
1 handle, 8 knobs



CXPR6HKPTCU
Brushed Copper
1 handle, 8 knobs



UXADBS36PSS
30"-36"H Stainless Steel
Adjustable Height
Backsplash with Shelf



UX12BS36PSS
12"H Stainless Steel
Backsplash



CXPR6TKPMWS
Matte White Toe Kick



CXPR6TKPMDS
Matte Black Toe Kick



CXPR6TKPMSS
Stainless Steel Toe Kick

SUMMARY

DV3 LOT 82 - WASHER WM6500HBA

DIMENSIONS



CAPACITY
5.8 cu.ft.

Dimensions (WxHxD)
27" x 39" x 33 1/8" (57 3/4" D with door open)

Steam Technology
Yes

ThinQ®
Yes

Key Spec

Capacity(cu. ft.)
5.8

Dimensions (WxHxD inch)
27 x 39 x 33 1/8

Steam
Yes

ThinQ(Wi-Fi)
Yes

DS Initial

All Spec

MATERIAL & FINISH

Body Color	Door Type
Black Steel (B)	Tempered Glass Door

CONTROL & DISPLAY

Display Type
LCD Display

CAPACITY

Capacity(cu. ft.)
5.8

ENERGY

ENERGY STAR® Qualified	ENERGY STAR® Most Efficient
Yes	Yes
IMEF	IWF
2.92	3

FEATURES

Type	6 Motion DD
Front Load Washer	Yes
AI DD	ColdWash
Yes	Yes
Drum Light	End of Cycle Signal
Yes	Yes
TurboWash	Inverter DirectDrive
Yes	Yes
Leveling Legs	LoadSense
4 Adjustable Legs	Yes

NeveRust Stainless Steel Drum

Yes

TrueBalance AntiVibration System

Yes

Steam

Yes

TurboWash360 °

Yes

PROGRAMS

AI Wash

Yes

Baby Wear

Yes

Bright Whites

Yes

Downloaded Cycle

Yes

Heavy Duty

Yes

Perm. Press

Yes

Rinse+Spin

Yes

Small Load

Yes

Towels

Yes

Allergiene

Yes

Bedding

Yes

Delicates

Yes

Hand Wash/Wool

Yes

Normal

Yes

Quick Wash

Yes

Sanitary

Yes

Sportswear(Activewear)

Yes

Tub Clean

Yes

POWER SOURCE

Electrical Requirements

120V, 10 Amps

ADDITIONAL OPTIONS

Add Item

Yes

Control Lock

Yes

ColdWash

Yes

Delay Wash

Yes

SUMMARY

DV3 LOT 82 - DRYER DLEX6500B

CAPACITY
7.4 cu ft.

Dimensions (WxHxD)
27" x 39" x 30 1/8" (51 3/8" D with door open)

Steam Technology
Yes

ThinQ®
Yes

All Spec

SUMMARY

Series
LG

Vent Type
Vented

LCD Display
Yes

Dial-A-Cycle®
Yes

Full Touch Electronic Control Panel with LED Display
No

Steam
Yes

Type
Front Load Dryer, Electric

On-Door Electronic Control Panel with LED Display
No

Hard Buttons
No

Touch Buttons
Yes

Matching Washer
WM6500HBA

Colour
Black Steel(B)

CAPACITY

Capacity
7.4 cu. ft.

DRYER PROGRAMS

No. of Programs

Programs (Sensor Dry)

DS Initial

23

Normal, AI Dry, Bedding, Delicates, Towels, Quick Dry,Timed Dry, Power Dry, Perm.Press, SteamFresh™, Heavy Duty, Air Dry, Steam Sanitary™, Super Dry, Active Wear, Jeans, Blanket Refresh, Low Temp Dry, Overnight Dry, Easy Ironing, Small Load, Large Load Dry,X Large Load Dry

No. of Options

12

Options

Cycle Optimization, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, TurboSteam®, Reduce Static, Remote Start, Drum Light, Signal, Cycle List Edit

Temperature Settings

High, Med.High, Medium, Low, Ultra Low

Drying Levels

Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry

Dry Mode

No

Manual Dry Times

10 min ~ 100 min (10 min incremental)

FABRIC CARE FEATURES

AI Sensor Dry™

Yes

Sensor Dry

Yes

Precise Temperature Control with Variable Compressor

No

Steam

TurboSteam®

CONVENIENCE FEATURES

3 Minute Installation Check

Yes

End of Cycle Signal

Yes

Drum Light

Yes

Reversible Door

Yes

FlowSense® Duct Clogging Indicator

Yes

Wrinkle Care Option

Yes

Control Lock

Yes

Venting Option

Electric: 4 Way Venting

4 Adjustable Legs

Yes

Remaining Time Display/Status Indicator(s)

Yes

THINQ®TECHNOLOGY

SmartDiagnosis™ (v3.0)
Yes

NFC Tag On Technology
No

Remote Start and Cycle Monitor
Yes

Wi-Fi
Yes

Energy Monitoring
Yes

ENERGY

ENERGY STAR® Certified
Yes

CEF
3.94

MATERIALS AND FINISHES

Aluminized Alloy Steel Drum
No

Cabinet
Painted Steel

All Available Colours
Black Steel (B), White (W)

NeveRust® Stainless Steel Drum
Yes

Door
Tempered Glass Door

POWER SOURCE

Ratings
CSA Listed

Type
Electric

Electrical Requirements
120/240V, 60Hz, 26A (120/208V, 60Hz, 23A)

OPTIONS/ACCESSORIES

Pedestal
WDP6B

DIMENSIONS

Product (WxHxD)

Depth with Door Open

27" x 39" x 29 3/4"	about:blank
Carton (WxHxD)	51 3/8"
28 7/8" x 43 1/8" x 31 3/8"	Weight (Product)
Weight (Carton)	124.3 lbs
136.5 lbs	Pedestal (WxHxD)
	27" x 13 5/8" x 28" (43 7/8" D with door open)

WARRANTY & UPC

Parts & Labor	Drum
1 Year	3 Years
UPC	
195174056448	

BX215 | CLASSIC Collection

Cyclone[®]
Breathe Better



28"



34"

Insert

The three speed control is located on the underside of the BX215 for easy access and control. The range hood cannot be seen from eye-level, allowing you to arrange your cabinets as though there were no fan, creating a fluid and classic look. Mesh filters efficiently filter the air while bright halogen light bulbs provide all the illumination you'll need. Another innovative design unique to Cyclone.

Green Features



3 Speed Slide
Control Panel



Grease Cup



Halogen Light Bulbs



Model	Colour	Ducting	Filters	Size	CFM	Fits Cabinet
BX21528	Stainless Steel	6"	Mesh	28"	550	30"
BX21534	Stainless Steel	6"	Mesh	34"	550	36"

Cyclone Range Hoods Inc.

1361 Huntingwood Drive, Unit 16. Toronto, ON. M1S 3J1. Canada.

Toll Free: 1-888-293-5662 Tel: (416) 293-0933 Fax: (416) 293-4793 Website: www.CycloneRangeHoods.com



DS Initial

BX215 | CLASSIC Collection



Features

- Insert range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed slide control
- Quick release aluminum mesh filters
- 2 halogen light bulbs (2 x 25W E26)
- Plug-in connection

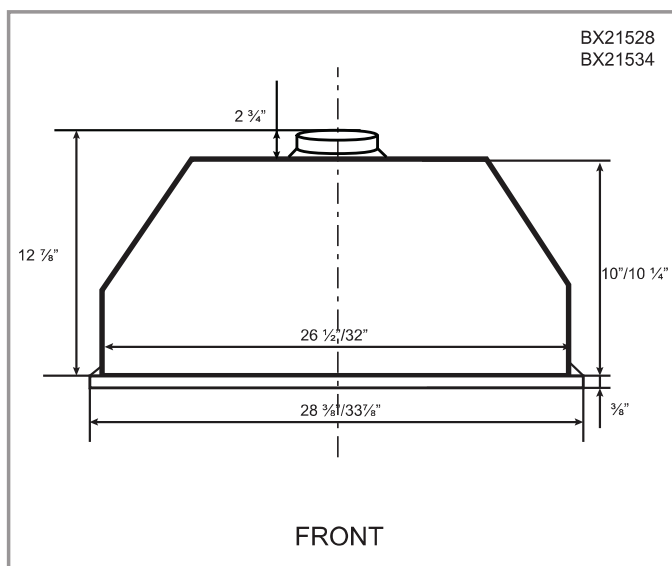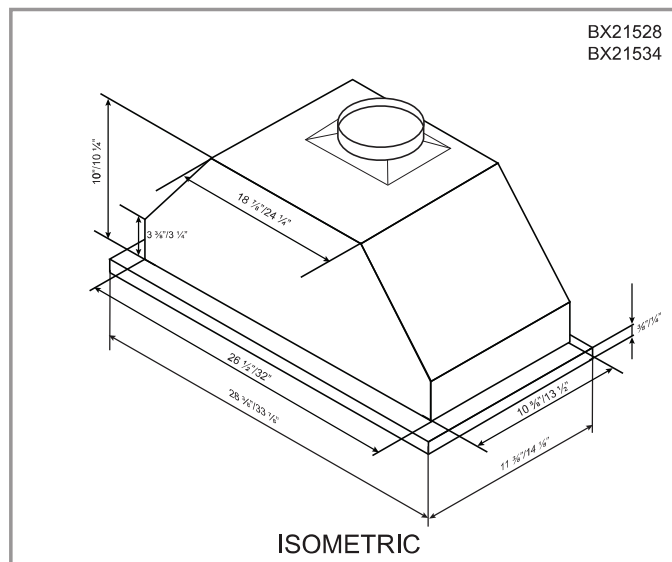

Options

- Widths: 28", 34"
- Charcoal Filter: CF01

Specifications

- | | | |
|--------------------------------------|--------------------------------|---|
| ▪ Air Flow Volume: 550 CFM | ▪ Current: 2.5 Amps | ▪ Finishes: Stainless Steel |
| ▪ Electrical Connection: 120 V/60 Hz | ▪ Fan Speed: 1599 RPM | ▪ Ducting: 6" Round |
| ▪ Power Consumption: 300 Watts | ▪ Fan Type: Centrifugal Blower | ▪ Noise Level: Min. 2 Sones
Max. 6 Sones |

