


Use one form for each individual who reviews and takes responsibility for design activities with respect to the project.

<b>A. Project Information</b>					
Building number, street name				Lot:	2B
<b>Model 1850B/C - Lot 2B</b>				Lot/con.	
Municipality		Postal code	Plan number/ other description		
Richmond Hill					
<b>B. Individual who reviews and takes responsibility for design activities</b>					
Name		Firm			
David DaCosta		gtaDesigns Inc.			
Street address				Unit no.	Lot/con.
2985 Drew Road, Suite 202					
Municipality		Postal code	Province	E-mail	
Mississauga		L4T 0A4	Ontario	<a href="mailto:hvac@gtadesigns.ca">hvac@gtadesigns.ca</a>	
Telephone number		Fax number		Cell number	
(905) 671-9800					
<b>C. Design activities undertaken by individual identified in Section B. [Building Code Table 3.5.2.1 of Division C]</b>					
<input type="checkbox"/> House <input checked="" type="checkbox"/> HVAC – House <input type="checkbox"/> Building Structural <input type="checkbox"/> Small Buildings <input type="checkbox"/> Building Services <input type="checkbox"/> Plumbing – House <input type="checkbox"/> Large Buildings <input type="checkbox"/> Detection, Lighting and Power <input type="checkbox"/> Plumbing – All Buildings <input type="checkbox"/> Complex Buildings <input type="checkbox"/> Fire Protection <input type="checkbox"/> On-site Sewage Systems					
<b>Description of designer's work</b>				<b>Model Certification</b>	
				Project #:	PJ-00267
				Layout #:	JB-09318
Heating and Cooling Load Calculations		Main	X	Builder	EM Air
Air System Design		Alternate		Project	King East Developments
Residential mechanical ventilation Design Summary		O.D. GFA	1844	Model	Model 1850B/C - Lot 2B
Residential System Design per CAN/CSA-F280-12				SB-12	Energy Star
Residential New Construction - Forced Air					
<b>D. Declaration of Designer</b>					
<p>I, <u>David DaCosta</u> declare that (choose one as appropriate):</p> <p style="text-align: center;">(print name)</p> <p><input type="checkbox"/> I review and take responsibility for the design work on behalf of a firm registered under subsection 3.2.4 Division C of the Building Code. I am qualified, and the firm is registered, in the appropriate classes/categories.</p> <p style="margin-left: 150px;">Individual BCIN: _____</p> <p style="margin-left: 150px;">Firm BCIN: _____</p> <p><input checked="" type="checkbox"/> I review and take responsibility for the design and am qualified in the appropriate category as an "other designer" under subsection 3.2.5 of Division C, of the Building Code.</p> <p style="margin-left: 150px;">Individual BCIN: <u>32964</u></p> <p style="margin-left: 150px;">Basis for exemption from registration: <u>Division C 3.2.4.1. (4)</u></p> <p><input type="checkbox"/> The design work is exempt from the registration and qualification requirements of the Building Code.</p> <p style="margin-left: 150px;">Basis for exemption from registration and qualification:</p>					
I certify that:					
1. The information contained in this schedule is true to the best of my knowledge.					
2. I have submitted this application with the knowledge and consent of the firm.					
<u>February 5, 2024</u> Date			 Signature of Designer		

**NOTE:**

- For the purposes of this form, "individual" means the "person" referred to in Clause 3.2.4.7(1) d), of Division C, Article 3.2.5.1. of Division C and all other persons who are exempt from qualifications under Subsections 3.2.4 . and 3.2.5.of Division C.
- Schedule 1 does not require to be completed a holder of a license, temporary license, or a certificate of authorization, issued by the Ontario Association of Architects. Schedule 1 is also not required to be completed by a holder of a license to practise, a limited licence to practise, or a certificate of authorization, issued by the Association of Professional Engineers of Ontario.

Heat loss and gain calculation summary sheet				CSA-F280-M12 Standard Form No. 1	
These documents issued for the use of <b>EM Air</b>				Layout No.	
and may not be used by any other persons without authorization. Documents for permit and/or construction are signed in red.				<b>JB-09318</b>	
<b>Building Location</b>					
Address (Model): <b>Model 1850B/C - Lot 2B</b>			Site: <b>King East Developments</b>		
Model:			Lot: <b>2B</b>		
City and Province: <b>Richmond Hill</b>			Postal code:		
<b>Calculations based on</b>					
Dimensional information based on:			<b>Architectural Design Inc. Jan/2024</b>		
Attachment: <b>Semi</b>			Front facing: <b>East/West</b>		Assumed? <b>Yes</b>
No. of Levels: <b>3</b> Ventilated? <b>Included</b>			Air tightness: <b>1961-Present (ACH=3.57)</b>		Assumed? <b>Yes</b>
Weather location: <b>Richmond Hill</b>			Wind exposure: <b>Sheltered</b>		
HRV? <b>VanEE</b> <b>V150E75NS</b>			Internal shading: <b>Light-translucent</b>		Occupants: <b>5</b>
Sensible Eff. at -25C <b>60%</b>		Apparent Effect. at -0C <b>80%</b>		Units: <b>Imperial</b>	Area Sq ft: <b>1844</b>
Sensible Eff. at -0C <b>75%</b>					
<b>Heating design conditions</b>			<b>Cooling design conditions</b>		
Outdoor temp <b>-5.8</b> Indoor temp: <b>72</b> Mean soil temp: <b>50</b>			Outdoor temp <b>88</b> Indoor temp: <b>75</b> Latitude: <b>44</b>		
<b>Above grade walls</b>			<b>Below grade walls</b>		
Style A: <b>As per OBC SB12</b> <b>Energy Star</b> <b>R 22 + 5ci</b>			Style A: <b>As per OBC SB12</b> <b>Energy Star</b> <b>R 20ci</b>		
Style B:			Style B:		
Style C:			Style C:		
Style D:			Style D:		
<b>Floors on soil</b>			<b>Ceilings</b>		
Style A: <b>As per Selected OBC SB12</b> <b>Energy Star</b>			Style A: <b>As per Selected OBC SB12</b> <b>Energy Star</b> <b>R 60</b>		
Style B:			Style B: <b>As per Selected OBC SB12</b> <b>Energy Star</b> <b>R 31</b>		
<b>Exposed floors</b>			Style C:		
Style A: <b>As per Selected OBC SB12</b> <b>Energy Star</b> <b>R 31</b>			<b>Doors</b>		
Style B:			Style A: <b>As per Selected OBC SB12</b> <b>Energy Star</b> <b>R 4.00</b>		
<b>Windows</b>			Style B:		
Style A: <b>As per Selected OBC SB12</b> <b>Energy Star</b> <b>R 4.00</b>			Style C:		
Style B:			<b>Skylights</b>		
Style C:			Style A: <b>As per Selected OBC SB12</b> <b>Energy Star</b> <b>R 2.03</b>		
Style D:			Style B:		
Attached documents: <b>As per Shedule 1</b>		<b>Heat Loss/Gain Caculations based on CSA-F280-12 Effective R-Values</b>			
Notes: <b>Residential New Construction - Forced Air</b>					
<b>Calculations performed by</b>					
Name: <b>David DaCosta</b>			Postal code: <b>L4T 0A4</b>		
Company: <b>gtaDesigns Inc.</b>			Telephone: <b>(905) 671-9800</b>		
Address: <b>2985 Drew Road, Suite 202</b>			Fax:		
City: <b>Mississauga</b>			E-mail <b>hvac@gtadesigns.ca</b>		

Builder: **EM Air**

Date: **February 5, 2024**

I review and take responsibility for the design work and am qualified in the appropriate category as an "other designer" under Division C subsection 3.2.5. of the Building Code.

Page 3

Project: **King East Developments**

Model: **Model 1850B/C - Lot 2B**

System 1

Individual BCIN: 32964

David DaCosta

Project # **PJ-00267**  
Layout # **JB-09318**

## DESIGN LOAD SPECIFICATIONS

Level 1 Net Load	11,235 btu/h
Level 2 Net Load	9,983 btu/h
Level 3 Net Load	9,563 btu/h
Level 4 Net Load	0 btu/h
Total Heat Loss	30,782 btu/h
Total Heat Gain	19,162 btu/h

Building Volume Vb	20989 ft³
Ventilation Load	1,336 Btu/h.
Ventilation PVC	79.5 cfm
Supply Branch and Grill Sizing	

## AIR DISTRIBUTION & PRESSURE

Equipment External Static Pressure	0.5 "w.c.
Additional Equipment Pressure Drop	0.225 "w.c.
Available Design Pressure	0.275 "w.c.
Return Branch Longest Effective Length	300 ft
R/A Plenum Pressure	0.138 "w.c.
S/A Plenum Pressure	0.14 "w.c.
Heating Air Flow Proportioning Factor	0.0262 cfm/btuh
Cooling Air Flow Proportioning Factor	0.0420 cfm/btuh
R/A Temp	70 deg. F.
S/A Temp	115 deg. F.
Diffuser loss	0.01 "w.c.

## FURNACE/AIR HANDLER DATA:

Make	Carrier
Model	59SC5B040E14--10
High Input	40000 BTU/h
High Output	39000 BTU/h
E.s.p.	0.50 " W.C.
Water Temp	deg. F.
Thermal Eff.	98%
Electric Heat	
Temp. Rise>>>	45 deg. F.

## BOILER/WATER HEATER DATA:

Make	Type	Carrier	2.0 Ton
Model		Model:	
Input Btu/h		Cond.-----	2.0
Output Btu/h		Coil -----	2.0
Min.Output Btu/h	AWH		
Blower DATA:			
Blower Speed Selected:	Yellow	Blower Type	ECM
		(Brushless DC OBC 12.3.1.5.(2))	
Check	805 cfm	Cool. Check	805 cfm
Heat.	805 cfm	Cooling	805 cfm
		Design Airflow	805 cfm

	Level 1												Level 2											
S/A Outlet No.	1	2	3										4	5	6	7	8	9						
Room Use	BASE	BASE	BASE										KIT	KIT	GRT	GRT	WR	FOY						
Btu/Outlet	3745	3745	3745										1574	1574	1736	1736	341	3022						
Heating Airflow Rate CFM	98	98	98										41	41	45	45	9	79						
Cooling Airflow Rate CFM	13	13	13										99	99	71	71	2	68						
Duct Design Pressure	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
Actual Duct Length	37	21	23										34	37	26	17	10	32						
Equivalent Length	120	80	90	70	70	70	70	70	70	70	70	70	90	100	70	90	110	80	70	70	70	70	70	70
Total Effective Length	157	101	113	70	70	70	70	70	70	70	70	70	124	137	96	107	120	112	70	70	70	70	70	70
Adjusted Pressure	0.08	0.13	0.12	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.10	0.09	0.14	0.12	0.11	0.12	0.19	0.19	0.19	0.19	0.19	0.19
Duct Size Round	6	6	6										6	6	5	5	3	6						
Outlet Size	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	3x10	3x10	3x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10
Trunk	C	B	D										C	C	B	B	B	D						

	Level 3												Level 4											
S/A Outlet No.	10	11	12	13	14	15																		
Room Use	MAST	ENS	BED 4	BED 3	BED 2	BATH																		
Btu/Outlet	2238	1165	1218	2494	2184	263																		
Heating Airflow Rate CFM	59	30	32	65	57	7																		
Cooling Airflow Rate CFM	89	30	52	93	88	3																		
Duct Design Pressure	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13	0.13
Actual Duct Length	59	52	26	38	34	28																		
Equivalent Length	160	130	130	90	130	140	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70
Total Effective Length	219	182	156	128	164	168	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70	70
Adjusted Pressure	0.06	0.07	0.08	0.10	0.08	0.08	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19	0.19
Duct Size Round	6	4	6	6	6	2																		
Outlet Size	4x10	3x10	4x10	4x10	4x10	3x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10	4x10
Trunk	C	C	B	D	D	D																		

Return Branch And Grill Sizing	Grill Pressure Loss											0.02 "w.c.
R/A Inlet No.	1R	2R	3R	4R	5R	6R	7R	8R	9R	10R	11R	
Inlet Air Volume CFM	147	343	105	105	105							
Duct Design Pressure	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	0.12	
Actual Duct Length	5	5	36	41	33							
Equivalent Length	155	125	145	140	180	50	50	50	50	50	50	
Total Effective Length	160	130	181	181	213	50	50	50	50	50	50	
Adjusted Pressure	0.07	0.09	0.06	0.06	0.06	0.24	0.24	0.24	0.24	0.24	0.24	
Duct Size Round	7.0	9.5	6.0	6.0	6.0							
Inlet Size	FLC	8	8	8	8							
" "	x	x	x	x	x	x	x	x	x	x	x	
Inlet Size		30	14	14	14							
Trunk	Z	Z	Z	Z	Z							

Return Trunk Duct Sizing	CFM	Press.	Round	Rect. Size
Trunk				
Drop	805	0.06	14.5	24x10
Z	805	0.06	14.5	24x8 18x10
Y				
X				
W				
V				
U				
T				
S				
R				
Q				

Supply Trunk Duct Sizing						
Trunk	C.CFM	H.CFM	Press.	Round	Rect. Size	
A	805	805	0.06	14.5	24x8	18x10
B	540	499	0.06	12.5	18x8	14x10
C	330	269	0.06	10.5	12x8	10x10
D	265	306	0.08	9.5	10x8	127
E						
F						
G						
H						
I						
J						
K						

2012 OBC

Builder: EM Air

Date: February 5, 2024

Project: King East Developments

Model: Model 1850B/C - Lot 2B

System 1

Weather Data Richmond Hill 44 -5.8 88 20 50

Heat Loss ^T 77.8 deg. F Ht gain ^T 12.8 deg. F

Project # PJ-00267  
Layout # JB-09318

## Level 1

### BASE

Run ft. exposed wall A	118	A	A	A	A	A	A	A	A	A	A	A	A
Run ft. exposed wall B	B	B	B	B	B	B	B	B	B	B	B	B	B
Ceiling height	4.0	AG	4.0	AG	4.0	AG	4.0	AG	4.0	AG	4.0	AG	4.0
Floor area	713	Area	Area	Area	Area	Area	Area	Area	Area	Area	Area	Area	Area
Exposed Ceilings A	A	A	A	A	A	A	A	A	A	A	A	A	A
Exposed Ceilings B	B	B	B	B	B	B	B	B	B	B	B	B	B
Exposed Floors	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr
Gross Exp Wall A	472												
Gross Exp Wall B													

Components	R-Values	Loss	Gain	Loss	Gain	Loss	Gain	Loss	Gain	Loss	Gain	Loss	Gain	Loss	Gain	Loss	Gain
North Shaded	4.00	19.45	11.73														
East/West	4.00	19.45	29.66	5	97	148											
South	4.00	19.45	22.60	5	97	113											
Existing Windows	3.55	21.92	27.86														
Skylight	2.03	38.33	89.12														
Doors	4.00	19.45	3.20	21	408	67											
Net exposed walls A	20.84	3.73	0.61	441		271											
Net exposed walls B	21.40	3.64	0.60														
Exposed Ceilings A	59.22	1.31	0.67														
Exposed Ceilings B	27.65	2.81	1.44														
Exposed Floors	29.80	2.61	0.23														
Foundation Conductive Heatloss																	
Total Conductive																	
Air Leakage																	
Ventilation																	
Case 1		0.12	0.12														
Case 2		16.80	13.82														
Case 3	x	0.07	0.12	399	75												
Heat Gain People			239														
Appliances Loads	1 = .25 percent		2988														
Duct and Pipe loss			10%														
Level HL Total	11,235			11235													
Level HG Total	919				919												

## Level 2

### KIT

### GRT

### WR

### FOY

Run ft. exposed wall A	31	A	48	A	6	A	34	A	A	A	A	A	A	A	A	A	A
Run ft. exposed wall B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
Ceiling height	10.0		10.0		10.0		10.0		10.0		10.0		10.0		10.0		10.0
Floor area	225	Area	349	Area	28	Area	106	Area	Area	Area	Area	Area	Area	Area	Area	Area	Area
Exposed Ceilings A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A	A
Exposed Ceilings B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B	B
Exposed Floors	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr	Flr
Gross Exp Wall A	310		480		60		340										
Gross Exp Wall B																	

Components	R-Values	Loss	Gain	Loss	Gain	Loss	Gain	Loss	Gain	Loss	Gain	Loss	Gain	Loss	Gain	Loss	Gain
North Shaded	4.00	19.45	11.73														
East/West	4.00	19.45	29.66	56	1089	1661				22	428	653					
South	4.00	19.45	22.60				30	584	678	8	156	181					
Existing Windows	1.99	39.10	24.56														
Skylight	2.03	38.33	89.12														
Doors	4.00	19.45	3.20							14	272	45					
Net exposed walls A	21.40	3.64	0.60	254	923	152	450	1636	269	60	218	36	296	1076	177		
Net exposed walls B	8.50	9.15	1.51														
Exposed Ceilings A	59.22	1.31	0.67														
Exposed Ceilings B	27.65	2.81	1.44														
Exposed Floors	29.80	2.61	0.23														
Foundation Conductive Heatloss			x														
Total Conductive																	
Air Leakage																	
Ventilation																	
Case 1		0.06	0.12														
Case 2		16.80	13.82														
Case 3	x	0.07	0.12	143	225			158	118	16	4		138	131			
Heat Gain People			239														
Appliances Loads	1 = .25 percent		2988														
Duct and Pipe loss			10%														
Level HL Total	9,983			3148				3472		341			3022				
Level HG Total	9,788				4721				3394		55						

I review and take responsibility for the design work and am qualified in the appropriate category as an "other designer" under

Division C subsection 3.2.5. of the Building Code. Individual BCIN:

32964

Name

David DaCosta

SB-12 Package

Energy Star

Total Heat Loss	30,782	btu/h
Total Heat Gain	19,162	btu/h



I review and take responsibility for the design work and am qualified in the appropriate category as an "other designer" under Division C subsection 3.2.5. of the Building Code.

Individual BCIN: 32964

David DaCosta

**Package:** Energy Star  
**Project:** Richmond Hill

**Model:** Model 1850B/C - Lot 2B

## RESIDENTIAL MECHANICAL VENTILATION DESIGN SUMMARY

*For systems serving one dwelling unit & conforming to the Ontario Building Code, O.reg 332/12*

Location of Installation	
Lot #	Plan #
Township	Richmond Hill
Roll #	Permit #
Address	

Builder	
Name	EM Air
Address	
City	
Tel	Fax

Installing Contractor	
Name	
Address	
City	
Tel	Fax

Combustion Appliances 9.32.3.1(1)		
a)	x	Direct vent (sealed combustion) only
b)		Positive venting induced draft (except fireplaces)
c)		Natural draft, B-vent or induced draft fireplaces
d)		Solid fuel (including fireplaces)
e)		No combustion Appliances

Heating System		
x	Forced air	
	Non forced air	
	Electric space heat (if over 10% of heat load)	

House Type 9.32.3.1(2)		
I	x	Type a) or b) appliances only, no solid fuel
II		Type I except with solid fuel (including fireplace)
III		Any type c) appliance
IV		Type I or II either electric space heat
Other		Type I, II or IV no forced air

System Design Option		
1	x	Exhaust only / forced air system
2		HRV WITH DUCTING / forced air system
3	x	HRV simplified connection to forced air system
4		HRV full ducting/not coupled to forced air system
		Part 6 design

Total Ventilation Capacity 9.32.3.3(1)				
Bsmt & Master Bdrm	2	@	21.2 cfm	42.4 cfm
Other Bedrooms	3	@	10.6 cfm	31.8 cfm
Bathrooms & Kitchen	4	@	10.6 cfm	42.4 cfm
Other rooms	2	@	10.6 cfm	21.2 cfm
Total				<u>137.8</u>

Principal Ventilation Capacity 9.32.3.4(1)				
Master bedroom	1	@	31.8 cfm	31.8 cfm
Other bedrooms	3	@	15.9 cfm	47.7 cfm
Total				<u>79.5</u>


Principal Exhaust Fan Capacity				
Make	Model		Location	
VanEE	V150E75NS		Base	
127 cfm			80.0 Sones	or Equiv.

Heat Recovery Ventilator				
Make	VanEE			
Model	V150E75NS			
	127 cfm high		80 cfm low	
Sensible efficiency @ -25 deg C	60%			
Sensible efficiency @ 0 deg C	75%			

Note: Installer to balance HRV/ERV to within 10 percent of PVC

Supplemental Ventilation Capacity		
Total ventilation capacity		137.8
Less principal exhaust capacity		79.5
REQUIRED supplemental vent. Capacity		<u>58.3</u> cfm

Supplemental Fans 9.32.3.5.			
Location	cfm	Model	Sones
Ens	50	XB50	0.3
Bath	50	XB50	0.3
all fans HVI listed			
	Make	Broan	or Equiv.

Designer Certification			
I hereby certify that this ventilation system has been designed in accordance with the Ontario Building Code.			
Name	David DaCosta		
Signature			
HRAI #	5190	BCIN #	32964
Date	February 5, 2024		



2985 Drew Road, Suite 202, Mississauga, Ontario  
L4T 0A4 Tel: 905-671-9800 Fax: 647-494-9643  
e-mail dave@gtadesigns.ca

## Energy Efficiency Design Summary: Performance & Other Acceptable Compliance Methods (Building Code Part 9, Residential)

Page 7  
Project # PJ-00267  
Layout # JB-09318

This form is used by a designer to demonstrate that the energy efficiency design of a house complies with the building code using the Performance or Other Acceptable Compliance Methods described in Subsections 3.1.2. and 3.1.3. of SB-12,

This form must accurately reflect the information contained on the drawings and specifications being submitted. Refer to Supplementary Standard SB-12 for details about building code compliance requirements. Further information about energy efficiency requirements for new buildings is available from the provincial building code website or the municipal building department.

For use by Principal Authority

Application No:	Model/Certification Number
-----------------	----------------------------

### A. Project Information

Building number, street name  <b>Model 1850B/C - Lot 2B</b>	Unit number	Lot/Con
Municipality <b>Richmond Hill</b>	Postal code	Reg. Plan number / other description

### B. Prescriptive Compliance [indicate the building code compliance option being employed in the house design]

<input type="checkbox"/> SB-12 Performance* [SB-12 - 3.1.2.]	*Attach energy performance results using an approved software (see guide)
<input checked="" type="checkbox"/> ENERGY STAR** [SB-12 - 3.1.3.]	*Attach Builder Option Package [BOP] form
<input type="checkbox"/> R-2000** [SB-12 - 3.1.3.]	*Attach R-2000 HOT2000 Report

### C. Project Building Design Conditions

Climatic Zone (SB-1):	Heat. Equip. Efficiency	Space Heating Fuel Source
<input checked="" type="checkbox"/> Zone 1 (< 5000 degree days) <input type="checkbox"/> Zone 2 (≥ 5000 degree days)	<input checked="" type="checkbox"/> ≥ 92% AFUE <input type="checkbox"/> ≥ 84% < 92% AFUE	<input checked="" type="checkbox"/> Gas <input type="checkbox"/> Propane <input type="checkbox"/> Solid Fuel <input type="checkbox"/> Oil <input type="checkbox"/> Electric <input type="checkbox"/> Earth Energy
Ratio of Windows, Skylights & Glass (W, S & G) to Wall Area		Other Building Characteristics
Area of Walls = <u>100</u> m <sup>2</sup> or <u>1076.4</u> ft <sup>2</sup>	W,S & G % = <u>15.0</u> %	<input type="checkbox"/> Log/Post&Beam <input type="checkbox"/> ICF Above Grade <input type="checkbox"/> ICF Basement <input type="checkbox"/> Slab-on-ground          Walkout Basement <input checked="" type="checkbox"/> Air Conditioning          Combo Unit <input type="checkbox"/> Air Sourced Heat Pump (ASHP) <input type="checkbox"/> Ground Source Heat Pump (GSHP)
Area of W, S & G = <u>15</u> m <sup>2</sup> or <u>161.5</u> ft <sup>2</sup>		

### SB-12 Performance Reference Building Design Package indicating the prescriptive package to be compared for compliance

SB-12 Referenced Building Package (input design package):	<u>Energy Star</u>	Table: <u>3.1.3.</u>
---	--------------------	----------------------

### D. Building Specifications [provide values and ratings of the energy efficiency components proposed, or attach ENERGY STAR BOP form]

Building Component	Minimum RSI/R-Values or Maximum U-Value <sup>1</sup>		Building Component	Efficiency Ratings
<b>Thermal Insulation</b>	Nominal	Effective	<b>Windows &amp; Doors</b> Provide U-Value <sup>(1)</sup> or ER rating	
Ceiling with Attic Space	60	59.22	Windows/Sliding Glass Doors	1.4
Ceiling without Attic Space	31	27.65	Skylights	2.8
Exposed Floor	31	29.80	<b>Mechanicals</b>	
Walls Above Grade	22 +5.0ci	21.40	Heating Equip.(AFUE)	96%
Basement Walls	20.0ci	20.84	HRV Efficiency (SRE% at 0°C)	75%
Slab (all >600mm below grade)	x	x	DHW Heater (EF)	0.95
Slab (edge only ≤600mm below grade)	10	11.13	DWHR (CSA B55.1 (min. 42% efficiency))	42.0% #Showers 2
Slab (all ≤600mm below grade, or heated)	10	11.13	Combined Heating System	

(1) U value to be provided in either W/(m<sup>2</sup>·K) or Btu/(h·ft<sup>2</sup>·F) but not both.



2985 Drew Road, Suite 202, Mississauga, Ontario  
L4T 0A4 Tel: 905-671-9800 Fax: 647-494-9643  
e-mail dave@gtadesigns.ca

**Energy Efficiency Design Summary:**  
**Performance & Other Acceptable Compliance Methods**  
(Building Code Part 9, Residential)

Page 8  
Project # PJ-00267  
Layout # JB-09318

**E. Project Design Verification** [Subsection 3.1.2. Performance Compliance]

The annual energy consumption using Subsection 3.1.1. SB-12 Reference Building Package is \_\_\_\_\_ GJ (1J=1000MJ)

The annual energy consumption of this house as designed is \_\_\_\_\_ GJ

The software used to simulate the annual energy use of the building is: \_\_\_\_\_

The building is being designed using an air tightness baseline of:

- ☐ OBC reference ACH, NLA or NLR default values (no depressurization test required)
- ☐ Targeted ACH, NLA or NLR. Depressurization test to meet \_\_\_\_\_ ACH50 or NLR or NLA
- ☐ Reduction of overall thermal performance of the proposed building envelope is not more than 25% of the envelope of the compliance package it is compared against (3.1.2.1.(6)).
- ☐ Standard Operating Conditions Applied (A-3.1.2.1 - 4.6.2)
- ☐ Reduced Operating Conditions for Zero-rated homes Applied (A-3.1.2.1 - 4.6.2.5)

☐ On Site Renewable(s): Solar: \_\_\_\_\_  
Other Types: \_\_\_\_\_

**F. ENERGY STAR or R-2000 Performance Design Verification** [Subsection 3.1.3. Other Acceptable Compliance Methods]

- ☐ The NRCAN "ENERGY STAR for New Homes Standard Version 12.6" technical requirements, applied to this building design result in the building performance meeting or exceeding the prescriptive performance requirements of the Supplementary Standard SB12 (A-3.1.3.1).
- ☐ The NRCAN, "2012 R-2000 Standard" technical requirements, applied to this building design result in the building performance meeting or exceeding the prescriptive performance requirements of the Supplementary Standard SB12 (A-3.1.3.1).

Performance Energy Modeling Professional

Energy Evaluator/Advisor/Rater/CEM Name and company: \_\_\_\_\_ Accreditation or Evaluator/Advisor/Rater License # \_\_\_\_\_

ENERGY STAR or R-2000

Energy Evaluator/Advisor/Rater/Name and company: \_\_\_\_\_ Evaluator/Advisor/Rater License # \_\_\_\_\_

Angela Bustamante, Building Knowledge Canada

5506

**G. Designer(s)** [name(s) & BCIN(s), if applicable, of person(s) providing information herein to substantiate that design meets building code]

Name	BCIN	Signature
David DaCosta	32964	





50 Fleming Drive, Unit # 6, Cambridge, ON, N1T 2B1

T | 1-800-267-6830

F | 519-658-6103 E | [info@buildingknowledge.ca](mailto:info@buildingknowledge.ca)

ENERGY STAR® for New Homes  
Version Ontario 17.1 Revision 2  
BOP Form Zone 1 Ontario



General Details		House Details	
Performance or Prescriptive :	<b>Prescriptive</b>	ESEnrolment ID:	
Attached or Detached or MURB :	<b>Attached</b>	Site/Phase:	<b>KING EAST PH 2&amp;3</b>
Province / Territory :	<b>ON</b>	LOT :	
Zone :	<b>Zone 1 Heating Degree Days</b>	Street # and Name:	
Service Organization (SO) number :	<b>55 - Enerquality</b>	Street Type:	
Builder number :	<b>TBD</b>	City :	<b>RICHMOND HILL</b>
Builder Name:	<b>PLAZACORP</b>	Postal Code (or FSA) :	
		Model:	<b>ALL MODELS</b>
Supplementary Information		Third Party Evaluator:	<b>BUILDING KNOWLEDGE CANADA</b>
		Evaluator Name:	<b>ANGELA BUSTAMANTE</b>
		Evaluator Number:	<b>5506</b>

Building Component	Core / Option	BOP Selection Description	BOP Option Credits	Measure Selected (Check)	Nominal Efficiency Values (Optional)	Notes (Optional)
				✓		
Ceilings Below Attic	Core	RSI 10.43 (R 59.2)	Core Minimum	✓	R60	
	Option	N/A	n/a			
Cathedral Ceilings and Flat Roofs	Core	RSI 4.87 (R 27.7)	Core Minimum	✓	R31	
	Option	N/A	n/a			
Ceilings Below Attic and Cathedral Ceilings/Flat Roofs	Option	N/A	n/a			
Walls Above Grade	Core	RSI 3.08 (R 17.5)	Core Minimum			
	Option	RSI 3.72 (R 21.1)	0.7	✓	R22+R5	
Floors Over Unheated Spaces	Core	RSI 5.25 (29.8)	Core Minimum	✓	R31	
Foundation Walls Below or in Contact with the Ground	Core	RSI 3.72 (R 21.1) below grade	Core Minimum	✓	R20 blanket	
	Option	N/A	n/a			
Unheated Floors on Ground Above Frost Line	Core	RSI 1.96 (R 11.1)	Core Minimum	✓	R10 if applicable	
Unheated Floors on Ground Below Frost Line	Option	N/A	n/a			
Heated Floors on Ground	Core	N/A	n/a			
Slabs on Grade with Integral Footing	Core	N/A	n/a			
Windows (Fenestrations)	Core	ENERGY STAR Zone 2 UV1.4 and/or ER29	Core Minimum	✓	Zone 2	
	Option	N/A	n/a			
	Core	Total area of all windows to max. 20% of above grade wall area.	Core Minimum	✓		
Fireplace	Core	Gas fireplace spark ignition if installed	#N/A	✓		
Space Heating	Core	Min. 96% AFUE ENERGY STAR fuel fired furnace	Core Minimum	✓		<b>COOLING - ASHP</b>
	Req'd	Supply ducts and 1m return sealed	Required	✓		
Domestic Water Heating	Core	Instantaneous min. EF or UEF 0.80 Tank EF or UEF 0.80 (direct vent (sealed))	Core Minimum			
	Option	Instantaneous condensing min. UEF 0.95	0.4	✓		
Drain Water Heat Recovery	Option	≥ 42% to ≤ 54% - two showers	0.3	✓	42%	
Airtightness	Core	Level 1 (DT 2.5ach / 0.18 nlr) (AT 3.0ach/0.26nlr)	Core Minimum	✓		
	Option	N/A	n/a			
Ventilation (HRV / ERV)	Core	65% SRE @0 °C and 55% SRE @ -25 °C	Core Minimum			
	Option	≥75% SRE @ 0 °C	0.2	✓		
	Req'd	Interconnected to the Furnace Fan	Required	✓		
	Req'd	HRV balanced	Required	✓		
Electrical Savings	Electrical	SRE ≥75% SRE @ 0 °C, ≥ 0.57 L/s/W	0.1	✓		
	Core	75% ENERGY STAR lighting	Core Minimum			
	Option	100% ENERGY STAR lighting	0.1	✓		
ENERGY STAR Certified Appliances	Option	N/A	n/a			

NOTE: Thermal resistance values under "BOP Selection Description" are listed in effective values, unless indicated with "nominal".

Total BOP Option Credits (Must be ≥ 1.8 Credits)

1.8

**Package:** Energy Star      **System:** System 1  
**Project:** Richmond Hill      **Model:** Model 1850B/C - Lot 2B

## Air Leakage Calculations

Building Air Leakage Heat Loss				
B	LRairh	Vb	HL^T	HLleak
0.018	0.357	20989	77.8	10488

Building Air Leakage Heat Gain				
B	LRairh	Vb	HG^T	HG Leak
0.018	0.100	20989	12.8	484

Air Leakage Heat Loss/Gain Multiplier Table (Section 11)				
Level	Level Factor (LF)	Building Air	Level Conductive Heat Loss (HLclevel)	Air Leakage Heat Loss Multiplier
Level 1	0.5	10488	5593	0.9376
Level 2	0.3		6382	0.4930
Level 3	0.2		6771	0.3098
Level 4	0		0	0.0000

Levels			
1	2	3	4
(LF)	(LF)	(LF)	(LF)
1.0	0.6	0.5	0.4
	0.4	0.3	0.3
		0.2	0.2
			0.1

HG LEAK		Air Leakage Heat Gain	
	484		0.0547
BUILDING CONDUCTIVE HEAT GAIN			
	8840		

Levels this Dwelling	
	3

Highest Ceiling Height		25.0 FT	7.62 M
------------------------	--	---------	--------

## Ventilation Calculations

Vent	Ventilation Heat Loss					Ventilation Heat Gain				Vent
	Ventilation Heat Loss					Ventilation Heat Gain				
	C	PVC	HL^T	(1-E) HRV	HLbvent	C	PVC	HG^T	HGbvent	
	1.08	79.5	77.8	0.20	1336	1.1	79.5	12.8	1099	
Case 1						Case 1				
Case 1	Ventilation Heat Loss (Exhaust only Systems)					Ventilation Heat Gain (Exhaust Only Systems)				
	Case 1 - Exhaust Only					Case 1 - Exhaust Only		Multiplier		0.12
	Level	LF	HLbvent	LVL Cond. HL	Multiplier	HGbvent	1099			
	Level 1	0.5	1336	5593	0.12	Building	8840			
	Level 2	0.3		6382	0.06					
Level 3	0.2	6771		0.04						
Level 4	0	0		0.00						
Case 2						Case 2				
Case 2	Ventilation Heat Loss (Direct Ducted Systems)					Ventilation Heat Gain (Direct Ducted Systems)				
				Multiplier				Multiplier		
	C	HL^T	(1-E) HRV	16.80	C	HG^T	13.82			
	1.08	77.8	0.20		1.08	12.8				
Case 3						Case 3				
Case 3	Ventilation Heat Loss (Forced Air Systems)					Ventilation Heat Gain (Forced Air Systems)				
			HLbvent	Multiplier				Vent Heat Gain	Multiplier	
	Total Ventilation Load		1336	0.07		HGbvent	HG*1.3	1099	0.12	
					1099	1				

Foundation Conductive Heatloss Level 1	Level 1	1462	Watts	4990	Btu/h
Foundation Conductive Heatloss Level 2	Level 2		Watts		Btu/h
Slab on Grade Foundation Conductive Heatloss			Watts		Btu/h
Walk Out Basement Foundation Conductive Heatloss			Watts		Btu/h


# Envelope Air Leakage Calculator

Supplemental tool for CAN/CSA-F280

Weather Station Description				
Province:	Ontario ▼			
Region:	Richmond Hill ▼			
Weather Station Location:	Open flat terrain, grass ▼			
Anemometer height (m):	10			
Local Shielding				
Building Site:	Suburban, forest ▼			
Walls:	Heavy ▼			
Flue:	Heavy ▼			
Highest Ceiling Height (m):	7.62			
Building Configuration				
Type:	Semi-Detached			
Number of Stories:	Two			
Foundation:	Full			
House Volume (m <sup>3</sup> ):	594.41			
Air Leakage/Ventilation				
Air Tightness Type:	Present (1961-) (ACH=3.57)			
Custom BDT Data:	ELA @ 10 Pa. ▼ 322.44 cm <sup>2</sup>			
	3.57 ACH @ 50 Pa			
Mechanical Ventilation (L/s):	Total Supply:		Total Exhaust:	
	39.75		39.75	
Flue #:	#1	#2	#3	#4
Diameter (mm):	0	0	0	0
Heating Air Leakage Rate (ACH/H):		0.357		
Cooling Air Leakage Rate (ACH/H):		0.100		

# Residential Foundation Thermal Load Calculator

Supplemental tool for CAN/CSA-F280

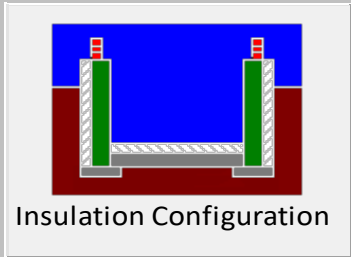Weather Station Description		
Province:	Ontario ▼	
Region:	Richmond Hill ▼	
Site Description		
Soil Conductivity:	High conductivity: moist soil ▼	
Water Table:	Normal (7-10 m, 23-33 Ft) ▼	
Foundation Dimensions		
Floor Length (m):	18.14	 <p>Insulation Configuration</p>
Floor Width (m):	3.65	
Exposed Perimeter (m):	35.97	
Wall Height (m):	2.74	
Depth Below Grade (m):	1.52	
Window Area (m <sup>2</sup> ):	0.93	
Door Area (m <sup>2</sup> ):	1.95	
Radiant Slab		
Heated Fraction of the Slab:	0	
Fluid Temperature (°C):	33	
Design Months		
Heating Month	1	
Foundation Loads		
Heating Load (Watts):		1462



2985 Drew Road, Suite 202 Mississauga, Ontario L4T 0A4

Tel: 905-671-9800 email: [hvac@gtadesigns.ca](mailto:hvac@gtadesigns.ca)

### Effective R-Value Calculations

Effective R-Value - Above Grade Walls	
Insulation	R22+5ci
Exterior Air Film	0.17
Hollow Vinyl Siding	0.62
Continuous Insulation	5.00
Effective Cavity Insulation	14.49
Drywall	0.44
Interior Air Film	0.68
Effective R-Value	21.40

Effective R-Value - Below Grade Walls	
Insulation	R20ci
Concrete Foundation	0.44
Interior Air Film	0.68
Continuous Insulation	20.0
Effective R-Value	21.12

Effective R-Value – Exposed Floors	
Insulation	R31
Exterior Air Film	0.17
Effective Cavity Insulation	28.72
Interior Air Film	0.91
Continuous Insulation	0.00
Effective R-Value	29.80



2985 Drew Road, Suite 202 Mississauga, Ontario L4T 0A4

Tel: 905-671-9800 email: [hvac@gtadesigns.ca](mailto:hvac@gtadesigns.ca)

















Effective R-Value – Exposed Ceiling with Attic

Insulation	R60
Exterior Air Film	0.17
Effective Insulation	58.61
Drywall	0.44
Effective R-Value	59.22


Effective R-Value – Exposed Ceiling with Flat Roofs

Insulation	R31
Exterior Air Film	0.17
Effective Insulation	27.04
Drywall	0.44
Effective R-Value	27.65



	FLEX DUCT		LOW/HIGH WALL/KICK SUPPLY DIFFUSER		DUCT CONNECTION TO JOIST LINING		RETURN AIR GRILLE (SIZE INDICATED ON DRAWING)	S.A.	SUPPLY AIR
	RIGID ROUND DUCT		HRV EXHAUST GRILLE		RETURN AIR PIPE RISER		RETURN AIR RISER UP TO FLOOR ABOVE	R.A.	RETURN AIR
	SUPPLY DIFFUSER		SUPPLY AIR PIPE RISER		RETURN ROUND DUCT		RETURN AIR FROM BASEMENT SECOND FLOOR		THERMOSTAT
			VOLUME DAMPER				PRINCIPAL EXHAUST FAN SWITCH		W/R & PRINCIPAL EXHAUST FAN

KITCHEN EXHAUST  
100 CFM MIN. 6"  
ALL OTHER FANS SHALL BE  
A MIN. OF 50 CFM OR  
OTHERWISE NOTED  
AS PER 9.32.3.5



CIRCULATION PRINCIPAL  
FAN SWITCH  
TO BE CENTRALLY  
LOCATED

INSULATE ALL DUCTS IN  
UNCONDITIONED  
SPACES MIN. R12

ALL DUCTWORK  
MUST BE SEALED TO CLASS  
A LEVEL AS PER OBC PART  
6-6.2.4.3. (II)

ALL R.A. STUD OPENINGS  
ON THE GROUND FLOOR  
AND SECOND FLOOR TO BE  
AT LEAST 14X5.5 AND  
14X3.25 RESPECTIVELY

ENERGY STAR  
SEAL ALL JOINTS ON ANY  
DUCTWORK.  
SEAL FURNACE VENTS, A/C  
PIPING AND HRV DUCTS AT  
EXTERIOR WALLS

ENERGY STAR V12 STANDARD.  
ALL DUCTS SHALL BE LOCATED  
WITHIN HEATED BOUNDARY  
(4.7.2.2.)

THE UNDERSIGNED HAS REVIEWED AND TAKES RESPONSIBILITY FOR THIS DESIGN ON BEHALF OF GTA DESIGNS INC. AND HAS THE QUALIFICATIONS AND MEETS THE REQUIREMENTS SET OUT IN THE BUILDING CODE TO BE A DESIGNER

**QUALIFICATION INFORMATION**

REQUIRED UNLESS DESIGN IS EXEMPT UNDER DIVISION C 3.2.5.1 OF THE ONTARIO BUILDING CODE

DAVID DA COSTA  B.C.I.N. 32964  
SIGNATURE OF DESIGNER

OBC 2012

ZONE I COMPLIANCE  
PACKAGE "ENERGY STAR" REF. TABLE 3.1.3.

**NOTES**

INSTALLATION TO COMPLY WITH THE LATEST ONTARIO BUILDING CODE.

ALL SUPPLY OUTLETS TO BE 5" DIA. UNLESS OTHERWISE SPECIFIED.

PROVIDE BALANCING DAMPERS ON ALL BRANCHES.

ALL R/A PARTITIONS 6" (FIRST FLOOR ONLY)

INSULATE DUCTS IN UNCONDITIONED SPACES R12 UNDERCUT ALL DOORS 1" MIN.

CONTRACTOR MUST WORK FROM APPROVED PLANS.

ANY ALTERATIONS TO THIS ORIGINAL PLAN ARE NOT THE RESPONSIBILITY OF GTA DESIGNS.

GTA DESIGNS MUST BE CONSULTED IF KITCHEN EXHAUST FAN EXCEEDS 700 CFM DEPRESSURIZATION MAY OCCUR WITH IN THE DWELLING.

**GTADESIGNS**

2985 DREW ROAD  
SUITE 202,  
MISSISSAUGA, ONT.  
L4T 0A4 TEL: 905-671-9800  
EMAIL: DAVE@GTADESIGNS.CA  
WEB: WWW.GTADESIGNS.CA
















HEAT-LOSS	30,782	BTU/HR.
UNIT MAKE	CARRIER	OR EQUAL.
UNIT MODEL	59SC5B040EI4--10	OR EQUAL.
UNIT HEATING INPUT	40,000	BTU/HR.
UNIT HEATING OUTPUT	39,000	BTU/HR.
A/C COOLING CAPACITY	2.0	TONS.
FAN SPEED	805	CFM


# OF RUNS	S/A	R/A	FANS
3RD FLOOR			
2ND FLOOR	6	3	2
1ST FLOOR	6	1	2
BASEMENT	3	1	

FLOOR PLAN:		
GROUND FLOOR		
DRAWN BY: JL	CHECKED: DD	SQFT 1844
LAYOUT NO. JB-09318	DRAWING NO. M2	

DATE:	FEBRUARY 5, 2024
CLIENT:	EM AIR
MODEL:	MODEL 1850B/C LOT 2B
PROJECT:	KING EAST DEVELOPMENTS RICHMOND HILL ,ONT.
SCALE:	3/16" = 1'-0"



	FLEX DUCT		LOW/HIGH WALL/KICK SUPPLY DIFFUSER		DUCT CONNECTION TO JOIST LINING		RETURN AIR PIPE RISER		RETURN AIR GRILLE (SIZE INDICATED ON DRAWING)	S.A.	SUPPLY AIR
	RIGID ROUND DUCT		HRV EXHAUST GRILLE		RETURN ROUND DUCT		RETURN AIR RISER UP TO FLOOR ABOVE		RETURN AIR FROM BASEMENT SECOND FLOOR	R.A.	RETURN AIR
	SUPPLY DIFFUSER		SUPPLY AIR PIPE RISER								THERMOSTAT
			VOLUME DAMPER								PRINCIPAL EXHAUST FAN SWITCH
											W/R & PRINCIPAL EXHAUST FAN

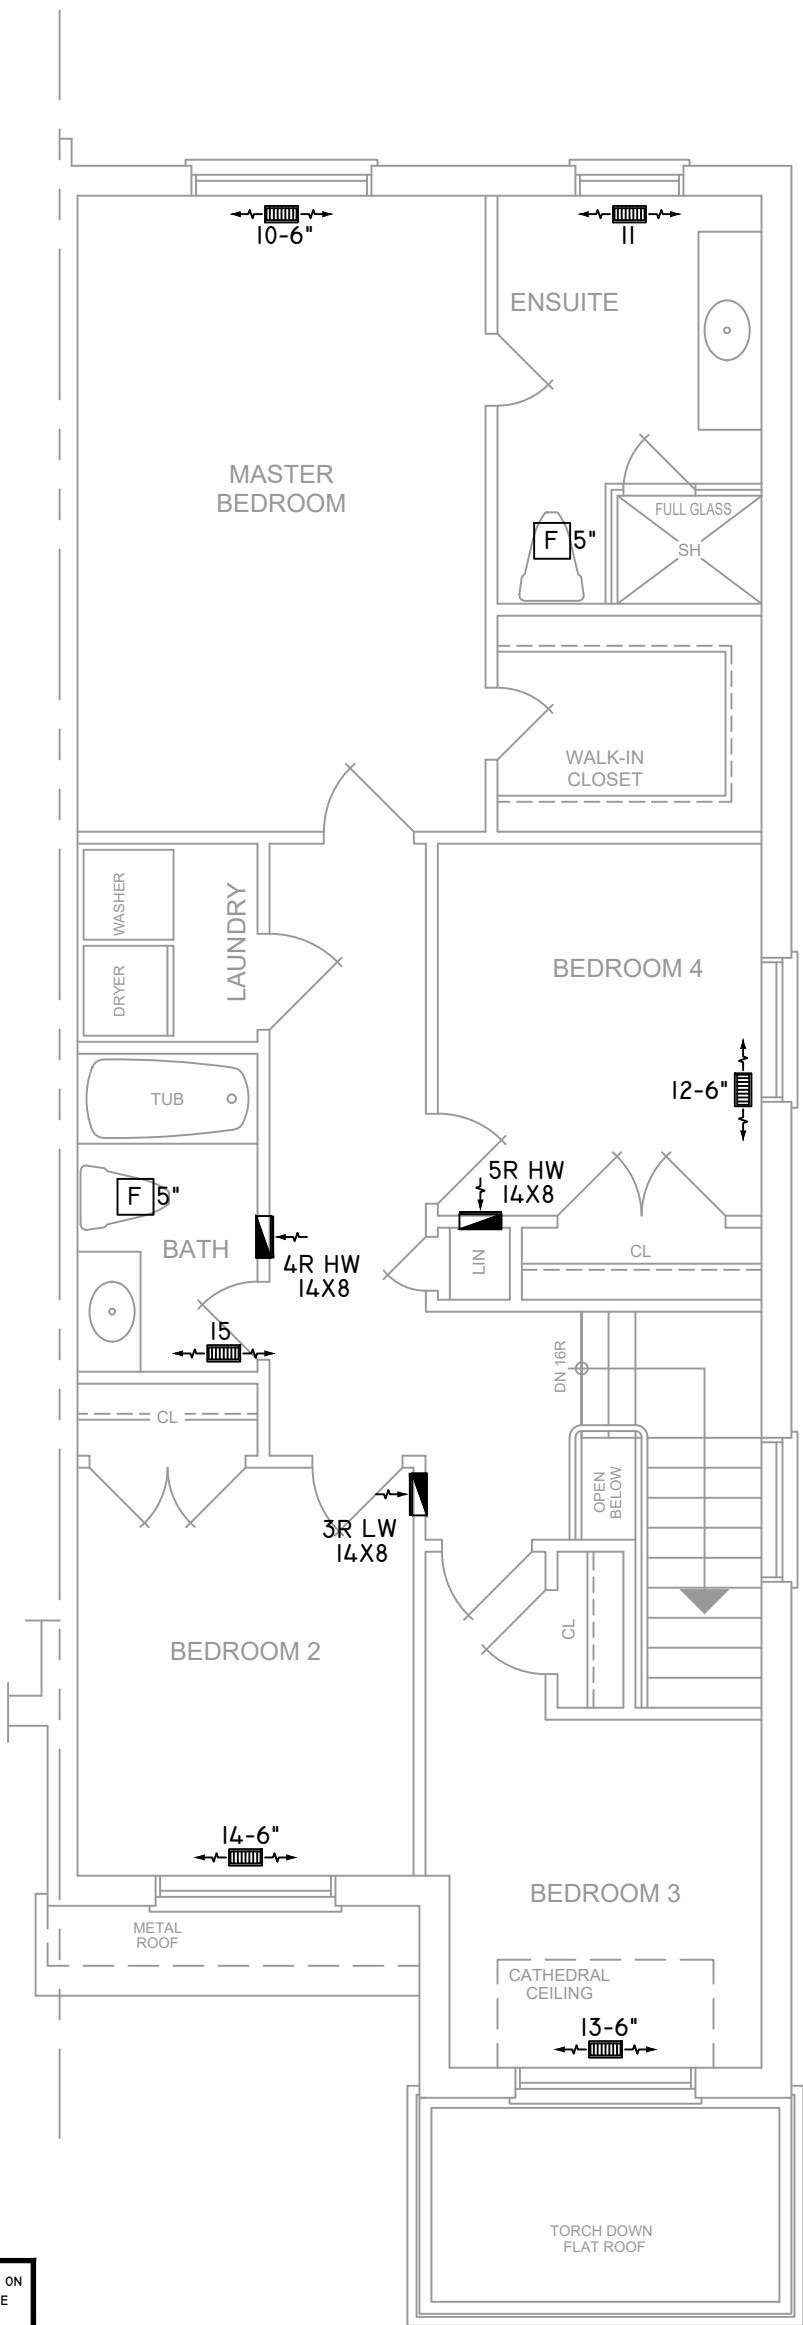

INSULATE ALL DUCTS IN UNCONDITIONED SPACES MIN. R12

ALL DUCTWORK MUST BE SEALED TO CLASS A LEVEL AS PER OBC PART 6-6.2.4.3. (II)

ALL R.A. STUD OPENINGS ON THE GROUND FLOOR AND SECOND FLOOR TO BE AT LEAST 14X5.5 AND 14X3.25 RESPECTIVELY


**ENERGY STAR**  
SEAL ALL JOINTS ON ANY DUCTWORK.  
SEAL FURNACE VENTS, A/C PIPING AND HRV DUCTS AT EXTERIOR WALLS

ENERGY STAR V12 STANDARD.  
ALL DUCTS SHALL BE LOCATED WITHIN HEATED BOUNDARY (4.7.2.2.)

THE UNDERSIGNED HAS REVIEWED AND TAKES RESPONSIBILITY FOR THIS DESIGN ON BEHALF OF GTA DESIGNS INC. AND HAS THE QUALIFICATIONS AND MEETS THE REQUIREMENTS SET OUT IN THE BUILDING CODE TO BE A DESIGNER

QUALIFICATION INFORMATION

REQUIRED UNLESS DESIGN IS EXEMPT UNDER DIVISION C 3.2.5.1 OF THE ONTARIO BUILDING CODE

DAVID DA COSTA  B.C.I.N. 32964

SIGNATURE OF DESIGNER

## OBC 2012

ZONE I COMPLIANCE  
PACKAGE "ENERGY STAR" REF. TABLE 3.1.3.

**NOTES**  
INSTALLATION TO COMPLY WITH THE LATEST ONTARIO BUILDING CODE.  
ALL SUPPLY OUTLETS TO BE 5" DIA. UNLESS OTHERWISE SPECIFIED.  
PROVIDE BALANCING DAMPERS ON ALL BRANCHES.  
ALL R/A PARTITIONS 6" (FIRST FLOOR ONLY)  
INSULATE DUCTS IN UNCONDITIONED SPACES R12 UNDERCUT ALL DOORS 1" MIN.  
CONTRACTOR MUST WORK FROM APPROVED PLANS.  
ANY ALTERATIONS TO THIS ORIGINAL PLAN ARE NOT THE RESPONSIBILITY OF GTA DESIGNS.  
GTA DESIGNS MUST BE CONSULTED IF KITCHEN EXHAUST FAN EXCEEDS 700 CFM DEPRESSURIZATION MAY OCCUR WITH IN THE DWELLING.



2985 DREW ROAD  
SUITE 202,  
MISSISSAUGA, ONT.  
L4T 0A4 TEL: 905-671-9800  
EMAIL: DAVE@GTADESIGNS.CA  
WEB: WWW.GTADESIGNS.CA

HEAT-LOSS	30,782	BTU/HR.
UNIT MAKE	CARRIER	OR EQUAL.
UNIT MODEL	59SC5B040EI4--10	OR EQUAL.
UNIT HEATING INPUT	40,000	BTU/HR.
UNIT HEATING OUTPUT	39,000	BTU/HR.
A/C COOLING CAPACITY	2.0	TONS.
FAN SPEED	805	CFM

# OF RUNS	S/A	R/A	FANS
3RD FLOOR			
2ND FLOOR	6	3	2
1ST FLOOR	6	1	2
BASEMENT	3	1	

FLOOR PLAN: SECOND FLOOR		
DRAWN BY: JL	CHECKED: DD	SQFT 1844
LAYOUT NO. JB-09318	DRAWING NO. M3	

DATE:	FEBRUARY 5, 2024
CLIENT:	EM AIR
MODEL:	MODEL 1850B/C LOT 2B
PROJECT:	KING EAST DEVELOPMENTS RICHMOND HILL ,ONT.
SCALE:	3/16" = 1'-0"