


ALL ROOF SLOPES 10/12 UNLESS NOTED OTHERWISE

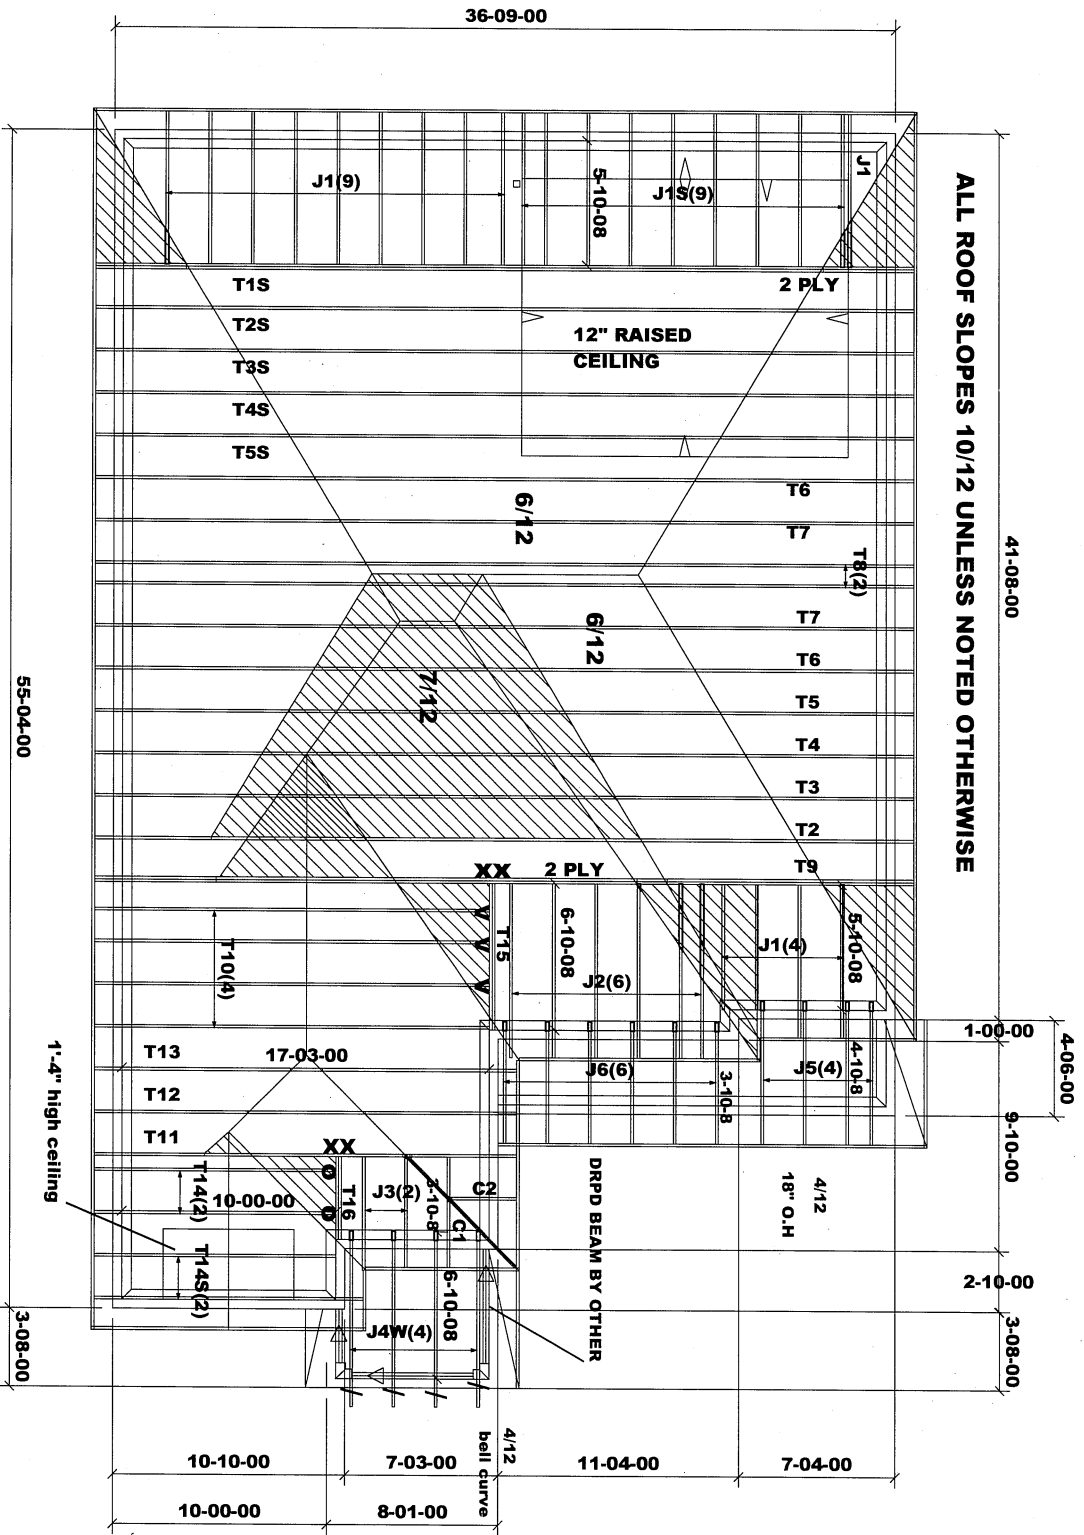

ASPHALT SHINGLES
FINISHED OVERHANG: 12"
2x6 EXTERIOR WALLS
2x6 FASCIA BOARD
HEEL: R.T.M.C.

All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment).
Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.

DESIGN CONFORMS WITH OBC 2012
(2019 amendment) OCCUPANCY:
RESIDENTIAL | PART: 9
Ss = 31.35 psf | Sr = 8.4 psf

DESIGN LOADS:

TCSL = 25.6 psf
TCOL = 6.0 psf
BCIL = 0.0 psf
BCDL = 7.4 psf

HARDWARE:

LUS24 - (O)
LUS26DS - (V)
HGS26-2 - (XX)
H2.5T - (-)

 DENOTES:
CONVENTIONAL
FRAMING

M464

		Job Track: 51004 Plan Log: 201943 Layout ID: 406403	
Builder / Location: ROYAL PINE HOMES / RICHMOND HILL		Project: CENTREFIELD Date: 2021-05-31 Sales: Mario Dicano Designer: EEO JG	
THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC.. SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE. Mitek ver 8.4.2.286			



TAMARACK
ROOF TRUSSES INC.

Job Track: **51004**

Plan Log: **201943**

Layout ID: **411069**

Builder / Location: _____
Project: **CENT**
Date: 2021-05-21

ROYAL P
REFIELD

LINE HQ

COME

DES / RIC

THESE DR	
OR REDIST	
TAMARACH	

D HILL
SAVINGS CO
TRIBUTED IN
K ROOF TRU

Mod	INSTITUTE T ANY MANN SSES INC A
-----	---------------------------------------

UNIT 2

4504-1

FLANK
ARACK ROO
ANY PURPOS
ED BY TAMA

KAGE

/ A-ST

TD. WITH


TH OP
REPRODUCI
RE OF TRU
LIZED FOR A

T. COF

IF
HEED,

ROYAL PINE HOMES / RICHMOND HILL

UNIT 4504-FLANKAGE / A-STD.WITH OPT.COFF

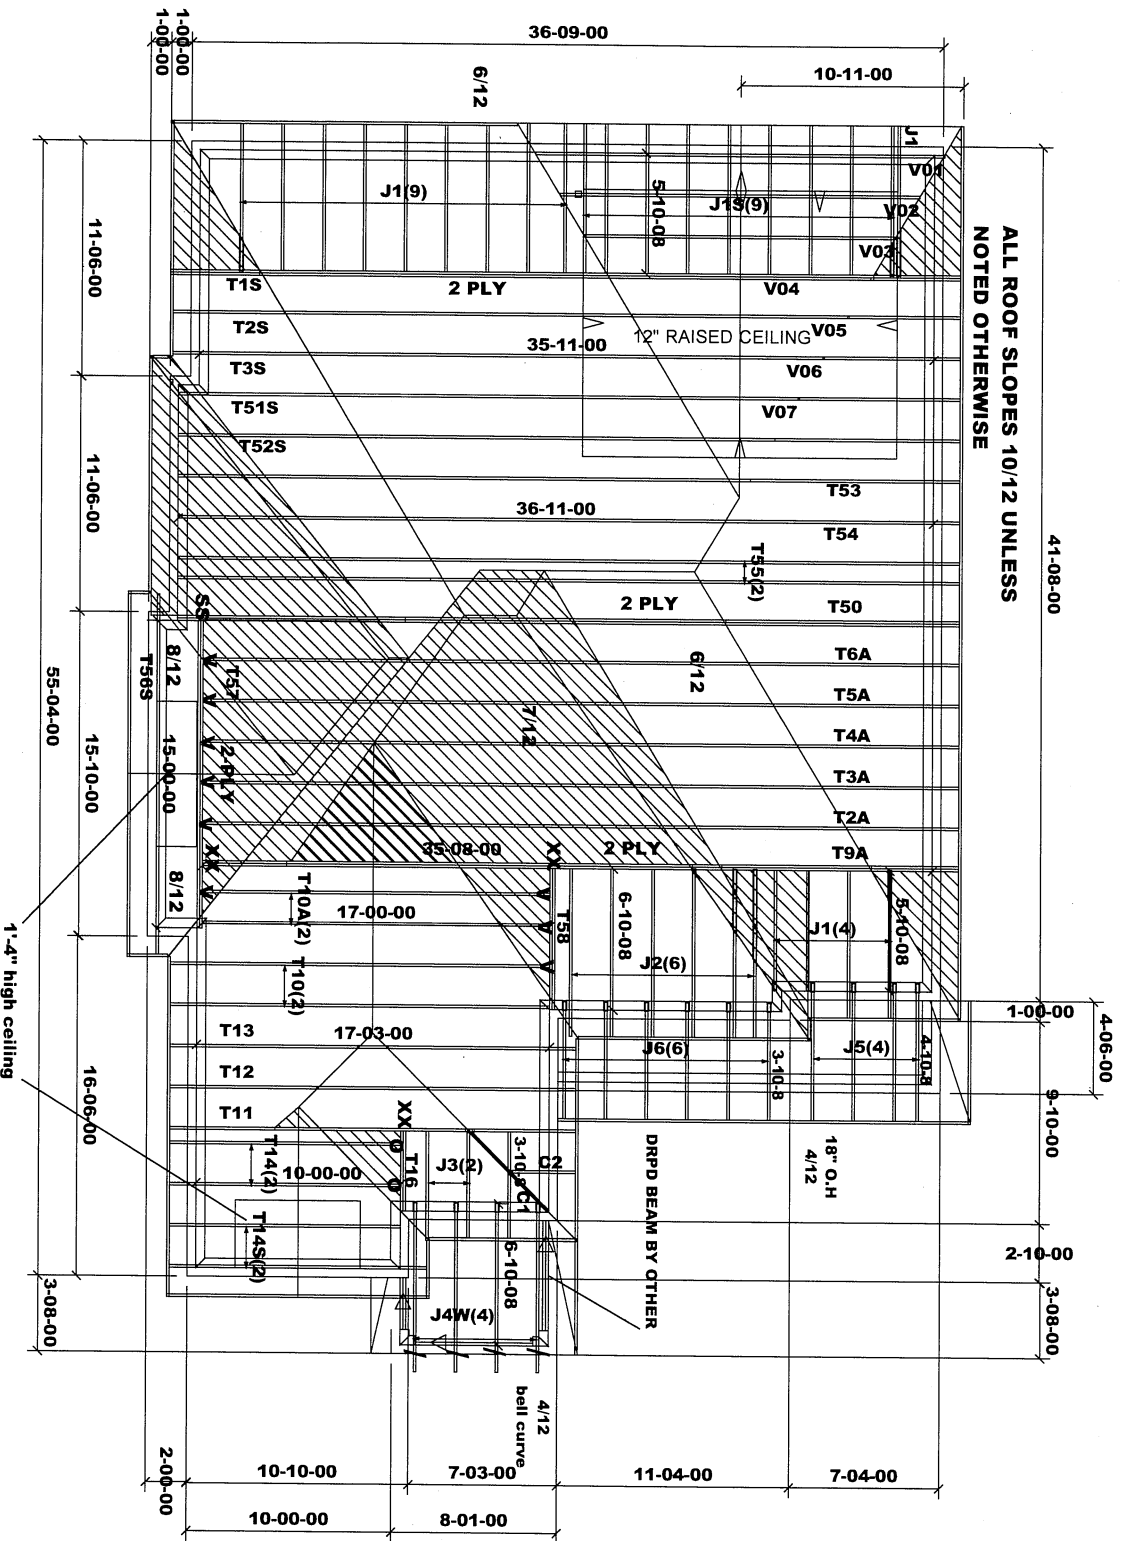

DENOTES:
CONVENTIONAL
FRAMING

HARDWARE:
 LUS24 - (O)
 LJS26DS - (N)
 HGUS26-2 - (XX)
 LUS26-2 - (W)
 HGUS28-2 - (SS)
 H2.5T - (I)


DESIGN LOADS:

TCSL = 25.6 ps
TCDL = 6.0 psf
BCLL = 0.0 psf
BCDL = 7.4 psf

DESIGN CONFORMS WITH OBC 2012
(2019 amendment) OCCUPANCY:
RESIDENTIAL | PART: 9
Ss = 31.35 psf | Sr = 8.4 psf

All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.

ASPHALT SHINGLES
FINISHED OVERHANG: 12"
2x6 EXTERIOR WALLS
2x6 FASCIA BOARD
HEEL: R.T.M.C.

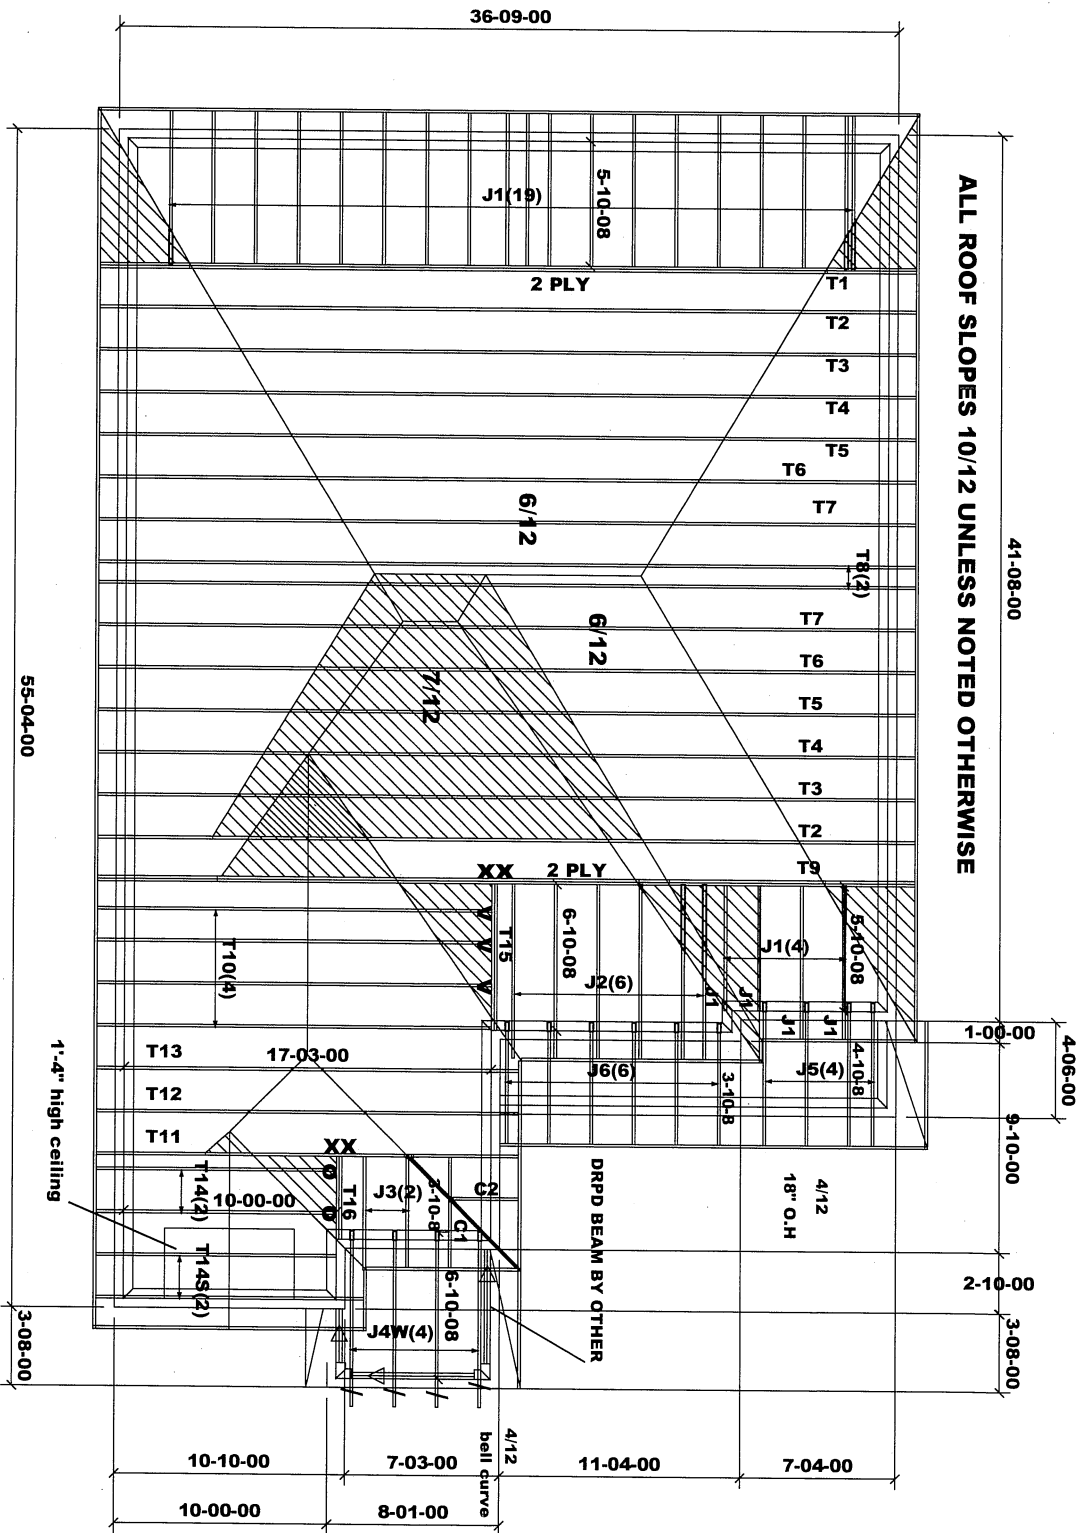

ASPHALT SHINGLES
FINISHED OVERHANG: 12"
2X6 EXTERIOR WALLS
2X6 FASCIA BOARD
HEEL: R.T.M.C.

All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.

DESIGN CONFORMS WITH OBC 2012 (2019 amendment) OCCUPANCY: RESIDENTIAL | PART: 9
Ss = 31.35 psf | Sr = 8.4 psf

DESIGN LOADS:

TCSL = 25.6 psf
TCDL = 6.0 psf
BCLL = 0.0 psf
BCDL = 7.4 psf


HARDWARE:

LUS24 - (O)
LUS26DS - (V)
HGS26S-2 - (XX)
H2.5T - (V)

 **DENOTES:**
CONVENTIONAL
FRAMING

M/14/14

	Job Track: 51004 Plan Log: 201943 Layout ID: 418988	Builder / Location: ROYAL PINE HOMES / RICHMOND HILL Project: CENTREFIELD Date: 2021-05-26 Sales: Mario DiCano Designer: EEO JOC	Model / Elevation: UNIT - 4504 / A-STD. OR 5 BRM THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC. SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE. Mtek ver 8.4.2.286
---	--	--	---

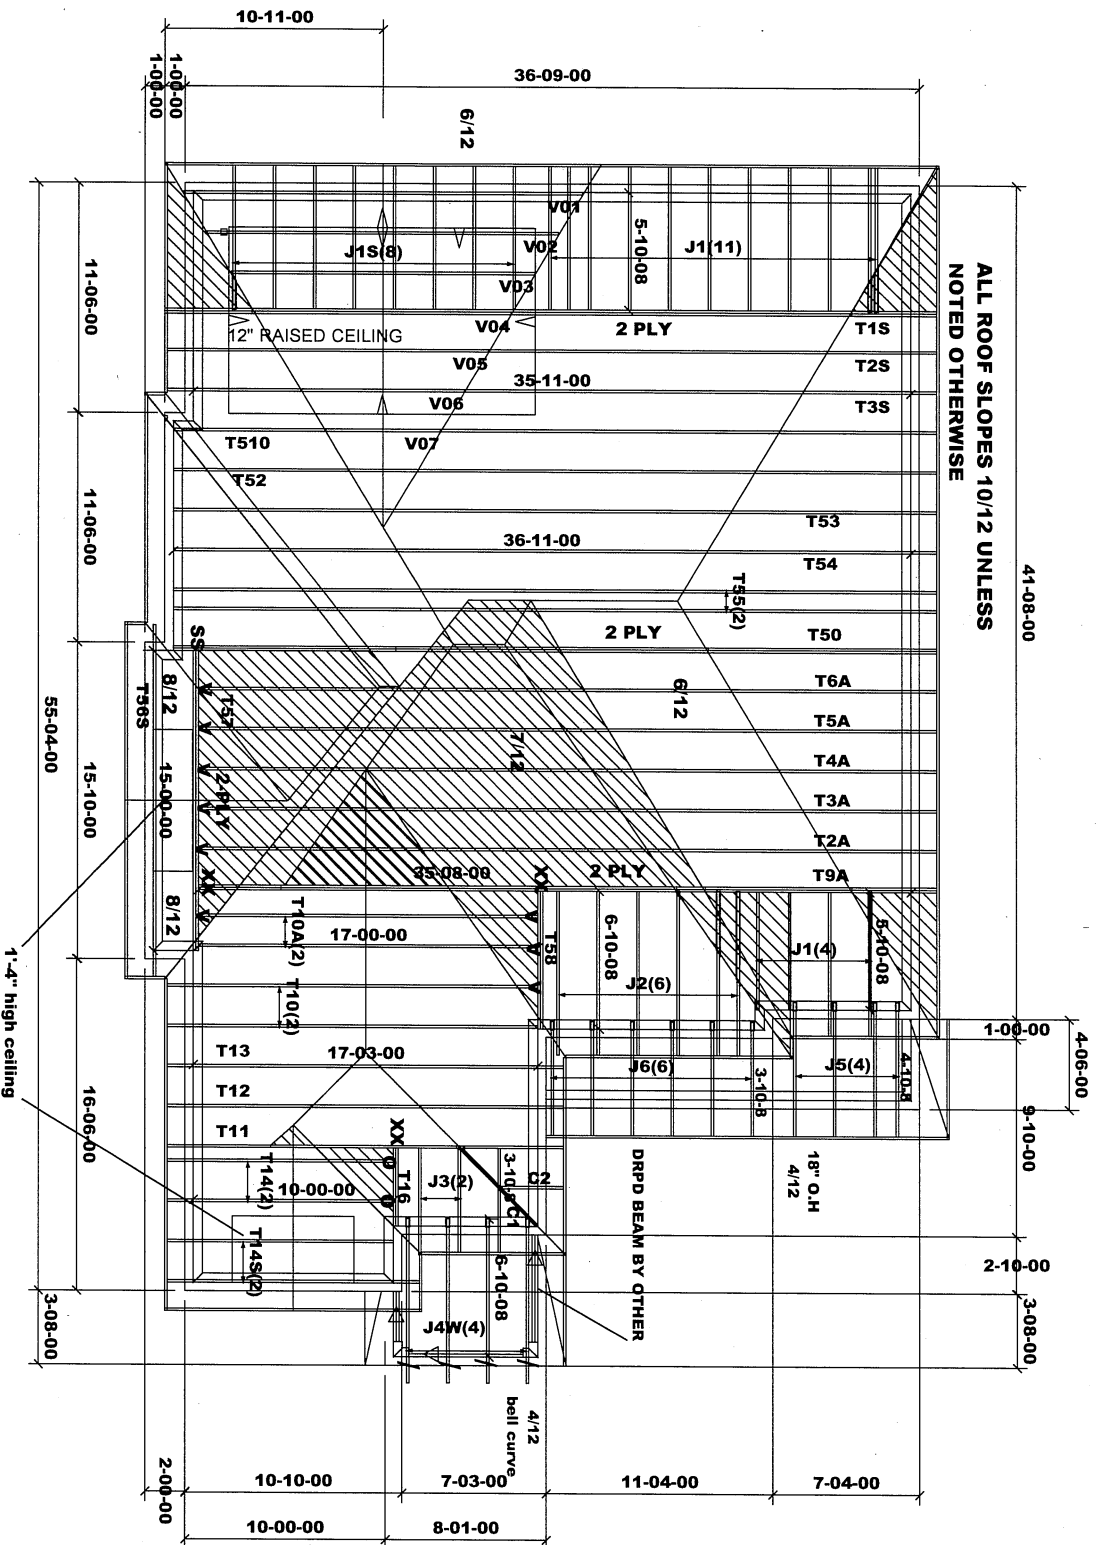

ALL ROOF SLOPES 10/12 UNLESS NOTED OTHERWISE

ASPHALT SHINGLES
FINISHED OVERHANG: 12"
2x6 EXTERIOR WALLS
2x6 FASCIA BOARD
HEEL: R.T.M.C.

All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.

DESIGN CONFORMS WITH OBC 2012 (2019 amendment) OCCUPANCY: RESIDENTIAL | PART: 9
Ss = 31.35 psf | Sr = 8.4 psf

DESIGN LOADS:

TCSL = 25.6 psf
TCDL = 6.0 psf
BCIL = 0.0 psf
BCDL = 7.4 psf

HARDWARE:

LUS24 - (O)
LUS26DS - (V)
HGUS26-2 - (XX)
LUS26-2 - (VV)
HGUS28-2 - (SS)
H2.5T - (I)

CONVENTIONAL FRAMING

M14014


Job Track: **51004**
Plan Log: **201943**
Layout ID: **411070**

Builder / Location: **ROYAL PINE HOMES / RICHMOND HILL**
Model / Elevation: **UNIT 4504-FLANKAGE / A-5 BRM WITH OPT. COFF.**

Project: **CENTREFIELD**
Date: **2021-05-27**
Sales: **Mario DiCaro**
Designer: **EEO JG**

THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC. SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.

Mitek ver 8.4.2.286

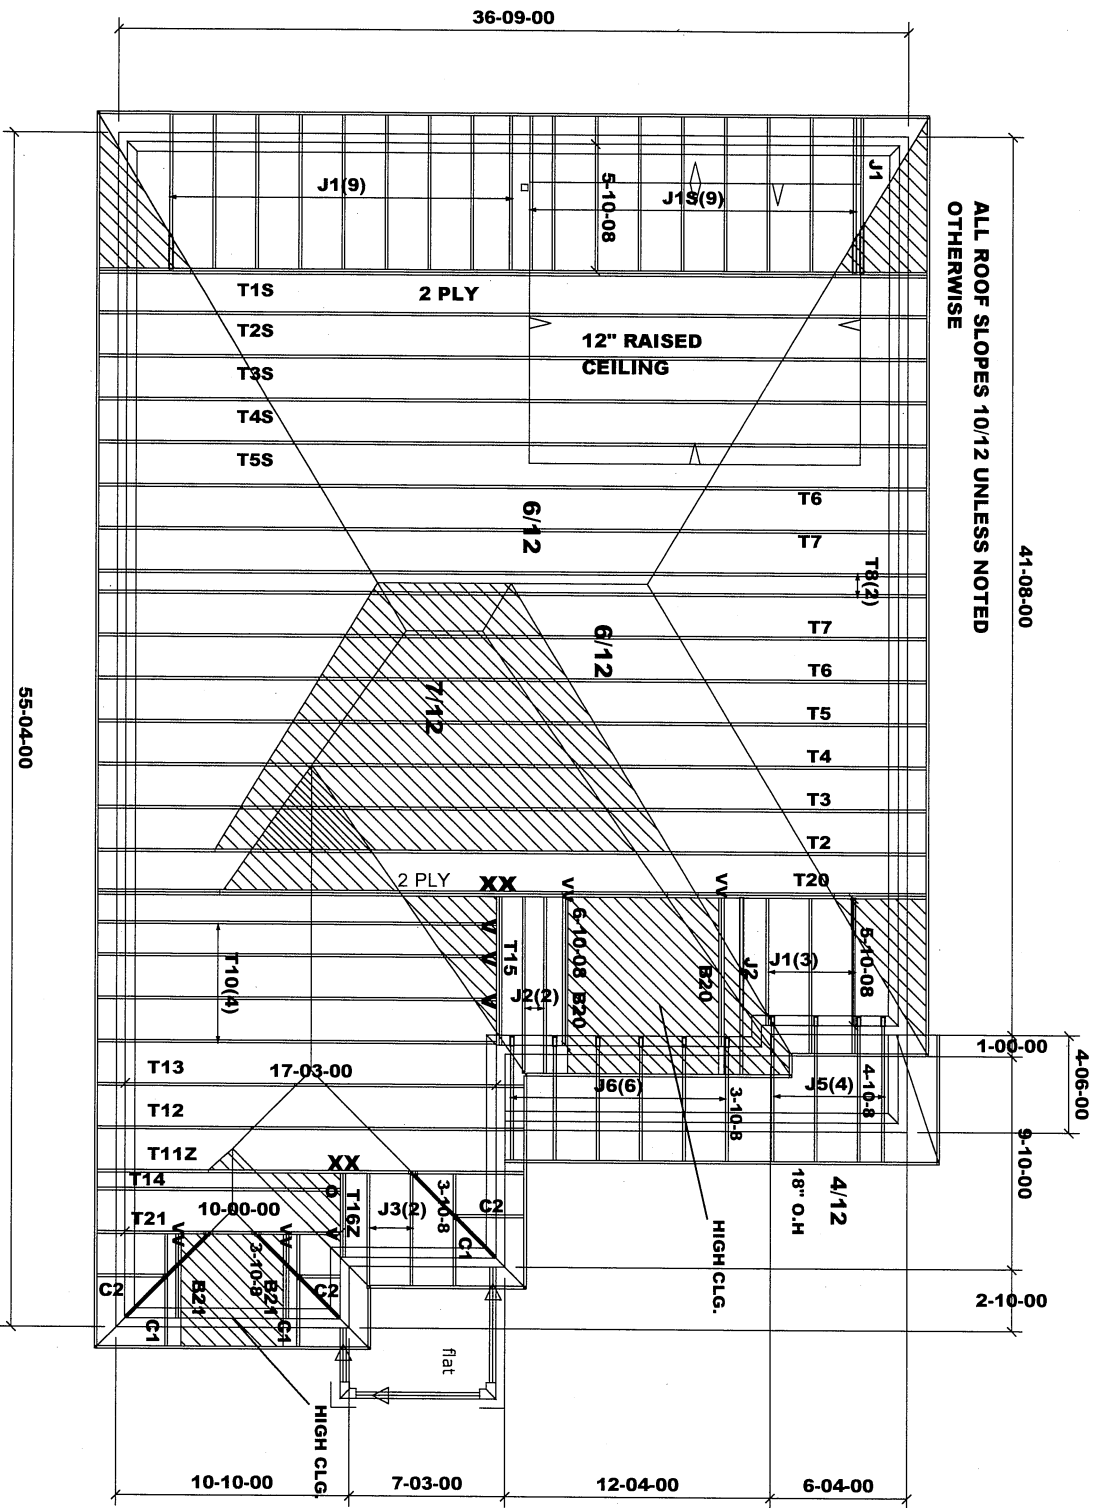

ALL ROOF SLOPES 10/12 UNLESS NOTED OTHERWISE

ASPHALT SHINGLES
FINISHED OVERHANG: 12"
2X6 EXTERIOR WALLS
2X6 FASCIA BOARD
HEEL: R.T.M.C.

All conventional framing to conform with Part 9 of O.B.C., 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.

DESIGN CONFORMS WITH OBC 2012 (2019 amendment) OCCUPANCY: RESIDENTIAL | PART: 9
Ss = 31.35 psf | Sr = 8.4 psf

DESIGN LOADS:
TCOL = 25.6 psf
TCOL = 6.0 psf
BCOL = 0.0 psf
BCOL = 7.4 psf


HARDWARE:
LUS24 - (O)
LUS26DS - (V)
HGUS26-2 - (XX)
LUS26-2 - (VV)

BEAMS:
B20 = B21 =
2 - 2x10 SPF #2


NOTES:
CONVENTIONAL
FRAMING

Michael

		Job Track: 51004 Plan Log: 201943 Layout ID: 406516		Builder / Location: ROYAL PINE HOMES / RICHMOND HILL Project: CENTREFIELD Date: 2021-05-26 Sales: Mario DiCaro Designer: EEO PURPOSE: THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC. SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC. AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC. IF UTILIZED FOR ANY OTHER PURPOSE.	
		Model / Elevation: UNIT - 4504 / B-STD. WITH COFF			

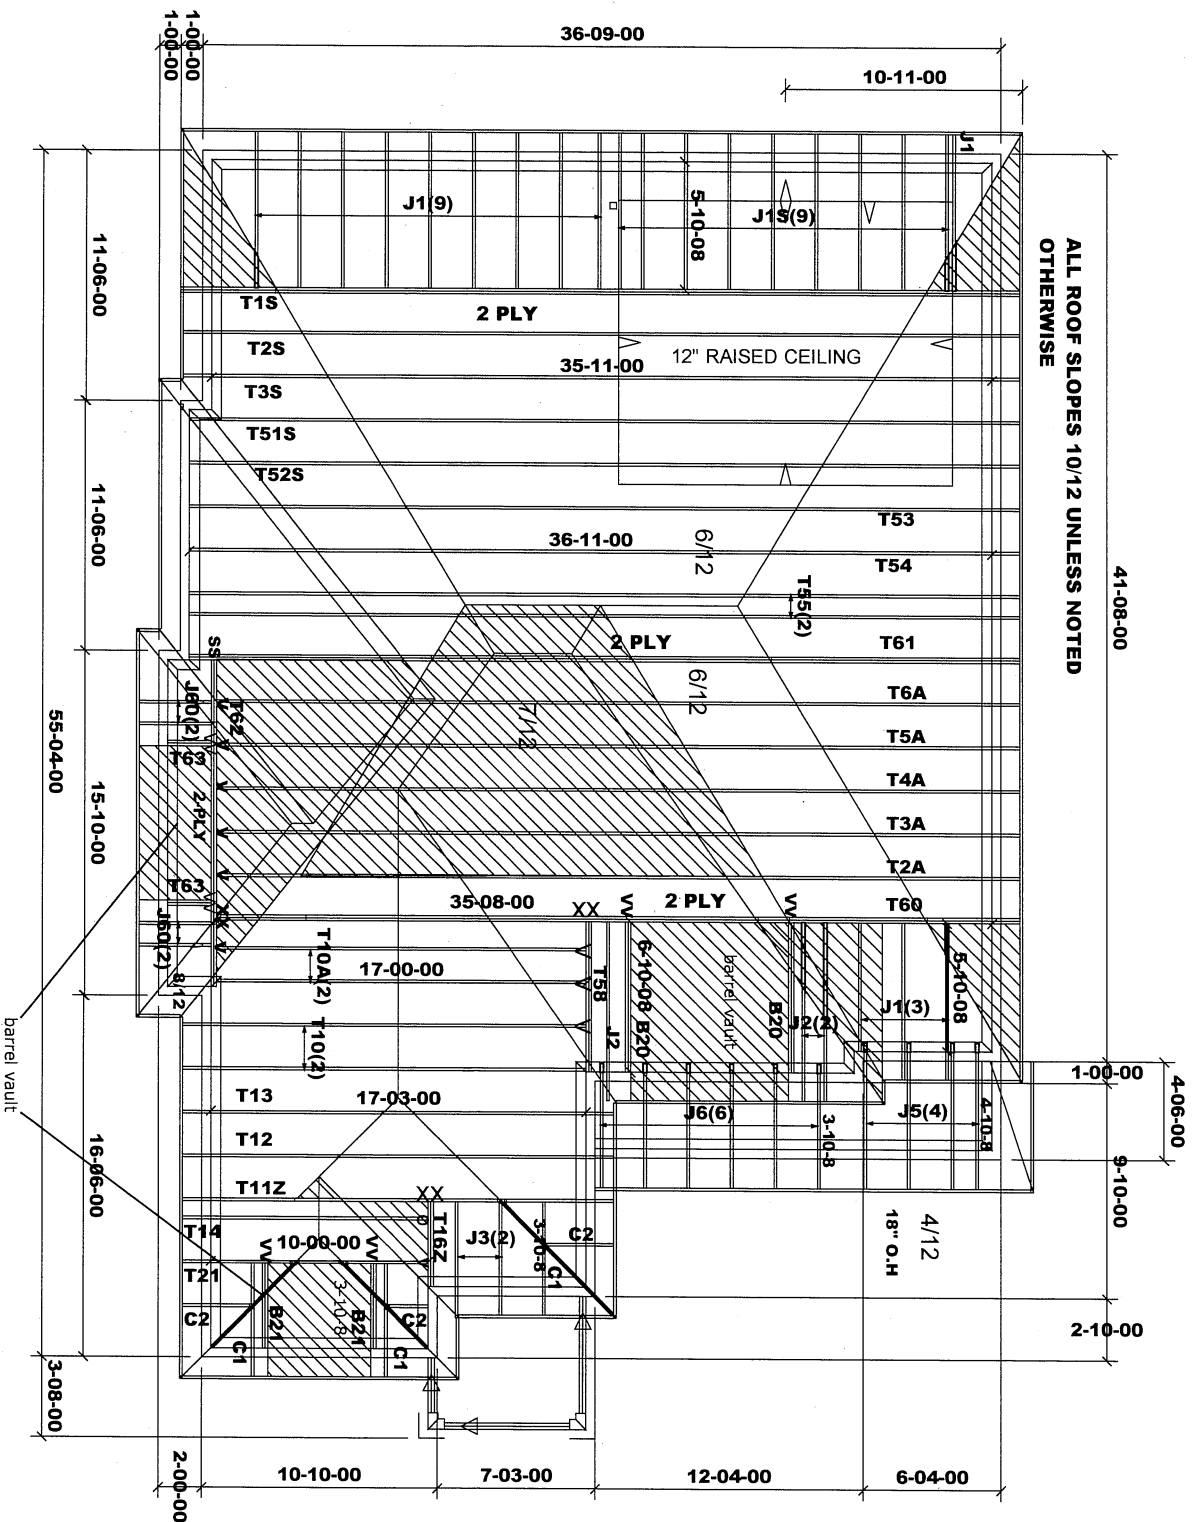

ASPHALT SHINGLES
FINISHED OVERHANG: 12"
2X6 EXTERIOR WALLS
2X6 FASCIA BOARD
HEEL: R.T.M.C.

All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.

DESIGN CONFORMS WITH OBC 2012 (2019 amendment) OCCUPANCY: RESIDENTIAL | PART: 9
Ss = 31.35 psf | Sr = 8.4 psf

DESIGN LOADS:
TCSL = 25.6 psf
TCOL = 6.0 psf
BCLL = 0.0 psf
BCDL = 7.4 psf


HARDWARE:
LUS24 - (O)
LUS26S - (W)
HGUS26S-2 - (XX)
LUS26-2 - (W)
HGUS26-2 - (SS)

BEAMS:
B20 = B21 = B22 = B60
2 - 2x10 SPF #2

CONVENTIONAL FRAMING

M14044

		Job Track: 51004 Plan Log: 201943 Layout ID: 411071		Builder / Location: ROYAL PINE HOMES / RICHMOND HILL Model / Elevation: UNIT 4504-FLANKAGE / B-STD.WITH OPT. COFF.	
Project: CENTREFIELD Date: 2021-05-26		Sales: Mario DiCano Designer: EEO		THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE. Mitek ver 8.4.2.286	

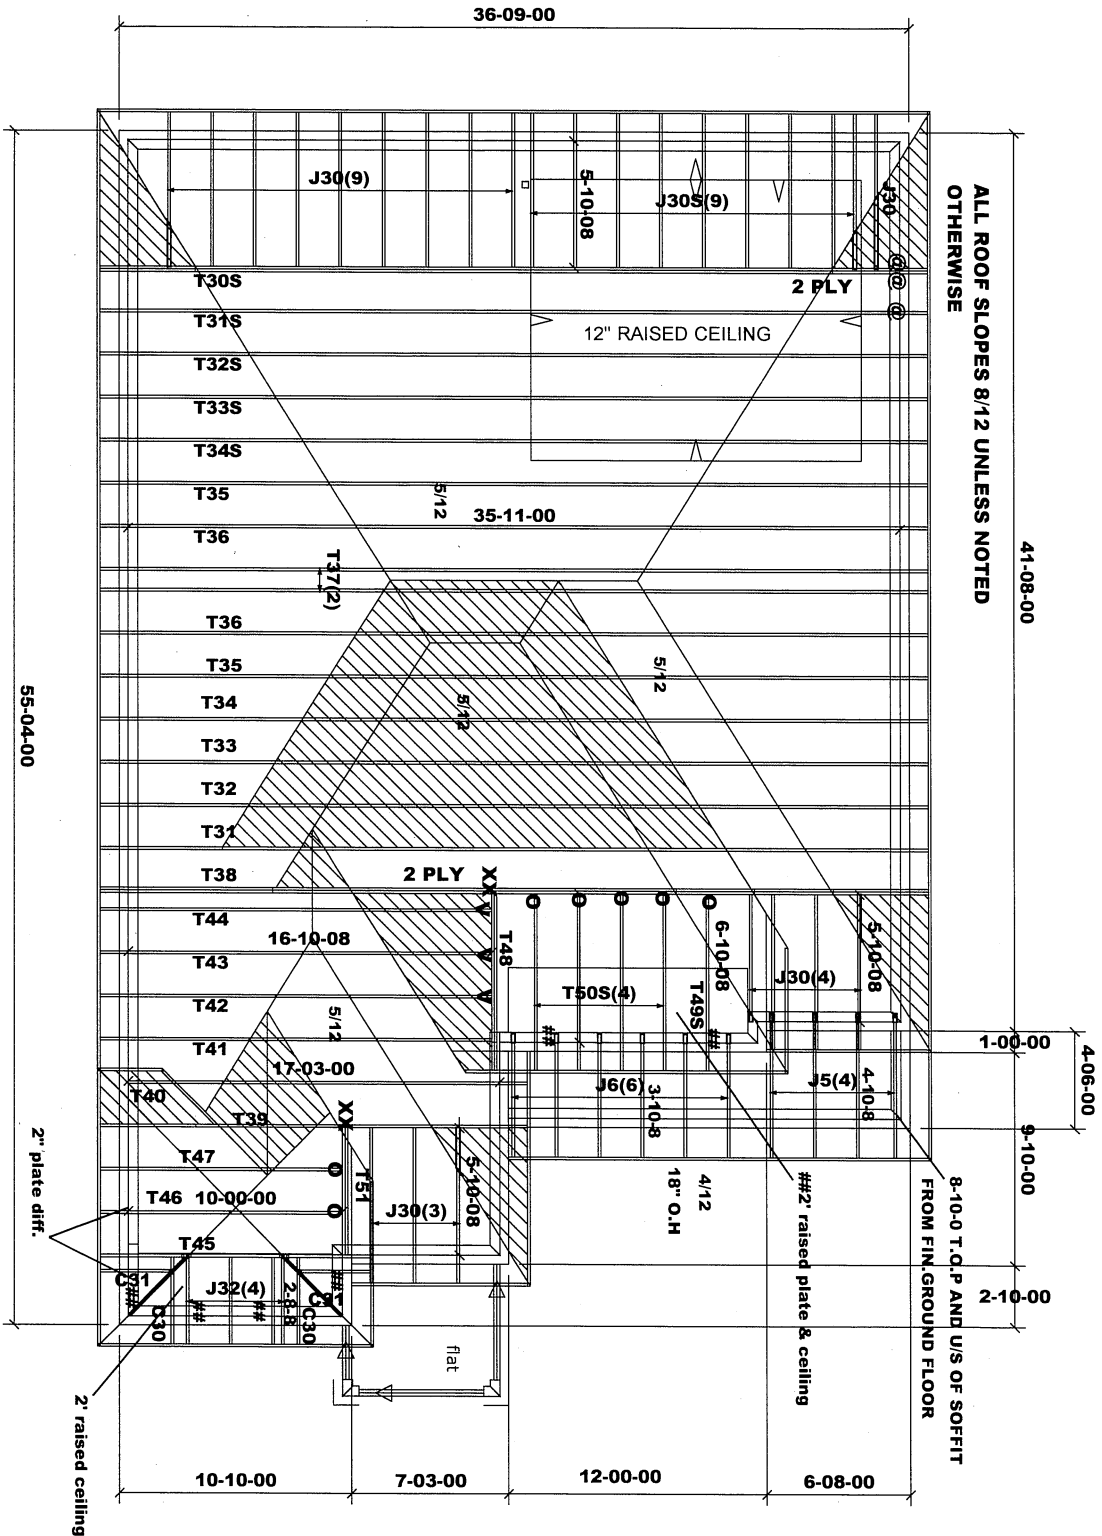

ASPHALT SHINGLES
FINISHED OVERHANG: 12"
2x6 EXTERIOR WALLS
2x6 FASCIA BOARD
HEEL: R.T.M.C.

All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post end points and lateral bracing does not exceed 6'.

DESIGN CONFORMS WITH OBC 2012 (2019 amendment) OCCUPANCY: RESIDENTIAL | PART: 9
Ss = 31.35 psf | Sr = 8.4 psf

DESIGN LOADS:


TCSL = 25.6 psf
TCDL = 6.0 psf
BCLL = 0.0 psf
BCDL = 7.4 psf

HARDWARE:

LUS24 - (O)
LUS26DS - (V)
HGUS26-2 - (XX)
LUS26-2.0 (VV)
TC26 - (@)

 DENOTES:
CONVENTIONAL
FRAMING

		Job Track: 51004 Plan Log: 201943 Layout ID: 411017	
Builder / Location: ROYAL PINE HOMES / RICHMOND HILL		Model / Elevation: UNIT-4504 / C-STD.WITH OPT.COFF.	
Project: CENTREFIELD Date: 2021-05-26		Sales: Mario DiCarno Designer: EEO JVG	
THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.			
Milek ver 8.4.2.296			

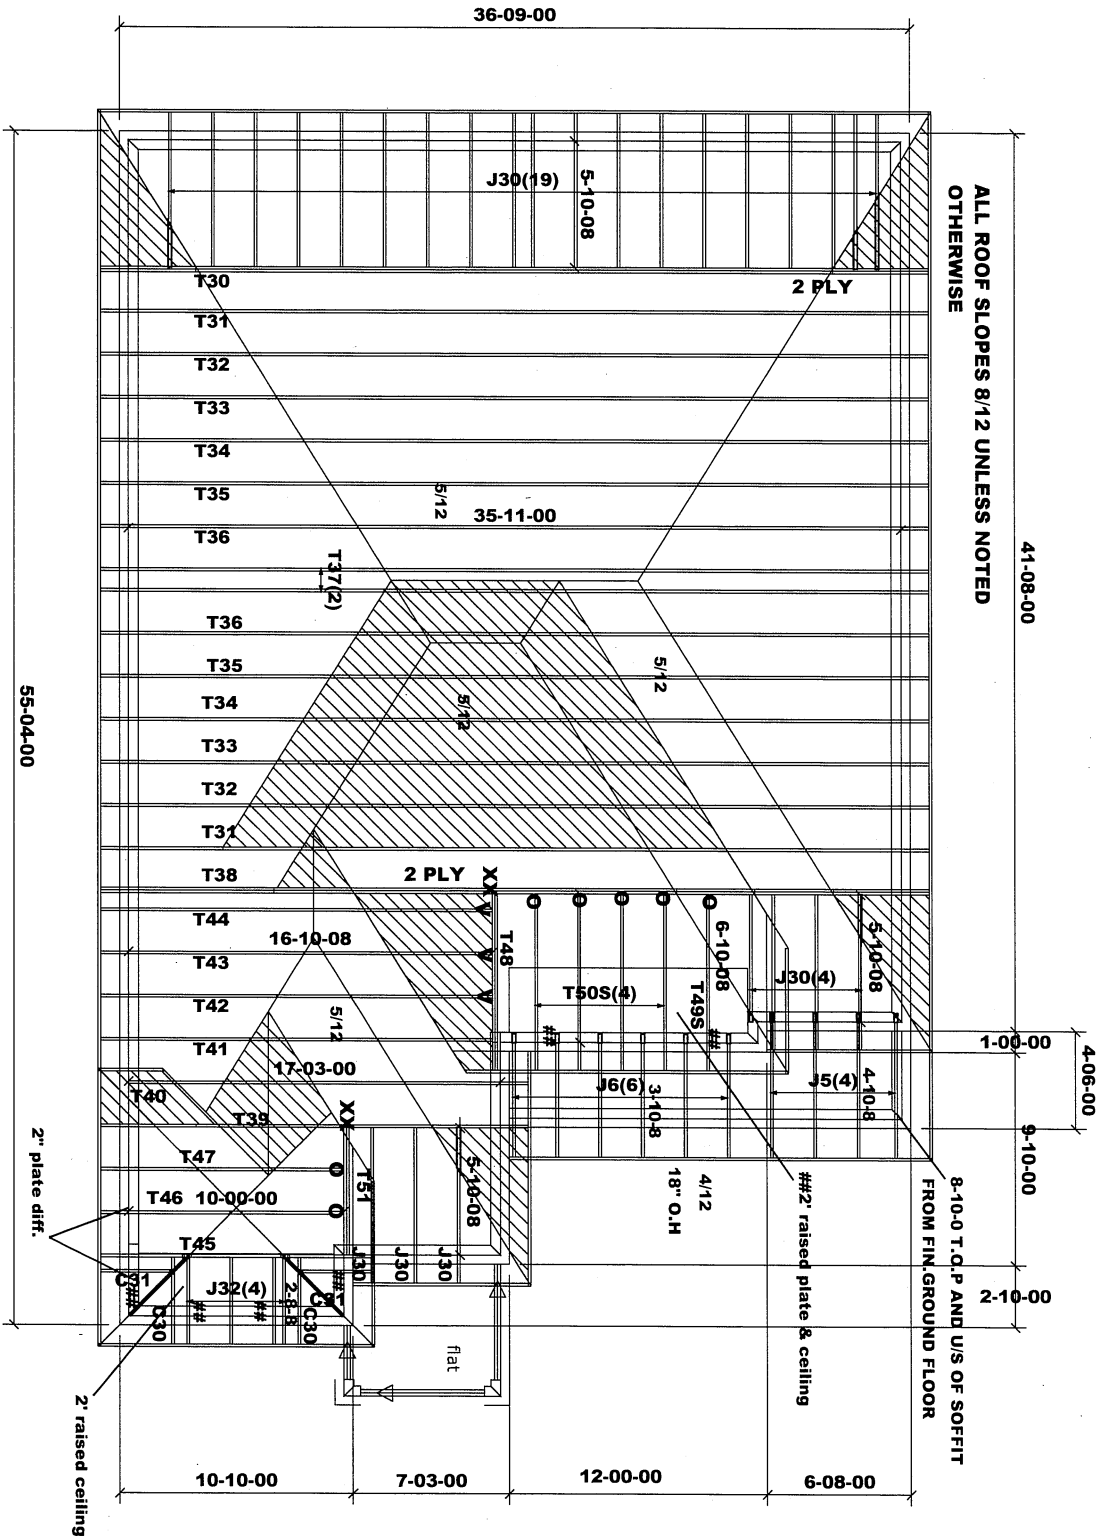

ASPHALT SHINGLES
FINISHED OVERHANG: 12"
2x6 EXTERIOR WALLS
2x6 FASCIA BOARD
HEEL: R.T.M.C.

All conventional framing to conform with Part 9 of O.B.C. 2012 (2019 amendment). Roof rafters that cross over or meet trusses to be min. 2x4 SPF #2 @ 24" o/c with a vertical post to the truss at each cross point. Vertical posts longer than 6' to have lateral bracing so that the distance between the post and points and lateral bracing does not exceed 6'.

DESIGN CONFORMS WITH OBC 2012 (2019 amendment) OCCUPANCY: RESIDENTIAL | PART: 9
Ss = 31.35 psf | Sr = 8.4 psf


DESIGN LOADS:
TCSL = 25.6 psf
TCDL = 6.0 psf
BCIL = 0.0 psf
BCDL = 7.4 psf

HARDWARE:
LUS24 - (O)
LUS26DS - (V)
HGUS26-2 - (XX)





 **DENOTES:**
CONVENTIONAL
FRAMING


M14014

		Job Track: 51004		Builder / Location: ROYAL PINE HOMES / RICHMOND HILL		Model / Elevation: UNIT - 4504 / C-STD. OR 5 BRM	
Plan Log: 201943		Project: CENTREFIELD		THESE DRAWINGS CONSTITUTE THE PROPERTY OF TAMARACK ROOF TRUSSES INC., SHALL NOT BE REPRODUCED, PUBLISHED, OR REDISTRIBUTED IN ANY MANNER OR UTILIZED FOR ANY PURPOSE OTHER THAN THE MANUFACTURE OF TRUSSES BY TAMARACK ROOF TRUSSES INC AND WILL BE RETRACTED BY TAMARACK ROOF TRUSSES INC IF UTILIZED FOR ANY OTHER PURPOSE.			
Layout ID: 418992		Date: 2021-05-26		Sales: Mario DiCano		Designer: EEO JLG	





 TAMARACK ROOF TRUSSES INC. ALPHA LUMBER GROUP	DELIVERY SHIPLIST							
	Lumber Yard: TAMARACK LUMBER	Job Track: 51004	PlanLog: 201943					
Builder: ROYAL PINE HOMES	Layout ID: 406403							
Project: CENTREFIELD	Ref #: 11638							
Location: RICHMOND HILL	Page: 1 of 3							
Model: UNIT - 4504	Date: 05-28-2021							
Lot #:	Designer: Jewel Thottakath							
Elevation: A-STD.WITH OPT.COFF.	Sales Rep: Mario DiCano							


Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T1S Hip Girder	10 / 12	35-11-00	4-01-04	2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	421.03 264.00		
	1	T2 Hip	10 / 12	35-11-00	5-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	148.9 93.50		
	1	T2S Hip	10 / 12	35-11-00	5-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	161.94 104.50		
	1	T3 Hip	10 / 12	35-11-00	6-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	150.38 95.00		
	1	T3S Hip	10 / 12	35-11-00	6-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	167.69 106.83		
	1	T4 Hip	10 / 12	35-11-00	7-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	166.76 103.83		
	1	T4S Hip	10 / 12	35-11-00	7-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	175.18 109.83		
	1	T5 Hip	10 / 12	35-11-00	8-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	165.21 103.00		
	1	T5S Hip	10 / 12	35-11-00	8-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	180.87 115.67		
	2	T6 Hip	10 / 12	35-11-00	9-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	367.4 230.00		
	2	T7 Hip	10 / 12	35-11-00	10-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	351.11 220.00		
	2	T8 Hip	10 / 12	35-11-00	11-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	384.63 238.00		
	1 2-ply	T9 Roof Special Girder	10 / 12	35-11-00	5-03-15	2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	436.66 262.00		
	4	T10 Common	10 / 12	17-03-00	8-09-15	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	337.62 217.33		



 TAMARACK ROOF TRUSSES INC. ALPHA LUMBER GROUP	DELIVERY SHIPLIST										
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT - 4504 Lot #: Elevation: A-STD.WITH OPT.COFF.						Job Track: 51004 PlanLog: 201943 Layout ID: 406403 Ref #: 11638 Page: 2 of 3 Date: 05-28-2021 Designer: Jewel Thottakath Sales Rep: Mario DiCano				

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1	T11 Hip Girder	10 /12	17-03-00	4-10-07	2 x 4 2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	87.7 56.50		
	1	T12 Hip	10 /12	17-03-00	6-06-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	75.92 48.00		
	1	T13 Hip	10 /12	17-03-00	8-02-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	83.6 54.33		
	2	T14 Common	10 /12	10-00-00	5-09-11	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	90.67 58.67		
	2	T14S Roof Special	10 /12	10-00-00	5-09-11	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	109.39 76.00		
	1 2-ply	T15 Jack-Closed Girder	7 /12	6-10-08	5-03-09	2 x 4 2 x 6		1-03-07 5-03-09	70.65 45.00		
	1 2-ply	T16 Jack-Closed Girder	10 /12	3-10-08	4-10-07	2 x 4 2 x 6		1-07-11 4-10-07	43.15 29.33		
	14	J1 Jack-Open	6 /12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 4-01-04	235.12 149.33		
	9	J1S Jack-Open	6 /12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 3-01-04	187.64 132.00		
	6	J2 Jack-Open	7 /12	6-10-08	5-03-09	2 x 4	1-03-08	1-03-07 5-03-09	159.83 102.00		
	2	J3 Jack-Open	10 /12	3-10-08	4-10-07	2 x 4	1-03-08	1-07-11 4-10-07	31.15 20.33		
	4	J4W Jack-Open	4 /12	6-10-08	2-10-11	2 x 4	1-03-08	7-03 2-10-11	89.61 58.00		
	4	J5 Jack-Open	4 /12	4-10-08	2-08-11	2 x 4	1-09-08	1-01-03 2-08-11	57.46 37.33		
	6	J6 Jack-Open	4 /12	3-10-08	2-04-11	2 x 4	1-09-08	1-01-03 2-04-11	72.13 48.00		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST	
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT - 4504 Lot #: Elevation: A-STD.WITH OPT.COFF.	Job Track: 51004 PlanLog: 201943 Layout ID: 406403 Ref #: 11638 Page: 3 of 3 Date: 05-28-2021 Designer: Jewel Thottakath Sales Rep: Mario DiCano

Roof Trusses


PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1	C1 Jack-Open	10 /12	1-09-07	3-01-09	2 x 4	1-03-08 2-01-01	1-07-11 3-01-09	12.02 8.33		
	1	C2 Jack-Open	10 /12	1-09-07	3-01-09	2 x 4	1-03-08 1-01	1-07-11 3-01-09	9.74 7.00		

TOTAL # TRUSS= 80 TOTAL BFT OF ALL TRUSSES= 3193.64 BFT. TOTAL WEIGHT OF ALL TRSSES 5031.16 LBS

HARDWARE


QTY	TYPE	MODEL	LENGTH
4	Hardware	H2.5T	
2	Hardware	HGUS26-2	
3	Hardware	LJS26DS	
2	Hardware	LUS24	

TOTAL NUMBER OF ITEMS= 11




 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST			
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT 4504- FLANKAGE Lot #: Elevation: A-STD.WITH OPT.COFF	Job Track: 51004 PlanLog: 201943 Layout ID: 411069 Ref #: 11638 Page: 1 of 4 Date: 05-28-2021 Designer: Sales Rep: Mario DiCano		


Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T1S Hip Girder	10 / 12	35-11-00	4-01-04	2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	393.25 247.33		
	1	T2A Hip	10 / 12	35-06-08	5-01-04	2 x 4	1-03-08	1-07-11 1-07-11	146.42 91.67		
	1	T2S Hip	10 / 12	35-11-00	5-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	161.65 104.17		
	1	T3A Hip	10 / 12	35-06-08	6-01-04	2 x 4	1-03-08	1-07-11 1-07-11	147.89 93.67		
	1	T3S Hip	10 / 12	35-11-00	6-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	163.9 104.67		
	1	T4A Hip	10 / 12	35-06-08	7-01-04	2 x 4	1-03-08	1-07-11 1-07-11	164.25 102.50		
	1	T5A Hip	10 / 12	35-06-08	8-01-04	2 x 4	1-03-08	1-07-11 1-07-11	162.69 101.67		
	1	T6A Hip	10 / 12	35-08-00	9-01-04	2 x 4	1-03-08	1-07-11 1-10-03	181.22 113.67		
	1 2-ply	T9A Roof Special Girder	10 / 12	35-06-08	5-03-15	2 x 6	1-03-08	1-07-11 1-07-11	428.89 258.67		
	2	T10 Common	10 / 12	17-03-00	8-09-15	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	168.81 108.67		
	2	T10A Common	10 / 12	17-00-00	8-09-15	2 x 4		1-10-03 1-07-11	160.09 102.33		
	1	T11 Hip Girder	10 / 12	17-03-00	4-10-07	2 x 4 2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	87.7 56.50		
	1	T12 Hip	10 / 12	17-03-00	6-06-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	75.92 48.00		
	1	T13 Hip	10 / 12	17-03-00	8-02-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	83.6 54.33		






 TAMARACK ROOF TRUSSES INC. ALPHA LUMBER GROUP	DELIVERY SHIPLIST							
	Lumber Yard: TAMARACK LUMBER						Job Track: 51004	
	Builder: ROYAL PINE HOMES						PlanLog: 201943	
	Project: CENTREFIELD						Layout ID: 411069	
	Location: RICHMOND HILL						Ref #: 11638	
	Model: UNIT 4504- FLANKAGE						Page: 2 of 4	
Lot #:						Date: 05-28-2021		
Elevation: A-STD.WITH OPT.COFF						Designer:		
						Sales Rep: Mario DiCano		


Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	2	T14 Common	10 / 12	10-00-00	5-09-11	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	90.67 58.67		
	2	T14S Roof Special	10 / 12	10-00-00	5-09-11	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	109.39 76.00		
	1 2-ply	T16 Jack-Closed Girder	10 / 12	3-10-08	4-10-07	2 x 4 2 x 6		1-07-11 4-10-07	43.15 29.33		
	1 2-ply	T50 Hip Girder	10 / 12	36-11-00	10-01-00	2 x 4 2 x 8	1-03-08	1-07-11 9-11	512.86 312.00		
	1	T51S Hip	10 / 12	36-11-00	7-01-04	2 x 4 2 x 6	1-03-08	9-11 1-07-11	198.6 123.50		
	1	T52S Hip	10 / 12	36-11-00	8-01-04	2 x 4 2 x 6	1-03-08	9-11 1-07-11	209.87 130.50		
	1	T53 Hip	10 / 12	36-11-00	9-01-04	2 x 4 2 x 6	1-03-08	1-07-11 9-11	211.59 131.17		
	1	T54 Hip	10 / 12	36-11-00	10-01-04	2 x 4 2 x 6	1-03-08	1-07-11 9-11	204.31 124.50		
	2	T55 Hip	10 / 12	36-11-00	11-01-04	2 x 4 2 x 6	1-03-08	1-07-11 9-11	442.84 273.33		
	1	T56S Roof Special	8 / 12	15-00-00	6-04-13	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	75.59 48.83		
	1 2-ply	T57 Common Girder	8 / 12	15-00-00	6-04-13	2 x 4 2 x 8		1-04-13 1-04-13	177 108.00		
	1 2-ply	T58 Jack-Closed Girder	7 / 12	6-10-08	5-03-09	2 x 4 2 x 6		1-03-07 5-03-09	70.65 45.00		
	1	V01 Valley	10 / 12	19-11-14	8-03-15	2 x 4			66.48 41.67		
	1	V02 Valley	10 / 12	17-07-01	7-03-15	2 x 4			55.99 34.17		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST										
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT 4504- FLANKAGE Lot #: Elevation: A-STD.WITH OPT.COFF						Job Track: 51004 PlanLog: 201943 Layout ID: 411069 Ref #: 11638 Page: 3 of 4 Date: 05-28-2021 Designer: Sales Rep: Mario DiCano				

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1	V03 Valley	10 /12	15-02-04	6-03-15	2 x 4			47.24 30.00		
	1	V04 Valley	10 /12	12-09-07	5-03-15	2 x 4			38.5 23.83		
	1	V05 Valley	10 /12	10-06-07	4-04-11	2 x 4			29.53 18.67		
	1	V06 Valley	10 /12	8-01-10	3-04-11	2 x 4			22.42 14.17		
	1	V07 Valley	10 /12	5-08-14	2-04-11	2 x 4			15.31 10.33		
	14	J1 Jack-Open	6 /12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 4-01-04	235.12 149.33		
	9	J1S Jack-Open	6 /12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 3-01-04	187.66 132.00		
	6	J2 Jack-Open	7 /12	6-10-08	5-03-09	2 x 4	1-03-08	1-03-07 5-03-09	159.83 102.00		
	2	J3 Jack-Open	10 /12	3-10-08	4-10-07	2 x 4	1-03-08	1-07-11 4-10-07	31.15 20.33		
	4	J4W Jack-Open	4 /12	6-10-08	2-10-11	2 x 4	1-03-08	7-03 2-10-11	89.03 58.00		
	4	J5 Jack-Open	4 /12	4-10-08	2-08-11	2 x 4	1-09-08	1-01-03 2-08-11	57.46 37.33		
	6	J6 Jack-Open	4 /12	3-10-08	2-04-11	2 x 4	1-09-08	1-01-03 2-04-11	72.13 48.00		
	1	C1 Jack-Open	10 /12	1-09-07	3-01-09	2 x 4	1-03-08 2-01-01	1-07-11 3-01-09	12.02 8.33		
	1	C2 Jack-Open	10 /12	1-09-07	3-01-09	2 x 4	1-03-08 1-01	1-07-11 3-01-09	9.99 7.00		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST	
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT 4504- FLANKAGE Lot #: Elevation: A-STD.WITH OPT.COFF	Job Track: 51004 PlanLog: 201943 Layout ID: 411069 Ref #: 11638 Page: 4 of 4 Date: 05-28-2021 Designer: Sales Rep: Mario DiCano


Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
TOTAL # TRUSS= 91		TOTAL BFT OF ALL TRUSSES= 3783.84					BFT.	TOTAL WEIGHT OF ALL TRSSES 6002.69 LBS			








HARDWARE


QTY	TYPE	MODEL	LENGTH
2	Hardware	HGUS26-2	
1	Hardware	HGUS28-2	
10	Hardware	LJS26DS	
2	Hardware	LUS24	
1	Hardware	LUS26-2	

TOTAL NUMBER OF ITEMS= 16











 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST			
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT - 4504 Lot #: Elevation: A-STD.OR 5 BRM	Job Track: 51004 PlanLog: 201943 Layout ID: 418988 Ref #: 11638 Page: 1 of 2 Date: 05-28-2021 Designer: Sales Rep: Mario DiCano		

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T1 Hip Girder	10 / 12	35-11-00	4-01-10	2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	405.42 241.33		
	2	T2 Hip	10 / 12	35-11-00	5-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	297.79 187.00		
	2	T3 Hip	10 / 12	35-11-00	6-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	300.76 190.00		
	2	T4 Hip	10 / 12	35-11-00	7-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	327.29 204.33		
	2	T5 Hip	10 / 12	35-11-00	8-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	323.18 202.00		
	2	T6 Hip	10 / 12	35-11-00	9-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	367.4 230.00		
	2	T7 Hip	10 / 12	35-11-00	10-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	351.11 220.00		
	2	T8 Hip	10 / 12	35-11-00	11-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	384.63 238.00		
	1 2-ply	T9 Roof Special Girder	10 / 12	35-11-00	5-03-15	2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	395.43 238.00		
	4	T10 Common	10 / 12	17-03-00	8-09-15	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	337.62 217.33		
	1	T11 Hip Girder	10 / 12	17-03-00	4-10-07	2 x 4 2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	87.7 56.50		
	1	T12 Hip	10 / 12	17-03-00	6-06-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	75.92 48.00		
	1	T13 Hip	10 / 12	17-03-00	8-02-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	83.6 54.33		
	2	T14 Common	10 / 12	10-00-00	5-09-11	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	90.67 58.67		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST							
	Lumber Yard: TAMARACK LUMBER						Job Track: 51004	
	Builder: ROYAL PINE HOMES						PlanLog: 201943	
	Project: CENTREFIELD						Layout ID: 418988	
	Location: RICHMOND HILL						Ref #: 11638	
	Model: UNIT - 4504						Page: 2 of 2	
Lot #:						Date: 05-28-2021		
Elevation: A-STD.OR 5 BRM						Designer:		
						Sales Rep: Mario DiCano		

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	2	T14S Roof Special	10 / 12	10-00-00	5-09-11	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	109.39 76.00		
	1 2-ply	T15 Jack-Closed Girder	7 / 12	6-10-08	5-03-09	2 x 4 2 x 6		1-03-07 5-03-09	70.65 45.00		
	1 2-ply	T16 Jack-Closed Girder	10 / 12	3-10-08	4-10-07	2 x 4 2 x 6		1-07-11 4-10-07	43.15 29.33		
	23	J1 Jack-Open	6 / 12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 4-01-04	386.27 245.33		
	6	J2 Jack-Open	7 / 12	6-10-08	5-03-09	2 x 4	1-03-08	1-03-07 5-03-09	159.83 102.00		
	2	J3 Jack-Open	10 / 12	3-10-08	4-10-07	2 x 4	1-03-08	1-07-11 4-10-07	31.15 20.33		
	4	J4W Jack-Open	4 / 12	6-10-08	2-10-11	2 x 4	1-03-08	7-03 2-10-11	89.61 58.00		
	4	J5 Jack-Open	4 / 12	4-10-08	2-08-11	2 x 4	1-09-08	1-01-03 2-08-11	57.46 37.33		
	6	J6 Jack-Open	4 / 12	3-10-08	2-04-11	2 x 4	1-09-08	1-01-03 2-04-11	72.13 48.00		
	1	C1 Jack-Open	10 / 12	1-09-07	3-01-09	2 x 4	1-03-08 2-01-01	1-07-11 3-01-09	12.02 8.33		
	1	C2 Jack-Open	10 / 12	1-09-07	3-01-09	2 x 4	1-03-08 1-01	1-07-11 3-01-09	9.74 7.00		

TOTAL # TRUSS= 80

TOTAL BFT OF ALL TRUSSES= 3062.14

BFT.

TOTAL WEIGHT OF ALL TRSSES 4869.95 LBS



HARDWARE


QTY	TYPE	MODEL	LENGTH
4	Hardware	H2.5T	
2	Hardware	HGUS26-2	
3	Hardware	LJS26DS	
2	Hardware	LUS24	

TOTAL NUMBER OF ITEMS= 11


 TAMARACK ROOF TRUSSES INC. ALPHA LUMBER GROUP	DELIVERY SHIPLIST							
	Lumber Yard: TAMARACK LUMBER	Job Track: 51004						
Builder: ROYAL PINE HOMES	PlanLog: 201943							
Project: CENTREFIELD	Layout ID: 411070							
Location: RICHMOND HILL	Ref #: 11638							
Model: UNIT 4504-FLANKAGE	Page: 1 of 4							
Lot #:	Date: 05-28-2021							
Elevation: A-5 BRM WITH OPT. COFF.	Designer:	Sales Rep: Mario DiCano						


Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T1S Hip Girder	10 / 12	35-11-00	4-01-04	2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	393.25 247.33		
	1	T2A Hip	10 / 12	35-06-08	5-01-04	2 x 4	1-03-08	1-07-11 1-07-11	146.42 91.67		
	1	T2S Hip	10 / 12	35-11-00	5-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	161.65 104.17		
	1	T3A Hip	10 / 12	35-06-08	6-01-04	2 x 4	1-03-08	1-07-11 1-07-11	147.89 93.67		
	1	T3S Hip	10 / 12	35-11-00	6-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	163.9 104.67		
	1	T4A Hip	10 / 12	35-06-08	7-01-04	2 x 4	1-03-08	1-07-11 1-07-11	161.19 100.83		
	1	T5A Hip	10 / 12	35-06-08	8-01-04	2 x 4	1-03-08	1-07-11 1-07-11	159.12 99.67		
	1	T6A Hip	10 / 12	35-08-00	9-01-04	2 x 4	1-03-08	1-07-11 1-10-03	181.22 113.67		
	1 2-ply	T9A Roof Special Girder	10 / 12	35-06-08	5-03-15	2 x 6	1-03-08	1-07-11 1-07-11	387.79 235.00		
	2	T10 Common	10 / 12	17-03-00	8-09-15	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	168.81 108.67		
	2	T10A Common	10 / 12	17-00-00	8-09-15	2 x 4		1-10-03 1-07-11	160.09 102.33		
	1	T11 Hip Girder	10 / 12	17-03-00	4-10-07	2 x 4 2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	87.7 56.50		
	1	T12 Hip	10 / 12	17-03-00	6-06-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	75.92 48.00		
	1	T13 Hip	10 / 12	17-03-00	8-02-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	83.6 54.33		




 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST							
	Lumber Yard: TAMARACK LUMBER	Job Track: 51004						
Builder: ROYAL PINE HOMES	PlanLog: 201943							
Project: CENTREFIELD	Layout ID: 411070							
Location: RICHMOND HILL	Ref #: 11638							
Model: UNIT 4504-FLANKAGE	Page: 2 of 4							
Lot #:	Date: 05-28-2021							
Elevation: A-5 BRM WITH OPT. COFF.	Designer:							
	Sales Rep: Mario DiCano							

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	2	T14 Common	10 / 12	10-00-00	5-09-11	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	90.67 58.67		
	2	T14S Roof Special	10 / 12	10-00-00	5-09-11	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	109.39 76.00		
	1 2-ply	T16 Jack-Closed Girder	10 / 12	3-10-08	4-10-07	2 x 4 2 x 6		1-07-11 4-10-07	43.15 29.33		
	1 2-ply	T50 Hip Girder	10 / 12	36-11-00	10-01-00	2 x 4 2 x 8	1-03-08	1-07-11 9-11	469.75 287.00		
	1	T52 Hip	10 / 12	36-11-00	8-01-04	2 x 4 2 x 6	1-03-08	9-11 1-07-11	192.37 118.33		
	1	T53 Hip	10 / 12	36-11-00	9-01-04	2 x 4 2 x 6	1-03-08	1-07-11 9-11	211.59 131.17		
	1	T54 Hip	10 / 12	36-11-00	10-01-04	2 x 4 2 x 6	1-03-08	1-07-11 9-11	204.31 124.50		
	2	T55 Hip	10 / 12	36-11-00	11-01-04	2 x 4 2 x 6	1-03-08	1-07-11 9-11	442.84 273.33		
	1	T56S Roof Special	8 / 12	15-00-00	6-04-13	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	75.59 48.83		
	1 2-ply	T57 Common Girder	8 / 12	15-00-00	6-04-13	2 x 4 2 x 8		1-04-13 1-04-13	162.2 102.33		
	1 2-ply	T58 Jack-Closed Girder	7 / 12	6-10-08	5-03-09	2 x 4 2 x 6		1-03-07 5-03-09	70.65 45.00		
	1	T510 Hip	10 / 12	36-11-00	7-01-10	2 x 6	1-03-08	9-11 1-07-11	202.06 124.33		
	1	V01 Valley	10 / 12	19-11-14	8-03-15	2 x 4			66.48 41.67		
	1	V02 Valley	10 / 12	17-07-01	7-03-15	2 x 4			55.98 34.17		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST							
	Lumber Yard: TAMARACK LUMBER	Job Track: 51004						
Builder: ROYAL PINE HOMES	PlanLog: 201943							
Project: CENTREFIELD	Layout ID: 411070							
Location: RICHMOND HILL	Ref #: 11638							
Model: UNIT 4504-FLANKAGE	Page: 3 of 4							
Lot #:	Date: 05-28-2021							
Elevation: A-5 BRM WITH OPT. COFF.	Designer:	Sales Rep: Mario DiCano						

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1	V03 Valley	10 / 12	15-02-04	6-03-15	2 x 4			47.24 30.00		
	1	V04 Valley	10 / 12	12-09-07	5-03-15	2 x 4			38.5 23.83		
	1	V05 Valley	10 / 12	10-06-07	4-04-11	2 x 4			29.53 18.67		
	1	V06 Valley	10 / 12	8-01-10	3-04-11	2 x 4			22.42 14.17		
	1	V07 Valley	10 / 12	5-08-14	2-04-11	2 x 4			15.31 10.33		
	15	J1 Jack-Open	6 / 12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 4-01-04	251.92 160.00		
	8	J1S Jack-Open	6 / 12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 3-01-04	166.85 117.33		
	6	J2 Jack-Open	7 / 12	6-10-08	5-03-09	2 x 4	1-03-08	1-03-07 5-03-09	159.83 102.00		
	2	J3 Jack-Open	10 / 12	3-10-08	4-10-07	2 x 4	1-03-08	1-07-11 4-10-07	31.15 20.33		
	4	J4W Jack-Open	4 / 12	6-10-08	2-10-11	2 x 4	1-03-08	7-03 2-10-11	89.03 58.00		
	4	J5 Jack-Open	4 / 12	4-10-08	2-08-11	2 x 4	1-09-08	1-01-03 2-08-11	57.46 37.33		
	6	J6 Jack-Open	4 / 12	3-10-08	2-04-11	2 x 4	1-09-08	1-01-03 2-04-11	72.13 48.00		
	1	C1 Jack-Open	10 / 12	1-09-07	3-01-09	2 x 4	1-03-08 2-01-01	1-07-11 3-01-09	12.02 8.33		
	1	C2 Jack-Open	10 / 12	1-09-07	3-01-09	2 x 4	1-03-08 1-01	1-07-11 3-01-09	9.99 7.00		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST	
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT 4504-FLANKAGE Lot #: Elevation: A-5 BRM WITH OPT. COFF.	Job Track: 51004 PlanLog: 201943 Layout ID: 411070 Ref #: 11638 Page: 4 of 4 Date: 05-28-2021 Designer: Sales Rep: Mario DiCano


Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
TOTAL # TRUSS= 91		TOTAL BFT OF ALL TRUSSES= 3710.49					BFT.	TOTAL WEIGHT OF ALL TRSSES 5878.98 LBS			

HARDWARE


QTY	TYPE	MODEL	LENGTH
2	Hardware	LUS24	
2	Hardware	HGUS26-2	
1	Hardware	HGUS28-2	
10	Hardware	LJS26DS	
1	Hardware	LUS26-2	

TOTAL NUMBER OF ITEMS= 16





 TAMARACK ROOF TRUSSES INC. ALPHA LUMBER GROUP	DELIVERY SHIPLIST							
	Lumber Yard: TAMARACK LUMBER	Job Track: 51004						
Builder: ROYAL PINE HOMES	PlanLog: 201943							
Project: CENTREFIELD	Layout ID: 406516							
Location: RICHMOND HILL	Ref #: 11638							
Model: UNIT- 4504	Page: 1 of 3							
Lot #:	Date: 05-28-2021							
Elevation: B-STD.WITH COFF	Designer: Jewel Thottakath							
	Sales Rep: Mario DiCano							


Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T1S Hip Girder	10 /12	35-11-00	4-01-04	2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	393.25 247.33		
	1	T2 Hip	10 /12	35-11-00	5-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	148.9 93.50		
	1	T2S Hip	10 /12	35-11-00	5-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	161.54 104.17		
	1	T3 Hip	10 /12	35-11-00	6-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	150.38 95.00		
	1	T3S Hip	10 /12	35-11-00	6-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	163.9 104.67		
	1	T4 Hip	10 /12	35-11-00	7-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	163.65 102.17		
	1	T4S Hip	10 /12	35-11-00	7-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	170.64 107.33		
	1	T5 Hip	10 /12	35-11-00	8-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	161.59 101.00		
	1	T5S Hip	10 /12	35-11-00	8-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	178.67 114.33		
	2	T6 Hip	10 /12	35-11-00	9-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	367.4 230.00		
	2	T7 Hip	10 /12	35-11-00	10-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	351.11 220.00		
	2	T8 Hip	10 /12	35-11-00	11-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	384.63 238.00		
	4	T10 Common	10 /12	17-03-00	8-09-15	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	337.62 217.33		
	1	T11Z Hip Girder	10 /12	17-03-00	4-10-07	2 x 4 2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	87.7 56.50		

 TAMARACK ROOF TRUSSES INC. ALPHA LUMBER GROUP	DELIVERY SHIPLIST									
	Lumber Yard: TAMARACK LUMBER					Job Track: 51004				
	Builder: ROYAL PINE HOMES					PlanLog: 201943				
	Project: CENTREFIELD					Layout ID: 406516				
	Location: RICHMOND HILL					Ref # 11638				
	Model: UNIT- 4504					Page: 2 of 3				
	Lot #:					Date: 05-28-2021				
	Elevation: B-STD.WITH COFF					Designer: Jewel Thottakath				
						Sales Rep: Mario DiCano				

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1	T12 Hip	10 /12	17-03-00	6-06-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	75.92 48.00		
	1	T13 Hip	10 /12	17-03-00	8-02-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	83.6 54.33		
	1	T14 Common	10 /12	10-00-00	5-09-11	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	45.34 29.33		
	1 2-ply	T15 Jack-Closed Girder	7 /12	6-10-08	5-03-09	2 x 4 2 x 6		1-03-07 5-03-09	70.65 45.00		
	1 2-ply	T16Z Jack-Closed Girder	10 /12	3-10-08	4-10-07	2 x 4 2 x 6		1-07-11 4-10-07	43.15 29.33		
	1 2-ply	T20 Roof Special Girder	10 /12	35-11-00	5-03-15	2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	436.5 262.67		
	1	T21 Hip Girder	10 /12	10-00-00	4-10-07	2 x 4 2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	56.9 36.83		
	13	J1 Jack-Open	6 /12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 4-01-04	218.33 138.67		
	9	J1S Jack-Open	6 /12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 3-01-04	187.64 132.00		
	3	J2 Jack-Open	7 /12	6-10-08	5-03-09	2 x 4	1-03-08	1-03-07 5-03-09	79.92 51.00		
	2	J3 Jack-Open	10 /12	3-10-08	4-10-07	2 x 4	1-03-08	1-07-11 4-10-07	31.15 20.33		
	4	J5 Jack-Open	4 /12	4-10-08	2-08-11	2 x 4	1-09-08	1-01-03 2-08-11	57.46 37.33		
	6	J6 Jack-Open	4 /12	3-10-08	2-04-11	2 x 4	1-09-08	1-01-03 2-04-11	72.13 48.00		
	3	C1 Jack-Open	10 /12	1-09-07	3-01-09	2 x 4	1-03-08 2-01-01	1-07-11 3-01-09	36.06 25.00		

 TAMARACK ROOF TRUSSES INC. ALPHA LUMBER GROUP	DELIVERY SHIPLIST	
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT- 4504 Lot #: Elevation: B-STD.WITH COFF	Job Track: 51004 PlanLog: 201943 Layout ID: 406516 Ref #: 11638 Page: 3 of 3 Date: 05-28-2021 Designer: Jewel Thottakath Sales Rep: Mario DiCano

Roof Trusses


PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	3	C2 Jack-Open	10 /12	1-09-07	3-01-09	2 x 4	1-03-08 1-01	1-07-11 3-01-09	29.22 21.00		

TOTAL # TRUSS= 74 TOTAL BFT OF ALL TRUSSES= 3010.15 BFT. TOTAL WEIGHT OF ALL TRSSES 4744.93 LBS






HARDWARE

QTY	TYPE	MODEL	LENGTH
2	Hardware	HGUS26-2	
4	Hardware	LJS26DS	
1	Hardware	LUS24	
4	Hardware	LUS26-2	


TOTAL NUMBER OF ITEMS= 11

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST			
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT 4504- FLANKAGE Lot #: Elevation: B-STD.WITH OPT. COFF.	Job Track: 51004 PlanLog: 201943 Layout ID: 411071 Ref #: 11638 Page: 1 of 3 Date: 05-28-2021 Designer: Sales Rep: Mario DiCano		

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T1S Hip Girder	10 / 12	35-11-00	4-01-04	2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	393.25 247.33		
	1	T2A Hip	10 / 12	35-06-08	5-01-04	2 x 4	1-03-08	1-07-11 1-07-11	146.42 91.67		
	1	T2S Hip	10 / 12	35-11-00	5-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	161.65 104.17		
	1	T3A Hip	10 / 12	35-06-08	6-01-04	2 x 4	1-03-08	1-07-11 1-07-11	147.89 93.67		
	1	T3S Hip	10 / 12	35-11-00	6-01-04	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	163.9 104.67		
	1	T4A Hip	10 / 12	35-06-08	7-01-04	2 x 4	1-03-08	1-07-11 1-07-11	161.19 100.83		
	1	T5A Hip	10 / 12	35-06-08	8-01-04	2 x 4	1-03-08	1-07-11 1-07-11	159.12 99.67		
	1	T6A Hip	10 / 12	35-08-00	9-01-04	2 x 4	1-03-08	1-07-11 1-10-03	181.22 113.67		
	2	T10 Common	10 / 12	17-03-00	8-09-15	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	168.81 108.67		
	2	T10A Common	10 / 12	17-00-00	8-09-15	2 x 4		1-10-03 1-07-11	160.09 102.33		
	1	T11Z Hip Girder	10 / 12	17-03-00	4-10-07	2 x 4 2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	87.7 56.50		
	1	T12 Hip	10 / 12	17-03-00	6-06-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	75.92 48.00		
	1	T13 Hip	10 / 12	17-03-00	8-02-07	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	83.6 54.33		
	1	T14 Common	10 / 12	10-00-00	5-09-11	2 x 4	1-03-08 1-03-08	1-07-11 1-07-11	45.34 29.33		

DELIVERY SHIPLIST




Lumber Yard: TAMARACK LUMBER
 Builder: ROYAL PINE HOMES
 Project: CENTREFIELD
 Location: RICHMOND HILL
 Model: UNIT 4504- FLANKAGE
 Lot #:
 Elevation: B-STD.WITH OPT. COFF.








Job Track: 51004
 PlanLog: 201943
 Layout ID: 411071
 Ref #: 11638
 Page: 2 of 3
 Date: 05-28-2021
 Designer:
 Sales Rep: Mario DiCano

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T16Z Jack-Closed Girder	10 /12	3-10-08	4-10-07	2 x 4 2 x 6		1-07-11 4-10-07	43.15 29.33		
	1	T21 Hip Girder	10 /12	10-00-00	4-10-07	2 x 4 2 x 6	1-03-08 1-03-08	1-07-11 1-07-11	55.23 35.50		
	1	T51S Hip	10 /12	36-11-00	7-01-04	2 x 4 2 x 6	1-03-08	9-11 1-07-11	194.92 121.50		
	1	T52S Hip	10 /12	36-11-00	8-01-04	2 x 4 2 x 6	1-03-08	9-11 1-07-11	206.19 128.17		
	1	T53 Hip	10 /12	36-11-00	9-01-04	2 x 4 2 x 6	1-03-08	1-07-11 9-11	211.31 131.17		
	1	T54 Hip	10 /12	36-11-00	10-01-04	2 x 4 2 x 6	1-03-08	1-07-11 9-11	204.03 125.00		
	2	T55 Hip	10 /12	36-11-00	11-01-04	2 x 4 2 x 6	1-03-08	1-07-11 9-11	442.3 271.33		
	1 2-ply	T58 Jack-Closed Girder	7 /12	6-10-08	5-03-09	2 x 4 2 x 6		1-03-07 5-03-09	70.65 45.00		
	1 2-ply	T60 Roof Special Girder	10 /12	35-08-00	5-03-15	2 x 6	1-03-08	1-07-11 1-10-03	428.74 259.33		
	1 2-ply	T61 Hip Girder	10 /12	36-11-00	10-01-06	2 x 6 2 x 8	1-03-08	1-07-11 9-11	550 328.67		
	1 2-ply	T62 Hip Girder	8 /12	15-00-00	3-03-11	2 x 6 2 x 8		1-04-13 1-04-13	184.85 114.67		
	2 2-ply	T63 Jack-Closed	10 /12	2-00-00	3-03-11	2 x 4 2 x 6		1-07-11 3-03-11	49.09 33.33		
	13	J1 Jack-Open	6 /12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 4-01-04	218.33 138.67		
	9	J1S Jack-Open	6 /12	5-10-08	4-01-04	2 x 4	1-03-08	1-02-00 3-01-04	187.66 132.00		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST	
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT 4504- FLANKAGE Lot #: Elevation: B-STD.WITH OPT. COFF.	Job Track: 51004 PlanLog: 201943 Layout ID: 411071 Ref #: 11638 Page: 3 of 3 Date: 05-28-2021 Designer: Sales Rep: Mario DiCano

Roof Trusses


PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	3	J2 Jack-Open	7 /12	6-10-08	5-03-09	2 x 4	1-03-08	1-03-07 5-03-09	79.92 51.00		
	2	J3 Jack-Open	10 /12	3-10-08	4-10-07	2 x 4	1-03-08	1-07-11 4-10-07	31.15 20.33		
	4	J5 Jack-Open	4 /12	4-10-08	2-08-11	2 x 4	1-09-08	1-01-03 2-08-11	57.46 37.33		
	6	J6 Jack-Open	4 /12	3-10-08	2-04-11	2 x 4	1-09-08	1-01-03 2-04-11	72.13 48.00		
	4	J60 Jack-Open	10 /12	2-00-00	3-03-11	2 x 4	1-03-08	1-07-11 3-03-11	41.33 28.00		
	3	C1 Jack-Open	10 /12	1-09-07	3-01-09	2 x 4	1-03-08 2-01-01	1-07-11 3-01-09	36.06 25.00		
	3	C2 Jack-Open	10 /12	1-09-07	3-01-09	2 x 4	1-03-08 1-01	1-07-11 3-01-09	29.22 21.00		

TOTAL # TRUSS= 85 TOTAL BFT OF ALL TRUSSES= 3479.17 BFT. TOTAL WEIGHT OF ALL TRSSES 5529.81 LBS




HARDWARE

QTY	TYPE	MODEL	LENGTH
3	Hardware	HGUS26-2	
1	Hardware	HGUS28-2	
11	Hardware	LJS26DS	
1	Hardware	LUS24	
6	Hardware	LUS26-2	

TOTAL NUMBER OF ITEMS= 22





 TAMARACK ROOF TRUSSES INC. ALPHA LUMBER GROUP	DELIVERY SHIPLIST										
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT-4504 Lot #: Elevation: C-STD.WITH OPT.COFF.						Job Track: 51004 PlanLog: 201943 Layout ID: 411017 Ref #: 11638 Page: 1 of 3 Date: 05-28-2021 Designer: Sales Rep: Mario DiCano				


Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T30S Hip Girder	8 /12	35-11-00	3-05-15	2 x 4 2 x 6	1-03-08 1-03-08	1-04-13 1-04-13	403.42 249.33		
	1	T31 Hip	8 /12	35-11-00	4-03-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	141.27 89.17		
	1	T31S Hip	8 /12	35-11-00	4-03-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	152.24 96.33		
	1	T32 Hip	8 /12	35-11-00	5-01-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	142.49 88.50		
	1	T32S Hip	8 /12	35-11-00	5-01-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	152.33 96.33		
	1	T33 Hip	8 /12	35-11-00	5-11-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	152.59 96.33		
	1	T33S Hip	8 /12	35-11-00	5-11-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	161.21 102.83		
	1	T34 Hip	8 /12	35-11-00	6-09-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	154.62 96.17		
	1	T34S Hip	8 /12	35-11-00	6-09-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	167.9 105.83		
	2	T35 Hip	8 /12	35-11-00	7-07-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	321.96 205.00		
	2	T36 Hip	8 /12	35-11-00	8-05-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	326.02 200.00		
	2	T37 Hip	8 /12	35-11-00	9-03-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	336.59 207.67		
	1 2-ply	T38 Roof Special Girder	8 /12	35-11-00	5-10-15	2 x 4 2 x 6	1-03-08 1-03-08	1-04-13 1-04-13	362.73 225.33		
	1	T39 Hip Girder	8 /12	17-03-00	3-05-15	2 x 4 2 x 6	1-03-08 1-03-08	1-04-13 1-04-13	80.08 48.83		



 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST									
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT-4504 Lot #: Elevation: C-STD.WITH OPT.COFF.					Job Track: 51004 PlanLog: 201943 Layout ID: 411017 Ref #: 11638 Page: 2 of 3 Date: 05-28-2021 Designer: Sales Rep: Mario DiCano				

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1	T40 Hip	8 /12	17-03-00	4-03-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	72.36 47.00		
	1	T41 Hip	8 /12	16-10-08	4-11-11	2 x 4	1-03-08 1-03-08	1-01-13 1-04-13	68.17 43.67		
	1	T42 Hip	8 /12	16-10-08	5-11-15	2 x 4	1-03-08	1-04-13 1-07-13	74.59 48.83		
	1	T43 Hip	8 /12	16-10-08	6-09-15	2 x 4	1-03-08	1-04-13 1-07-13	77.96 49.67		
	1	T44 Common	8 /12	16-10-08	7-01-13	2 x 4	1-03-08	1-04-13 1-07-13	73.73 47.33		
	1	T45 Hip Girder	8 /12	10-00-00	3-02-08	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	42.73 26.50		
	1	T46 Hip	8 /12	10-00-00	6-06-08	2 x 4	1-03-08 1-03-08	3-04-13 3-04-13	51.38 32.00		
	1	T47 Hip	8 /12	10-00-00	5-06-02	2 x 4	1-03-08	3-04-13 3-04-13	52.76 33.00		
	1 2-ply	T48 Jack-Closed Girder	5 /12	6-10-08	5-10-15	2 x 4 2 x 6	1-03-08	3-00-09 5-10-15	82.54 51.00		
	1	T49S Half Hip	5 /12	6-10-08	4-10-13	2 x 4	1-03-08	1-00-09 4-10-13	40.34 27.33		
	4	T50S Jack-Closed	5 /12	6-10-08	5-10-15	2 x 4	1-03-08	1-00-09 5-10-15	157.44 103.33		
	1 2-ply	T51 Jack-Closed Girder	5 /12	5-10-08	3-05-15	2 x 4 2 x 6		1-00-09 3-05-15	55 35.33		
	4	J5 Jack-Open	4 /12	4-10-08	2-08-11	2 x 4	1-09-08	1-01-03 2-08-11	57.46 37.33		
	6	J6 Jack-Open	4 /12	3-10-08	2-04-11	2 x 4	1-09-08	1-01-03 2-04-11	72.13 48.00		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST	
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT-4504 Lot #: Elevation: C-STD.WITH OPT.COFF.	Job Track: 51004 PlanLog: 201943 Layout ID: 411017 Ref #: 11638 Page: 3 of 3 Date: 05-28-2021 Designer: Sales Rep: Mario DiCano

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	17	J30 Jack-Open	5 /12	5-10-08	3-05-15	2 x 4	1-03-08	1-00-09 3-05-15	277.62 170.00		
	9	J30S Jack-Open	5 /12	5-10-08	3-05-15	2 x 4	1-03-08	1-00-09 2-05-15	186.58 130.50		
	4	J32 Jack-Open	8 /12	2-08-08	3-02-08	2 x 4	1-03-08	1-04-13 3-02-08	44.52 28.00		
	2	C30 Jack-Open	8 /12	1-10-15	2-08-02	2 x 4	1-03-08 9-09	1-04-13 2-08-02	20.23 14.00		
	2	C31 Jack-Open	8 /12	1-10-15	2-08-02	2 x 4	1-03-08 1-01	1-04-13 2-08-02	18.4 12.67		

TOTAL # TRUSS= 80

TOTAL BFT OF ALL TRUSSES= 2893.14


BFT.

TOTAL WEIGHT OF ALL TRSSES 4581.38 LBS

HARDWARE

QTY	TYPE	MODEL	LENGTH
1	Hardware	HGUS26-2	
4	Hardware	LJS26DS	
7	Hardware	LUS24	
1	Hardware	LUS26-2	
3	Hardware	TC26	

TOTAL NUMBER OF ITEMS= 16



DELIVERY SHIPLIST

Lumber Yard: TAMARACK LUMBER
 Builder: ROYAL PINE HOMES
 Project: CENTREFIELD
 Location: RICHMOND HILL
 Model: UNIT - 4504
 Lot #:
 Elevation: C-STD.OR 5 BRM










Job Track: 51004
 PlanLog: 201943
 Layout ID: 418992
 Ref #: 11638
 Page: 1 of 3
 Date: 05-28-2021
 Designer:
 Sales Rep: Mario DiCano


Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1 2-ply	T30 Hip Girder	8 /12	35-11-00	3-06-01	2 x 6	1-03-08 1-03-08	1-04-13 1-04-13	390.75 230.67		
	2	T31 Hip	8 /12	35-11-00	4-03-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	282.53 178.33		
	2	T32 Hip	8 /12	35-11-00	5-01-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	284.97 177.00		
	2	T33 Hip	8 /12	35-11-00	5-11-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	305.19 192.67		
	2	T34 Hip	8 /12	35-11-00	6-09-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	309.25 192.33		
	2	T35 Hip	8 /12	35-11-00	7-07-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	321.96 205.00		
	2	T36 Hip	8 /12	35-11-00	8-05-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	326.02 200.00		
	2	T37 Hip	8 /12	35-11-00	9-03-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	336.59 207.67		
	1 2-ply	T38 Roof Special Girder	8 /12	35-11-00	5-10-15	2 x 4 2 x 6	1-03-08 1-03-08	1-04-13 1-04-13	356.28 220.67		
	1	T39 Hip Girder	8 /12	17-03-00	3-05-15	2 x 4 2 x 6	1-03-08 1-03-08	1-04-13 1-04-13	80.08 48.83		
	1	T40 Hip	8 /12	17-03-00	4-03-15	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	72.36 47.00		
	1	T41 Hip	8 /12	16-10-08	4-11-11	2 x 4	1-03-08 1-03-08	1-01-13 1-04-13	68.17 43.67		
	1	T42 Hip	8 /12	16-10-08	5-11-15	2 x 4	1-03-08	1-04-13 1-07-13	74.59 48.83		
	1	T43 Hip	8 /12	16-10-08	6-09-15	2 x 4	1-03-08	1-04-13 1-07-13	77.96 49.67		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST							
	Lumber Yard: TAMARACK LUMBER	Job Track: 51004						
Builder: ROYAL PINE HOMES	PlanLog: 201943							
Project: CENTREFIELD	Layout ID: 418992							
Location: RICHMOND HILL	Ref #: 11638							
Model: UNIT - 4504	Page: 2 of 3							
Lot #:	Date: 05-28-2021							
Elevation: C-STD.OR 5 BRM	Designer:	Sales Rep: Mario DiCano						

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
	1	T44 Common	8 /12	16-10-08	7-01-13	2 x 4	1-03-08	1-04-13 1-07-13	73.73 47.33		
	1	T45 Hip Girder	8 /12	10-00-00	3-02-08	2 x 4	1-03-08 1-03-08	1-04-13 1-04-13	42.73 26.50		
	1	T46 Hip	8 /12	10-00-00	6-06-08	2 x 4	1-03-08 1-03-08	3-04-13 3-04-13	51.38 32.00		
	1	T47 Hip	8 /12	10-00-00	5-06-02	2 x 4	1-03-08	3-04-13 3-04-13	52.76 33.00		
	1 2-ply	T48 Jack-Closed Girder	5 /12	6-10-08	5-10-15	2 x 4 2 x 6	1-03-08	3-00-09 5-10-15	82.54 51.00		
	1	T49S Half Hip	5 /12	6-10-08	4-10-13	2 x 4	1-03-08	1-00-09 4-10-13	40.34 27.33		
	4	T50S Jack-Closed	5 /12	6-10-08	5-10-15	2 x 4	1-03-08	1-00-09 5-10-15	157.44 103.33		
	1 2-ply	T51 Jack-Closed Girder	5 /12	5-10-08	3-05-15	2 x 4 2 x 6		1-00-09 3-05-15	54.49 34.67		
	4	J5 Jack-Open	4 /12	4-10-08	2-08-11	2 x 4	1-09-08	1-01-03 2-08-11	57.46 37.33		
	6	J6 Jack-Open	4 /12	3-10-08	2-04-11	2 x 4	1-09-08	1-01-03 2-04-11	72.13 48.00		
	26	J30 Jack-Open	5 /12	5-10-08	3-05-15	2 x 4	1-03-08	1-00-09 3-05-15	424.59 260.00		
	4	J32 Jack-Open	8 /12	2-08-08	3-02-08	2 x 4	1-03-08	1-04-13 3-02-08	44.52 28.00		
	2	C30 Jack-Open	8 /12	1-10-15	2-08-02	2 x 4	1-03-08 9-09	1-04-13 2-08-02	20.23 14.00		
	2	C31 Jack-Open	8 /12	1-10-15	2-08-02	2 x 4	1-03-08 1-01	1-04-13 2-08-02	18.4 12.67		

 TAMARACK ROOF TRUSSES INC. ALPA LUMBER GROUP	DELIVERY SHIPLIST	
	Lumber Yard: TAMARACK LUMBER Builder: ROYAL PINE HOMES Project: CENTREFIELD Location: RICHMOND HILL Model: UNIT - 4504 Lot #: Elevation: C-STD.OR 5 BRM	Job Track: 51004 PlanLog: 201943 Layout ID: 418992 Ref #: 11638 Page: 3 of 3 Date: 05-28-2021 Designer: Sales Rep: Mario DiCano

Roof Trusses

PROFILE	QTY PLY	MARK TYPE	PITCH	SPAN	HEIGHT	LUMBER	OVERHANG LEFT RIGHT	HEEL HEIGHT LEFT RIGHT	LBS. BFT.	BUNDLE # STACK #	LOAD BY REMARKS
TOTAL # TRUSS= 80		TOTAL BFT OF ALL TRUSSES= 2797.5					BFT.	TOTAL WEIGHT OF ALL TRSSES 4479.41 LBS			

HARDWARE

QTY	TYPE	MODEL	LENGTH
7	Hardware	LUS24	
3	Hardware	LJS26DS	
2	Hardware	HGUS26-2	

TOTAL NUMBER OF ITEMS= 12

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
418988	T1	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:12:17 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-nt0gj w9X5oMecwgZcqSMq44eizWLDHGOkw7p7zCzsS

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	5.0	6.0	2.00	2.25
C	TTWW+m	MT20	8.0	9.0	3.50	2.25
D	TMVW-t	MT20	5.0	6.0		
E	TMVW+w	MT20	3.0	6.0		
F	TS-t	MT20	5.0	6.0		
G	TMVW-t	MT20	5.0	6.0		
H	TTWW+m	MT20	8.0	9.0	3.50	2.25
I	TMVW+p	MT20	5.0	6.0	2.00	2.25
K	BMV1+p	MT20	3.0	6.0		
L	BMVW-t	MT20	5.0	6.0		
M	BMVW-t	MT20	5.0	6.0	2.50	2.50
N	BS-t	MT20	5.0	6.0		
O	BMVWW-t	MT20	5.0	6.0		
P	BS-t	MT20	5.0	6.0		
Q	BMVW-t	MT20	5.0	6.0	2.50	2.50
R	BMVW-t	MT20	5.0	6.0		
S	BMV1+p	MT20	3.0	6.0		

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CS1 (LC)	MAX. UNBRAC LENGTH FR-TO	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS1 (LC)
FR-TO		FROM	TO		FR-TO		
AS-M	0 / 7082	-18.5	-18.5	0.53 (1)	10.00		
M-AT	0 / 2642	-18.5	-18.5	0.24 (1)	10.00		
AT-AU	0 / 2642	-18.5	-18.5	0.24 (1)	10.00		
AU-AV	0 / 2642	-18.5	-18.5	0.24 (1)	10.00		
AV-AW	0 / 2642	-18.5	-18.5	0.24 (1)	10.00		
AW-L	0 / 2642	-18.5	-18.5	0.24 (1)	10.00		
L-AX	0 / 0	-18.5	-18.5	0.08 (4)	10.00		
AX-K	0 / 0	-18.5	-18.5	0.08 (4)	10.00		

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	2-11-8	-30	-30	---	FRONT	VERT	DEAD	---	C1
C	2-11-8	-127	-127	---	FRONT	VERT	SNOW	---	C1
E	18-0-12	-76	-76	---	FRONT	VERT	TOTAL	---	C1
H	32-11-8	-30	-30	---	FRONT	VERT	DEAD	---	C1
H	32-11-8	-127	-127	---	FRONT	VERT	SNOW	---	C1
N	21-10-4	-21	-21	---	FRONT	VERT	TOTAL	---	C1
O	18-0-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
P	14-0-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
T	4-0-12	-76	-76	---	FRONT	VERT	TOTAL	---	C1
U	6-0-12	-76	-76	---	FRONT	VERT	TOTAL	---	C1
V	8-0-12	-76	-76	---	FRONT	VERT	TOTAL	---	C1
W	10-0-12	-76	-76	---	FRONT	VERT	TOTAL	---	C1
X	12-0-12	-76	-76	---	FRONT	VERT	TOTAL	---	C1
Y	14-0-12	-76	-76	---	FRONT	VERT	TOTAL	---	C1
Z	16-0-12	-76	-76	---	FRONT	VERT	TOTAL	---	C1
AA	17-1-4	-76	-76	---	FRONT	VERT	TOTAL	---	C1
AB	19-10-4	-76	-76	---	FRONT	VERT	TOTAL	---	C1
AC	21-10-4	-76	-76	---	FRONT	VERT	TOTAL	---	C1
AD	23-10-4	-76	-76	---	FRONT	VERT	TOTAL	---	C1
AE	25-10-4	-76	-76	---	FRONT	VERT	TOTAL	---	C1
AF	27-10-4	-76	-76	---	FRONT	VERT	TOTAL	---	C1
AG	29-10-4	-76	-76	---	FRONT	VERT	TOTAL	---	C1
AH	31-10-4	-76	-76	---	FRONT	VERT	TOTAL	---	C1
AI	1-8-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AJ	2-0-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AK	4-0-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AL	6-0-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AM	8-0-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AN	10-0-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AO	12-0-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AP	16-0-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AQ	17-1-4	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AR	19-10-4	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AS	23-10-4	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AT	25-10-4	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AU	27-10-4	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AV	29-10-4	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AW	31-10-4	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AX	33-10-4	-21	-21	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.




Structural component only
DWG# T-2115540

JOB NAME 406403	TRUSS NAME T1S	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:28 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-vkBlmt9uyfh23z1qE8bDv1dTe7XldMcXAzCzkn

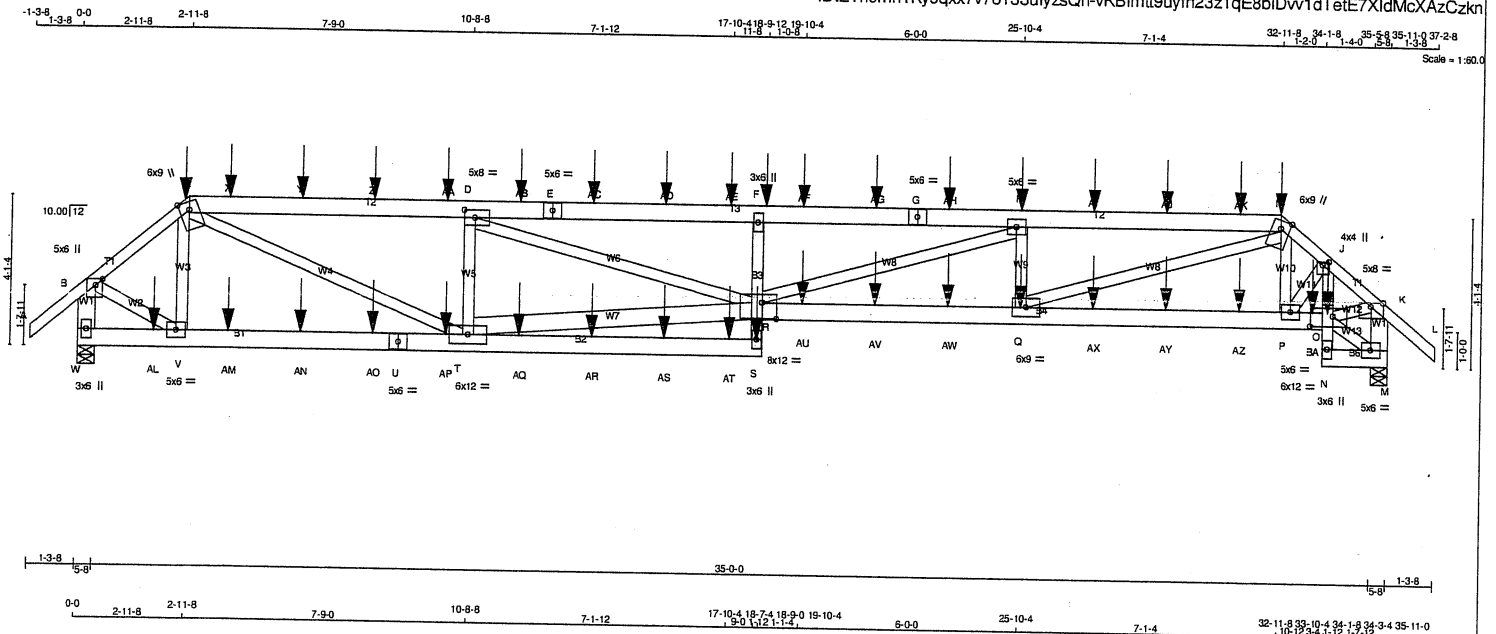

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			
A - C	2x4 DRY	No.2	SPF
C - E	2x6 DRY	No.2	SPF
E - G	2x6 DRY	No.2	SPF
G - I	2x6 DRY	No.2	SPF
I - L	2x4 DRY	No.2	SPF
W - B	2x6 DRY	No.2	SPF
M - K	2x6 DRY	No.2	SPF
W - U	2x6 DRY	No.2	SPF
U - S	2x6 DRY	No.2	SPF
S - F	2x4 DRY	No.2	SPF
R - O	2x6 DRY	No.2	SPF
N - J	2x4 DRY	No.2	SPF
N - M	2x6 DRY	No.2	SPF
ALL WEBS	2x4 DRY	No.2	SPF
EXCEPT			
T - R	2x6 DRY	No.2	SPF

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A-C	12	SIDE(61.0)
I-L	12	SIDE(61.0)
C-E	12	SIDE(61.0)
E-G	12	SIDE(183.1)
G-I	12	SIDE(183.1)
W-B	12	TOP
M-K	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
W-U	12	SIDE(0.0)
U-S	12	SIDE(122.0)
R-O	12	SIDE(183.1)
N-M	12	TOP
S-F	12	TOP
J-N	12	TOP
WEBS : (0.122"x3") SPIRAL NAILS		
2x4	6	
2x6	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	DOWN	IN-SX	IN-SX
W	3615	0	5-8	5-8
M	3915	0	5-8	5-8

UNFACTORED REACTIONS

	1ST LOASE	MAX./MIN. COMPONENT REACTIONS				
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	SOIL
W	2555	1681 / 0	0 / 0	0 / 0	874 / 0	0 / 0
M	2770	1811 / 0	0 / 0	0 / 0	959 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) W, M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.91 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (PLF)
FR-TO									
A-B	0 / 41	-91.8	-91.8	0.07 (1)	10.00	V-C	-935 / 0	0.08 (1)	
B-C	-3474 / 0	-91.8	-91.8	0.12 (1)	4.93	P-I	0 / 181	0.02 (4)	
C-X	-7567 / 0	-91.8	-91.8	0.51 (1)	3.92	P-J	0 / 449	0.04 (1)	
X-Y	-7567 / 0	-91.8	-91.8	0.51 (1)	3.92	B-V	0 / 2919	0.26 (1)	
Y-Z	-7567 / 0	-91.8	-91.8	0.51 (1)	3.92	O-M	-130 / 0	0.01 (1)	
Z-AA	-7567 / 0	-91.8	-91.8	0.51 (1)	3.92	O-K	0 / 3776	0.33 (1)	
AA-D	-7567 / 0	-91.8	-91.8	0.51 (1)	3.92	Q-I	0 / 6907	0.61 (1)	
D-AB	-12607 / 0	-91.8	-91.8	0.78 (1)	2.91	R-H	0 / 2372	0.21 (1)	
AB-E	-12607 / 0	-91.8	-91.8	0.78 (1)	2.91	Q-H	-1994 / 0	0.13 (1)	
E-AC	-12607 / 0	-91.8	-91.8	0.78 (1)	2.91	C-T	0 / 5398	0.48 (1)	
AC-AD	-12607 / 0	-91.8	-91.8	0.78 (1)	2.91	T-D	-3007 / 0	0.26 (1)	
AD-AE	-12607 / 0	-91.8	-91.8	0.78 (1)	2.91	T-R	0 / 7318	0.48 (1)	
AE-F	-12607 / 0	-91.8	-91.8	0.78 (1)	2.91	D-R	0 / 5150	0.46 (1)	
F-AF	-12780 / 0	-91.8	-91.8	0.58 (1)	3.09				
AF-AG	-12780 / 0	-91.8	-91.8	0.58 (1)	3.09				
AG-G	-12780 / 0	-91.8	-91.8	0.58 (1)	3.09				
G-AH	-12780 / 0	-91.8	-91.8	0.58 (1)	3.09				
AH-H	-12780 / 0	-91.8	-91.8	0.58 (1)	3.09				
H-AI	-10552 / 0	-91.8	-91.8	0.51 (1)	3.42				
AI-AJ	-10552 / 0	-91.8	-91.8	0.51 (1)	3.42				
AJ-AK	-10552 / 0	-91.8	-91.8	0.51 (1)	3.42				
AK-I	-10552 / 0	-91.8	-91.8	0.51 (1)	3.42				
I-J	-5251 / 0	-91.8	-91.8	0.15 (1)	4.12				
J-K	-4955 / 0	-91.8	-91.8	0.14 (1)	4.23				
K-L	0 / 41	-91.8	-91.8	0.07 (1)	10.00				
W-B	-3640 / 0	0.0	0.0	0.13 (1)	7.37				
M-K	-3830 / 0	0.0	0.0	0.14 (1)	7.23				
W-AL	0 / 0	-18.5	-18.5	0.07 (4)	10.00				
AL-V	0 / 0	-18.5	-18.5	0.07 (4)	10.00				
V-AM	0 / 2714	-18.5	-18.5	0.24 (1)	10.00				
AM-AN	0 / 2714	-18.5	-18.5	0.24 (1)	10.00				
AN-AO	0 / 2714	-18.5	-18.5	0.24 (1)	10.00				
AO-U	0 / 2714	-18.5	-18.5	0.24 (1)	10.00				
U-AP	0 / 2714	-18.5	-18.5	0.24 (1)	10.00				
AP-T	0 / 2714	-18.5	-18.5	0.24 (1)	10.00				
T-AQ	0 / 459	-18.5	-18.5	0.13 (4)	10.00				
AQ-AR	0 / 459	-18.5	-18.5	0.13 (4)	10.00				
AR-AS	0 / 459	-18.5	-18.5	0.13 (4)	10.00				
AS-AT	0 / 459	-18.5	-18.5	0.13 (4)	10.00				
AT-S	0 / 459	-18.5	-18.5	0.13 (4)	10.00				
S-R	0 / 226	0.0	0.0	0.36 (1)	10.00				
R-F	-1102 / 0	0.0	0.0	0.36 (1)	7.81				

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
	DL	= 6.0	PSF
BOT CH.	LL	= 0.0	PSF
	DL	= 7.4	PSF
TOTAL LOAD	= 39.0	PSF	

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

*** NON STANDARD GIRDER ***

ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.39")
ALLOWABLE DEFL.(TL) = L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/591 (0.73")

CSI: TC=0.78/1.00 (D-F:1), BC=0.84/1.00 (Q-R:1),
WB=0.61/1.00 (I-Q:1), SS=0.24/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY)	SHEAR (PSI)	SECTION (PLI)
MT20	650	371
	1747	788
	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.



Structural component only
DWG# T-2115450

CONTINUED ON PAGE 2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
406403	T1S	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:28 2021 Page 2
ID:E?n9mn1Ky9qxv7v78133ulyzsQn-vkBlmtt9uyfh23z1qE8bIDw1dTetE7XldMcXAzCzkn

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	5.0	6.0	2.00	2.25
C	TTWW+m	MT20	6.0	9.0	Edge	
D	TMWW-t	MT20	5.0	8.0	2.50	3.50
E	TS-t	MT20	5.0	6.0		
F	TMV+p	MT20	3.0	6.0		
G	TS-t	MT20	5.0	6.0		
H	TMWW-t	MT20	5.0	6.0		
I	TTWW+m	MT20	6.0	9.0	Edge	
J	TMVW+p	MT20	4.0	4.0	1.00	2.00
K	TMVW-p	MT20	5.0	8.0	Edge	
M	BMVW1-t	MT20	5.0	6.0		
N	BMV+p	MT20	3.0	6.0		
O	BVMWW-I	MT20	6.0	12.0	3.25	7.50
P	BMWW-t	MT20	5.0	6.0		
Q	BMWW-t	MT20	6.0	9.0		
R	BVMWWW-I	MT20	8.0	12.0	5.25	4.75
S	BMV+p	MT20	3.0	6.0		
T	BMWWW-t	MT20	6.0	12.0		
U	BS-t	MT20	5.0	6.0		
V	BMWW-t	MT20	5.0	6.0		
W	BMV1+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2

LOADING

TOTAL LOAD CASES: (4)

CHORDS			WEBS		
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)
FR-TO		FROM TO	CS1 (LC)	FR-TO	
R-AU	0 / 10552	-18.5 -18.5	0.84 (1)	10.00	
AU-AV	0 / 10552	-18.5 -18.5	0.84 (1)	10.00	
AV-AW	0 / 10552	-18.5 -18.5	0.84 (1)	10.00	
AW-Q	0 / 10552	-18.5 -18.5	0.84 (1)	10.00	
Q-AX	0 / 4085	-18.5 -18.5	0.43 (1)	10.00	
AX-AY	0 / 4085	-18.5 -18.5	0.43 (1)	10.00	
AY-AZ	0 / 4085	-18.5 -18.5	0.43 (1)	10.00	
AZ-P	0 / 4085	-18.5 -18.5	0.43 (1)	10.00	
P-BA	0 / 3818	-18.5 -18.5	0.41 (1)	10.00	
BA-O	0 / 3818	-18.5 -18.5	0.41 (1)	10.00	
N-O	0 / 17	0.0 0.0	0.09 (1)	10.00	
O-J	-553 / 0	0.0 0.0	0.09 (1)	7.81	
N-M	0 / 109	-18.5 -18.5	0.01 (1)	10.00	


SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	2-11-8	-30	-30	---	FRONT	VERT	DEAD	---	C1
C	2-11-8	-127	-127	---	FRONT	VERT	SNOW	---	C1
F	18-9-12	-73	-73	---	BACK	VERT	TOTAL	---	C1
H	25-10-4	-73	-73	---	BACK	VERT	TOTAL	---	C1
I	32-11-8	-30	-30	---	FRONT	VERT	DEAD	---	C1
I	32-11-8	-127	-127	---	FRONT	VERT	SNOW	---	C1
O	34-3-4	-28	-28	---	BACK	VERT	TOTAL	---	C1
Q	25-10-4	-68	-68	---	BACK	VERT	TOTAL	---	C1
S	18-7-4	-74	-74	---	BACK	VERT	TOTAL	---	C1
X	4-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
Y	6-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
Z	8-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
AA	10-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
AB	12-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
AC	14-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
AD	16-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
AE	17-10-4	-76	-76	---	BACK	VERT	TOTAL	---	C1
AF	19-10-4	-73	-73	---	BACK	VERT	TOTAL	---	C1
AG	21-10-4	-73	-73	---	BACK	VERT	TOTAL	---	C1
AH	23-10-4	-73	-73	---	BACK	VERT	TOTAL	---	C1
AI	27-10-4	-73	-73	---	BACK	VERT	TOTAL	---	C1
AJ	29-10-4	-73	-73	---	BACK	VERT	TOTAL	---	C1
AK	31-10-4	-73	-73	---	BACK	VERT	TOTAL	---	C1
AL	2-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AM	4-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AN	6-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AO	8-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AP	10-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AQ	12-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AR	14-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AS	16-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AT	17-10-4	-23	-23	---	BACK	VERT	TOTAL	---	C1
AU	19-10-4	-68	-68	---	BACK	VERT	TOTAL	---	C1
AV	21-10-4	-68	-68	---	BACK	VERT	TOTAL	---	C1
AW	23-10-4	-68	-68	---	BACK	VERT	TOTAL	---	C1
AX	27-10-4	-68	-68	---	BACK	VERT	TOTAL	---	C1
AY	29-10-4	-68	-68	---	BACK	VERT	TOTAL	---	C1
AZ	31-10-4	-68	-68	---	BACK	VERT	TOTAL	---	C1
BA	33-10-4	-73	-73	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

JSI GRIP= 0.89 (D) (INPUT = 0.90)
JSI METAL= 0.74 (I) (INPUT = 1.00)




Structural component only
DWG# T-2115450 2/2

JOB NAME 406403	TRUSS NAME T2	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
---------------------------	-------------------------	----------------------	-----------------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:29 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-NXlg_DtnfGnYfDYEOxfqRS5k1s?ck?gXH693czCzkm

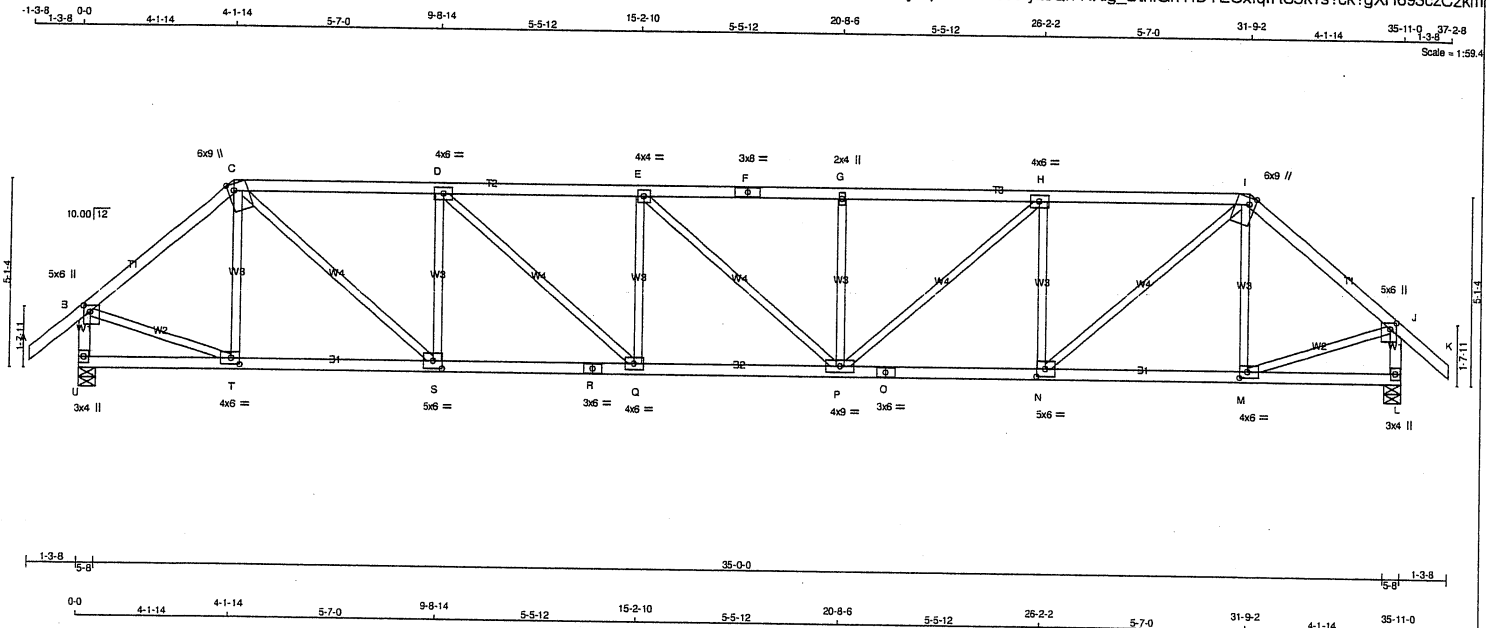

LUMBER				DESCR.
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	
A - C	2x4	DRY	No.2	SPF
C - F	2x4	DRY	No.2	SPF
F - I	2x4	DRY	No.2	SPF
I - K	2x4	DRY	No.2	SPF
U - B	2x4	DRY	No.2	SPF
L - J	2x4	DRY	No.2	SPF
U - R	2x4	DRY	No.2	SPF
R - O	2x4	DRY	No.2	SPF
O - L	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	5.0	6.0	2.00	2.00
C	TTWW+m	MT20	6.0	9.0	Edge	1.75
D	TMVW-t	MT20	4.0	6.0		
E	TMVW-t	MT20	4.0	4.0		
F	TS-t	MT20	3.0	8.0		
G	TMVW+w	MT20	2.0	4.0		
H	TMVW-t	MT20	4.0	6.0		
I	TTWW+m	MT20	6.0	9.0	Edge	1.75
J	TMVW+p	MT20	5.0	6.0	2.00	2.00
L	BMV1+p	MT20	3.0	4.0		
M	BMVW-t	MT20	4.0	6.0	2.00	2.50
N	BMVW-t	MT20	5.0	6.0	2.50	2.75
O	BS-t	MT20	3.0	6.0		
P	BMVW-w	MT20	4.0	9.0		
Q	BMVW-t	MT20	4.0	6.0		
R	BS-t	MT20	3.0	6.0		
S	BMVW-t	MT20	5.0	6.0	2.50	2.75
T	BMVW-t	MT20	4.0	6.0	2.00	2.50
U	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG	
	VERT	HORZ	DOWN	HORZ	IN-SX	IN-SX	IN-SX	IN-SX
U	2107	0	2107	0	0	5-8	5-8	5-8
L	2107	0	2107	0	0	5-8	5-8	5-8

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED		MAX./MIN. COMPONENT REACTIONS		WIND	DEAD	SOIL
	SNOW	LIVE	PERM. LIVE	WIND			
U	1488	990 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0
L	1488	990 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.09 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 41	-91.8 -91.8	0.13 (1)	10.00	T-C	-368 / 0	0.14 (1)
B-C	-2007 / 0	-91.8 -91.8	0.36 (1)	4.41	C-S	0 / 1918	0.43 (1)
C-D	-2985 / 0	-91.8 -91.8	0.62 (1)	3.48	S-D	-1150 / 0	0.44 (1)
D-E	-3657 / 0	-91.8 -91.8	0.72 (1)	3.09	D-Q	0 / 894	0.20 (1)
E-F	-3656 / 0	-91.8 -91.8	0.59 (1)	3.26	Q-E	-488 / 0	0.19 (1)
F-G	-3656 / 0	-91.8 -91.8	0.59 (1)	3.26	E-P	-2 / 0	0.00 (1)
G-H	-3656 / 0	-91.8 -91.8	0.72 (1)	3.09	P-G	-487 / 0	0.19 (1)
H-I	-2986 / 0	-91.8 -91.8	0.62 (1)	3.48	P-H	0 / 891	0.20 (1)
I-J	-2007 / 0	-91.8 -91.8	0.36 (1)	4.41	N-H	-1149 / 0	0.44 (1)
J-K	0 / 41	-91.8 -91.8	0.13 (1)	10.00	N-I	0 / 1919	0.43 (1)
U-B	-2078 / 0	0.0 0.0	0.22 (1)	5.87	M-I	-368 / 0	0.14 (1)
L-J	-2078 / 0	0.0 0.0	0.22 (1)	5.87	B-T	0 / 1608	0.36 (1)
					M-J	0 / 1608	0.36 (1)
U-T	0 / 0	-18.5 -18.5	0.10 (4)	10.00			
T-S	0 / 1530	-18.5 -18.5	0.31 (1)	10.00			
S-R	0 / 2986	-18.5 -18.5	0.53 (1)	10.00			
R-Q	0 / 2986	-18.5 -18.5	0.53 (1)	10.00			
Q-P	0 / 3657	-18.5 -18.5	0.64 (1)	10.00			
P-O	0 / 2986	-18.5 -18.5	0.53 (1)	10.00			
O-N	0 / 2986	-18.5 -18.5	0.53 (1)	10.00			
N-M	0 / 1530	-18.5 -18.5	0.31 (1)	10.00			
M-L	0 / 0	-18.5 -18.5	0.10 (4)	10.00			

TOTAL WEIGHT = 149 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.22")
ALLOWABLE DEFL.(TL) = L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/999 (0.42")

CSI: TO=0.72/1.00 (G-H:1), BC=0.64/1.00 (P-Q:1),
WB=0.44/1.00 (D-S:1), SS=0.24/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP= 0.85 (B) (INPUT = 0.90)
JSI METAL= 0.89 (O) (INPUT = 1.00)



Structural component only
DWG# T-2115451

JOB NAME 411069	TRUSS NAME T2A	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:12 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-k0ilbZw2RQYtp7DK6ctBfv1?bUDG6yGxAjifTxd_Vn

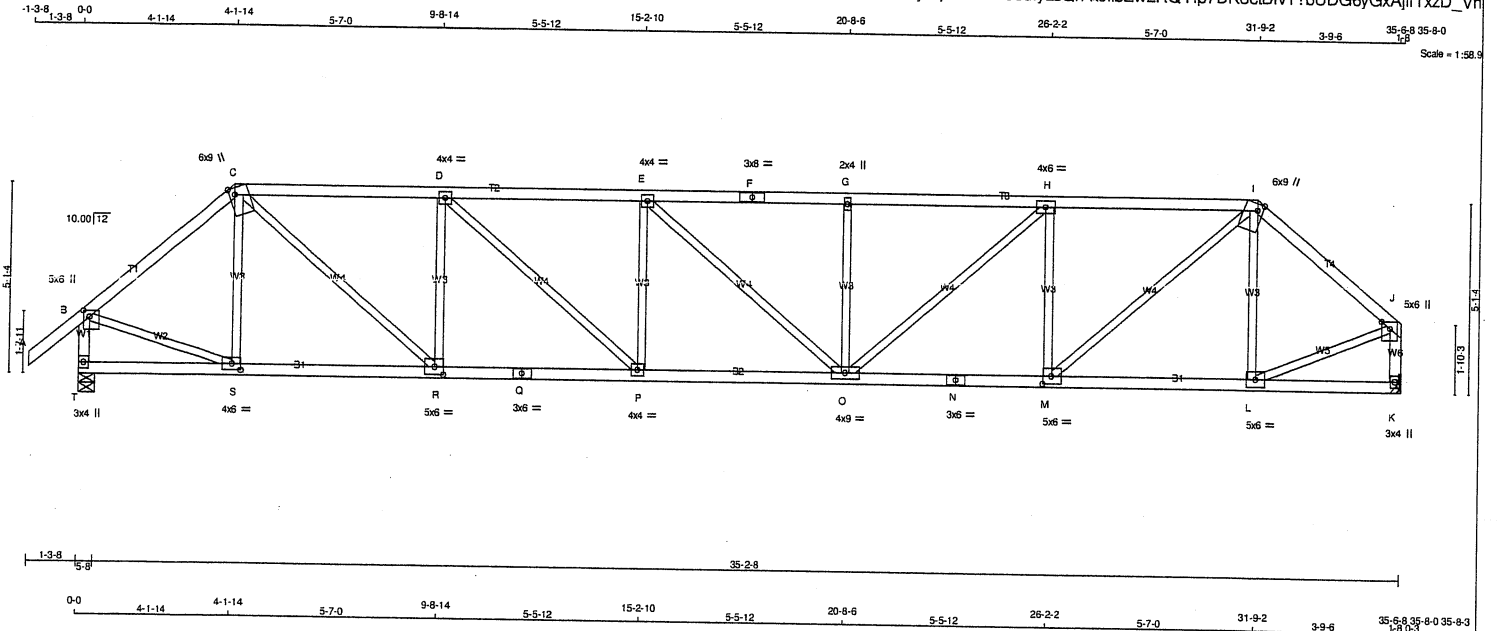

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x4	DRY	No.2
C - F	2x4	DRY	No.2
F - I	2x4	DRY	No.2
I - J	2x4	DRY	No.2
T - B	2x4	DRY	No.2
T - Q	2x4	DRY	No.2
Q - N	2x4	DRY	No.2
N - K	2x4	DRY	No.2
ALL WEBS EXCEPT K - J	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
T	2085	0	2085	0	5-8
K	1958	0	1958	0	5-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT K. MINIMUM BEARING LENGTH AT JOINT K = 3-8.

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

1ST LOASE	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
JT	1472	980 / 0	0 / 0	0 / 0	0 / 0	493 / 0	0 / 0
K	1385	909 / 0	0 / 0	0 / 0	0 / 0	476 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) T

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.12 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CS1 (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS1 (LC)
FR-TO		FROM	TO		FR-TO		
A-B	0 / 41	-91.8	-91.8 0.13 (1)	10.00	S-C	-362 / 0	0.14 (1)
B-C	-1982 / 0	-91.8	-91.8 0.36 (1)	4.44	C-R	0 / 1885	0.42 (1)
C-D	-2941 / 0	-91.8	-91.8 0.62 (1)	3.50	R-D	-1128 / 0	0.43 (1)
D-E	-3588 / 0	-91.8	-91.8 0.71 (1)	3.12	D-P	0 / 861	0.19 (1)
E-F	-3562 / 0	-91.8	-91.8 0.57 (1)	3.31	P-E	-466 / 0	0.18 (1)
F-G	-3562 / 0	-91.8	-91.8 0.57 (1)	3.31	E-O	-35 / 0	0.04 (1)
G-H	-3562 / 0	-91.8	-91.8 0.70 (1)	3.14	O-G	-487 / 0	0.19 (1)
H-I	-2867 / 0	-91.8	-91.8 0.61 (1)	3.55	O-H	0 / 924	0.21 (1)
I-J	-1822 / 0	-91.8	-91.8 0.29 (1)	4.68	M-H	-1172 / 0	0.45 (1)
T-B	-2057 / 0	0.0	0.0 0.22 (1)	5.90	M-I	0 / 1953	0.44 (1)
T-S	0 / 0	-18.5	-18.5 0.10 (4)	10.00	L-I	-490 / 0	0.19 (1)
S-R	0 / 1511	-18.5	-18.5 0.31 (1)	10.00	B-S	0 / 1588	0.36 (1)
R-Q	0 / 2941	-18.5	-18.5 0.52 (1)	10.00	L-J	0 / 1515	0.34 (1)
Q-P	0 / 2941	-18.5	-18.5 0.52 (1)	10.00	K-J	-1934 / 0	0.20 (1)
P-O	0 / 3588	-18.5	-18.5 0.63 (1)	10.00			
O-N	0 / 2867	-18.5	-18.5 0.51 (1)	10.00			
N-M	0 / 2867	-18.5	-18.5 0.51 (1)	10.00			
M-L	0 / 1385	-18.5	-18.5 0.28 (1)	10.00			
L-K	0 / 0	-18.5	-18.5 0.10 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.18")
CALCULATED VERT. DEFL.(LL) = L/999 (0.21")
ALLOWABLE DEFL.(TL)= L/360 (1.18")
CALCULATED VERT. DEFL.(TL) = L/999 (0.40")

CSI: TC=0.71/1.00 (D-E:1), BC=0.63/1.00 (O-P:1), WB=0.45/1.00 (H-M:1), SSI=0.24/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788
	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.86 (S) (INPUT = 0.90)
JSI METAL= 0.91 (Q) (INPUT = 1.00)



Structural component only
DWG# T-2115510

JOB NAME 406403	TRUSS NAME T2S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:30 2021 Page 1
ID:E?n9mn1Ky9qx7v78133ulyzsQn-rj2BYuPQavPHN7QxfA3qe_ORBaL9Cqmxrc2zCzkl

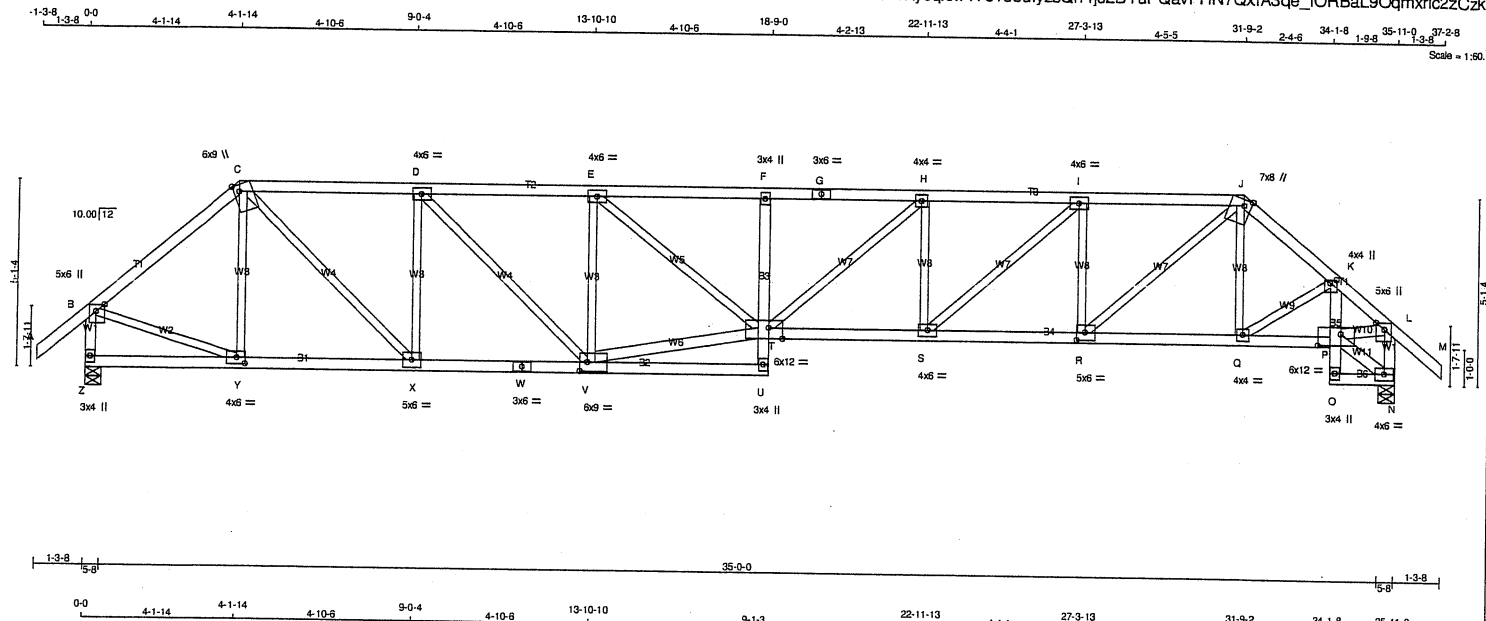

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x4	DRY	No.2
C - G	2x4	DRY	No.2
G - J	2x4	DRY	No.2
J - M	2x4	DRY	No.2
Z - B	2x4	DRY	No.2
N - L	2x4	DRY	No.2
Z - W	2x4	DRY	No.2
W - U	2x4	DRY	No.2
U - F	2x4	DRY	No.2
T - P	2x4	DRY	No.2
O - K	2x4	DRY	No.2
O - N	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			
V - T	2x4	DRY	No.2
P - N	2x4	DRY	No.2
P - L	2x4	DRY	No.2

DRY: SEASONED LUMBER.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER									
BEARINGS									
	FACTORED	MAXIMUM FACTORED	INPUT	REQD					
	GROSS REACTION	GROSS REACTION	BRG	BRG					
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX		
Z	2105	0	2105	0	0	5-8	5-8		
N	2109	0	2109	0	0	5-8	5-8		
UNFACTORED REACTIONS									
	1ST LCASE	MAX./MIN.	COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL		
Z	1486	988 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0		
N	1489	991 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0		
BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) Z, N									
BRACING									
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.89 FT.									
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.									
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.									
LOADING									
TOTAL LOAD CASES: (4)									

PLATES (table is in inches)				
JT TYPE	PLATES	W	LEN	Y X
B TMVW+p	MT20	5.0	6.0	Edge 2.75
C TTWW+m	MT20	6.0	9.0	Edge 1.75
D, E, I				
D TMVW-t	MT20	4.0	6.0	
F TMV+p	MT20	3.0	4.0	
G TS-t	MT20	3.0	6.0	
H TMVW-t	MT20	4.0	4.0	
J TTWW+m	MT20	7.0	8.0	Edge 2.25
K TMVW+p	MT20	4.0	4.0	1.00 2.00
L TMVW+p	MT20	5.0	6.0	Edge 2.75
N BMVW1-t	MT20	4.0	6.0	
O BMV+p	MT20	3.0	4.0	
P BVMWV-t	MT20	6.0	12.0	3.75 7.50
Q BMVW-t	MT20	4.0	4.0	
R BMVW-t	MT20	5.0	6.0	2.50 2.75
S BMVW-t	MT20	4.0	6.0	
T BVMWVW-t	MT20	6.0	12.0	Edge 4.50
U BMV+p	MT20	3.0	4.0	
V BMVWVW-t	MT20	6.0	9.0	3.00 2.50
W BS-t	MT20	3.0	6.0	

CHORDS									
MEMB.	MAX. FACTORED	FACTORED	VERT. LOAD	LC1 MAX	MAX. UNBRAC	MEMB.	MAX. FACTORED	MAX. UNBRAC	MEMB.
	FORCE (LBS)	(PLF)		CSI (LC)	LENGTH		FORCE (LBS)	MAX. UNBRAC	
FR-TO		FROM TO				FR-TO			
A-B	0 / 41	-91.8 -91.8	0.13 (1)	10.00		Y-C	-372 / 0	0.14 (1)	
B-C	-2003 / 0	-91.8 -91.8	0.36 (1)	4.42		C-X	0 / 1826	0.41 (1)	
C-D	-2834 / 0	-91.8 -91.8	0.47 (1)	3.72		X-D	-1193 / 0	0.46 (1)	
D-E	-3526 / 0	-91.8 -91.8	0.54 (1)	3.30		D-V	0 / 986	0.22 (1)	
E-F	-4646 / 0	-91.8 -91.8	0.60 (1)	2.89		V-E	-1319 / 0	0.51 (1)	
F-G	-4679 / 0	-91.8 -91.8	0.54 (1)	2.92		V-T	0 / 3494	0.56 (1)	
G-H	-4679 / 0	-91.8 -91.8	0.54 (1)	2.92		E-T	0 / 1414	0.32 (1)	
H-I	-4316 / 0	-91.8 -91.8	0.54 (1)	3.01		Q-J	0 / 59	0.02 (4)	
I-J	-3425 / 0	-91.8 -91.8	0.44 (1)	3.46		Q-K	-74 / 0	0.01 (1)	
J-K	-2495 / 0	-91.8 -91.8	0.17 (1)	4.22		B-Y	0 / 1605	0.36 (1)	
K-L	-2547 / 0	-91.8 -91.8	0.19 (1)	4.16		P-N	-68 / 0	0.01 (1)	
L-M	0 / 41	-91.8 -91.8	0.13 (1)	10.00		P-L	0 / 1939	0.31 (1)	
Z-B	-2075 / 0	0.0 0.0	0.22 (1)	5.87		R-J	0 / 1994	0.45 (1)	
N-L	-2055 / 0	0.0 0.0	0.22 (1)	5.90		T-H	0 / 482	0.11 (1)	
Z-Y	0 / 0	-18.5 -18.5	0.09 (4)	10.00		R-I	-1219 / 0	0.31 (1)	
Y-X	0 / 1526	-18.5 -18.5	0.30 (1)	10.00		S-H	-700 / 0	0.18 (1)	
X-W	0 / 2834	-18.5 -18.5	0.50 (1)	10.00		S-I	0 / 1186	0.27 (1)	
W-V	0 / 2834	-18.5 -18.5	0.50 (1)	10.00					
V-U	0 / 126	-18.5 -18.5	0.11 (4)	10.00					
U-T	0 / 40	0.0 0.0	0.18 (1)	10.00					
T-F	-416 / 0	0.0 0.0	0.19 (1)	7.81					
T-S	0 / 4316	-18.5 -18.5	0.75 (1)	10.00					
S-R	0 / 3425	-18.5 -18.5	0.59 (1)	10.00					
R-Q	0 / 1909	-18.5 -18.5	0.35 (1)	10.00					
Q-P	0 / 1974	-18.5 -18.5	0.36 (1)	10.00					
O-P	0 / 17	0.0 0.0	0.09 (1)	10.00					
P-K	-95 / 0	0.0 0.0	0.09 (1)	7.81					
O-N	0 / 56	-18.5 -18.5	0.02 (4)	10.00					

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
DL = 6.0 PSF

BOT CH. LL = 0.0 PSF
DL = 7.4 PSF

TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.30")
ALLOWABLE DEFL.(TL) = L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/787 (0.55")

CSI: TC=0.60/1.00 (E-F:1), BC=0.75/1.00 (S-T:1), WB=0.56/1.00 (T-V:1), SSI=0.21/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)

MAX MIN MAX MIN MAX MIN

MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.87 (X) (INPUT = 0.90)
JSI METAL= 0.85 (W) (INPUT = 1.00)



Structural component only
DWG# T-2115452 1/2

JOB NAME 406403	TRUSS NAME T2S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	---	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:30 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-rjJ2BYuPQavPHN7QxfA3qe IORBaL9Oqmxic2zCzkl

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
X	BMWV-t	MT20	5.0	6.0		
Y	BMWV-t	MT20	4.0	6.0	2.00	2.75
Z	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2




Structural component only
DWG# T-2115452 *TH*

JOB NAME 406403	TRUSS NAME T3	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	TRUSS DESC.	DRWG NO.
---------------------------	-------------------------	----------------------	-----------------	-------------------------------	-------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:31 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-KvtQPuv1Bt1GvXhcVMhInSXPwraW4cVz_bbG8VzCzkk

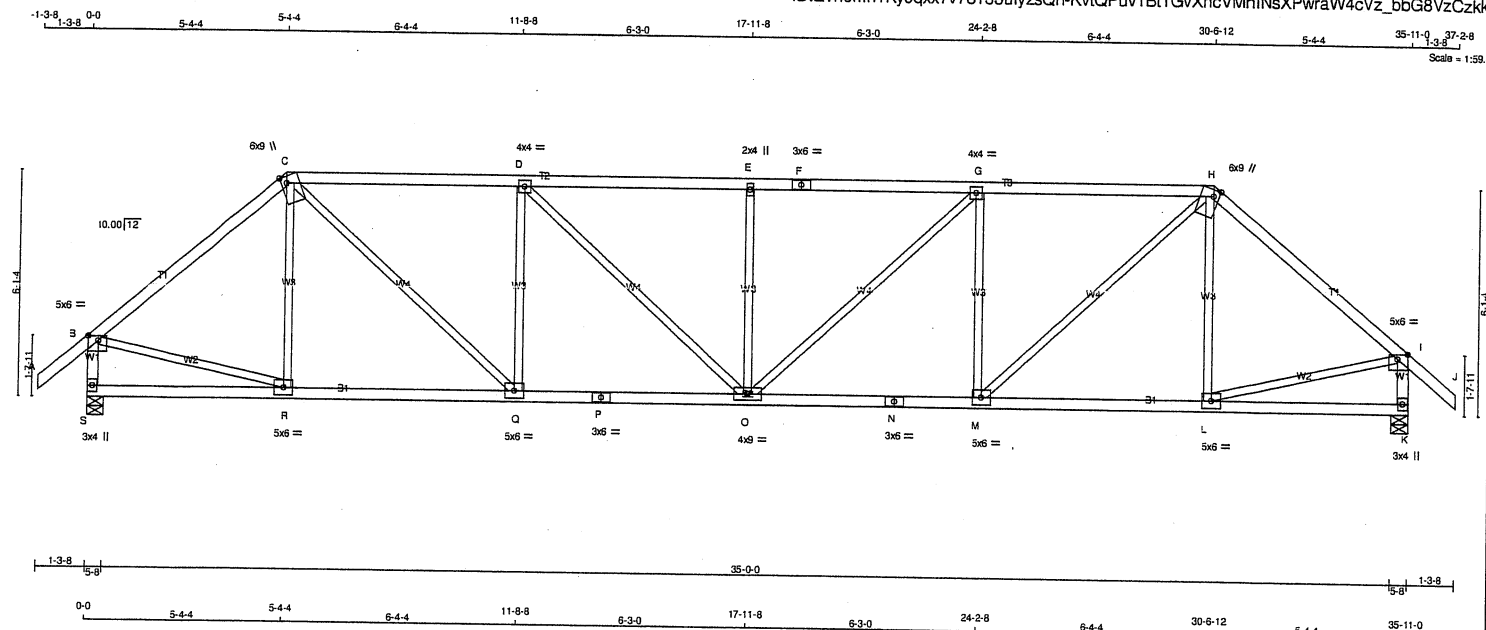

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2 SPF
C - F	2x4	DRY	No.2 SPF
F - H	2x4	DRY	No.2 SPF
H - J	2x4	DRY	No.2 SPF
S - B	2x4	DRY	No.2 SPF
K - I	2x4	DRY	No.2 SPF
S - P	2x4	DRY	No.2 SPF
P - N	2x4	DRY	No.2 SPF
N - K	2x4	DRY	No.2 SPF
ALL WEBS EXCEPT	2x3	DRY	No.2 SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	1.50	3.25
C	TTWW+m	MT20	6.0	9.0	Edge	1.75
D	TMVW-t	MT20	4.0	4.0		
E	TMVW-w	MT20	2.0	4.0		
F	TS-t	MT20	3.0	6.0		
G	TMVW-t	MT20	4.0	4.0		
H	TTWW+m	MT20	6.0	9.0	Edge	1.75
I	TMVW-p	MT20	5.0	6.0	1.50	3.25
K	BMV1+p	MT20	3.0	4.0		
L, M, Q, R						
L	BMVW-t	MT20	5.0	6.0		
N	BS-t	MT20	3.0	6.0		
O	BMVW-t	MT20	4.0	9.0		
P	BS-t	MT20	3.0	6.0		
S	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQD BRG
	VERT	HORZ	DOWN	UP/LIFT		
S	2107	0	2107	0	5-8	5-8
K	2107	0	2107	0	5-8	5-8

UNFACTORED REACTIONS

JT	1ST LOASE COMBINED		MAX./MIN. COMPONENT REACTIONS		PERM. LIVE	WIND	DEAD	SOIL
	SNOW	LIVE	SNOW	LIVE				
S	1488	990 / 0	0 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0
K	1488	990 / 0	0 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, K

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.14 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 41	-91.8 -91.8	0.13 (1)	10.00	R-C	-254 / 6	0.15 (1)
B-C	-2054 / 0	-91.8 -91.8	0.65 (1)	4.06	C-Q	0 / 1612	0.36 (1)
C-D	-2762 / 0	-91.8 -91.8	0.81 (1)	3.36	Q-D	-972 / 0	0.57 (1)
D-E	-3108 / 0	-91.8 -91.8	0.87 (1)	3.14	D-O	0 / 472	0.11 (1)
E-F	-3108 / 0	-91.8 -91.8	0.87 (1)	3.14	O-E	-529 / 0	0.31 (1)
F-G	-3108 / 0	-91.8 -91.8	0.87 (1)	3.14	O-G	0 / 472	0.11 (1)
G-H	-2762 / 0	-91.8 -91.8	0.81 (1)	3.36	M-G	-972 / 0	0.57 (1)
H-I	-2054 / 0	-91.8 -91.8	0.65 (1)	4.06	M-H	0 / 1612	0.36 (1)
I-J	0 / 41	-91.8 -91.8	0.13 (1)	10.00	L-H	-254 / 6	0.15 (1)
S-B	-2068 / 0	0.0 0.0	0.22 (1)	5.88	B-R	0 / 1619	0.36 (1)
K-I	-2068 / 0	0.0 0.0	0.22 (1)	5.88	L-I	0 / 1619	0.36 (1)
S-R	0 / 0	-18.5 -18.5	0.15 (4)	10.00			
R-Q	0 / 1570	-18.5 -18.5	0.34 (1)	10.00			
Q-P	0 / 2762	-18.5 -18.5	0.51 (1)	10.00			
P-O	0 / 2762	-18.5 -18.5	0.51 (1)	10.00			
O-N	0 / 2762	-18.5 -18.5	0.51 (1)	10.00			
N-M	0 / 2762	-18.5 -18.5	0.51 (1)	10.00			
M-L	0 / 1570	-18.5 -18.5	0.34 (1)	10.00			
L-K	0 / 0	-18.5 -18.5	0.15 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.20")
CALCULATED VERT. DEFL.(LL)= L/999 (0.17")
ALLOWABLE DEFL.(TL)= L/360 (1.20")
CALCULATED VERT. DEFL.(TL)= L/999 (0.31")

CSI: TC=0.87/1.00 (E-G:1), BC=0.51/1.00 (M-O:1), WB=0.57/1.00 (D-Q:1), SSI=0.27/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches
PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.86 (I) (INPUT = 0.90)
JSI METAL= 0.87 (P) (INPUT = 1.00)



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411069	T3A	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:14 2021 Page 1
ID:E?n9mn1Ky9qx7v78133ulyzsQn-gPpW0Fxy1oN2RNiE1vfkK6JmxiagIeE1BmXqzD_VI

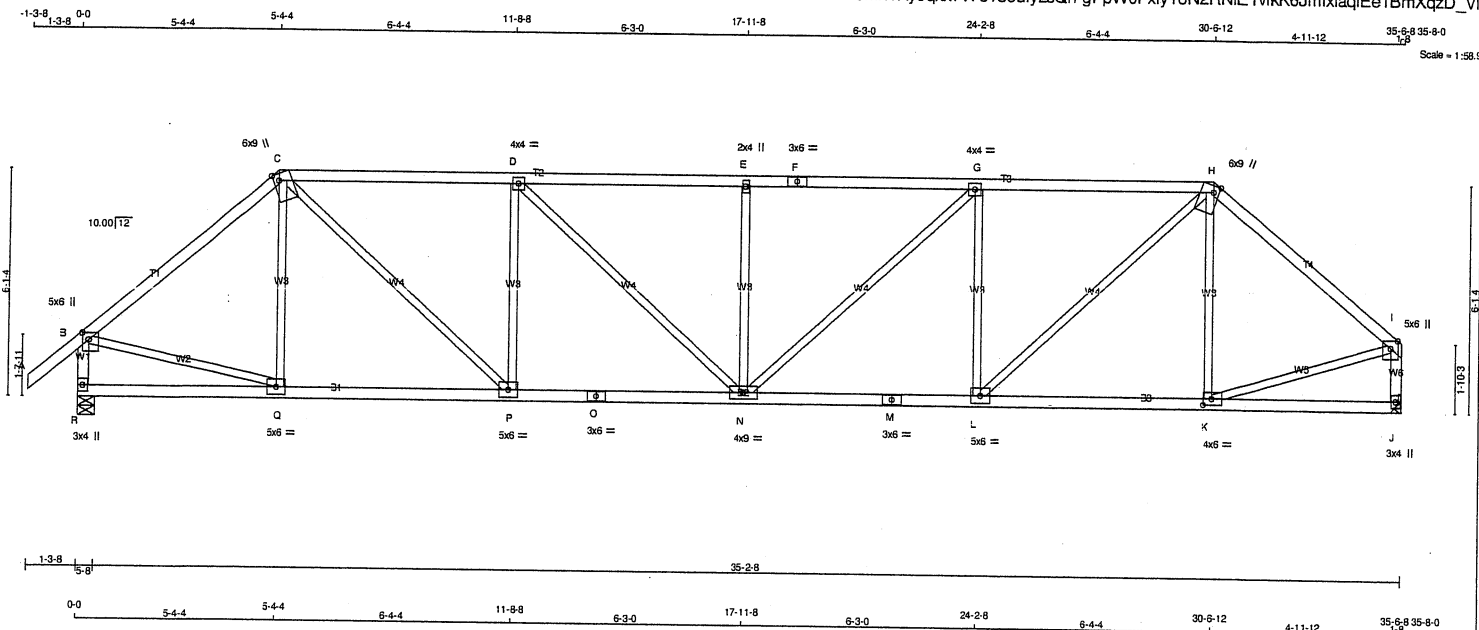

LUMBER				DESCR.	
N. L. G. A. RULES					
CHORDS	SIZE	LUMBER			
A - C	2x4	DRY	No.2	SPF	
C - F	2x4	DRY	No.2	SPF	
F - H	2x4	DRY	No.2	SPF	
H - I	2x4	DRY	No.2	SPF	
I - B	2x4	DRY	No.2	SPF	
B - O	2x4	DRY	No.2	SPF	
O - M	2x4	DRY	No.2	SPF	
M - J	2x4	DRY	No.2	SPF	
ALL WEBS EXCEPT J - I	2x3	DRY	No.2	SPF	
J - I	2x4	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	5.0	6.0	2.25	2.00
C	TTWW+m	MT20	6.0	9.0	Edge	1.75
D	TMVW-t	MT20	4.0	4.0		
E	TMVW-w	MT20	2.0	4.0		
F	TS-t	MT20	3.0	6.0		
G	TMVW-t	MT20	4.0	4.0		
H	TTWW+m	MT20	6.0	9.0	Edge	1.75
I	TMVW-w	MT20	5.0	6.0	2.50	2.25
J	BMV1+w	MT20	3.0	4.0		
K	BMVW-t	MT20	4.0	6.0	2.00	2.75
L, P, Q						
L	BMVW-t	MT20	5.0	6.0		
M	BS-t	MT20	3.0	6.0		
N	BMVW-w	MT20	4.0	9.0		
O	BS-t	MT20	3.0	6.0		
R	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES-

(1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG
	VERT	HORZ	DOWN	HORZ		
R	2085	0	2085	0	5-8	5-8
J	1958	0	1958	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT J. MINIMUM BEARING LENGTH AT JOINT J = 3-8.

UNFACTORED REACTIONS

JT	1ST CASE COMBINED		MAX./MIN. COMPONENT REACTIONS		WIND	DEAD	SOIL
	SNOW	LIVE	PERM.	LIVE			
R	1472	980 / 0	0 / 0	0 / 0	0 / 0	493 / 0	0 / 0
J	1385	909 / 0	0 / 0	0 / 0	0 / 0	476 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.17 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 41	-91.8 -91.8	0.13 (1)	Q-C	-250 / 7	0.15 (1)	
B-C	-2028 / 0	-91.8 -91.8	0.64 (1)	C-P	0 / 1580	0.36 (1)	
C-D	-2718 / 0	-91.8 -91.8	0.81 (1)	P-D	-951 / 0	0.56 (1)	
D-E	-3040 / 0	-91.8 -91.8	0.85 (1)	D-N	0 / 440	0.10 (1)	
E-F	-3040 / 0	-91.8 -91.8	0.85 (1)	N-E	-529 / 0	0.31 (1)	
F-G	-3040 / 0	-91.8 -91.8	0.85 (1)	N-G	0 / 504	0.11 (1)	
G-H	-2671 / 0	-91.8 -91.8	0.80 (1)	L-G	-994 / 0	0.58 (1)	
H-I	-1906 / 0	-91.8 -91.8	0.52 (1)	L-H	0 / 1646	0.37 (1)	
R-B	-2046 / 0	0.0 0.0	0.22 (1)	K-H	-354 / 0	0.21 (1)	
				B-Q	0 / 1598	0.36 (1)	
R-Q	0 / 0	-18.5 -18.5	0.15 (4)	J-I	-1923 / 0	0.20 (1)	
Q-P	0 / 1550	-18.5 -18.5	0.33 (1)	K-I	0 / 1535	0.35 (1)	
P-O	0 / 2718	-18.5 -18.5	0.50 (1)				
O-N	0 / 2718	-18.5 -18.5	0.50 (1)				
N-M	0 / 2671	-18.5 -18.5	0.50 (1)				
M-L	0 / 2671	-18.5 -18.5	0.50 (1)				
L-K	0 / 1455	-18.5 -18.5	0.32 (1)				
K-J	0 / 0	-18.5 -18.5	0.14 (4)				

TOTAL WEIGHT = 148 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (1.18")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.16")
ALLOWABLE DEFL.(TL) = $L/360$ (1.18")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.30")

CSI: TC=0.85/1.00 (E-G:1), BC=0.50/1.00 (N-P:1),
WB=0.58/1.00 (G-L:1), SSI=0.27/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MAX	MIN	MAX	MIN
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.90 (B) (INPUT = 0.90)
JSI METAL = 0.85 (O) (INPUT = 1.00)



Structural component only
DWG# T-2115511

Tamarack Roof Truss, Burlington


Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:32 2021 Page 1

ID:E?n9mn1Ky9qxx7v78133ulyzsQn-o6QocEwfYb97WgGp34DXw34aKEuHp4g7DFKpgxzCzkj

The drawing shows a roof truss with various members labeled with numbers and letters. The dimensions are as follows:

- Top chord: 1-3-8, 0-0, 5-4-4, 5-4-4, 6-7-14, 12-0-2, 3-3-5, 15-3-7, 3-5-9, 18-9-0, 5-10-14, 24-7-14, 5-10-14, 30-6-12, 34-1-8, 35-7-8, 35-11-0, 37-2-8
- Bottom chord: 1-3-8, 1-3-8, 5-4-4, 6-7-14, 12-0-2, 3-3-5, 15-3-7, 3-5-9, 18-9-0, 5-10-14, 24-7-14, 5-10-14, 30-6-12, 34-1-8, 35-7-8, 35-11-0, 37-2-8
- Vertical members: 1-3-8, 1-3-8, 5-4-4, 6-7-14, 12-0-2, 3-3-5, 15-3-7, 3-5-9, 18-9-0, 5-10-14, 24-7-14, 5-10-14, 30-6-12, 34-1-8, 35-7-8, 35-11-0, 37-2-8
- Diagonal members: 1-3-8, 1-3-8, 5-4-4, 6-7-14, 12-0-2, 3-3-5, 15-3-7, 3-5-9, 18-9-0, 5-10-14, 24-7-14, 5-10-14, 30-6-12, 34-1-8, 35-7-8, 35-11-0, 37-2-8

Scale = 1/60.0

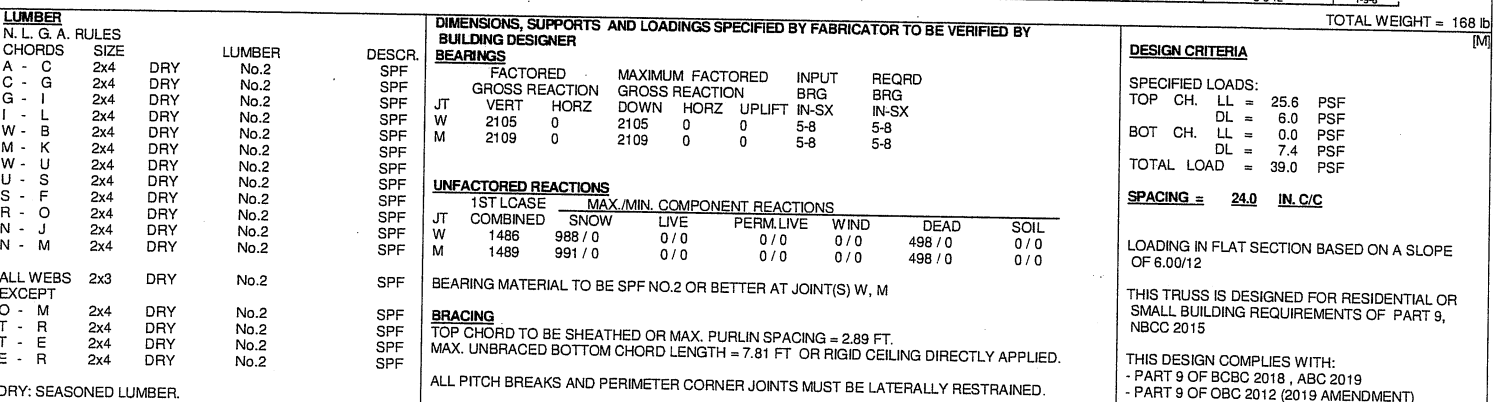

TOTAL LOAD CASES: (4)					DESIGN ASSUMPTIONS	
CHORDS					WEBS	
MAX. FACTORED					MAX. FACTORED	
MEMB.	FORCE	VERT. LOAD	LC1 MAX	MAX. UNBRAC	MEMB.	FORCE
	(LBS)	(PLF)	CSI (LC)	LENGTH		(LBS)
FR-TO		FROM TO			FR-TO	CSI (LC)
A-B	0 / 41	-91.8 -91.8	0.13 (1)	10.00	V-C	-254 / 5
B-C	-2051 / 0	-91.8 -91.8	0.64 (1)	4.06	R-H	0 / 578
C-D	-2794 / 0	-91.8 -91.8	0.82 (1)	3.39	Q-H	-987 / 0
D-E	-2793 / 0	-91.8 -91.8	0.62 (1)	3.39	Q-I	0 / 1774
E-F	-3695 / 0	-91.8 -91.8	0.43 (1)	3.31	P-I	0 / 99
F-G	-3716 / 0	-91.8 -91.8	0.89 (1)	2.89	P-J	-151 / 0
G-H	-3716 / 0	-91.8 -91.8	0.89 (1)	2.89	B-V	0 / 1617
H-I	-3286 / 0	-91.8 -91.8	0.81 (1)	3.14	C-M	-76 / 0
I-J	-2462 / 0	-91.8 -91.8	0.28 (1)	4.16	C-K	0 / 1978
J-K	-2571 / 0	-91.8 -91.8	0.19 (1)	4.14	C-T	0 / 1624
K-L	0 / 41	-91.8 -91.8	0.13 (1)	10.00	T-D	-617 / 0
W-B	-2068 / 0	0.0	0.22 (1)	5.89	T-R	0 / 3174
M-K	-2051 / 0	0.0	0.22 (1)	5.91	T-E	-908 / 0
					E-R	0 / 805
W-V	0 / 0	-18.5	-18.5	0.15 (4)	10.00	
V-U	0 / 1568	-18.5	-18.5	0.34 (1)	10.00	
U-T	0 / 1568	-18.5	-18.5	0.34 (1)	10.00	

PLATES (table is in inches)

TYPE	PLATES	W	LEN	Y	X
TMVW+P	MT20	5.0	6.0	2.00	2.00
TTWW+m	MT20	6.0	9.0	Edge	1.75
TMVW+w	MT20	2.0	4.0		
TMVW-t	MT20	4.0	4.0		
TMVW+P	MT20	3.0	4.0		
TS-t	MT20	3.0	8.0		
TMVW-t	MT20	4.0	4.0		
TTWW+m	MT20	6.0	3.0	Edge	1.75
TMVW+P	MT20	4.0	4.0	1.00	2.00
TMVW-P	MT20	5.0	6.0	1.50	3.00
BMVW-t	MT20	4.0	6.0		
BMV+P	MT20	3.0	4.0		
BMVWW-t	MT20	6.0	12.0	3.75	7.50
BMVW-t	MT20	4.0	4.0		
BMVW-t	MT20	5.0	6.0		
BVMVWW-t	MT20	6.0	12.0	3.25	4.25
BMV+P	MT20	3.0	4.0		
BMVWW-t	MT20	10.0	12.0	Edge	
BS-t	MT20	3.0	6.0		

75% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.20")
CALCULATED VERT. DEFL.(LL)= L/999 (0.21")
ALLOWABLE DEFL.(TL)= L/360 (1.20")
CALCULATED VERT. DEFL.(TL)= L/999 (0.40")

CSI: TC=0.89/1.00 (F-H:1), BC=0.60/1.00 (Q-R:1),
WB=0.51/1.00 (R-T:1), SS=0.28/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

	T-S	0 / 100	-18.5	-18.5	0.39 (1)	10.00	TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.			
	S-R	0 / 55	0.0	0.0	0.14 (1)	10.00				
	R-F	-452 / 0	0.0	0.0	0.19 (1)	7.81				
	R-Q	0 / 3266	-18.5	-18.5	0.60 (1)	10.00				
	Q-P	0 / 1879	-18.5	-18.5	0.37 (1)	10.00				
	P-O	0 / 2016	-18.5	-18.5	0.39 (1)	10.00				
	N-O	0 / 17	0.0	0.0	0.10 (1)	10.00				
	O-J	-124 / 0	0.0	0.0	0.10 (1)	7.81				
	N-M	0 / 62	-18.5	-18.5	0.02 (4)	10.00				
							NAIL VALUES PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI) MAX MIN MAX MIN MAX MIN MT20 650 371 1747 788 1987 1873			



Structural component only
DWG# T-2115454 *211*

[M]

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	39.0	PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.21")
ALLOWABLE DEFL.(TL)= L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.40")

CSI: TC=0.89/1.00 (F-H:1) , BC=0.60/1.00 (Q-R:1) ,
WB=0.51/1.00 (R-T:1) , SS=0.28/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.88 (B) (INPUT = 0.90)
JSI METAL= 0.52 (R) (INPUT = 1.00)

JOB NAME 406403	TRUSS NAME T3S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	---	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:32 2021 Page 2
ID:E?n9mn1Ky9qxx7V78133ulyzsQn-o6QocEwfyB97WgGp34DXw34aKEuHp4g7DFKpgxzCzki

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
V	BMW-t	MT20	5.0	6.0		
W	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

NOTES- (1)


1) Lateral braces to be a minimum of 2x4 SPF #2



Structural component only
DWG# T-2115454 *ml*

JOB NAME 406403	TRUSS NAME T4	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:33 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-Gl_BpawHjVH_8qr?dnkmSHcpBeh7YSuGSv4NCNzCzki

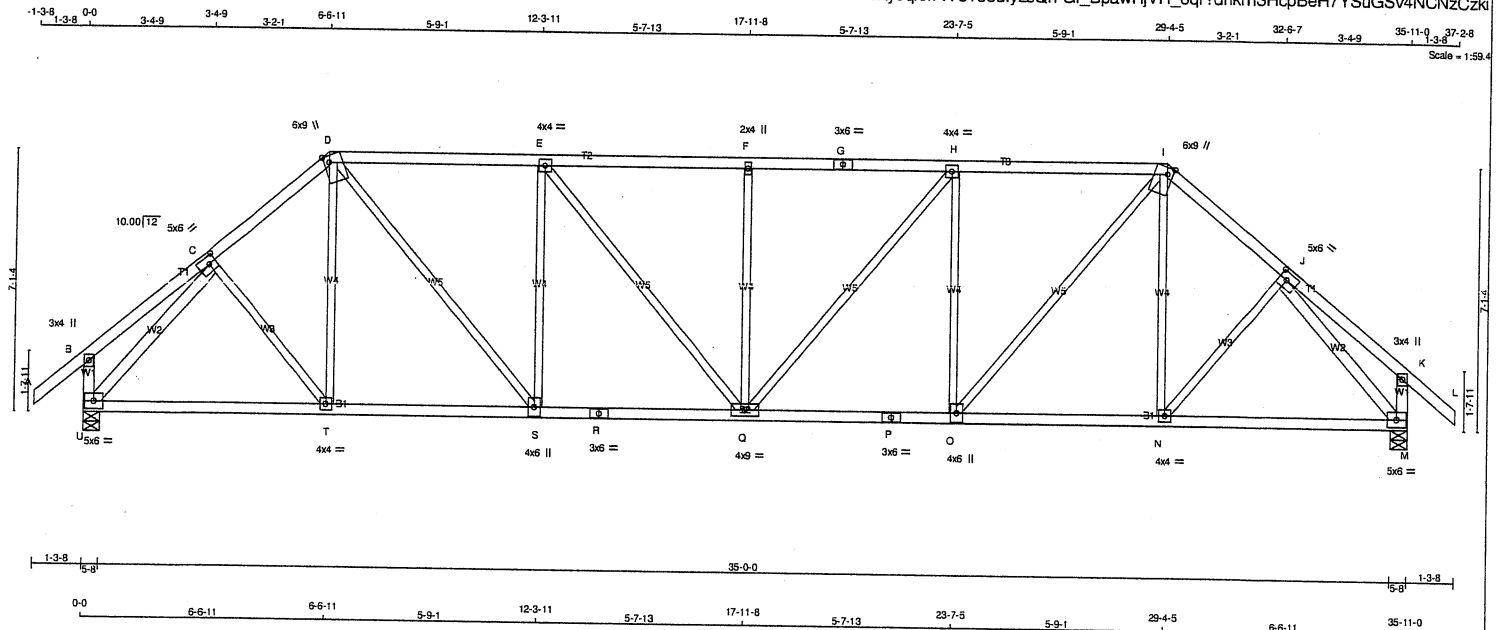


LUMBER				DESCR.	
N. L. G. A. RULES					
CHORDS	SIZE	LUMBER			
A - D	2x4	DRY	No.2	SPF	
D - G	2x4	DRY	No.2	SPF	
G - I	2x4	DRY	No.2	SPF	
I - L	2x4	DRY	No.2	SPF	
U - B	2x4	DRY	No.2	SPF	
M - K	2x4	DRY	No.2	SPF	
U - R	2x4	DRY	No.2	SPF	
R - P	2x4	DRY	No.2	SPF	
P - M	2x4	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
EXCEPT					
U - C	2x4	DRY	No.2	SPF	
J - M	2x4	DRY	No.2	SPF	
DRY: SEASONED LUMBER.					

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMV+p	MT20	3.0	4.0	
C	TMWW-t	MT20	5.0	6.0	2.50 2.50
D	TTWW+m	MT20	6.0	9.0	Edge 1.75
E	TMWW-t	MT20	4.0	4.0	
F	TMWW+m	MT20	2.0	4.0	
G	TS-t	MT20	3.0	6.0	
H	TMWW-t	MT20	4.0	4.0	
I	TTWW+m	MT20	6.0	9.0	Edge 1.75
J	TMWW-t	MT20	5.0	6.0	2.50 2.50
K	TMV+p	MT20	3.0	4.0	
M	BMVW1-t	MT20	5.0	6.0	
N	BMVW-t	MT20	4.0	4.0	
O	BMVW+m	MT20	4.0	6.0	
P	BS-t	MT20	3.0	6.0	
Q	BMVWW-t	MT20	4.0	9.0	
R	BS-t	MT20	3.0	6.0	
S	BMVW+m	MT20	4.0	6.0	
T	BMVW-t	MT20	4.0	4.0	
U	BMVW1-t	MT20	5.0	6.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES (1)
1)



Structural component only
DWG# T-2115455

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD	
JT	VERT	GROSS REACTION	HORZ	GROSS REACTION	HORZ	BRG	IN-SX	BRG	IN-SX
U	2107	0	2107	0	0	5-8	5-8		
M	2107	0	2107	0	0	5-8	5-8		

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS							
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL		
U	1488	990 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0		
M	1488	990 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0		

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.63 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 41	-91.8 -91.8 0.13 (1)	10.00	C-T	0 / 166	0.04 (1)	
B-C	0 / 20	-91.8 -91.8 0.14 (1)	10.00	T-D	0 / 75	0.03 (4)	
C-D	-2076 / 0	-91.8 -91.8 0.20 (1)	4.53	D-S	0 / 1280	0.29 (1)	
D-E	-2402 / 0	-91.8 -91.8 0.60 (1)	3.81	S-E	-880 / 0	0.77 (1)	
E-F	-2644 / 0	-91.8 -91.8 0.63 (1)	3.63	E-Q	0 / 378	0.09 (1)	
F-G	-2644 / 0	-91.8 -91.8 0.63 (1)	3.63	Q-F	-477 / 0	0.42 (1)	
G-H	-2644 / 0	-91.8 -91.8 0.63 (1)	3.63	Q-H	0 / 378	0.09 (1)	
H-I	-2402 / 0	-91.8 -91.8 0.60 (1)	3.81	O-H	-880 / 0	0.77 (1)	
I-J	-2076 / 0	-91.8 -91.8 0.20 (1)	4.53	O-I	0 / 1280	0.29 (1)	
J-K	0 / 20	-91.8 -91.8 0.14 (1)	10.00	N-I	0 / 75	0.03 (4)	
K-L	0 / 41	-91.8 -91.8 0.13 (1)	10.00	N-J	0 / 166	0.04 (1)	
U-B	-244 / 0	0.0 0.0 0.03 (1)	7.81	U-C	-2332 / 0	0.72 (1)	
M-K	-244 / 0	0.0 0.0 0.03 (1)	7.81	J-M	-2332 / 0	0.72 (1)	
U-T	0 / 1467	-18.5 -18.5 0.34 (1)	10.00				
T-S	0 / 1575	-18.5 -18.5 0.36 (1)	10.00				
S-R	0 / 2402	-18.5 -18.5 0.44 (1)	10.00				
R-Q	0 / 2402	-18.5 -18.5 0.44 (1)	10.00				
Q-P	0 / 2402	-18.5 -18.5 0.44 (1)	10.00				
P-O	0 / 2402	-18.5 -18.5 0.44 (1)	10.00				
O-N	0 / 1575	-18.5 -18.5 0.36 (1)	10.00				
N-M	0 / 1467	-18.5 -18.5 0.34 (1)	10.00				

TOTAL WEIGHT = 167 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6 PSF
	DL = 6.0 PSF
BOT CH.	LL = 0.0 PSF
	DL = 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.13")
ALLOWABLE DEFL.(TL) = L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/999 (0.24")

CSI: TC=0.63/1.00 (E-F:1), BC=0.44/1.00 (Q-S:1), WB=0.77/1.00 (E-S:1), SS=0.25/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MT20	650	371	1747 788 1987 1873


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.88 (J) (INPUT = 0.90)
JSI METAL= 0.74 (R) (INPUT = 1.00)

JOB NAME 411069	TRUSS NAME T4A	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington		TRUSS DESC.			

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:15 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-8bNuDbywLwDgbyvolRuHXfYCiH3JEKntxK4GzD_Vk

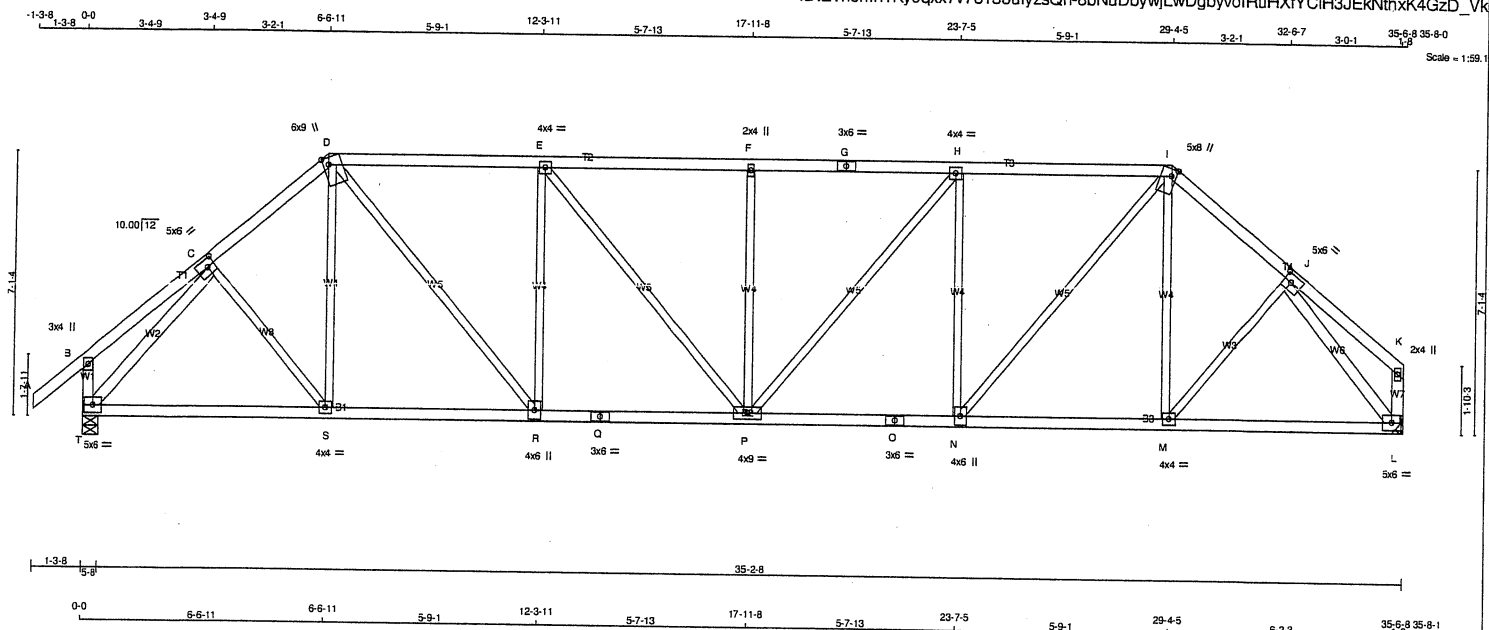

LUMBER				DESCR.	
N. L. G. A. RULES					
CHORDS	SIZE	LUMBER			
A - D	2x4	DRY	No.2	SPF	
D - G	2x4	DRY	No.2	SPF	
G - I	2x4	DRY	No.2	SPF	
I - K	2x4	DRY	No.2	SPF	
T - B	2x4	DRY	No.2	SPF	
T - Q	2x4	DRY	No.2	SPF	
Q - O	2x4	DRY	No.2	SPF	
O - L	2x4	DRY	No.2	SPF	
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF	
T - C	2x4	DRY	No.2	SPF	
J - L	2x4	DRY	No.2	SPF	
L - K	2x4	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
C	TMWW-t	MT20	5.0	6.0	2.50	2.50
D	TTWW+m	MT20	6.0	9.0	Edge	1.75
E	TMWW-t	MT20	4.0	4.0		
F	TMW+w	MT20	2.0	4.0		
G	TS-t	MT20	3.0	6.0		
H	TMWW-t	MT20	4.0	4.0		
I	TTWW+m	MT20	5.0	8.0	2.25	1.50
J	TMWW-t	MT20	5.0	6.0	2.50	2.50
K	TMW+w	MT20	2.0	4.0		
L	BMWW-t	MT20	5.0	6.0		
M	BMWW-t	MT20	4.0	4.0		
N	BMWW-t	MT20	4.0	6.0		
O	BS-t	MT20	3.0	6.0		
P	BMWW-t	MT20	4.0	9.0		
Q	BS-t	MT20	3.0	6.0		
R	BMWW-t	MT20	4.0	6.0		
S	BMWW-t	MT20	4.0	4.0		
T	BMWW-t	MT20	5.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES

1)



Structural component only
DWG# T-2115512

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	2085	2085	0	5-8
T	HORZ	0	0	0	5-8
L	UPLIFT	1967	1967	0	MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT L. MINIMUM BEARING LENGTH AT JOINT L = 3-8.

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

JT	COMBINED	1ST CASE SNOW	MAX. MIN. COMPONENT REACTIONS	LIVE	PERM. LIVE	WIND	DEAD	SOIL
T	1472	980 / 0	0 / 0	0 / 0	0 / 0	0 / 0	493 / 0	0 / 0
L	1391	914 / 0	0 / 0	0 / 0	0 / 0	0 / 0	477 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) T

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.67 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	
FR-TO		FROM	TO	FR-TO			
A-B	0 / 41	-91.8	-91.8 0.13 (1)	C-S	0 / 161	0.04 (1)	
B-C	0 / 20	-91.8	-91.8 0.14 (1)	D-R	0 / 76	0.03 (4)	
C-D	-2049 / 0	-91.8	-91.8 0.20 (1)	E-P	0 / 1252	0.28 (1)	
D-E	-2363 / 0	-91.8	-91.8 0.60 (1)	F-G	-858 / 0	0.75 (1)	
E-F	-2586 / 0	-91.8	-91.8 0.62 (1)	G-H	0 / 350	0.08 (1)	
F-G	-2586 / 0	-91.8	-91.8 0.62 (1)	H-I	-477 / 0	0.42 (1)	
G-H	-2586 / 0	-91.8	-91.8 0.62 (1)	I-J	0 / 406	0.09 (1)	
H-I	-2327 / 0	-91.8	-91.8 0.59 (1)	J-K	-902 / 0	0.79 (1)	
I-J	-1953 / 0	-91.8	-91.8 0.19 (1)	K-L	0 / 1311	0.29 (1)	
J-K	0 / 28	-91.8	-91.8 0.13 (1)	L-K	-98 / 38	0.09 (1)	
T-B	-244 / 0	0.0	0.0 0.03 (1)	M-J	0 / 296	0.07 (1)	
T-S	0 / 1449	-18.5	-18.5 0.34 (1)	N-I	-2304 / 0	0.71 (1)	
S-R	0 / 1554	-18.5	-18.5 0.35 (1)	O-N	-2236 / 0	0.64 (1)	
R-Q	0 / 2363	-18.5	-18.5 0.43 (1)	P-O	-98 / 0	0.01 (1)	
Q-P	0 / 2363	-18.5	-18.5 0.43 (1)				
P-O	0 / 2327	-18.5	-18.5 0.43 (1)				
O-N	0 / 2327	-18.5	-18.5 0.43 (1)				
N-M	0 / 1480	-18.5	-18.5 0.33 (1)				
M-L	0 / 1289	-18.5	-18.5 0.30 (1)				

TOTAL WEIGHT = 164 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	39.0	PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (1.18")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.13")
ALLOWABLE DEFL.(TL) = $L/360$ (1.18")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.23")

CSI: TC=0.62/1.00 (E-F:1), BC=0.43/1.00 (P-R:1), WB=0.79/1.00 (H-N:1), SSI=0.25/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MT20	650	371	1747 788 1987 1873


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (I) (INPUT = 0.90)
JSI METAL= 0.73 (Q) (INPUT = 1.00)

JOB NAME 406403	TRUSS NAME T4S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:34 2021 Page 1
ID:E?n9m1Ky9qpx7v78133ulyzsQn-kUYZ1wxvUoPrrm_QBAVF??U9xU2cGHW_QhZpwIqzCzkh

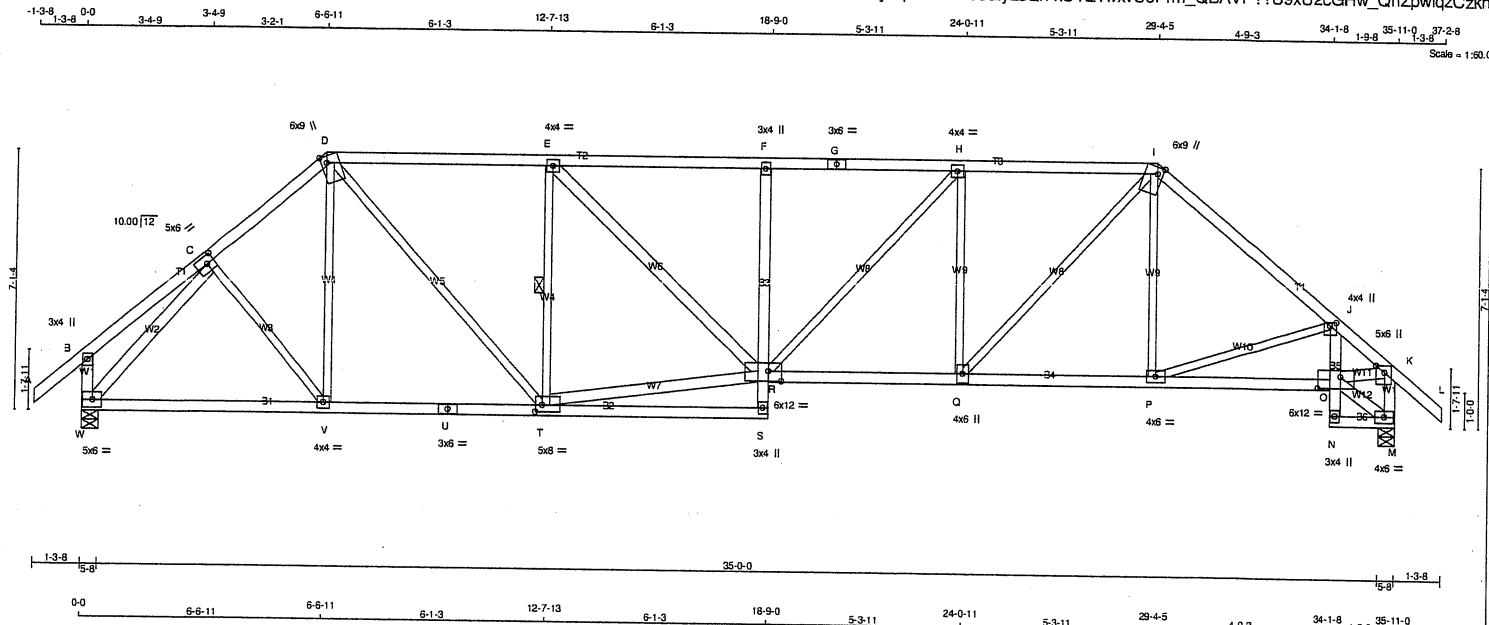

LUMBER				N. L. G. A. RULES	
CHORDS	SIZE	LUMBER	DESCR.		
A - D	2x4	DRY	No.2	SPF	
D - G	2x4	DRY	No.2	SPF	
G - I	2x4	DRY	No.2	SPF	
I - L	2x4	DRY	No.2	SPF	
W - B	2x4	DRY	No.2	SPF	
M - K	2x4	DRY	No.2	SPF	
W - U	2x4	DRY	No.2	SPF	
U - S	2x4	DRY	No.2	SPF	
S - F	2x4	DRY	No.2	SPF	
R - O	2x4	DRY	No.2	SPF	
N - J	2x4	DRY	No.2	SPF	
N - M	2x4	DRY	No.2	SPF	
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF	
T - R	2x4	DRY	No.2	SPF	
E - R	2x4	DRY	No.2	SPF	
W - C	2x4	DRY	No.2	SPF	
O - M	2x4	DRY	No.2	SPF	
O - K	2x4	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
C	TMVW-t	MT20	5.0	6.0	2.50	2.50
D	TTWW+m	MT20	6.0	9.0	Edge	1.75
E	TMVW-t	MT20	4.0	4.0		
F	TMV+p	MT20	3.0	4.0		
G	TS-t	MT20	3.0	6.0		
H	TMVW-t	MT20	4.0	4.0		
I	TTWW+m	MT20	6.0	9.0	Edge	1.75
J	TMVW+p	MT20	4.0	4.0	1.00	2.00
K	TMVW+p	MT20	5.0	6.0	Edge	2.75
L	BMVW-t	MT20	4.0	6.0		
M	BMV+p	MT20	3.0	4.0		
N	BVMW-t	MT20	6.0	12.0	3.75	7.50
O	BMVW-t	MT20	4.0	6.0		
P	BMVW-t	MT20	4.0	6.0		
Q	BMVW-t	MT20	6.0	12.0	3.25	4.25
R	BMVW-t	MT20	4.0	6.0		
S	BMV+p	MT20	3.0	4.0		
T	BMVW-t	MT20	5.0	8.0	2.25	2.25

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
	VERT	HORZ	DOWN	UP/LIFT
JT	2105	0	2105	0
W	2105	0	2105	0
M	2109	0	2109	0

UNFACTORED REACTIONS

	1ST LCASE	MAX./MIN. COMPONENT REACTIONS					
	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
JT	1486	988 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0
W	1486	988 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0
M	1489	991 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) W, M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.23 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-T.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED VERT. LOAD (LC)	
FR-TO		FROM	TO	FR-TO			
A-B	0 / 41	-91.8	-91.8 0.13 (1)	10.00	C-V	0 / 166	0.04 (1)
B-C	0 / 20	-91.8	-91.8 0.14 (1)	10.00	V-D	0 / 73	0.03 (4)
C-D	-2073 / 0	-91.8	-91.8 0.20 (1)	4.53	D-T	0 / 1289	0.29 (1)
D-E	-2428 / 0	-91.8	-91.8 0.69 (1)	3.68	T-E	-1242 / 0	0.40 (1)
E-F	-3069 / 0	-91.8	-91.8 0.78 (1)	3.23	T-R	0 / 2407	0.39 (1)
F-G	-3080 / 0	-91.8	-91.8 0.59 (1)	3.45	E-R	0 / 878	0.14 (1)
G-H	-3080 / 0	-91.8	-91.8 0.59 (1)	3.45	R-H	0 / 471	0.11 (1)
H-I	-2761 / 0	-91.8	-91.8 0.56 (1)	3.66	Q-H	-892 / 0	0.52 (1)
I-J	-2405 / 0	-91.8	-91.8 0.44 (1)	4.06	P-I	0 / 1365	0.31 (1)
J-K	-2622 / 0	-91.8	-91.8 0.30 (1)	3.97	I-O	0 / 132	0.04 (4)
K-L	0 / 41	-91.8	-91.8 0.13 (1)	10.00	P-J	-267 / 0	0.13 (1)
W-B	-244 / 0	0.0	0.0 0.03 (1)	7.81	W-C	-2328 / 0	0.71 (1)
M-K	-2054 / 0	0.0	0.0 0.22 (1)	5.90	C-M	-70 / 0	0.01 (1)
					O-K	0 / 2048	0.33 (1)
W-V	0 / 1465	-18.5	-18.5 0.34 (1)	10.00			
V-U	0 / 1572	-18.5	-18.5 0.35 (1)	10.00			
U-T	0 / 1572	-18.5	-18.5 0.35 (1)	10.00			
T-S	0 / 67	-18.5	-18.5 0.15 (4)	10.00			
S-R	0 / 51	0.0	0.0 0.10 (1)	10.00			
R-F	-478 / 0	0.0	0.0 0.25 (1)	7.81			
R-Q	0 / 2761	-18.5	-18.5 0.51 (1)	10.00			
Q-P	0 / 1829	-18.5	-18.5 0.36 (1)	10.00			
P-O	0 / 2081	-18.5	-18.5 0.40 (1)	10.00			
N-O	0 / 17	0.0	0.0 0.09 (1)	10.00			
O-J	-130 / 0	0.0	0.0 0.09 (1)	7.81			
N-M	0 / 58	-18.5	-18.5 0.02 (4)	10.00			

TOTAL WEIGHT = 175 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6 PSF
	DL = 6.0 PSF
BOT CH.	LL = 0.0 PSF
	DL = 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.16")
ALLOWABLE DEFL.(TL) = L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/999 (0.31")

CSI: TC=0.78/1.00 (E-F:1), BC=0.51/1.00 (Q-R:1), WB=0.71/1.00 (C-W:1), SS=0.29/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MAX MIN	MAX MIN	MAX MIN	
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.88 (K) (INPUT = 0.90)
JSI METAL = 0.52 (T) (INPUT = 1.00)



Structural component only
DWG# T-2115456

CONTINUED ON PAGE 2

JOB NAME 406403	TRUSS NAME T4S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:34 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-kUYZ1wxvUoPm QBAVF??U9xU2cGHw QhZpwlgzCzkh

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
U	BS-t	MT20	3.0	6.0		
V	BMWV-t	MT20	4.0	4.0		
W	BMWV1-t	MT20	5.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2



Structural component only
DWG# T-2115456 *mn*


Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:35 2021 Page 1

ID:E?n9mn1Ky9qxx7v78133ulyzsQn-Ch6xEGyYF6XiN8?NkCmEXiEdSz0JiZvDZTHGzCkg

Structural drawing of a roof truss. The drawing shows a series of vertical and diagonal members. Dimensions are indicated along the top and bottom edges. The top edge dimensions are: 1-3-8, 0-0, 3-11-13, 3-11-13, 3-9-5, 7-9-1, 6-10-1, 14-7-2, 6-8-13, 21-3-14, 6-10-1, 28-1-15, 3-9-5, 31-11-3, 3-11-13, 35-11-0, 37-2-8. The bottom edge dimensions are: 1-3-8, 3-11-13, 3-11-13, 3-9-5, 7-9-1, 6-10-1, 14-7-2, 6-8-13, 21-3-14, 6-10-1, 28-1-15, 3-9-5, 31-11-3, 3-11-13, 35-11-0, 37-2-8. A scale of 1:59.4 is indicated at the bottom right.

Scale = 1:59.4

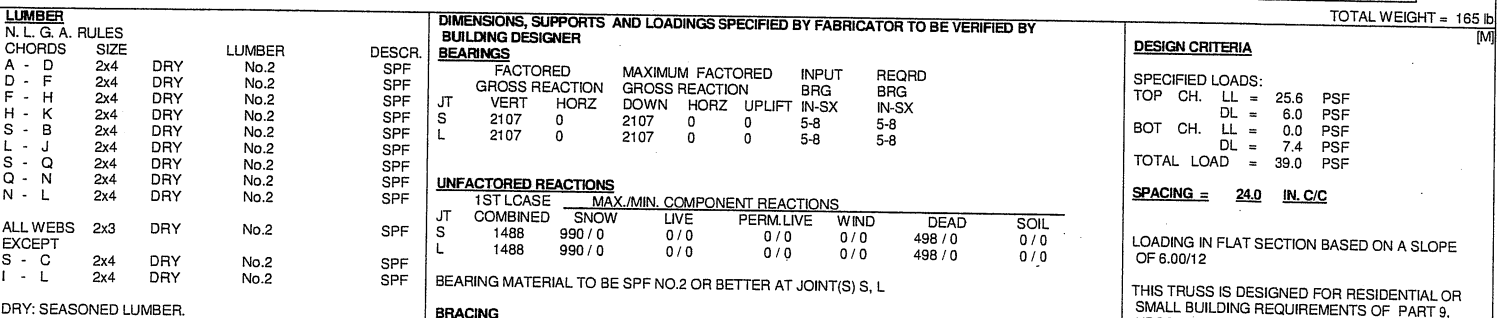

NOTES- (1)
) Lateral braces to be a minimum of 2x4 SPF #2


BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, L

BRACING

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW


CHORDS		WEBS	
MAX. FACTORED	FACTORED	MAX. FACTORED	
MEMB.	50737	MEMB.	50737

USI GRIP= 0.84 (I) (INPUT = 0.90)
USI METAL= 0.53 (I) (INPUT = 1.00)



JOB NAME 411069	TRUSS NAME T5A	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:16 2021 Page 1
 ID:E?n9mn1Ky9qxx7v78133ulyzsQn-cnxGRxxZUf24lIX5LSy7pIBgv5dH2ezX5LgtcizD_Vj

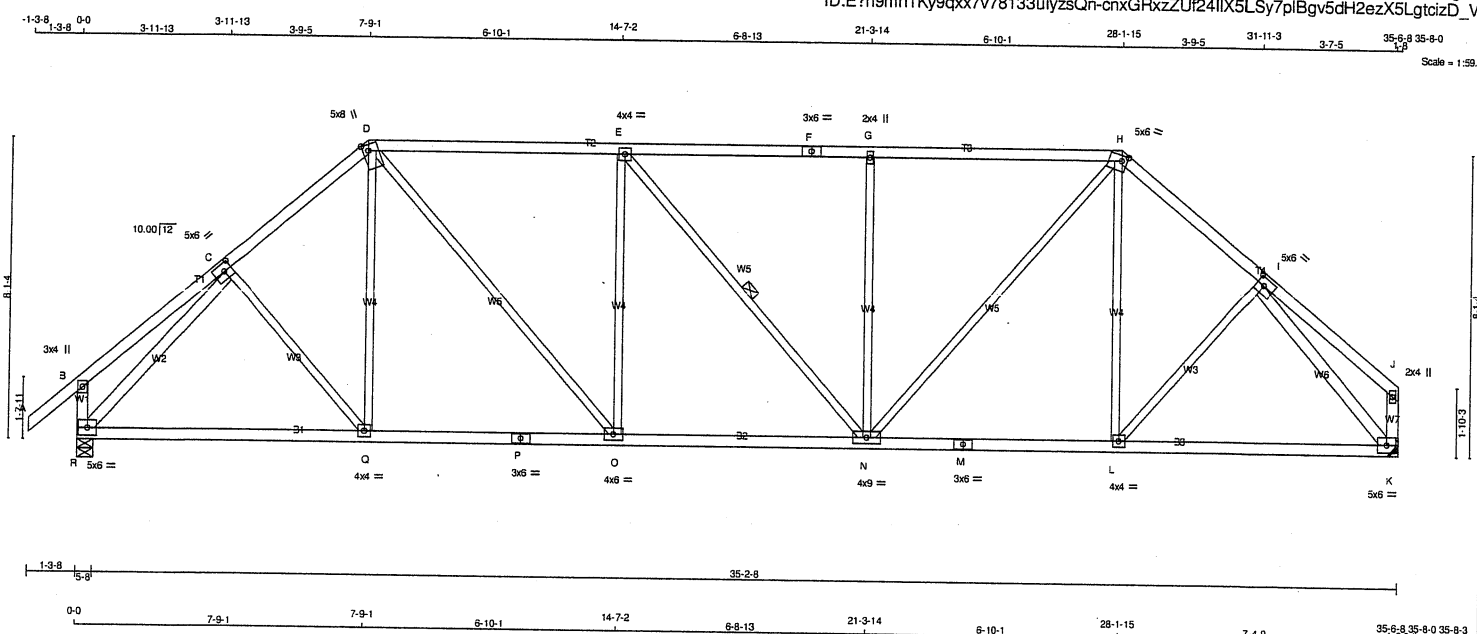

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
H - J	2x4	DRY	No.2
J - B	2x4	DRY	No.2
R - P	2x4	DRY	No.2
P - M	2x4	DRY	No.2
M - K	2x4	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2
R - C	2x4	DRY	No.2
I - K	2x4	DRY	No.2
K - J	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMV+p	MT20	3.0	4.0
C	TMWW-t	MT20	5.0	6.0 2.50 2.50
D	TTWW+m	MT20	5.0	8.0 2.00 1.75
E	TMWW-t	MT20	4.0	4.0
F	TS-t	MT20	3.0	6.0
G	TMW+w	MT20	2.0	4.0
H	TTWW-m	MT20	5.0	6.0 1.75 1.75
I	TMWW-t	MT20	5.0	6.0 2.50 2.50
J	TMW+w	MT20	2.0	4.0
K	BMWW-t	MT20	5.0	6.0
L	BMWW-t	MT20	4.0	4.0
M	BS-t	MT20	3.0	6.0
N	BMWW-t	MT20	4.0	9.0
O	BMWW-t	MT20	4.0	6.0
P	BS-t	MT20	3.0	6.0
Q	BMWW-t	MT20	4.0	4.0
R	BMWW-t	MT20	5.0	6.0

NOTES- (1)
 1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS			
JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT REQRD BRG
R	2085 0	2085 0 0	5-8 IN-SX MECHANICAL
K	1967 0	1967 0 0	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT K. MINIMUM BEARING LENGTH AT JOINT K = 3-8.

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

1ST LCASE	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
JT	1472	980 / 0	0 / 0	0 / 0	0 / 0	493 / 0	0 / 0
R	1391	914 / 0	0 / 0	0 / 0	0 / 0	477 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.66 FT.
 MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CS1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS1 (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 41	-91.8 -91.8	0.13 (1)	C-Q	0 / 66	0.02 (4)	
B-C	0 / 26	-91.8 -91.8	0.21 (1)	Q-D	0 / 126	0.04 (4)	
C-D	-2031 / 0	-91.8 -91.8	0.29 (1)	D-O	0 / 1026	0.23 (1)	
D-E	-2215 / 0	-91.8 -91.8	0.81 (1)	O-E	-654 / 0	0.83 (1)	
E-F	-2196 / 0	-91.8 -91.8	0.80 (1)	E-N	-30 / 0	0.02 (1)	
F-G	-2196 / 0	-91.8 -91.8	0.80 (1)	N-G	-675 / 0	0.85 (1)	
G-H	-2195 / 0	-91.8 -91.8	0.80 (1)	H-N	0 / 1084	0.24 (1)	
H-I	-1956 / 0	-91.8 -91.8	0.27 (1)	L-H	0 / 92	0.03 (4)	
I-J	0 / 35	-91.8 -91.8	0.20 (1)	L-I	0 / 172	0.04 (1)	
R-B	-264 / 0	0.0 0.0	0.03 (1)	R-C	-2316 / 0	0.98 (1)	
				I-K	-2260 / 0	0.90 (1)	
				K-J	-116 / 0	0.01 (1)	
R-Q	0 / 1503	-18.5 -18.5	0.39 (1)				
Q-P	0 / 1538	-18.5 -18.5	0.39 (1)				
P-O	0 / 1538	-18.5 -18.5	0.39 (1)				
O-N	0 / 2215	-18.5 -18.5	0.43 (1)				
N-M	0 / 1480	-18.5 -18.5	0.37 (1)				
M-L	0 / 1480	-18.5 -18.5	0.37 (1)				
L-K	0 / 1366	-18.5 -18.5	0.36 (1)				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
	DL	= 6.0	PSF
BOT CH.	LL	= 0.0	PSF
	DL	= 7.4	PSF
TOTAL LOAD		= 39.0	PSF

SPACING = 24.0 IN./C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.18")
 CALCULATED VERT. DEFL.(LL)= L/999 (0.10")
 ALLOWABLE DEFL.(TL)= L/360 (1.18")
 CALCULATED VERT. DEFL.(TL)= L/999 (0.21")

CSI: TC=0.81/1.00 (D-E:1), BC=0.43/1.00 (N-O:1), WB=0.98/1.00 (C-R:1), SSI=0.29/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES

PLATE GRIP(DRY)	SHEAR (PSI)	SECTION (PLI)
MT20	650 371 1747 788 1987 1873	

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.87 (H) (INPUT = 0.90)
 JSI METAL= 0.52 (C) (INPUT = 1.00)



Structural component only
 DWG# T-2115513

JOB NAME 406403	TRUSS NAME T5S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	---	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:36 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-gtqJSczA0QfY?laalvHT4vElsJolm9i8sl1pizCzkf

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
V	BMWV-t	MT20	4.0	4.0		
W	BMWV1-t	MT20	5.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2




Structural component only
DWG# T-2115458 *m*

JOB NAME 406403	TRUSS NAME T6	QUANTITY 2	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
---------------------------	-------------------------	----------------------	-----------------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 Mittek Industries, Inc. Tue May 25 12:20:37 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-83Ehfy_onjnPdS9msdoid7nVqFejUM3sNW2aM9zCzke

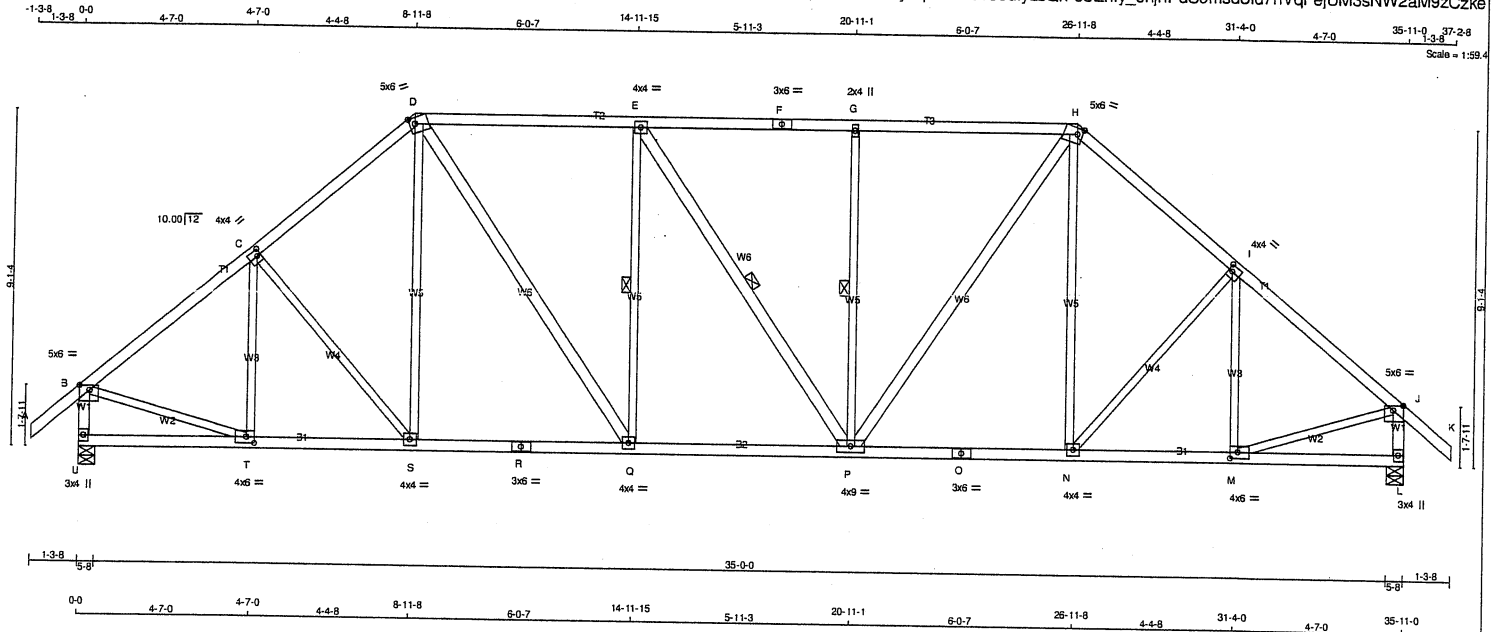

CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY No.2	SPF
D - F	2x4	DRY No.2	SPF
F - H	2x4	DRY No.2	SPF
H - K	2x4	DRY No.2	SPF
U - B	2x4	DRY No.2	SPF
L - J	2x4	DRY No.2	SPF
U - R	2x4	DRY No.2	SPF
R - O	2x4	DRY No.2	SPF
O - L	2x4	DRY No.2	SPF
ALL WEBS EXCEPT D - Q, E - P, P - H	2x3	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	1.50	3.25
C	TMVW-t	MT20	4.0	4.0	2.00	1.25
D	TTWW-m	MT20	5.0	6.0	2.00	1.75
E	TMVW-t	MT20	4.0	4.0		
F	TS-t	MT20	3.0	6.0		
G	TMVW-w	MT20	2.0	4.0		
H	TTWW-m	MT20	5.0	6.0	2.00	1.75
I	TMVW-t	MT20	4.0	4.0	2.00	1.25
J	TMVW-p	MT20	5.0	6.0	1.50	3.25
L	BMV1+p	MT20	3.0	4.0		
M	BMVW-t	MT20	4.0	6.0	2.00	2.50
N, Q, S						
N	BMVW-t	MT20	4.0	4.0		
O	BS-t	MT20	3.0	6.0		
P	BMVW-w	MT20	4.0	9.0		
R	BS-t	MT20	3.0	6.0		
T	BMVW-t	MT20	4.0	6.0	2.00	2.50
U	BMV1+p	MT20	3.0	4.0		

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
U	VERT 2107	DOWN 2107	0	5-8
L	HORZ 0	0	0	5-8

UNFACTORED REACTIONS

JT	1ST CASE COMBINED	MAX./MIN. SNOW	MAX./MIN. LIVE	PERM. LIVE	WIND	DEAD	SOIL
U	1488	990 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0
L	1488	990 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.13 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-Q, E-P, G-P.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX CSI (LC)	MAX. UNBRACED LENGTH	MEMB.	MAX. FORCE (LBS)	FACTORED MAX CSI (LC)
FR-TO		FROM	TO		FR-TO		
A-B	0 / 41	-91.8	-91.8 0.13 (1)	10.00	T-C	-369 / 0	0.16 (1)
B-C	-2041 / 0	-91.8	-91.8 0.41 (1)	4.35	C-S	-112 / 0	0.10 (1)
C-D	-2012 / 0	-91.8	-91.8 0.40 (1)	4.37	S-D	0 / 184	0.05 (4)
D-E	-2005 / 0	-91.8	-91.8 0.58 (1)	4.13	D-Q	0 / 858	0.14 (1)
E-F	-2004 / 0	-91.8	-91.8 0.58 (1)	4.13	Q-E	-594 / 0	0.32 (1)
F-G	-2004 / 0	-91.8	-91.8 0.58 (1)	4.13	E-P	-2 / 0	0.00 (1)
G-H	-2004 / 0	-91.8	-91.8 0.57 (1)	4.14	P-G	-593 / 0	0.32 (1)
H-I	-2012 / 0	-91.8	-91.8 0.40 (1)	4.37	P-H	0 / 855	0.14 (1)
I-J	-2041 / 0	-91.8	-91.8 0.41 (1)	4.35	N-H	0 / 185	0.05 (4)
J-K	0 / 41	-91.8	-91.8 0.13 (1)	10.00	N-I	-112 / 0	0.10 (1)
U-B	-2069 / 0	0.0	0.0 0.22 (1)	5.88	M-I	-370 / 0	0.17 (1)
L-J	-2069 / 0	0.0	0.0 0.22 (1)	5.88	B-T	0 / 1655	0.37 (1)
					M-J	0 / 1654	0.37 (1)
U-T	0 / 0	-18.5	-18.5 0.08 (4)	10.00			
T-S	0 / 1591	-18.5	-18.5 0.31 (1)	10.00			
S-R	0 / 1520	-18.5	-18.5 0.32 (1)	10.00			
R-Q	0 / 1520	-18.5	-18.5 0.32 (1)	10.00			
Q-P	0 / 2005	-18.5	-18.5 0.40 (1)	10.00			
P-O	0 / 1520	-18.5	-18.5 0.31 (1)	10.00			
O-N	0 / 1520	-18.5	-18.5 0.31 (1)	10.00			
N-M	0 / 1591	-18.5	-18.5 0.32 (1)	10.00			
M-L	0 / 0	-18.5	-18.5 0.08 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.09")
ALLOWABLE DEFL.(TL) = L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/999 (0.17")

CSI: TC=0.58/1.00 (D-E:1), BC=0.40/1.00 (P-Q:1), WB=0.37/1.00 (B-T:1), SSI=0.26/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.86 (J) (INPUT = 0.90)
JSI METAL= 0.52 (O) (INPUT = 1.00)




Structural component only
DWG# T-2115459

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411069	T6A	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MITek Industries, Inc. Tue May 25 11:28:18 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-ZA30sc_p0GJoX2hTtTt_buAH31vJOWi1qZf9_gbzD_Vh

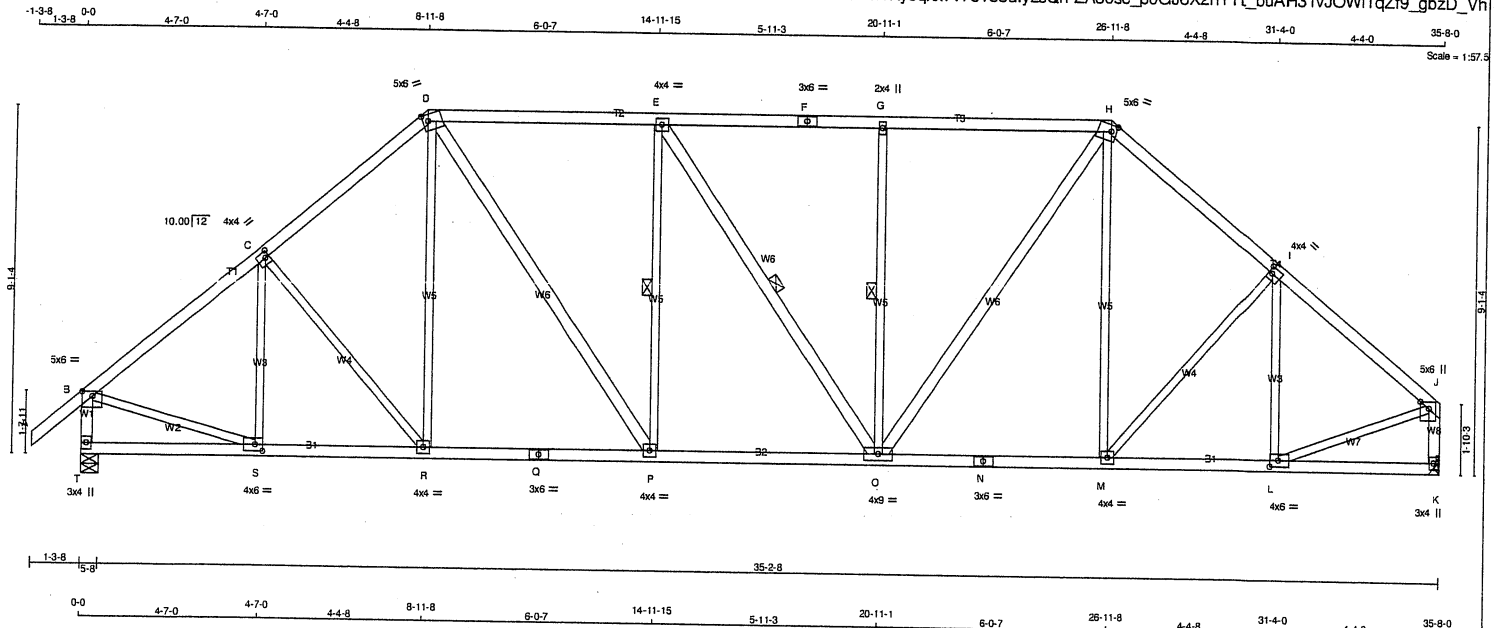

LUMBER				DESCR.	
N. L. G. A. RULES					
CHORDS	SIZE	LUMBER			
A - D	2x4	DRY	No.2	SPF	
D - F	2x4	DRY	No.2	SPF	
F - H	2x4	DRY	No.2	SPF	
H - J	2x4	DRY	No.2	SPF	
T - B	2x4	DRY	No.2	SPF	
K - J	2x4	DRY	No.2	SPF	
T - Q	2x4	DRY	No.2	SPF	
Q - N	2x4	DRY	No.2	SPF	
N - K	2x4	DRY	No.2	SPF	
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF	
D - P	2x4	DRY	No.2	SPF	
E - O	2x4	DRY	No.2	SPF	
O - H	2x4	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	1.50	3.25
C	TMVW-t	MT20	4.0	4.0	2.00	1.25
D	TTWW-m	MT20	5.0	6.0	2.00	1.75
E	TMVW-t	MT20	4.0	4.0		
F	TS-t	MT20	3.0	6.0		
G	TMVW-w	MT20	2.0	4.0		
H	TTWW-m	MT20	5.0	6.0	2.00	1.75
I	TMVW-t	MT20	4.0	4.0	2.00	1.25
J	TMVW-p	MT20	5.0	6.0	Edge	2.75
K	BMV1-p	MT20	3.0	4.0		
L	BMVW-t	MT20	4.0	6.0	2.00	2.75
M, P, R						
N	BMVW-t	MT20	4.0	4.0		
BS	BS-t	MT20	3.0	6.0		
O	BMVW-t	MT20	4.0	9.0		
Q	BS-t	MT20	3.0	6.0		
S	BMVW-t	MT20	4.0	6.0	2.00	2.50
T	BMV1-p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES (1)
1)

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQ'D BRG
JT	VERT	DOWN	HORIZ	UPLIFT
T	2093	0	2093	0
K	1966	0	1966	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT K. MINIMUM BEARING LENGTH AT JOINT K = 3-8.

UNFACTORED REACTIONS

	1ST LCASE	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
JT	COMBINED						
T	1478	983 / 0	0 / 0	0 / 0	0 / 0	495 / 0	0 / 0
K	1390	913 / 0	0 / 0	0 / 0	0 / 0	478 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) T

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.14 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-P, E-O, G-O.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED VERT. LOAD (LC)	
FR-TO		FROM	TO	FR-TO			
A-B	0 / 41	-91.8	-91.8 0.13 (1)	10.00	S-C	-366 / 0	0.16 (1)
B-C	-2025 / 0	-91.8	-91.8 0.41 (1)	4.36	C-R	-115 / 0	0.10 (1)
C-D	-1994 / 0	-91.8	-91.8 0.40 (1)	4.39	R-D	0 / 186	0.05 (4)
D-E	-1982 / 0	-91.8	-91.8 0.58 (1)	4.14	D-P	0 / 841	0.14 (1)
E-F	-1971 / 0	-91.8	-91.8 0.58 (1)	4.16	P-E	-581 / 0	0.31 (1)
F-G	-1971 / 0	-91.8	-91.8 0.58 (1)	4.16	E-O	-19 / 0	0.01 (1)
G-H	-1971 / 0	-91.8	-91.8 0.57 (1)	4.17	O-G	-594 / 0	0.32 (1)
H-I	-1956 / 0	-91.8	-91.8 0.38 (1)	4.45	O-H	0 / 872	0.14 (1)
I-J	-1928 / 0	-91.8	-91.8 0.37 (1)	4.48	M-H	0 / 134	0.04 (4)
T-B	-2056 / 0	0.0	0.0 0.22 (1)	5.90	M-I	-43 / 0	0.04 (1)
K-J	-1931 / 0	0.0	0.0 0.21 (1)	6.06	L-I	-445 / 0	0.20 (1)
T-S	0 / 0	-18.5	-18.5 0.08 (4)	10.00	B-S	0 / 1642	0.37 (1)
S-R	0 / 1579	-18.5	-18.5 0.31 (1)	10.00	L-J	0 / 1593	0.36 (1)
R-Q	0 / 1506	-18.5	-18.5 0.32 (1)	10.00			
Q-P	0 / 1506	-18.5	-18.5 0.32 (1)	10.00			
P-O	0 / 1982	-18.5	-18.5 0.39 (1)	10.00			
O-N	0 / 1478	-18.5	-18.5 0.30 (1)	10.00			
N-M	0 / 1478	-18.5	-18.5 0.30 (1)	10.00			
M-L	0 / 1504	-18.5	-18.5 0.30 (1)	10.00			
L-K	0 / 0	-18.5	-18.5 0.07 (4)	10.00			

TOTAL WEIGHT = 181 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	= 25.6 PSF
	DL	= 6.0 PSF
BOT CH.	LL	= 0.0 PSF
	DL	= 7.4 PSF
TOTAL LOAD		= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= $L/360$ (1.19")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.09")
ALLOWABLE DEFL.(TL)= $L/360$ (1.19")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.17")

CSI: TC=0.58/1.00 (D-E:1), BC=0.39/1.00 (O-P:1), WB=0.37/1.00 (B-S:1), SS=0.26/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.85 (H) (INPUT = 0.90)
JSI METAL = 0.51 (Q) (INPUT = 1.00)



Structural component only
DWG# T-2115514

JOB NAME 406403	TRUSS NAME T7	QUANTITY 2	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:38 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-dFo4tl_QY1vGEbkyPKJx9KKce?MDIX?bAn7ubzCzkd

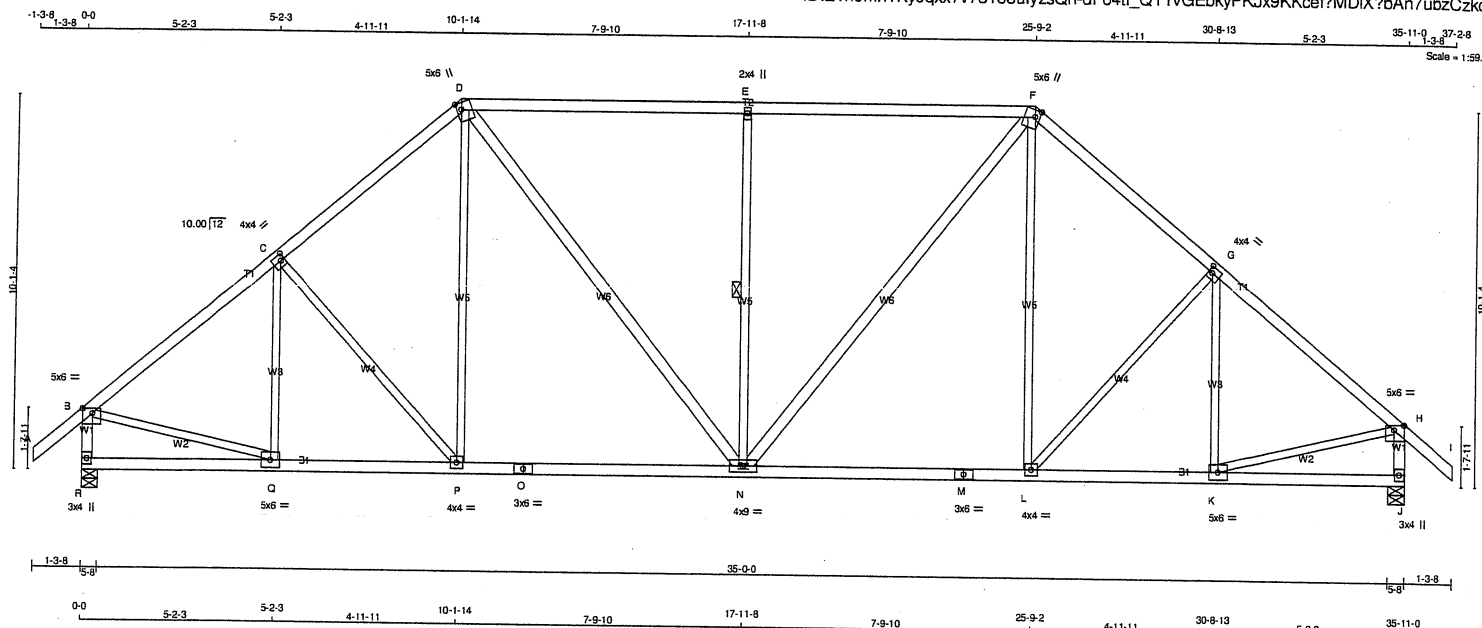

LUMBER				N. L. G. A. RULES	
CHORDS	SIZE	LUMBER	DESCR.	SPF	
A - D	2x4	DRY	No.2	SPF	
D - F	2x4	DRY	No.2	SPF	
F - I	2x4	DRY	No.2	SPF	
R - B	2x4	DRY	No.2	SPF	
J - H	2x4	DRY	No.2	SPF	
R - O	2x4	DRY	No.2	SPF	
O - M	2x4	DRY	No.2	SPF	
M - J	2x4	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
EXCEPT					
D - N	2x4	DRY	No.2	SPF	
N - F	2x4	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQD
GROSS REACTION		GROSS REACTION		BRG	BRG
JT VERT	HORZ	DOWN	UPLIFT	IN-SX	IN-SX
R	2107	0	2107	0	5-8
J	2107	0	2107	0	5-8

UNFACTORED REACTIONS

1ST LOASE	SNOW	MAX./MIN. COMPONENT REACTIONS					
JT COMBINED		LIVE	PERM.LIVE	WIND	DEAD	SOIL	
R	1488	990 / 0	0 / 0	0 / 0	498 / 0	0 / 0	
J	1488	990 / 0	0 / 0	0 / 0	498 / 0	0 / 0	

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.64 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 41	-91.8 -91.8	0.13 (1)	10.00	Q-C	-314 / 0	0.17 (1)
B-C	-2070 / 0	-91.8 -91.8	0.39 (1)	4.36	C-P	-207 / 0	0.24 (1)
C-D	-1964 / 0	-91.8 -91.8	0.37 (1)	4.47	P-D	0 / 276	0.06 (1)
D-E	-1891 / 0	-91.8 -91.8	0.84 (1)	3.64	D-N	0 / 659	0.11 (1)
E-F	-1891 / 0	-91.8 -91.8	0.84 (1)	3.64	N-E	-881 / 0	0.61 (1)
F-G	-1964 / 0	-91.8 -91.8	0.37 (1)	4.47	N-F	0 / 659	0.11 (1)
G-H	-2070 / 0	-91.8 -91.8	0.39 (1)	4.36	L-F	0 / 276	0.06 (1)
H-I	0 / 41	-91.8 -91.8	0.13 (1)	10.00	L-G	-207 / 0	0.24 (1)
R-B	-2065 / 0	0.0 0.0	0.22 (1)	5.89	K-G	-314 / 0	0.17 (1)
J-H	-2065 / 0	0.0 0.0	0.22 (1)	5.89	B-Q	0 / 1667	0.38 (1)
					K-H	0 / 1667	0.38 (1)
R-Q	0 / 0	-18.5 -18.5	0.10 (4)	10.00			
Q-P	0 / 1617	-18.5 -18.5	0.35 (1)	10.00			
P-O	0 / 1481	-18.5 -18.5	0.37 (1)	10.00			
O-N	0 / 1481	-18.5 -18.5	0.37 (1)	10.00			
N-M	0 / 1481	-18.5 -18.5	0.37 (1)	10.00			
M-L	0 / 1481	-18.5 -18.5	0.37 (1)	10.00			
L-K	0 / 1617	-18.5 -18.5	0.35 (1)	10.00			
K-J	0 / 0	-18.5 -18.5	0.10 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.08")
ALLOWABLE DEFL.(TL)= L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/999 (0.18")

CSI: TC=0.84/1.00 (D-E:1), BC=0.37/1.00 (N-P:1), WB=0.61/1.00 (E-N:1), SSI=0.35/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.86 (H) (INPUT = 0.90)
JSI METAL= 0.47 (O) (INPUT = 1.00)

PLATES (table is in inches)					
JT TYPE	PLATES	W	LEN	Y	X
B TMVW-p	MT20	5.0	6.0	1.50	3.25
C TMVW-t	MT20	4.0	4.0	2.00	1.25
D TTWW+m	MT20	5.0	6.0	2.25	1.50
E TMVW-w	MT20	2.0	4.0		
F TTWW+m	MT20	5.0	6.0	2.25	1.50
G TMVW-t	MT20	4.0	4.0	2.00	1.25
H TMVW-p	MT20	5.0	6.0	1.50	3.25
J BMV1-p	MT20	3.0	4.0		
K BMVW-t	MT20	5.0	6.0		
L BMVW-t	MT20	4.0	4.0		
M BS-t	MT20	3.0	6.0		
N BMVW-t	MT20	4.0	9.0		
O BS-t	MT20	3.0	6.0		
P BMVW-t	MT20	4.0	4.0		
Q BMVW-t	MT20	5.0	6.0		
R BMV1-p	MT20	3.0	4.0		


NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2



Structural component only
DWG# T-2115460

JOB NAME 406403	TRUSS NAME T8	QUANTITY 2	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:39 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-5SMS4d?2JL17slJ9z2rAiYsrX3L5yE_9qqXhQ1zCzkc

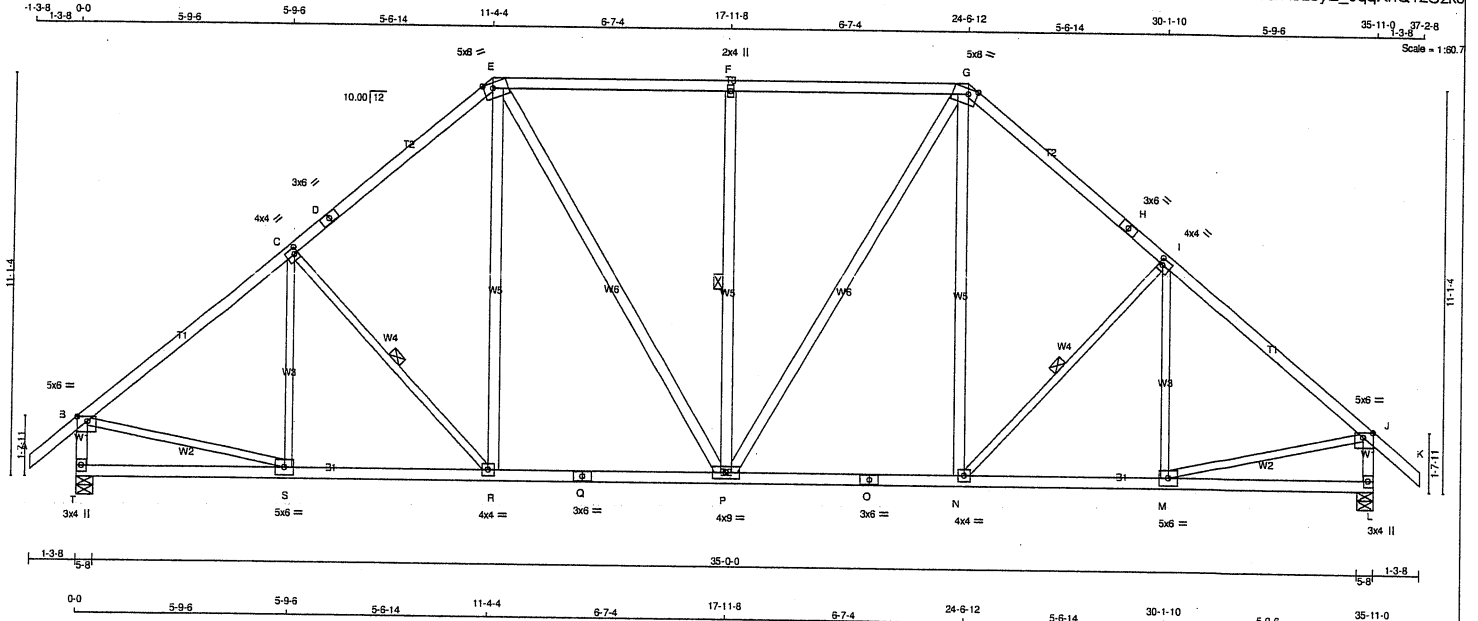

LUMBER				N. L. G. A. RULES	
CHORDS	SIZE	LUMBER	DESCR.	SPF	
A - D	2x4	DRY	No.2	SPF	
D - E	2x4	DRY	No.2	SPF	
E - G	2x4	DRY	No.2	SPF	
G - H	2x4	DRY	No.2	SPF	
H - K	2x4	DRY	No.2	SPF	
T - B	2x4	DRY	No.2	SPF	
L - J	2x4	DRY	No.2	SPF	
T - Q	2x4	DRY	No.2	SPF	
Q - O	2x4	DRY	No.2	SPF	
O - L	2x4	DRY	No.2	SPF	
ALL WEBS EXCEPT	2x4	DRY	No.2	SPF	
S - C	2x3	DRY	No.2	SPF	
C - R	2x3	DRY	No.2	SPF	
N - I	2x3	DRY	No.2	SPF	
M - I	2x3	DRY	No.2	SPF	
B - S	2x3	DRY	No.2	SPF	
M - J	2x3	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	1.50	3.25
C	TMVW-t	MT20	4.0	4.0	2.00	1.25
D	TS-t	MT20	3.0	6.0		
E	TTWW-m	MT20	5.0	8.0	Edge	3.00
F	TMW-w	MT20	2.0	4.0		
G	TTWW-m	MT20	5.0	8.0	Edge	3.00
H	TS-t	MT20	3.0	6.0		
I	TMVW-t	MT20	4.0	4.0	2.00	1.25
J	TMVW-p	MT20	5.0	6.0	1.50	3.25
L	BMV1-p	MT20	3.0	4.0		
M	BMVW-t	MT20	5.0	6.0		
N	BMVW-t	MT20	4.0	4.0		
O	BS-t	MT20	3.0	6.0		
P	BMVWW-t	MT20	4.0	9.0		
Q	BS-t	MT20	3.0	6.0		
R	BMVW-t	MT20	4.0	4.0		
S	BMVW-t	MT20	5.0	6.0		
T	BMV1-p	MT20	3.0	4.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQRD	
		GROSS REACTION		GROSS REACTION		BRG		BRG	
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	IN-SX	IN-SX
T	2107	0	2107	0	0	5-8	5-8	5-8	5-8
L	2107	0	2107	0	0	5-8	5-8	5-8	5-8

UNFACTORED REACTIONS

JT	1ST CASE	MAX./MIN. COMPONENT REACTIONS							
T	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL		
L	1488	990 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0		
T	1488	990 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0		

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) T, L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.22 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-R, F-P, I-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS		FACTORED		MAX. FACTORED		WEBS		FACTORED	
		MEMB. FORCE		VERT. LOAD LC1 MAX		MEMB. FORCE		MAX. FORCE	
		(LBS)		(PLF)		(LBS)		(LBS)	
				FROM TO					
				LENGTH					
				FR-TO					
A-B	0 / 41	-91.8	-91.8	0.13 (1)	10.00	S-C	-255 / 6	0.17 (1)	
B-C	-2089 / 0	-91.8	-91.8	0.50 (1)	4.22	C-R	-306 / 0	0.15 (1)	
C-D	-1901 / 0	-91.8	-91.8	0.47 (1)	4.41	R-E	0 / 336	0.05 (1)	
D-E	-1901 / 0	-91.8	-91.8	0.47 (1)	4.41	E-P	0 / 507	0.08 (1)	
E-F	-1695 / 0	-91.8	-91.8	0.57 (1)	4.40	P-F	-743 / 0	0.47 (1)	
F-G	-1695 / 0	-91.8	-91.8	0.57 (1)	4.40	P-G	0 / 507	0.08 (1)	
G-H	-1901 / 0	-91.8	-91.8	0.47 (1)	4.41	N-G	0 / 336	0.05 (1)	
H-I	-1901 / 0	-91.8	-91.8	0.47 (1)	4.41	N-I	-306 / 0	0.15 (1)	
I-J	-2089 / 0	-91.8	-91.8	0.50 (1)	4.22	M-I	-255 / 6	0.17 (1)	
J-K	0 / 41	-91.8	-91.8	0.13 (1)	10.00	B-S	0 / 1677	0.38 (1)	
T-B	-2062 / 0	0.0	0.0	0.22 (1)	5.89	M-J	0 / 1677	0.38 (1)	
L-J	-2062 / 0	0.0	0.0	0.22 (1)	5.89				
T-S	0 / 0	-18.5	-18.5	0.14 (4)	10.00				
S-R	0 / 1635	-18.5	-18.5	0.34 (1)	10.00				
R-Q	0 / 1431	-18.5	-18.5	0.32 (1)	10.00				
Q-P	0 / 1431	-18.5	-18.5	0.32 (1)	10.00				
P-O	0 / 1431	-18.5	-18.5	0.32 (1)	10.00				
O-N	0 / 1431	-18.5	-18.5	0.32 (1)	10.00				
N-M	0 / 1635	-18.5	-18.5	0.34 (1)	10.00				
M-L	0 / 0	-18.5	-18.5	0.14 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.08")
ALLOWABLE DEFL.(TL) = L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/999 (0.15")

CSI: TC=0.57/1.00 (E-F:1), BC=0.34/1.00 (M-N:1),
WB=0.47/1.00 (F-P:1), SS=0.29/1.00 (F-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MAX MIN	MAX MIN	MAX MIN	
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.86 (J) (INPUT = 0.90)
JSI METAL= 0.49 (Q) (INPUT = 1.00)



Structural component only
DWG# T-2115461

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:40 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-ZevqHz0g4eA_UvtLXIMPEIP?5Tb5hfGI3UGEvTzCzkb

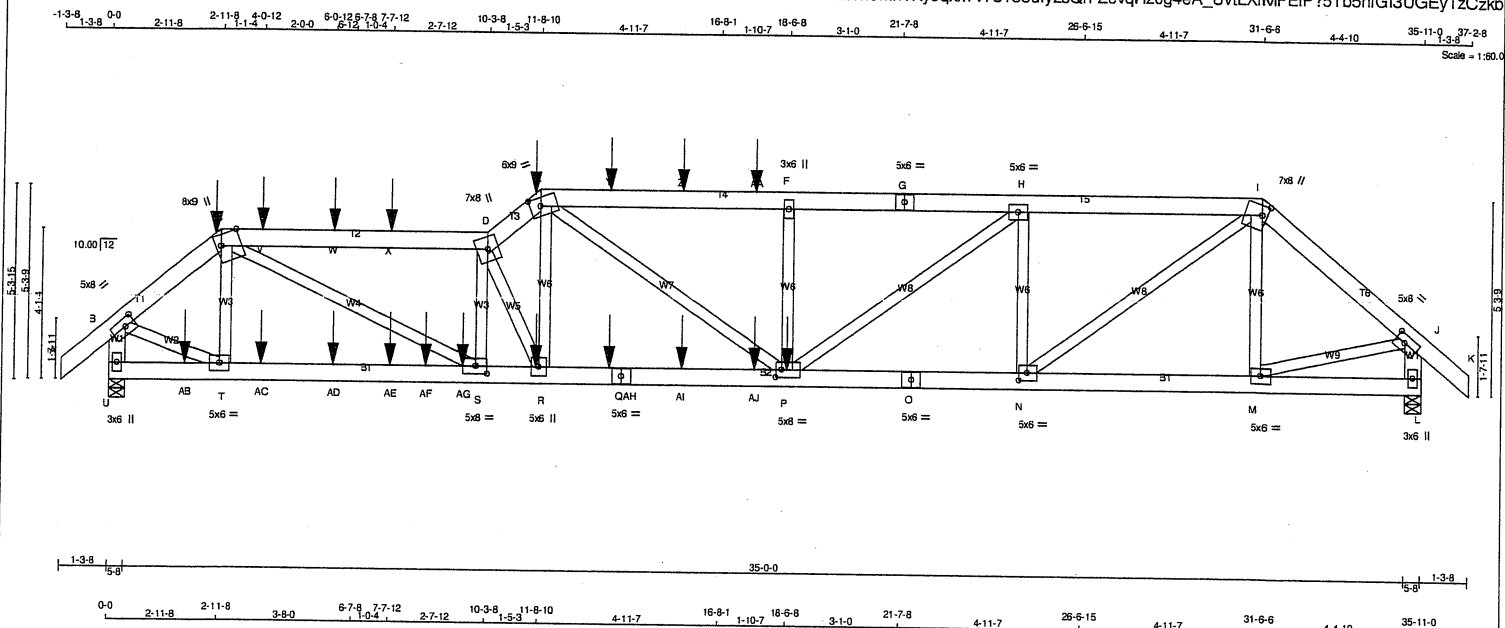

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - C	2x6	DRY No.2	SPF
C - D	2x6	DRY No.2	SPF
D - E	2x6	DRY No.2	SPF
E - G	2x6	DRY No.2	SPF
G - I	2x6	DRY No.2	SPF
I - K	2x6	DRY No.2	SPF
U - B	2x6	DRY No.2	SPF
L - J	2x6	DRY No.2	SPF
U - Q	2x6	DRY No.2	SPF
Q - O	2x6	DRY No.2	SPF
O - L	2x6	DRY No.2	SPF
ALL WEBS EXCEPT	2x4	DRY No.2	SPF

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT
SEPARATELY THEN FASTENED TOGETHER AS
FOLLOWS:

CHORDS	#ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS			
A-C	2	12	SIDE(122.0)
C-D	2	12	SIDE(61.0)
D-E	2	12	SIDE(122.0)
E-G	2	12	SIDE(61.0)
G-I	2	12	TOP
I-K	2	12	TOP
U-B	2	12	TOP
L-J	2	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS			
U-Q	2	12	SIDE(183.1)
Q-O	2	12	SIDE(183.1)
O-L	2	12	TOP
WEBS : (0.122"x3") SPIRAL NAILS			
2x4	1	6	
F-P	1	6	SIDE(385.8)

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.



Structural component only
DWG# T-2115462

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION			INPUT BRG	REQRD BRG
	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
U	4502	0	4502	0	0	5-8	5-8
L	3773	0	3773	0	0	5-8	5-8

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
	3177	2122 / 0	0 / 0	0 / 0	0 / 0	1055 / 0	0 / 0
U	2661	1786 / 0	0 / 0	0 / 0	0 / 0	875 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.43 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LOCAL CSI (LC)	MAX. UNBRAC	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)
FR-TO		FROM TO		LENGTH	FR-TO		
A-B	0 / 42	-91.8	-91.8 0.04 (1)	10.00	T-C	-927 / 0	0.08 (1)
B-C	-4675 / 0	-91.8	-91.8 0.07 (1)	5.30	C-S	0 / 6785	0.60 (1)
C-V	-9596 / 0	-91.8	-91.8 0.58 (1)	3.43	S-D	-3177 / 0	0.27 (1)
V-W	-9596 / 0	-91.8	-91.8 0.58 (1)	3.43	D-R	-4372 / 0	0.40 (1)
W-X	-9596 / 0	-91.8	-91.8 0.58 (1)	3.43	R-E	0 / 4398	0.39 (1)
X-D	-9596 / 0	-91.8	-91.8 0.58 (1)	3.43	E-P	0 / 1977	0.17 (1)
D-E	-10380 / 0	-91.8	-91.8 0.14 (1)	3.74	N-H	-2672 / 0	0.36 (1)
E-Y	-9724 / 0	-91.8	-91.8 0.47 (1)	3.56	N-I	0 / 4719	0.42 (1)
Y-Z	-9724 / 0	-91.8	-91.8 0.47 (1)	3.56	M-L	-641 / 0	0.09 (1)
Z-AA'	-9724 / 0	-91.8	-91.8 0.47 (1)	3.56	B-T	0 / 3794	0.34 (1)
AA'-F	-9724 / 0	-91.8	-91.8 0.47 (1)	3.56	M-J	0 / 3236	0.29 (1)
F-G	-9724 / 0	-91.8	-91.8 0.36 (1)	3.67	P-F	-909 / 0	0.12 (1)
G-H	-9724 / 0	-91.8	-91.8 0.36 (1)	3.67	P-H	0 / 3496	0.31 (1)
H-I	-6932 / 0	-91.8	-91.8 0.23 (1)	4.38			
I-J	-4107 / 0	-91.8	-91.8 0.11 (1)	5.53			
J-K	0 / 42	-91.8	-91.8 0.04 (1)	10.00			
U-B	-4566 / 0	0.0	0.0 0.16 (1)	6.74			
L-J	-3749 / 0	0.0	0.0 0.13 (1)	7.28			

U-AB	0 / 0	-18.5	-18.5	0.12 (†)	10.00
AB-T	0 / 0	-18.5	-18.5	0.12 (†)	10.00
T-AC	0 / 3533	-18.5	-18.5	0.35 (†)	10.00
AC-AD	0 / 3533	-18.5	-18.5	0.35 (†)	10.00
AD-AE	0 / 3533	-18.5	-18.5	0.35 (†)	10.00
AE-AF	0 / 3533	-18.5	-18.5	0.35 (†)	10.00
AF-AG	0 / 3533	-18.5	-18.5	0.35 (†)	10.00
G-S	0 / 3533	-18.5	-18.5	0.35 (†)	10.00
S-R	0 / 9724	-18.5	-18.5	0.74 (†)	10.00
RA-H	0 / 8108	-18.5	-18.5	0.60 (†)	10.00
H-Q	0 / 8108	-18.5	-18.5	0.60 (†)	10.00
Q-AI	0 / 8108	-18.5	-18.5	0.60 (†)	10.00
AI-J	0 / 8108	-18.5	-18.5	0.60 (†)	10.00
J-P	0 / 8108	-18.5	-18.5	0.60 (†)	10.00
P-O	0 / 6932	-18.5	-18.5	0.49 (†)	10.00
O-N	0 / 6932	-18.5	-18.5	0.49 (†)	10.00
N-M	0 / 3123	-18.5	-18.5	0.23 (†)	10.00
M-L	0 / 0	-18.5	-18.5	0.04 (4)	10.00

SPECIFIED CONCENTRATED LOADS (LBS)

LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
2-11-8	-30	-30	---	FRONT	VERT	DEAD	---	C1
2-11-8	-127	-127	---	FRONT	VERT	SNOW	---	C1
11-8-10	-53	-53	---	FRONT	VERT	DEAD	---	C1

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY
USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP	CH.	LL =	25.6	PSF
		DL =	6.0	PSF
BOT	CH.	LL =	0.0	PSF
		DL =	7.4	PSF
TOTAL LOAD		=	39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN ALL FLAT SECTIONS BASED ON A
SLOPE OF 6.00/12

*** NON STANDARD GIRDER ***
ADDIT'L USER-DEFINED LOADS APPLIED TO ALL
LOAD CASES

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR
SMALL BUILDING REQUIREMENTS OF PART 9,
NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.22")
ALLOWABLE DEFL.(TL)= L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.41")

CSI:TC=0.58/1.00 (C-D:1), BC=0.74/1.00 (R-S:1),
WB=0.60/1.00 (C-S:1), SSI=0.21/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)		(PLI)		(PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg

JSI GRIP= 0.90 (P) (INPUT = 0.90)
JSI METAL= 0.80 (E) (INPUT = 1.00)

CONTINUED ON PAGE 2

JOB NAME 406403	TRUSS NAME T9	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	TRUSS DESC.	DRWG NO.
---------------------------	-------------------------	----------------------	-----------------	-------------------------------	-------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:40 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-ZevqHz0g4eA UvtLXIMPEIP?5Tb5hfGI3UGeyTzCzkb

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-t	MT20	5.0	8.0	2.50	3.25
C	TTWW+m	MT20	8.0	9.0	Edge	6.50
D	TTWW+m	MT20	7.0	8.0		
E	TTWW-m	MT20	6.0	9.0	2.75	3.50
F	TMW+w	MT20	3.0	6.0		
G	TS-t	MT20	5.0	6.0		
H	TMW-t	MT20	5.0	6.0		
I	TTWW+m	MT20	7.0	8.0	3.25	1.50
J	TMVW-t	MT20	5.0	8.0	2.50	3.25
L	BMV1+p	MT20	3.0	6.0		
M	BMW-t	MT20	5.0	6.0		
N	BMW-t	MT20	5.0	6.0	2.50	2.75
O	BS-t	MT20	5.0	6.0		
P	BMWW-t	MT20	5.0	8.0	2.50	2.00
Q	BS-t	MT20	5.0	6.0		
R	BMW-t	MT20	5.0	6.0		
S	BMW-t	MT20	5.0	8.0	2.50	3.75
T	BMW-t	MT20	5.0	6.0		
U	BMV1+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)


1) Lateral braces to be a minimum of 2x4 SPF #2

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
E	11-8-10	-105	-105	---	BACK	VERT	TOTAL	---	C1
E	11-8-10	-233	-233	---	FRONT	VERT	SNOW	---	C1
P	18-6-8	-1534	-1534	---	BACK	VERT	TOTAL	---	C1
R	11-7-12	-27	-27	---	BACK	VERT	TOTAL	---	C1
V	4-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
W	8-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
X	7-7-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
Y	13-7-12	-100	-100	---	BACK	VERT	TOTAL	---	C1
Z	15-7-12	-100	-100	---	BACK	VERT	TOTAL	---	C1
AA	17-7-12	-100	-100	---	BACK	VERT	TOTAL	---	C1
AB	2-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AC	4-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AD	6-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AE	7-7-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AF	8-7-12	-27	-27	---	BACK	VERT	TOTAL	---	C1
AG	9-7-12	-27	-27	---	BACK	VERT	TOTAL	---	C1
AH	13-7-12	-27	-27	---	BACK	VERT	TOTAL	---	C1
AI	15-7-12	-27	-27	---	BACK	VERT	TOTAL	---	C1
AJ	17-7-12	-27	-27	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS


1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.



Structural component only
DWG# T-2115462

JOB NAME 411069	TRUSS NAME T9A	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:19 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-1MdP3y?RnaRf9CGg1bVqRnpF0JbIF55znJvXD1zD_Vg

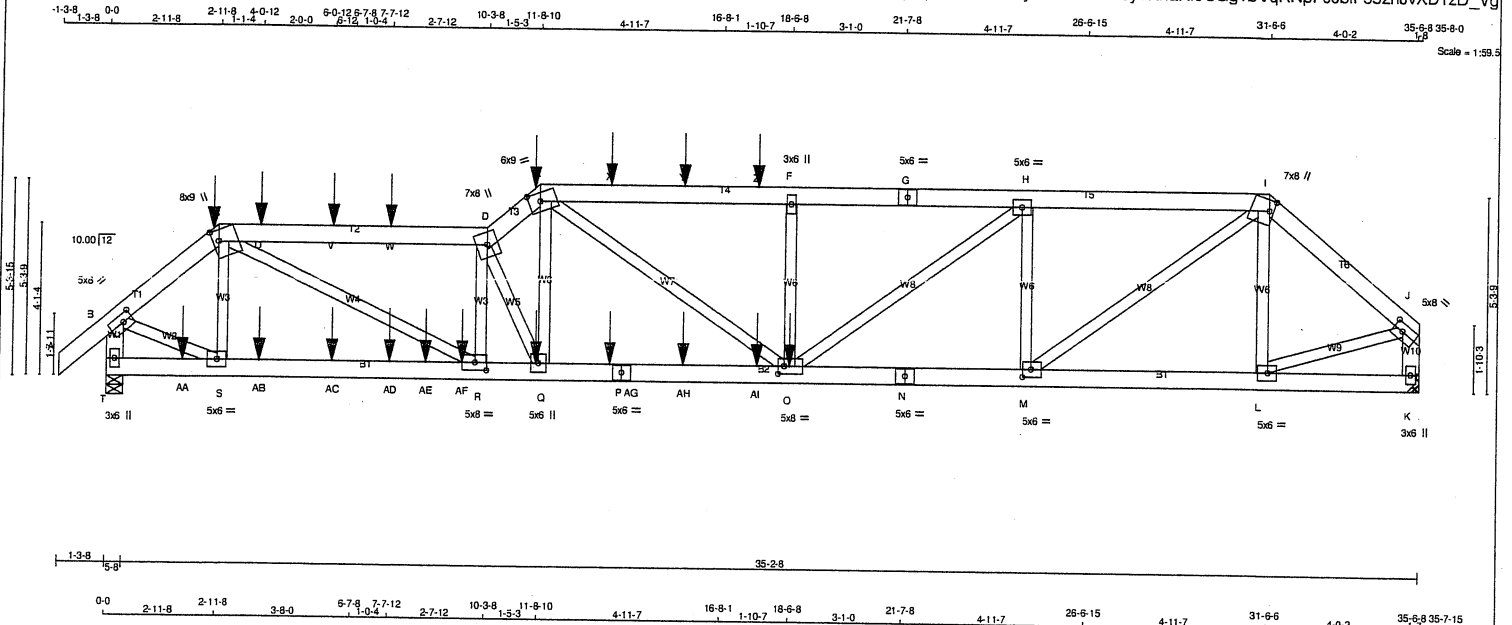

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411069	T9A	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:19 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulvzsQn-1MdP3y?RnaRf9CGq1bVgRNpF0JbIF55znJvXD1zD Vg

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-t	MT20	5.0	8.0	2.50	3.25
C	TTWW+m	MT20	8.0	9.0	3.50	1.75
D	TTWW+m	MT20	7.0	8.0		
E	TTWW-m	MT20	6.0	9.0	2.75	3.75
F	TMW+w	MT20	3.0	6.0		
G	TS-t	MT20	5.0	6.0		
H	TMW-W-t	MT20	5.0	6.0		
I	TTWW+m	MT20	7.0	8.0	3.50	1.50
J	TMW-W-t	MT20	5.0	8.0	2.50	3.25
K	BMW1+w	MT20	3.0	6.0		
L	BMW-W-t	MT20	5.0	6.0		
M	BMW-W-t	MT20	5.0	6.0	2.50	2.75
N	BS-t	MT20	5.0	6.0		
O	BMW-W-t	MT20	5.0	8.0	2.50	2.00
P	BS-t	MT20	5.0	6.0		
Q	BMW-W-t	MT20	5.0	6.0		
R	BMW-W-t	MT20	5.0	8.0	2.50	3.75
S	BMW-W-t	MT20	5.0	6.0		
T	BMV1+p	MT20	3.0	6.0		

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	2-11-8	-30	-30	---	FRONT	VERT	DEAD	---	C1
C	2-11-8	-127	-127	---	FRONT	VERT	SNOW	---	C1
E	11-8-10	-53	-53	---	FRONT	VERT	DEAD	---	C1
E	11-8-10	-105	-105	---	BACK	VERT	TOTAL	---	C1
E	11-8-10	-233	-233	---	FRONT	VERT	SNOW	---	C1
O	18-6-8	-1396	-1396	---	BACK	VERT	TOTAL	---	C1
Q	11-7-12	-27	-27	---	BACK	VERT	TOTAL	---	C1
U	4-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
V	6-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
W	7-7-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
X	13-7-12	-100	-100	---	BACK	VERT	TOTAL	---	C1
Y	15-7-12	-100	-100	---	BACK	VERT	TOTAL	---	C1
Z	17-7-12	-100	-100	---	BACK	VERT	TOTAL	---	C1
AA	2-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AB	4-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AC	6-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AD	7-7-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AE	8-7-12	-27	-27	---	BACK	VERT	TOTAL	---	C1
AF	9-7-12	-27	-27	---	BACK	VERT	TOTAL	---	C1
AG	13-7-12	-27	-27	---	BACK	VERT	TOTAL	---	C1
AH	15-7-12	-27	-27	---	BACK	VERT	TOTAL	---	C1
AI	17-7-12	-27	-27	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS


1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.



Structural component only
DWG# T-2115515 *m*

JOB NAME 406403	TRUSS NAME T10	QUANTITY 4	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:41 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-1qTCVJ1Iryr53SX5TienzyFbt4rQ4CRI80oVwzCzka

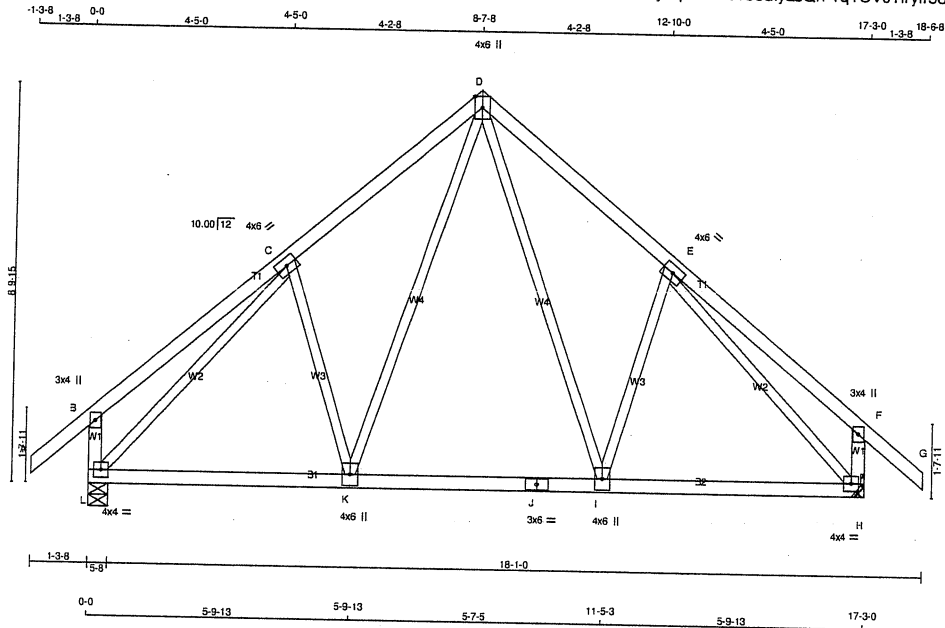

Scale = 1/48.6

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4 DRY	No.2	SPF
D - G	2x4 DRY	No.2	SPF
L - B	2x4 DRY	No.2	SPF
H - F	2x4 DRY	No.2	SPF
L - J	2x4 DRY	No.2	SPF
J - H	2x4 DRY	No.2	SPF
ALL WEBS	2x3 DRY	No.2	SPF
EXCEPT			

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
C	TMVW+t	MT20	4.0	6.0		
D	TTWV+p	MT20	4.0	6.0	Edge	
E	TMVW+t	MT20	4.0	6.0		
F	TMV+p	MT20	3.0	4.0		
H	BMVW1+t	MT20	4.0	4.0		
I	BMVW+t	MT20	4.0	6.0		
J	BS+t	MT20	3.0	6.0		
K	BMVW+t	MT20	4.0	6.0		
L	BMVW1+t	MT20	4.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQRD
JT	GROSS REACTION	GROSS REACTION	BRG	BRG	
L	VERT	DOWN	HORZ	UPLIFT	IN-SX
L	1078	0	1078	0	5-8
H	1078	0	1078	0	MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 3-8.

UNFACTORED REACTIONS

JT	1ST LCASE	MAX/MIN. COMPONENT REACTIONS					
L	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
L	760	512 / 0	0 / 0	0 / 0	0 / 0	248 / 0	0 / 0
H	760	512 / 0	0 / 0	0 / 0	0 / 0	248 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 41	-91.8 -91.8	0.13 (1)	10.00	D-I	0 / 358	0.08 (1)
B-C	0 / 30	-91.8 -91.8	0.28 (1)	10.00	I-E	-236 / 0	0.11 (1)
C-D	-801 / 0	-91.8 -91.8	0.22 (1)	6.25	K-D	0 / 358	0.08 (1)
D-E	-801 / 0	-91.8 -91.8	0.22 (1)	6.25	C-K	-236 / 0	0.11 (1)
E-F	0 / 30	-91.8 -91.8	0.28 (1)	10.00	L-C	-1008 / 0	0.75 (1)
F-G	0 / 41	-91.8 -91.8	0.13 (1)	10.00	E-H	-1008 / 0	0.75 (1)
L-B	-276 / 0	0.0 0.0	0.03 (1)	7.81			
H-F	-276 / 0	0.0 0.0	0.03 (1)	7.81			
L-K	0 / 665	-18.5 -18.5	0.19 (4)	10.00			
K-J	0 / 481	-18.5 -18.5	0.18 (4)	10.00			
J-I	0 / 481	-18.5 -18.5	0.18 (4)	10.00			
I-H	0 / 665	-18.5 -18.5	0.19 (4)	10.00			

TOTAL WEIGHT = 4 X 84 = 338 lb [M/F]

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6 PSF
	DL = 6.0 PSF
BOT CH.	LL = 0.0 PSF
	DL = 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.57")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL)= L/360 (0.57")
CALCULATED VERT. DEFL.(TL) = L/999 (0.05")

CSI: TC=0.28/1.00 (B-C:1), BC=0.19/1.00 (K-L:4),
WB=0.75/1.00 (C-L:1), SSI=0.15/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.77 (H) (INPUT = 0.90)
JSI METAL= 0.25 (C) (INPUT = 1.00)




Structural component only
DWG# T-2115463

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411069	T10A	2	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:21 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-zl9Ue1hJBhNOWP28?XIWovf06NAjy2GFdOeHwzD_Ve

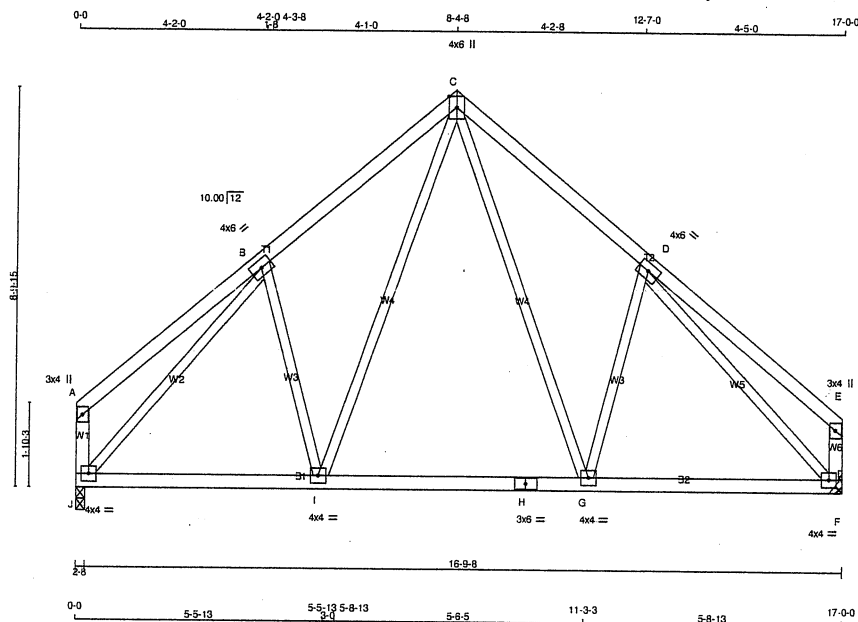

TOTAL WEIGHT = 2 X 80 = 160 lb

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x4	DRY	No.2	
C - E	2x4	DRY	No.2	
J - A	2x4	DRY	No.2	
F - E	2x4	DRY	No.2	
J - H	2x4	DRY	No.2	
H - F	2x4	DRY	No.2	

ALL WEBS 2x3 DRY No.2
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMV+p	MT20	3.0	4.0		
B	TMWV-t	MT20	4.0	6.0		
C	TTWW+p	MT20	4.0	6.0	Edge	
D	TMWV-t	MT20	4.0	6.0		
E	TMV+p	MT20	3.0	4.0		
F	BMWV1-t	MT20	4.0	4.0		
G	BMWV-t	MT20	4.0	4.0		
H	BS-t	MT20	3.0	6.0		
I	BMWV-t	MT20	4.0	4.0		
J	BMWV1-t	MT20	4.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES - (1)

1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	DOWN	HORZ	UPLIFT
J	937	0	0	2-8
F	937	0	0	2-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 3-8.

UNFACTORED REACTIONS

	1ST LCASE	MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
J	663	435 / 0	0 / 0	0 / 0	0 / 0	228 / 0	0 / 0
F	663	435 / 0	0 / 0	0 / 0	0 / 0	228 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 30	-91.8	-91.8 0.26 (1)	10.00	C-G	0 / 370	0.08 (1)
B-C	-772 / 0	-91.8	-91.8 0.21 (1)	6.25	G-D	-241 / 0	0.11 (1)
C-D	-793 / 0	-91.8	-91.8 0.22 (1)	6.25	J-B	-985 / 0	0.68 (1)
D-E	0 / 30	-91.8	-91.8 0.28 (1)	10.00	D-F	-992 / 0	0.74 (1)
J-A	-137 / 0	0.0	0.0 0.02 (1)	7.81	I-C	0 / 323	0.07 (1)
F-E	-149 / 0	0.0	0.0 0.02 (1)	7.81	B-I	-199 / 0	0.09 (1)
J-I	0 / 628	-18.5	-18.5 0.18 (4)	10.00			
I-H	0 / 466	-18.5	-18.5 0.18 (4)	10.00			
H-G	0 / 466	-18.5	-18.5 0.18 (4)	10.00			
G-F	0 / 654	-18.5	-18.5 0.19 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.57")
CALCULATED VERT. DEFL.(LL) = L / 999 (0.02")
ALLOWABLE DEFL.(TL)= L/360 (0.57")
CALCULATED VERT. DEFL.(TL) = L / 999 (0.04")

CSI: TC=0.28/1.00 (D-E:1), BC=0.19/1.00 (F-G:4),
WB=0.74/1.00 (D-F:1), SSI=0.15/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.81 (B) (INPUT = 0.90)
JSI METAL= 0.24 (D) (INPUT = 1.00)



Structural component only
DWG# T-2115516

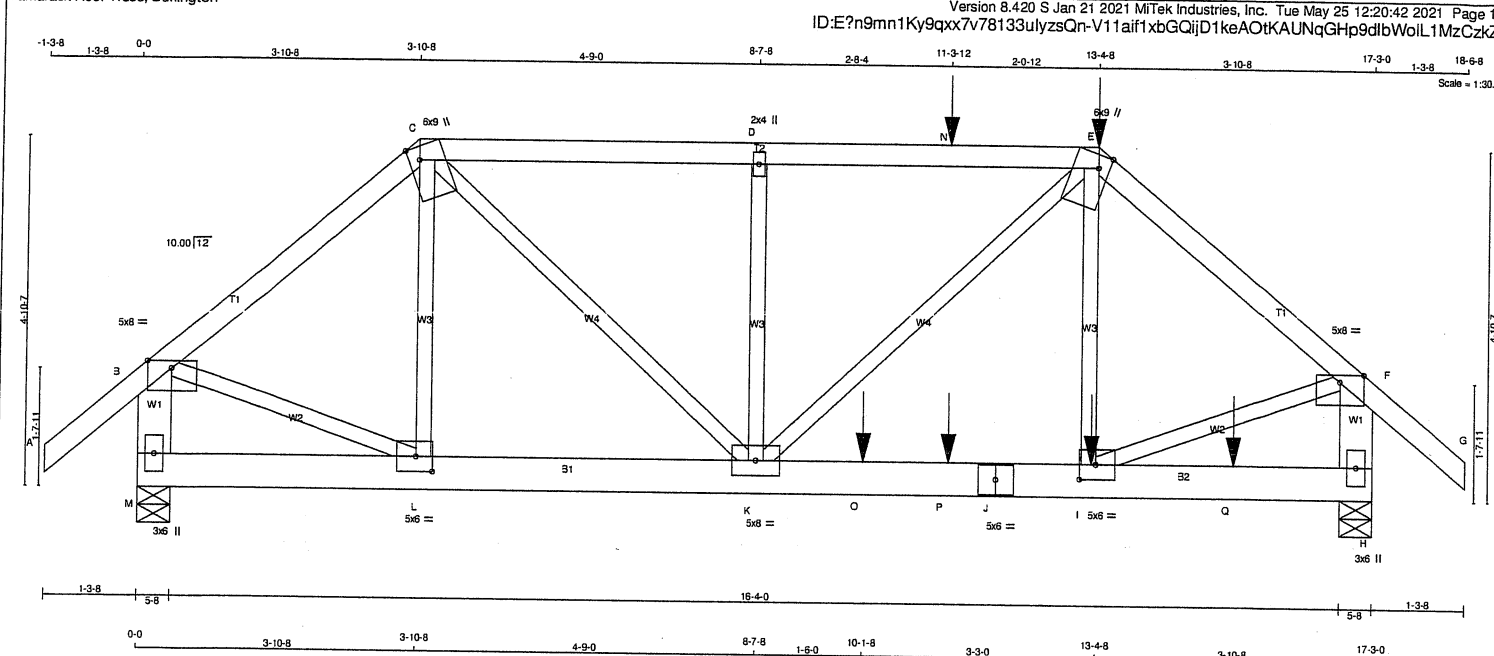

LUMBER
N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2 SPF
C - E	2x4	DRY	No.2 SPF
E - G	2x4	DRY	No.2 SPF
M - B	2x6	DRY	No.2 SPF
H - F	2x6	DRY	No.2 SPF
M - J	2x6	DRY	No.2 SPF
J - H	2x6	DRY	No.2 SPF
ALL WEBS EXCEPT	2x3	DRY	No.2 SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	8.0	Edge	1.75
C	TTWW+m	MT20	6.0	9.0	Edge	1.75
D	TMVW+w	MT20	2.0	4.0		
E	TTWW+m	MT20	6.0	9.0	Edge	1.75
F	TMVW-p	MT20	5.0	8.0	Edge	
H	BMV1-p	MT20	3.0	6.0		
I	BMVW-t	MT20	5.0	6.0	2.50	2.75
J	BS-t	MT20	5.0	6.0		
K	BMVW-t	MT20	5.0	6.0		
L	BMVW-t	MT20	5.0	6.0	2.50	2.75
M	BMV1-p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG IN-SX	REQD BRG IN-SX
	VERT	HORZ	DOWN	UPLIFT		
M	1571	0	1571	0	5-8	5-8
H	1931	0	1931	0	5-8	5-8

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED		MAX./MIN. COMPONENT REACTIONS		WIND	DEAD	SOIL
	SNOW	LIVE	PERM.LIVE	LIVE			
M	1106	755 / 0	0 / 0	0 / 0	0 / 0	350 / 0	0 / 0
H	1359	928 / 0	0 / 0	0 / 0	0 / 0	431 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) M, H

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.16 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

MEMB.	CHORDS MAX. FACTORED FORCE (LBS)		FACTORED VERT. LOAD LC1 MAX (PLF)		MAX. UNBRACED LENGTH	MEMB.	WEBS MAX. FACTORED FORCE (LBS)	
	FROM	TO	FROM	TO			FROM	TO
A-B	0 / 41	-91.8	-91.8	0.14 (1)	10.00	L-C	-333 / 0	0.11 (1)
B-C	-1389 / 0	-91.8	-91.8	0.31 (1)	5.13	C-K	0 / 1280	0.32 (1)
C-D	-1988 / 0	-91.8	-91.8	0.50 (1)	4.16	K-D	-568 / 0	0.19 (1)
D-N	-1988 / 0	-91.8	-91.8	0.50 (1)	4.16	K-E	0 / 750	0.19 (1)
N-E	-1988 / 0	-91.8	-91.8	0.50 (1)	4.16	E-I	0 / 105	0.04 (4)
E-F	-1881 / 0	-91.8	-91.8	0.34 (1)	4.52	B-L	0 / 1113	0.28 (1)
F-G	0 / 41	-91.8	-91.8	0.14 (1)	10.00	I-F	0 / 1507	0.37 (1)
M-B	-1524 / 0	0.0	0.0	0.11 (1)	7.81			
H-F	-1956 / 0	0.0	0.0	0.14 (1)	7.16			
M-L	0 / 0	-18.5	-18.5	0.04 (1)	10.00			
L-K	0 / 1056	-18.5	-18.5	0.37 (1)	10.00			
K-O	0 / 1442	-18.5	-18.5	0.72 (1)	10.00			
O-P	0 / 1442	-18.5	-18.5	0.72 (1)	10.00			
P-J	0 / 1442	-18.5	-18.5	0.72 (1)	10.00			
J-I	0 / 1442	-18.5	-18.5	0.72 (1)	10.00			
I-Q	0 / 0	-18.5	-18.5	0.21 (1)	10.00			
Q-H	0 / 0	-18.5	-18.5	0.21 (1)	10.00			

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
E	13-4-8	-174	-174	---	FRONT	VERT	TOTAL	---	C1
I	13-3-12	-14	-14	---	FRONT	VERT	TOTAL	---	C1
N	11-3-12	-59	-59	---	FRONT	VERT	TOTAL	---	C1
O	10-1-8	-671	-671	---	FRONT	VERT	TOTAL	---	C1
P	11-3-12	-14	-14	---	FRONT	VERT	TOTAL	---	C1
Q	15-3-12	-14	-14	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS
1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.58")
CALCULATED VERT. DEFL.(LL) = L/999 (0.07")
ALLOWABLE DEFL.(TL) = L/360 (0.58")
CALCULATED VERT. DEFL.(TL) = L/999 (0.12")

CSI: TC=0.50/1.00 (D-E:1), BC=0.72/1.00 (I-K:1), WB=0.37/1.00 (F-I:1), SS=0.47/1.00 (I-K:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.75 (L) (INPUT = 0.90)
JSI METAL= 0.40 (J) (INPUT = 1.00)



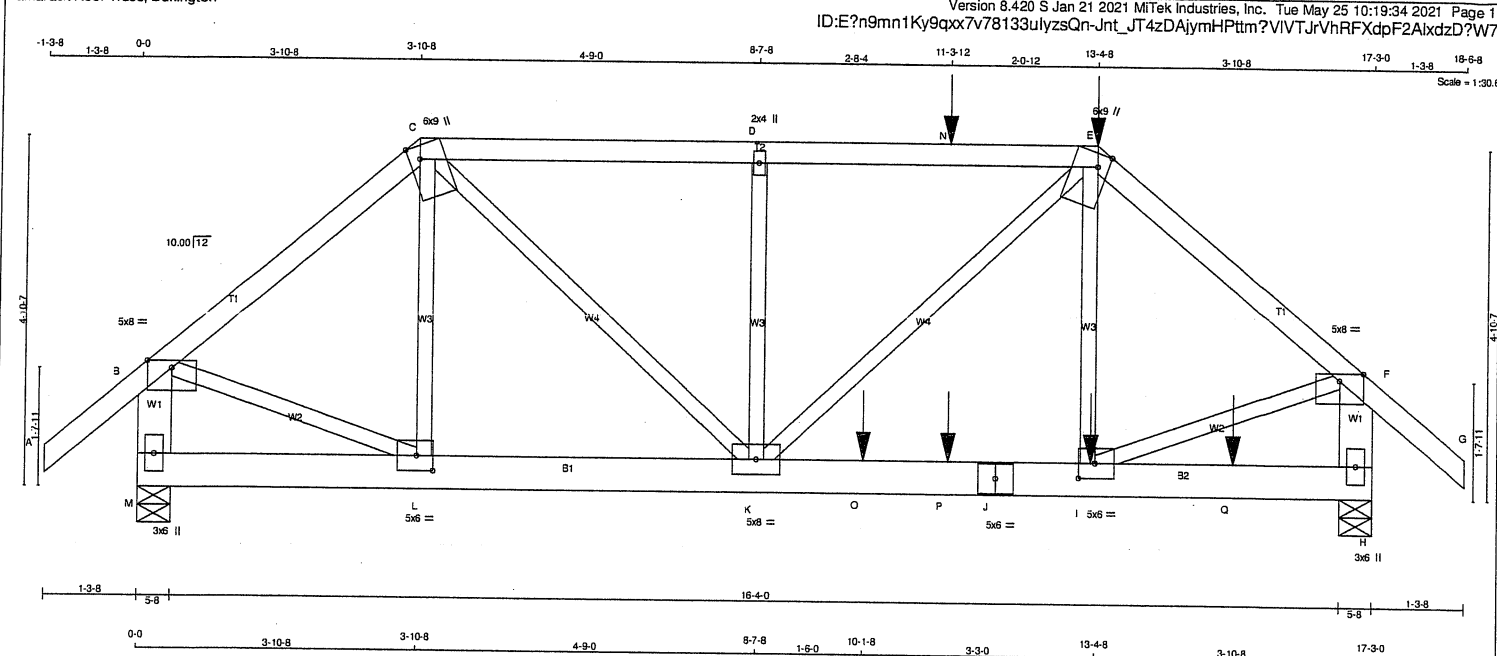

LUMBER

N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY No.2	SPF
C - E	2x4	DRY No.2	SPF
E - G	2x4	DRY No.2	SPF
H - B	2x6	DRY No.2	SPF
M - F	2x6	DRY No.2	SPF
M - J	2x6	DRY No.2	SPF
J - H	2x6	DRY No.2	SPF
ALL WEBS EXCEPT	2x3	DRY No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	8.0	Edge	
C	TTWW+m	MT20	6.0	9.0	Edge	1.75
D	TMW+w	MT20	2.0	4.0		
E	TTWW+m	MT20	6.0	9.0	Edge	1.75
F	TMVW-p	MT20	5.0	8.0	Edge	
H	BMV1+p	MT20	3.0	6.0		
I	BMVW-t	MT20	5.0	6.0		2.50 2.75
J	BS-t	MT20	5.0	6.0		
K	BMVW-t	MT20	5.0	6.0		
L	BMVW-t	MT20	5.0	6.0		2.50 2.75
M	BMV1+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG
	VERT	HORZ	DOWN	HORZ		
M	1654	0	1654	0	5-8	5-8
H	2029	0	2029	0	5-8	5-8

UNFACTORED REACTIONS

JT	MAX./MIN. COMPONENT REACTIONS						
	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
M	1164	794 / 0	0 / 0	0 / 0	0 / 0	370 / 0	0 / 0
H	1429	972 / 0	0 / 0	0 / 0	0 / 0	457 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) M, H

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM TO	LENGTH	FR-TO			
A-B	0 / 41	-91.8 -91.8	0.14 (1)	10.00	L-C	-379 / 0	0.13 (1)
B-C	-1478 / 0	-91.8 -91.8	0.31 (1)	5.00	C-K	0 / 1428	0.35 (1)
C-D	-2163 / 0	-91.8 -91.8	0.51 (1)	4.00	K-D	-566 / 0	0.19 (1)
D-N	-2163 / 0	-91.8 -91.8	0.51 (1)	4.00	K-E	0 / 854	0.21 (1)
N-E	-2163 / 0	-91.8 -91.8	0.51 (1)	4.00	E-I	0 / 121	0.05 (4)
E-F	-2009 / 0	-91.8 -91.8	0.35 (1)	4.38	B-L	0 / 1184	0.29 (1)
F-G	0 / 41	-91.8 -91.8	0.14 (1)	10.00	I-F	0 / 1610	0.40 (1)
M-B	-1603 / 0	0.0 0.0	0.12 (1)	7.73			
H-F	-2069 / 0	0.0 0.0	0.15 (1)	7.01			
M-L	0 / 0	-18.5 -18.5	0.05 (1)	10.00			
L-K	0 / 1124	-18.5 -18.5	0.43 (1)	10.00			
K-O	0 / 1542	-18.5 -18.5	0.85 (1)	10.00			
O-P	0 / 1542	-18.5 -18.5	0.85 (1)	10.00			
P-J	0 / 1542	-18.5 -18.5	0.85 (1)	10.00			
J-I	0 / 1542	-18.5 -18.5	0.85 (1)	10.00			
I-Q	0 / 0	-18.5 -18.5	0.25 (1)	10.00			
Q-H	0 / 0	-18.5 -18.5	0.25 (1)	10.00			

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
E	13-4-8	-145	-145	---	FRONT	VERT	TOTAL	---	C1
I	13-3-12	-14	-14	---	FRONT	VERT	TOTAL	---	C1
N	11-3-12	-59	-59	---	FRONT	VERT	TOTAL	---	C1
O	10-1-8	-828	-828	---	FRONT	VERT	TOTAL	---	C1
P	11-3-12	-14	-14	---	FRONT	VERT	TOTAL	---	C1
Q	15-3-12	-14	-14	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.58")
CALCULATED VERT. DEFL.(LL) = L/999 (0.07")
ALLOWABLE DEFL.(TL)= L/360 (0.58")
CALCULATED VERT. DEFL.(TL) = L/999 (0.13")

CSI: TC=0.51/1.00 (D-E:1), BC=0.85/1.00 (I-K:1), WB=0.40/1.00 (F-I:1), SS=0.57/1.00 (H-K:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.81 (L) (INPUT = 0.90)
JSI METAL= 0.45 (J) (INPUT = 1.00)





UNFACTORED REACTIONS							
	1ST LCASE	MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
K	760	512 / 0	0 / 0	0 / 0	0 / 0	248 / 0	0 / 0
G	760	512 / 0	0 / 0	0 / 0	0 / 0	248 / 0	0 / 0

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL =	25.6	PSF
	DL =	6.0	PSF
BOT CH.	LL =	0.0	PSF
	DL =	7.4	PSF
TOTAL LOAD	=	39.0	PSF

LOADING IN FLAT SECTION BASED ON A SLOPE
OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR
SMALL BUILDING REQUIREMENTS OF PART 9,
NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= $L/360$ (0.57")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.01")
ALLOWABLE DEFL.(TL)= $L/360$ (0.57")
CALCULATED VERT. DEFL. (TL) = $L/999$ (0.05")

CSI: TC=0.42/1.00 (D-E:1), BC=0.19/1.00 (H-J:4),
WB=0.14/1.00 (E-H:1), SSI=0.20/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT
RESPONSIBLE FOR QUALITY CONTROL IN THE
TRUSS MANUFACTURING PLANT

PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)		(PLI)		(PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

USI GRIP= 0.67 (J) (INPUT = 0.90)
USI METAL= 0.43 (E) (INPUT = 1.00)

$\chi^2 = 0.75$ ($df = 1$, $p = 0.38$)

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.21 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)


CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX. CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM TO			FR-TO		
A-B	0 / 41	-91.8	-91.8 0.13 (1)	10.00	J-C	-19 / 80	0.03 (4)
B-C	-785 / 0	-91.8	-91.8 0.42 (1)	6.22	C-H	0 / 2	0.00 (4)
C-D	-602 / 0	-91.8	-91.8 0.36 (1)	6.25	H-D	-17 / 82	0.03 (4)
D-E	-786 / 0	-91.8	-91.8 0.42 (1)	6.21	B-J	0 / 616	0.14 (1)
E-F	0 / 41	-91.8	-91.8 0.13 (1)	10.00	H-E	0 / 617	0.14 (1)
K-B	-1032 / 0	0.0	0.0 0.11 (1)	7.72			
G-E	-1031 / 0	0.0	0.0 0.11 (1)	7.72			

K-J	0 / 0	-18.5	-18.5	0.13 (4)	10.00
J-I	0 / 602	-18.5	-18.5	0.19 (4)	10.00
I-H	0 / 602	-18.5	-18.5	0.19 (4)	10.00
H-G	0 / 0	-18.5	-18.5	0.14 (4)	10.00



JOB NAME 406403	TRUSS NAME T13	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:44 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-RP9L7L3B7tgQyWB6mbQLPbana41XdT7u_6ES5FzCzkX

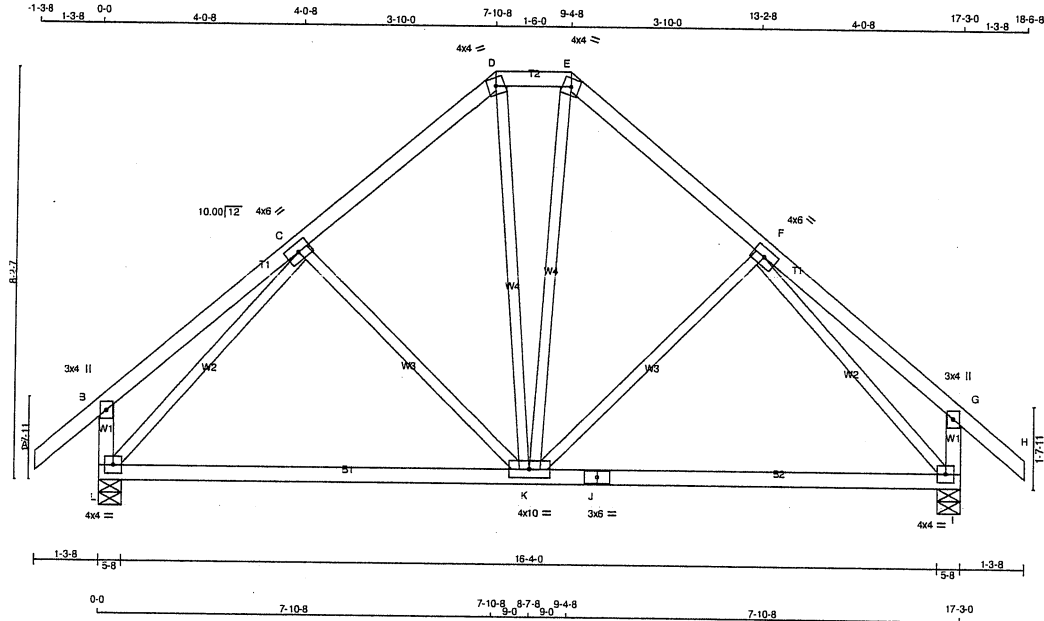

Scale = 1/4" = 1'-0"

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - D	2x4	DRY	No.2
D - E	2x4	DRY	No.2
E - H	2x4	DRY	No.2
L - B	2x4	DRY	No.2
I - G	2x4	DRY	No.2
L - J	2x4	DRY	No.2
J - I	2x4	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
C	TMVW-t	MT20	4.0	6.0		
D	TTW-m	MT20	4.0	4.0		
E	TTW-m	MT20	4.0	4.0		
F	TMVW-t	MT20	4.0	6.0		
G	TMV+p	MT20	3.0	4.0		
I	BMVW1-t	MT20	4.0	4.0		
J	BS-t	MT20	3.0	6.0		
K	BMVWW-t	MT20	4.0	10.0		
L	BMVW1-t	MT20	4.0	4.0		

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	RECORD BRG
JT	VERT	HORZ	DOWN	HORZ
L	1078	0	1078	0
I	1078	0	1078	0

UNFACTORED REACTIONS

JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
L	760	512 / 0	0 / 0	0 / 0	0 / 0	248 / 0	0 / 0
I	760	512 / 0	0 / 0	0 / 0	0 / 0	248 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L, I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 MAX CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX FACTORED CSI (LC)	
FR-TO		FROM	TO	FR-TO			
A-B	0 / 41	-91.8	-91.8 0.13 (1)	10.00	C-K	-180 / 0	0.14 (1)
B-C	0 / 27	-91.8	-91.8 0.23 (1)	10.00	K-F	-180 / 0	0.14 (1)
C-D	-701 / 0	-91.8	-91.8 0.18 (1)	6.25	L-C	-992 / 0	0.61 (1)
D-E	-538 / 0	-91.8	-91.8 0.03 (1)	6.25	F-I	-992 / 0	0.61 (1)
E-F	-701 / 0	-91.8	-91.8 0.18 (1)	6.25	D-K	0 / 225	0.05 (1)
F-G	0 / 27	-91.8	-91.8 0.23 (1)	10.00	K-E	0 / 225	0.05 (1)
G-H	0 / 41	-91.8	-91.8 0.13 (1)	10.00			
L-B	-264 / 0	0.0	0.0 0.03 (1)	7.81			
I-G	-264 / 0	0.0	0.0 0.03 (1)	7.81			
L-K	0 / 646	-18.5	-18.5 0.45 (4)	10.00			
K-J	0 / 646	-18.5	-18.5 0.45 (4)	10.00			
J-I	0 / 646	-18.5	-18.5 0.45 (4)	10.00			

TOTAL WEIGHT = 84 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.58")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.58")
CALCULATED VERT. DEFL.(TL) = L/999 (0.12")

CSI: TC=0.23/1.00 (B-C:1), BC=0.45/1.00 (I-K:4), WB=0.61/1.00 (C-L:1), SS=0.13/1.00 (K-L:4)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.76 (L) (INPUT = 0.90)
JSI METAL= 0.33 (J) (INPUT = 1.00)



Structural component only
DWG# T-2115466

JOB NAME 406403	TRUSS NAME T14	QUANTITY 2	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:45 2021 Page 1
ID:E?n9mn1Ky9qx7v78133ulyzsQn-vcjLh4puBoHagmIKIaxp6xKURiM3w1Cm_?ehzCzkW

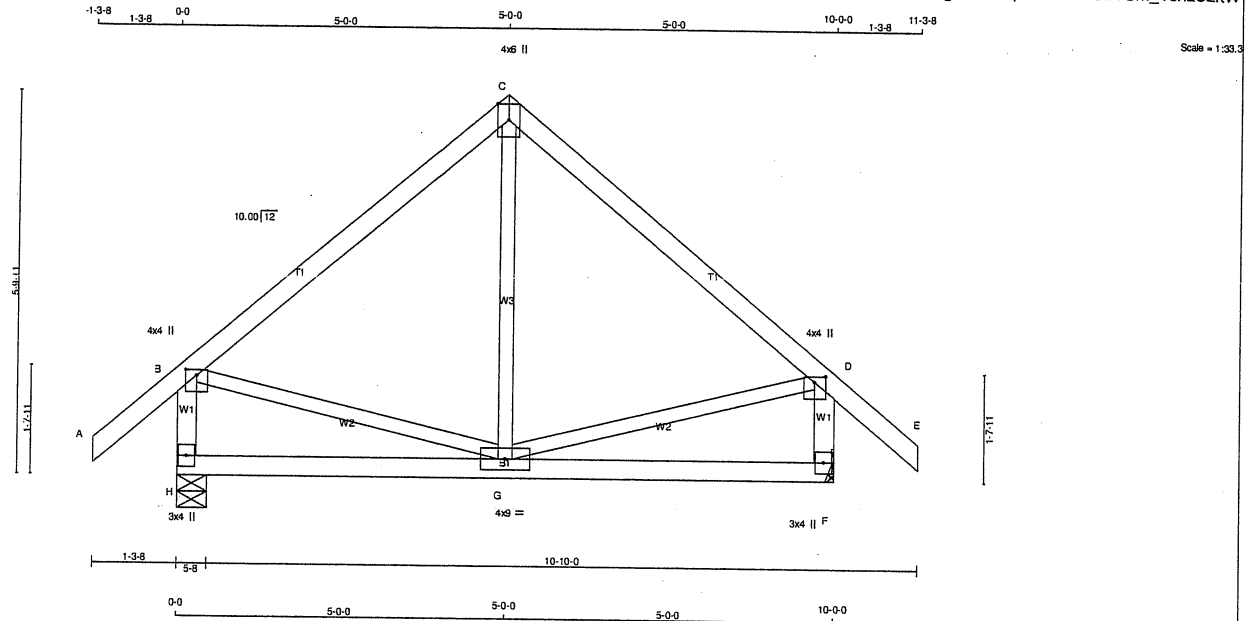

LUMBER				DESCR.	
N. L. G. A. RULES	CHORDS	SIZE	LUMBER		
A - C	2x4	DRY	No.2	SPF	
C - E	2x4	DRY	No.2	SPF	
H - B	2x4	DRY	No.2	SPF	
F - D	2x4	DRY	No.2	SPF	
H - F	2x4	DRY	No.2	SPF	
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	RECORD
JT	GROSS REACTION	GROSS REACTION	DOWN	BRG	BRG
H	678	0	678	0	5-8
F	678	0	678	0	5-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS				
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD
H	477	327 / 0	0 / 0	0 / 0	0 / 0	151 / 0
F	477	327 / 0	0 / 0	0 / 0	0 / 0	151 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	MAX. LC1 (LC)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. LC1 (LC)
FR-TO		FROM	TO		FR-TO		
A-B	0 / 41	-91.8	-91.8	0.13 (1)	10.00	G-C	-23 / 78
B-C	-341 / 0	-91.8	-91.8	0.29 (1)	6.25	B-G	0 / 270
C-D	-341 / 0	-91.8	-91.8	0.29 (1)	6.25	G-D	0 / 270
D-E	0 / 41	-91.8	-91.8	0.13 (1)	10.00		
H-B	-643 / 0	0.0	0.0	0.07 (1)	7.81		
F-D	-643 / 0	0.0	0.0	0.07 (1)	7.81		
H-G	0 / 0	-18.5	-18.5	0.13 (4)	10.00		
G-F	0 / 0	-18.5	-18.5	0.13 (4)	10.00		

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	4.0	1.00	2.00
C	TTW+p	MT20	4.0	6.0	Edge	
D	TMVW+p	MT20	4.0	4.0	1.00	2.00
F	BMV1+p	MT20	3.0	4.0		
G	BMVWW-t	MT20	4.0	9.0		
H	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES-

- (1) Lateral braces to be a minimum of 2x4 SPF #2

TOTAL WEIGHT = 2 X 45 = 91 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
	DL	= 6.0	PSF
BOT CH.	LL	= 0.0	PSF
	DL	= 7.4	PSF
TOTAL LOAD		= 39.0	PSF

SPACING = 24.0 IN./C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.33")
CALCULATED VERT. DEFL.(LL)= L/999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.33")
CALCULATED VERT. DEFL.(TL)= L/999 (0.02")

CSI: TC=0.29/1.00 (B-C:1), BC=0.13/1.00 (F-G:4),
WB=0.06/1.00 (B-G:1), SSI=0.14/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX	MIN	MAX	MIN
MT20	650	371	1747
		788	1987

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.53 (D) (INPUT = 0.90)
JSI METAL= 0.14 (D) (INPUT = 1.00)




Structural component only
DWG# T-2115467

JOB NAME 411069	TRUSS NAME T14S	QUANTITY 2	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
---------------------------	---------------------------	----------------------	-----------------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:22 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-RxIXh_1J4VpE0g_Fij3X30Rt7WkDSYNPUH7BpMzD_Vd

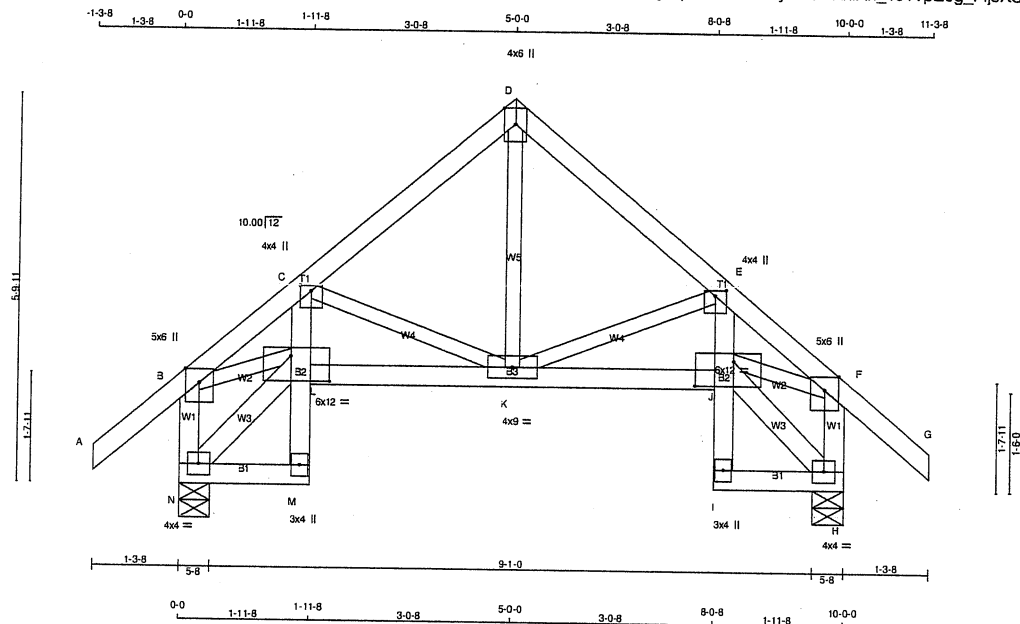

Scale = 1:32.9

LUMBER			
N.L.G.A. RULES	CHORDS	SIZE	LUMBER
A - D	2x4	DRY	No.2
D - G	2x4	DRY	No.2
N - B	2x4	DRY	No.2
H - F	2x4	DRY	No.2
N - M	2x4	DRY	No.2
M - C	2x4	DRY	No.2
L - J	2x4	DRY	No.2
I - E	2x4	DRY	No.2
I - H	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			
N - L	2x4	DRY	No.2
J - H	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	5.0	6.0	Edge	
C	TMVW+p	MT20	4.0	4.0	1.00	2.00
D	TTW+p	MT20	4.0	6.0	Edge	
E	TMVW+p	MT20	4.0	4.0	1.00	2.00
F	TMVW+p	MT20	5.0	6.0	Edge	
H	BMVW-1	MT20	4.0	4.0		
I	BMV+p	MT20	3.0	4.0		
J	BMVW-1	MT20	6.0	12.0	4.50	7.00
K	BMVW-1	MT20	4.0	9.0		
L	BMVW-1	MT20	6.0	12.0	4.50	7.00
M	BMV+p	MT20	3.0	4.0		
N	BMVW-1	MT20	4.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES: (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT	REQD
JT	VERT	DOWN	UP	BRG	BRG
N	678	0	678	0	5-8
H	678	0	678	0	5-8

UNFACTORED REACTIONS

1ST LCASE	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
JT	477	327 / 0	0 / 0	0 / 0	0 / 0	151 / 0	0 / 0
H	477	327 / 0	0 / 0	0 / 0	0 / 0	151 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. VERT. LOAD (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. VERT. LOAD (LC)	
FR-TO		FROM	TO	FR-TO			
A-B	0 / 41	-91.8	-91.8	0.13 (1)	10.00	K-D	0 / 286
B-C	-889 / 0	-91.8	-91.8	0.10 (1)	6.25	K-E	-404 / 0
C-D	-439 / 0	-91.8	-91.8	0.12 (1)	6.25	C-K	-404 / 0
D-E	-439 / 0	-91.8	-91.8	0.12 (1)	6.25	N-L	-29 / 0
E-F	-889 / 0	-91.8	-91.8	0.10 (1)	6.25	B-L	0 / 688
F-G	0 / 41	-91.8	-91.8	0.13 (1)	10.00	J-H	-29 / 0
N-B	-642 / 0	0.0	0.0	0.07 (1)	7.81	J-F	0 / 688
H-F	-642 / 0	0.0	0.0	0.07 (1)	7.81		
N-M	0 / 21	-18.5	-18.5	0.02 (4)	10.00		
M-L	0 / 19	0.0	0.0	0.05 (1)	10.00		
L-C	0 / 219	0.0	0.0	0.08 (1)	10.00		
L-K	0 / 705	-18.5	-18.5	0.14 (1)	10.00		
K-J	0 / 705	-18.5	-18.5	0.14 (1)	10.00		
I-J	0 / 19	0.0	0.0	0.05 (1)	10.00		
J-E	0 / 219	0.0	0.0	0.08 (1)	10.00		
I-H	0 / 21	-18.5	-18.5	0.02 (4)	10.00		

TOTAL WEIGHT = 2 X 55 = 109 lb [M/F]

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.33")
CALCULATED VERT. DEFL.(LL) = L/999 (0.01")
ALLOWABLE DEFL.(TL) = L/360 (0.33")
CALCULATED VERT. DEFL.(TL) = L/999 (0.03")

CSI: TC=0.13/1.00 (F-G:1), BC=0.14/1.00 (K-L:1), WB=0.15/1.00 (B-L:1), SS=0.10/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.53 (B) (INPUT = 0.90)
JSI METAL= 0.34 (F) (INPUT = 1.00)




Structural component only
DWG# T-2115517

JOB NAME 406403	TRUSS NAME T15	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	-------------------------------	-------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:46 2021 Page 1
ID:E?n9mn1Ky9qx7v78133ulyzsQn-OoH5Y15RfUw8CqLv0TpU0f9DujK5RnBRQjZA7zCzkV

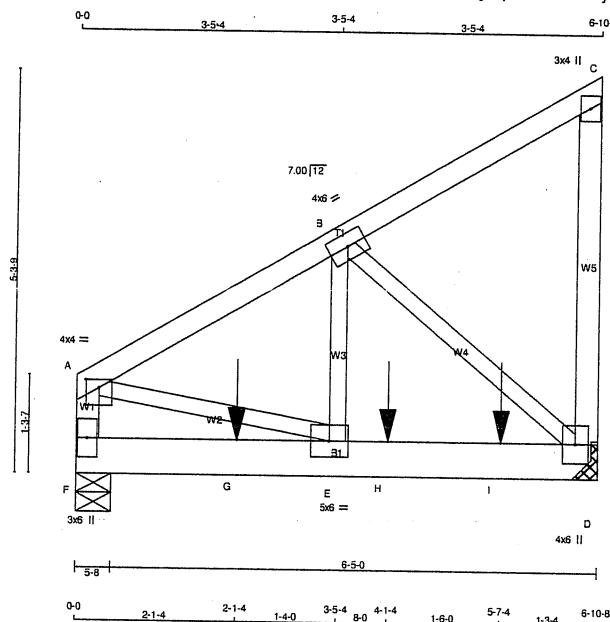

Scale = 1:28.9

LUMBER				
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
F - A	2x4	DRY	No.2	SPF
A - C	2x4	DRY	No.2	SPF
D - C	2x4	DRY	No.2	SPF
F - D	2x6	DRY	No.2	SPF
ALL WEBS 2x3 DRY No.2 SPF				
DRY: SEASONED LUMBER.				

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
F-A 1	12	TOP
A-C 1	12	TOP
C-D 1	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
F-D 2	12	SIDE (0.0)
WEBS : (0.122"x3") SPIRAL NAILS		
2x3 1	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TMVW-p	MT20	4.0	4.0	1.25 2.00
B	TMVW-t	MT20	4.0	6.0	
C	TMV-p	MT20	3.0	4.0	
D	BMVW1-p	MT20	4.0	6.0	
E	BMVW-t	MT20	5.0	6.0	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG
	VERT	HORZ	DOWN	HORZ		
F	1737	0	1737	0	5-8	5-8
D	2199	0	2199	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT D. MINIMUM BEARING LENGTH AT JOINT D = 4-0.

UNFACTORED REACTIONS

JT	1ST LOASE COMBINED		MAX./MIN. COMPONENT REACTIONS		WIND	DEAD	SOIL
	SNOW	LIVE	PERM.LIVE	WIND			
F	1223	832 / 0	0 / 0	0 / 0	0 / 0	391 / 0	0 / 0
D	1548	1056 / 0	0 / 0	0 / 0	0 / 0	492 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS MAX. FACTORED FORCE (LBS)		FACTORED VERT. LOAD LC1 (PLF)		MAX. CSI (LC)	WEBS MAX. FACTORED FORCE (LBS)		MAX. CSI (LC)
	FR-TO	FROM TO	FR-TO	FROM TO		FR-TO	FROM TO	
F-A	-1502 / 0	0.0	0.0	0.08 (1)	7.81	A-E	0 / 1687	0.21 (1)
A-B	-1875 / 0	-91.8	-91.8	0.09 (1)	6.25	E-B	0 / 1951	0.24 (1)
B-C	-15 / 0	-91.8	-91.8	0.08 (1)	6.25	B-D	-2135 / 0	0.34 (1)
D-C	-127 / 0	0.0	0.0	0.03 (1)	7.81			
F-G	0 / 0	-18.5	-18.5	0.26 (1)	10.00			
G-E	0 / 0	-18.5	-18.5	0.26 (1)	10.00			
E-H	0 / 1633	-18.5	-18.5	0.43 (1)	10.00			
H-I	0 / 1633	-18.5	-18.5	0.43 (1)	10.00			
I-D	0 / 1633	-18.5	-18.5	0.43 (1)	10.00			

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
G	2-1-4	-745	-745	---	BACK	VERT	TOTAL	---	C1
H	4-1-4	-745	-745	---	BACK	VERT	TOTAL	---	C1
I	5-7-4	-745	-745	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 35 = 71 lb

[M]

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BOBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.23")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL)= L/360 (0.23")
CALCULATED VERT. DEFL.(TL) = L/999 (0.03")

CSI: TC=0.09/1.00 (A-B:1), BC=0.43/1.00 (D-E:1),
WB=0.34/1.00 (B-D:1), SSI=0.49/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP (DRY)	(PSI)	(PLI)	SECTION
MT20	650	371	1747	788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.80 (B) (INPUT = 0.90)
JSI METAL = 0.37 (D) (INPUT = 1.00)



Structural component only
DWG# T-2115469

CONTINUED ON PAGE 2

JOB NAME 406403	TRUSS NAME T15	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	---	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:46 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-OoH5Y15RfUw8CqLVt0TpU0f9DuiK5RnBRQjZA7zCzkV

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
F	BMV1+p	MT20	3.0	6.0		

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2




Structural component only
DWG# T-2115469 *2/2*

JOB NAME 406403	TRUSS NAME T16	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	---	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:47 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-s_rTmM53Qo2?q_whRl_20ECJPH55qzMKg4T6iZzCzkU

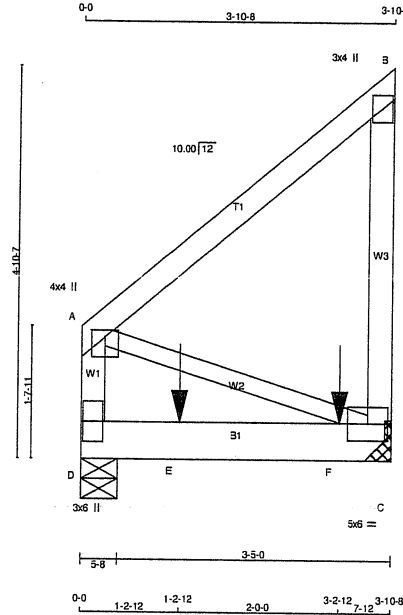

Scale = 1:27.3

LUMBER				
CHORDS	SIZE	LUMBER	DESCR.	
D - A	2x4	DRY	No.2	SPF
A - B	2x4	DRY	No.2	SPF
C - B	2x4	DRY	No.2	SPF
D - C	2x6	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
D-A 1 12		TOP
A-B 1 12		TOP
B-C 1 12		TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
D-C 2 12		SIDE (0.0)
WEBS : (0.122"x3") SPIRAL NAILS		
2x3 1 6		

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW+p	MT20	4.0	4.0	1.00	2.00
B	TMV+p	MT20	3.0	4.0		
C	BMVW1-i	MT20	5.0	6.0		
D	BMV1+p	MT20	3.0	6.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQD BRG	
	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	
D	775	0	775	0	0	5-8	5-8	
C	975	0	975	0	0	MECHANICAL		

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT C. MINIMUM BEARING LENGTH AT JOINT C = 4-0.

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED	MAX./MIN. SNOW	MAX./MIN. LIVE	PERM. LIVE	WIND	DEAD	SOIL
D	544	377 / 0	0 / 0	0 / 0	0 / 0	168 / 0	0 / 0
C	685	475 / 0	0 / 0	0 / 0	0 / 0	210 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) D

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS MAX. FACTORED FORCE (LBS)		FACTORED VERT. LOAD (PLF)		WEBS MAX. FACTORED FORCE (LBS)	
	FR-TO	TO	FROM	TO	FR-TO	TO
D-A	-178 / 0	0.0	0.0	0.01 (1)	7.81	A-C
A-B	0 / 0	-91.8	-91.8	0.13 (1)	10.00	
C-B	-178 / 0	0.0	0.0	0.03 (1)	7.81	
D-E	0 / 0	-18.5	-18.5	0.26 (1)	10.00	
E-F	0 / 0	-18.5	-18.5	0.26 (1)	10.00	
F-C	0 / 0	-18.5	-18.5	0.26 (1)	10.00	

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
E	1-2-12	-463	-463	---	BACK	VERT	TOTAL	---	C1
F	3-2-12	-465	-465	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 22 = 43 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")
CALCULATED VERT. DEFL.(LL)= L/999 (0.02")
ALLOWABLE DEFL.(TL)= L/360 (0.19")
CALCULATED VERT. DEFL.(TL)= L/999 (0.03")

CSI: TC=0.13/1.00 (A-B:1), BC=0.26/1.00 (C-D:1),
WB=0.00/1.00 (A-C:1), SS=0.26/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP (DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX	MIN	MAX	MIN
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.07 (A) (INPUT = 0.90)
JSI METAL= 0.03 (B) (INPUT = 1.00)




Structural component only
DWG# T-2115470

JOB NAME 406516	TRUSS NAME T16Z	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	DRWG NO.
---------------------------	---------------------------	----------------------	-----------------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:19:35 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-nzRMXp5b_TpOR_3RTWkl0acv6h_35yUivJT3zD?W6

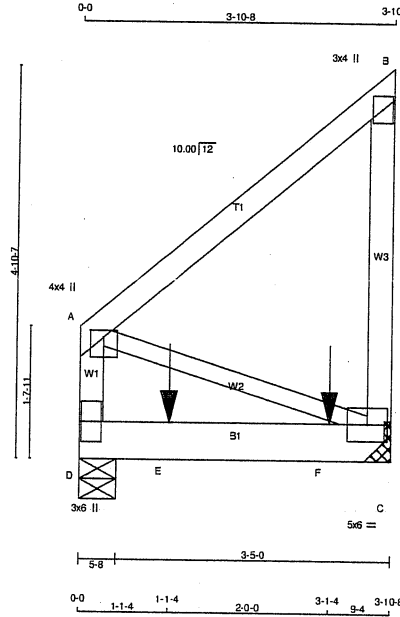

Scale = 1:27.3

LUMBER				
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
D - A	2x4	DRY	No.2	SPF
A - B	2x4	DRY	No.2	SPF
C - B	2x4	DRY	No.2	SPF
D - C	2x6	DRY	No.2	SPF
ALL WEBS 2x3 DRY No.2 SPF				
DRY: SEASONED LUMBER.				

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
D-A 1	12	TOP
A-B 1	12	TOP
B-C 1	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
D-C 2	12	SIDE (0.0)
WEBS : (0.122"x3") SPIRAL NAILS		
2x3 1	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW+p	MT20	4.0	4.0	1.00	2.00
B	TMV+p	MT20	3.0	4.0		
C	BMVW1-t	MT20	5.0	6.0		
D	BMV1+p	MT20	3.0	6.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQD BRG	
	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	
D	1487	0	1487	0	0	5-8	5-8	
C	1199	0	1199	0	0	MECHANICAL		

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT C. MINIMUM BEARING LENGTH AT JOINT C = 4-0.

UNFACTORED REACTIONS

JT	1ST LOASE	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
D	1046	717 / 0	0 / 0	0 / 0	0 / 0	329 / 0	0 / 0
C	843	581 / 0	0 / 0	0 / 0	0 / 0	262 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) D

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS		WEBS	
	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED UNBRACED LENGTH (FT)	MAX. FACTORED FORCE (LBS)
FR-TO		FROM TO		FR-TO
D-A	-178 / 0	0.0 0.0 0.01 (1)	7.81	A-C 0 / 0 0.00 (1)
A-B	0 / 0	-91.8 -91.8 0.13 (1)	10.00	
C-B	-178 / 0	0.0 0.0 0.03 (1)	7.81	
D-E	0 / 0	-18.5 -18.5 0.53 (1)	10.00	
E-F	0 / 0	-18.5 -18.5 0.53 (1)	10.00	
F-C	0 / 0	-18.5 -18.5 0.53 (1)	10.00	

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
E	1-1-4	-1123	-1123	---	BACK	VERT	TOTAL	---	C1
F	3-1-4	-464	-464	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 22 = 43 lb

[M]

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.03")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/898 (0.05")

CSI: TC=0.13/1.00 (A-B:1), BC=0.53/1.00 (C-D:1),
WB=0.00/1.00 (A-C:1), SSI=0.43/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP (DRY) (PSI)	SHEAR (PLI)	SECTION (PLI)
MT20	650	371	1747

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.07 (A) (INPUT = 0.90)
JSI METAL = 0.03 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115474

JOB NAME 406516	TRUSS NAME T20	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:19:37 2021 Page 1
ID:E?n9mn1Ky9qxx7V78133ulyzsQn-jmY6xV6rW56Wdk8SZuYCN75nKIJSnCFx0OQYyzD?W4

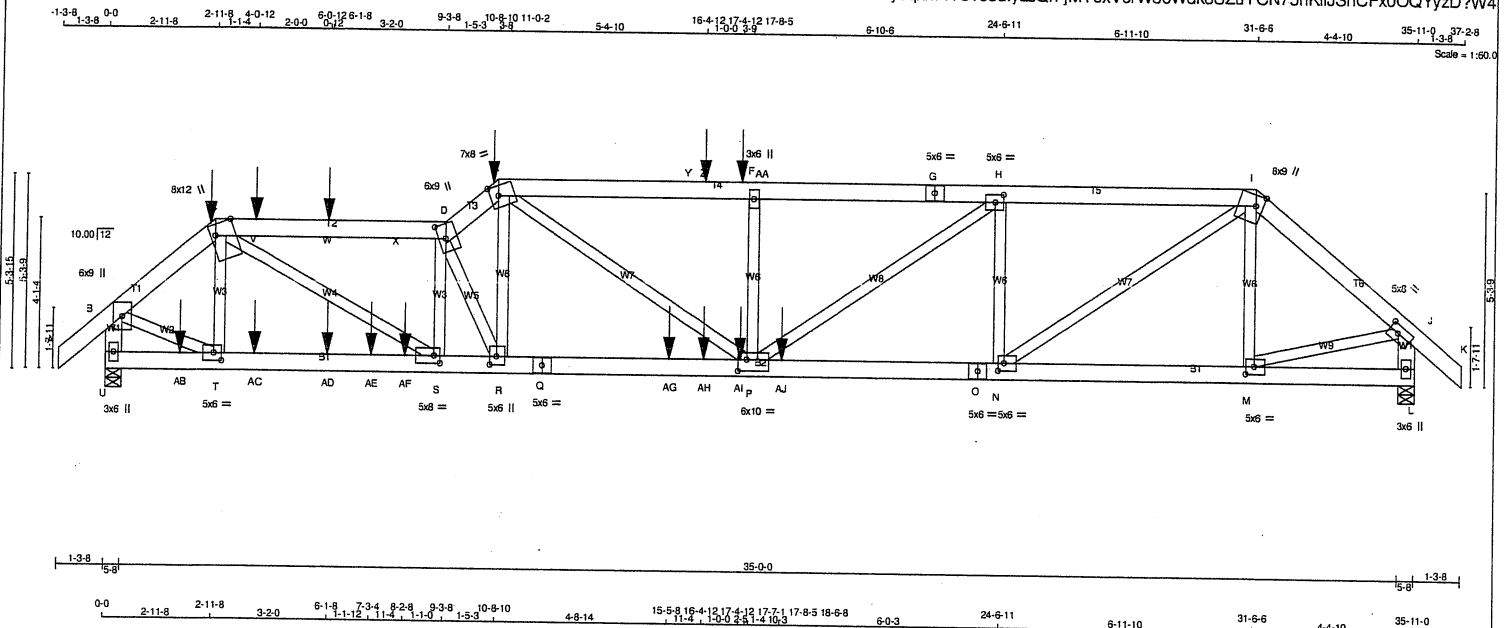

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS			
A - C	2x6	DRY	No.2
C - D	2x6	DRY	No.2
D - E	2x6	DRY	No.2
E - G	2x6	DRY	No.2
G - I	2x6	DRY	No.2
I - K	2x6	DRY	No.2
U - B	2x6	DRY	No.2
L - J	2x6	DRY	No.2
U - Q	2x6	DRY	1650F 1.5E
Q - O	2x6	DRY	1650F 1.5E
O - L	2x6	DRY	1650F 1.5E
ALL WEBS EXCEPT	2x4	DRY	No.2

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A-C 2	12	SIDE(122.0)
C-D 2	12	SIDE(61.0)
D-E 2	12	SIDE(86.2)
E-G 2	12	SIDE(183.1)
G-I 2	12	TOP
I-K 2	12	TOP
U-B 2	12	TOP
L-J 2	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
U-Q 2	12	SIDE(0.0)
Q-O 2	12	SIDE(183.1)
O-L 2	12	TOP
WEBS : (0.122"x3") SPIRAL NAILS		
2x4 1	6	SIDE(53.9)
R-E 1	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQD
JT	GROSS REACTION	GROSS REACTION	BRG	BRG	
U	6032 0	6032 0	5-8	5-8	
L	4529 0	4529 0	5-8	5-8	

UNFACTORED REACTIONS

JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
U	4247	2895 / 0	0 / 0	0 / 0	0 / 0	1351 / 0	0 / 0
L	3191	2164 / 0	0 / 0	0 / 0	0 / 0	1027 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.82 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		MAX. FACTORED	FACTORED	MAX.	WEBS		MAX. FACTORED
MEMB.	FORCE	VERT. LOAD	LC1 MAX	UNBRAC	MEMB.	FORCE	MAX
(LBS)	(LBS)	(PLF)	CSI (LC)	LENGTH	(LBS)	(LBS)	CSI (LC)
FR-TO		FROM	TO		FR-TO		
A-B	0 / 42	-91.8	-91.8 0.04 (1)	10.00	T-C	-1211 / 0	0.10 (1)
B-C	-6399 / 0	-91.8	-91.8 0.09 (1)	4.66	C-S	0 / 8972	0.79 (1)
C-V	-12588 / 0	-91.8	-91.8 0.56 (1)	3.02	S-D	-3947 / 0	0.34 (1)
V-W	-12588 / 0	-91.8	-91.8 0.56 (1)	3.02	D-R	-5870 / 0	0.54 (1)
W-X	-12588 / 0	-91.8	-91.8 0.56 (1)	3.02	R-E	0 / 5865	0.52 (1)
X-D	-12588 / 0	-213.5	-213.5 0.56 (1)	3.02	M-I	-834 / 0	0.11 (1)
D-E	-13535 / 0	-213.5	-213.5 0.24 (1)	3.20	B-T	0 / 5193	0.46 (1)
E-Y	-12754 / 0	-213.5	-213.5 0.75 (1)	2.82	M-J	0 / 3949	0.35 (1)
Y-Z	-12754 / 0	-91.8	-91.8 0.75 (1)	2.82	N-I	0 / 6247	0.55 (1)
Z-AA	-12754 / 0	-91.8	-91.8 0.75 (1)	2.82	E-P	0 / 2641	0.23 (1)
AA-F	-12754 / 0	-91.8	-91.8 0.75 (1)	2.82	N-H	-3275 / 0	0.44 (1)
F-G	-12755 / 0	-91.8	-91.8 0.57 (1)	3.05	P-F	-1215 / 0	0.16 (1)
G-H	-12755 / 0	-91.8	-91.8 0.57 (1)	3.05	P-H	0 / 4657	0.41 (1)
H-I	-8963 / 0	-91.8	-91.8 0.33 (1)	3.85			
I-J	-5012 / 0	-91.8	-91.8 0.12 (1)	5.11			
J-K	0 / 42	-91.8	-91.8 0.04 (1)	10.00			
U-B	-6152 / 0	0.0	0.0 0.22 (1)	5.97			
L-J	-4501 / 0	0.0	0.0 0.16 (1)	6.78			

U-AB	0 / 0	-18.5	-18.5 0.12 (1)	10.00
AB-T	0 / 0	-18.5	-18.5 0.12 (1)	10.00
T-AC	0 / 4839	-18.5	-18.5 0.40 (1)	10.00
AC-AD	0 / 4839	-18.5	-18.5 0.40 (1)	10.00
AD-AE	0 / 4839	-18.5	-18.5 0.40 (1)	10.00
AE-AF	0 / 4839	-18.5	-18.5 0.40 (1)	10.00
AF-S	0 / 4839	-18.5	-18.5 0.40 (1)	10.00
S-R	0 / 12747	-18.5	-18.5 0.59 (1)	10.00
R-Q	0 / 10576	-18.5	-18.5 0.71 (1)	10.00
Q-AG	0 / 10576	-18.5	-18.5 0.71 (1)	10.00
AG-AH	0 / 10576	-18.5	-18.5 0.71 (1)	10.00
AH-AI	0 / 10576	-18.5	-18.5 0.71 (1)	10.00
AI-P	0 / 10576	-18.5	-18.5 0.71 (1)	10.00
P-AJ	0 / 8963	-18.5	-18.5 0.64 (1)	10.00
AJ-O	0 / 8963	-18.5	-18.5 0.64 (1)	10.00
O-N	0 / 8963	-18.5	-18.5 0.64 (1)	10.00
N-M	0 / 3810	-18.5	-18.5 0.19 (1)	10.00
M-L	0 / 0	-18.5	-18.5 0.03 (4)	10.00

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	2-11-8	-30	-30	---	FRONT	VERT	DEAD	---	C1
C	2-11-8	-127	-127	---	FRONT	VERT	SNOW	---	C1
E	10-8-10	-286	-286	---	FRONT	VERT	SNOW	---	C1

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN ALL FLAT SECTIONS BASED ON A SLOPE OF 6.00/12

GIRDER TYPE: CStdGirder

START DISTANCE = 8-0-0
START SPAN CARRIED = 6-10-8
END DISTANCE = 16-0-0
END SPAN CARRIED = 6-10-8
END WALL WIDTH = 5-8
APPLIED TO FRONT SIDE OF TOP CHORD.
- ADDTL LOADS BASED ON 55 % OF GSL.

*** NON STANDARD GIRDER ***

ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.20")
CALCULATED VERT. DEFL.(LL)= L/999 (0.29")
ALLOWABLE DEFL.(TL)= L/360 (1.20")
CALCULATED VERT. DEFL.(TL)= L/810 (0.53")

CSI: TC=0.75/1.00 (E-F:1), BC=0.71/1.00 (P-R:1),
WB=0.79/1.00 (C-S:1), SSI=0.70/1.00 (N-P:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873

CONTINUED ON PAGE 2



Structural component only
DWG# T-2115475 112

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
406516	T20	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:19:37 2021 Page 2
ID:E?n9mn1Ky9gxx7v78133ulvzsQn-jMY6xV6rW56Wdk8SZuYCN75nKilJSnCFx0OQYyzD?W4

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	6.0	9.0		
C	TTWW+m	MT20	8.0	12.0	Edge	6.50
D	TTWW+m	MT20	6.0	9.0	4.75	2.25
E	TTWW-m	MT20	7.0	8.0	3.25	2.75
F	TMW+w	MT20	3.0	6.0		
G	TS-t	MT20	5.0	6.0		
H	TMWW-t	MT20	5.0	6.0	2.50	2.75
I	TTWW+m	MT20	8.0	9.0	3.50	2.25
J	TMVW-t	MT20	5.0	8.0	2.50	3.25
L	BMV1+p	MT20	3.0	6.0		
M	BMWW-t	MT20	5.0	6.0	2.50	2.75
N	BMWW-t	MT20	5.0	6.0	2.50	2.00
O	BS-t	MT20	5.0	6.0		
P	BMWWW-t	MT20	6.0	10.0	3.75	3.00
Q	BS-t	MT20	5.0	6.0		
R	BMWW-t	MT20	5.0	6.0	2.75	2.25
S	BMWW-t	MT20	5.0	8.0	2.50	2.00
T	BMWW-t	MT20	5.0	6.0	2.50	2.50
U	BMV1+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
V	4-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
W	6-0-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
Z	16-4-12	-100	-100	---	BACK	VERT	TOTAL	---	C1
AA	17-4-12	-100	-100	---	BACK	VERT	TOTAL	---	C1
AB	2-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AC	4-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AD	6-0-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AE	7-3-4	-27	-27	---	BACK	VERT	TOTAL	---	C1
AF	8-2-8	-647	-647	---	BACK	VERT	TOTAL	---	C1
AG	15-5-8	-647	-647	---	BACK	VERT	TOTAL	---	C1
AH	16-4-12	-27	-27	---	BACK	VERT	TOTAL	---	C1
AI	17-4-12	-27	-27	---	BACK	VERT	TOTAL	---	C1
AJ	18-6-8	-1534	-1534	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.90 (C) (INPUT = 0.90)
JSI METAL= 0.94 (E) (INPUT = 1.00)



Structural component only
DWG# T-2115475 9/2

Tamarack Roof Truss, Burlington

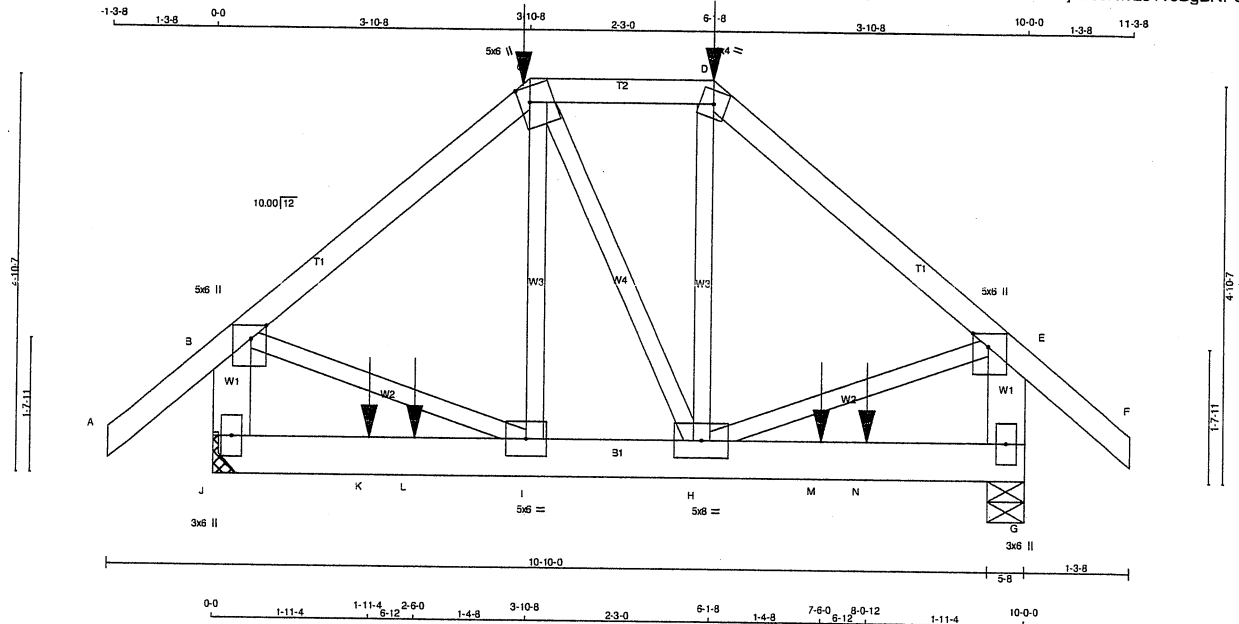

Scale = 1/25.8

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x4	DRY	No.2
C - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
J - B	2x6	DRY	No.2
G - E	2x6	DRY	No.2
J - G	2x6	DRY	No.2

ALL WEBS 2x3 DRY No.2 SPF

EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	5.0	6.0	2.00	2.25
C	TTWW+m	MT20	5.0	6.0	2.25	1.50
D	TTW-m	MT20	4.0	4.0		
E	TMVW+p	MT20	5.0	6.0	2.00	2.25
G	BMV1+p	MT20	3.0	6.0		
H	BMVWW-t	MT20	5.0	8.0		
I	BMVW-t	MT20	5.0	6.0		
J	BMV1+p	MT20	3.0	6.0		

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQD
JT	GROSS REACTION	DOWN	HORZ	UPLIFT	BRG
J	1615	0	1615	0	MECHANICAL
G	1615	0	1615	0	5-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT J. MINIMUM BEARING LENGTH AT JOINT J = 3-8.

UNFACTORED REACTIONS

1ST LCASE	MAX./MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
J	1137	773 / 0	0 / 0	0 / 0	0 / 0	365 / 0	0 / 0
G	1137	773 / 0	0 / 0	0 / 0	0 / 0	365 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.27 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. (PLF)	MAX. LC1 MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED MAX. CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 41	-91.8 -91.8	0.14 (1)	10.00	I-C	0 / 193	0.05 (1)
B-C	-1158 / 0	-140.0 -140.0	0.44 (1)	5.28	C-H	0 / 8	0.00 (1)
C-D	-896 / 0	-140.0 -140.0	0.14 (1)	6.25	H-D	0 / 203	0.05 (1)
D-E	-1163 / 0	-140.0 -140.0	0.44 (1)	5.27	B-I	0 / 928	0.23 (1)
E-F	0 / 41	-91.8 -91.8	0.14 (1)	10.00	H-E	0 / 932	0.23 (1)
J-B	-1415 / 0	0.0 0.0	0.10 (1)	7.81			
G-E	-1419 / 0	0.0 0.0	0.10 (1)	7.81			
J-K	0 / 0	-18.5 -18.5	0.32 (1)	10.00			
K-L	0 / 0	-18.5 -18.5	0.32 (1)	10.00			
L-I	0 / 0	-18.5 -18.5	0.32 (1)	10.00			
I-H	0 / 892	-18.5 -18.5	0.29 (1)	10.00			
H-M	0 / 0	-18.5 -18.5	0.31 (1)	10.00			
M-N	0 / 0	-18.5 -18.5	0.31 (1)	10.00			
N-G	0 / 0	-18.5 -18.5	0.31 (1)	10.00			

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	3-10-8	-80	-80		BACK	VERT	TOTAL		C1
D	6-1-8	-80	-80		BACK	VERT	TOTAL		C1
K	1-11-4	-14	-14		BACK	VERT	TOTAL		C1
L	2-6-0	-396	-396		BACK	VERT	TOTAL		C1
M	7-6-0	-396	-396		BACK	VERT	TOTAL		C1
N	8-0-12	-14	-14		BACK	VERT	TOTAL		C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

GIRDER TYPE: CStdGirder
START DISTANCE = 0-0
START SPAN CARRIED = 3-10-8
END DISTANCE = 10-0-0
END SPAN CARRIED = 3-10-8
END WALL WIDTH = 1-8
APPLIED TO FRONT SIDE OF TOP CHORD.
- ADDTL LOADS BASED ON 55 % OF GSL.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.33")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL)= L/360 (0.33")
CALCULATED VERT. DEFL.(TL) = L/999 (0.04")

CSI: TC=0.44/1.00 (D-E:1) , BC=0.32/1.00 (I-J:1) , WB=0.23/1.00 (E-H:1) , SSI=0.30/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT .

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP= 0.88 (E) (INPUT = 0.90)
JSI METAL= 0.23 (E) (INPUT = 1.00)



Structural component only
DWG# T-2115476

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:17:50 2021 Page 1

ID:E?n9m1Ky9qxx7v78133ulyzsqn-XxeZcny26Pi64nuga2iYlvM_7xcuspyh25E?KzCznF


The drawing shows a side elevation of a roof truss. The top chord is a horizontal line with several vertical members (rafters) extending downwards. The dimensions are as follows:

- Top chord segments: 1-3-8, 3-1-11, 3-1-11-3-11-4, 6-8-0, 10-7-4, 7-4-5, 17-11-8, 7-4-5, 25-9-13, 7-5-8, 32-9-5, 3-1-11, 35-11-0, 37-2-8.
- Vertical member labels: 1-3-8, 3-1-11, 3-1-11-3-11-4, 6-8-0, 10-7-4, 7-4-5, 17-11-8, 7-4-5, 25-9-13, 7-5-8, 32-9-5, 3-1-11, 35-11-0, 37-2-8.
- Bottom chord segments: 1-3-8, 3-1-11, 3-1-11-3-11-4, 6-8-0, 10-7-4, 7-4-5, 17-11-8, 7-4-5, 25-9-13, 7-5-8, 32-9-5, 3-1-11, 35-11-0, 37-2-8.

Scale: 1/8" = 1'-0"



NAILS TO BE DRIVEN FROM ONE SIDE ONLY.
 GIRDER NAILING ASSUMES NAILED HANGERS ARE
 FASTENED WITH MIN. 3-0 INCH NAILS.
 TOP - COMPONENTS ARE LOADED FROM THE TOP AND
 MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR
 THE LOAD TO BE TRANSFERRED TO EACH PLY.



JOB NAME 418992	TRUSS NAME T30	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	---	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:17:50 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-XxeZcny26P164nuga2IYLvM 7xcuspyHz25E?KzCznF

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	1.50	3.00
C	TTWW+m	MT20	8.0	9.0	Edge	6.50
D	TMVW-t	MT20	5.0	6.0		
E	TMVW-w	MT20	3.0	6.0		
F	TS-t	MT20	5.0	6.0		
G	TMVW-t	MT20	5.0	6.0		
H	TTWW+m	MT20	8.0	9.0	Edge	6.50
I	TMVW-p	MT20	5.0	6.0	1.50	3.00
K	BMV1+p	MT20	3.0	6.0		
L	BMVW-t	MT20	5.0	6.0		
M	BMVW-t	MT20	5.0	6.0	2.50	2.25
N	BS-t	MT20	5.0	6.0		
O	BMVW-w	MT20	5.0	8.0		
P	BS-t	MT20	5.0	6.0		
Q	BMVW-t	MT20	5.0	6.0	2.50	2.25
R	BMVW-t	MT20	5.0	6.0		
S	BMV1+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX	MAX. UNBRAC	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM TO		LENGTH	FR-TO		
M-AS	0 / 3393	-18.5	-18.5	0.29 (1)	10.00		
AS-AT	0 / 3393	-18.5	-18.5	0.29 (1)	10.00		
AT-AU	0 / 3393	-18.5	-18.5	0.29 (1)	10.00		
AU-L	0 / 3393	-18.5	-18.5	0.29 (1)	10.00		
L-AV	0 / 0	-18.5	-18.5	0.08 (4)	10.00		
AV-AW	0 / 0	-18.5	-18.5	0.08 (4)	10.00		
AW-K	0 / 0	-18.5	-18.5	0.08 (4)	10.00		

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	3-1-11	-30	-30	---	FRONT	VERT	DEAD	---	C1
C	3-1-11	-127	-127	---	FRONT	VERT	SNOW	---	C1
E	17-11-4	-76	-76	---	BACK	VERT	TOTAL	---	C1
H	32-9-5	-30	-30	---	FRONT	VERT	DEAD	---	C1
H	32-9-5	-82	-82	---	BACK	VERT	TOTAL	---	C1
H	32-9-5	-127	-127	---	FRONT	VERT	SNOW	---	C1
L	32-9-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
O	17-11-4	-21	-21	---	BACK	VERT	TOTAL	---	C1
P	11-11-4	-21	-21	---	BACK	VERT	TOTAL	---	C1
T	3-11-4	-82	-82	---	BACK	VERT	TOTAL	---	C1
U	5-11-4	-76	-76	---	BACK	VERT	TOTAL	---	C1
V	7-11-4	-76	-76	---	BACK	VERT	TOTAL	---	C1
W	9-11-4	-76	-76	---	BACK	VERT	TOTAL	---	C1
X	11-11-4	-76	-76	---	BACK	VERT	TOTAL	---	C1
Y	13-11-4	-76	-76	---	BACK	VERT	TOTAL	---	C1
Z	15-11-4	-76	-76	---	BACK	VERT	TOTAL	---	C1
AA	18-9-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
AB	20-9-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
AC	22-9-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
AD	24-9-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
AE	26-9-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
AF	28-9-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
AG	30-9-12	-76	-76	---	BACK	VERT	TOTAL	---	C1
AH	1-11-4	-21	-21	---	BACK	VERT	TOTAL	---	C1
AI	3-11-4	-21	-21	---	BACK	VERT	TOTAL	---	C1
AJ	5-11-4	-21	-21	---	BACK	VERT	TOTAL	---	C1
AK	7-11-4	-21	-21	---	BACK	VERT	TOTAL	---	C1
AL	9-11-4	-21	-21	---	BACK	VERT	TOTAL	---	C1
AM	13-11-4	-21	-21	---	BACK	VERT	TOTAL	---	C1
AN	15-11-4	-21	-21	---	BACK	VERT	TOTAL	---	C1
AO	18-9-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AP	20-9-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AQ	22-9-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AR	24-9-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AS	26-9-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AT	28-9-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AU	30-9-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AV	33-9-12	-21	-21	---	BACK	VERT	TOTAL	---	C1
AW	34-9-12	-21	-21	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.




Structural component only
DWG# T-2115541

JOB NAME 411017	TRUSS NAME T30S	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	DRWG NO.
---------------------------	---------------------------	----------------------	-----------------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:30 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-x0WMDASj9c9eYEOeigyb1vHQ7P3mMPyJD8vgV8zD??N

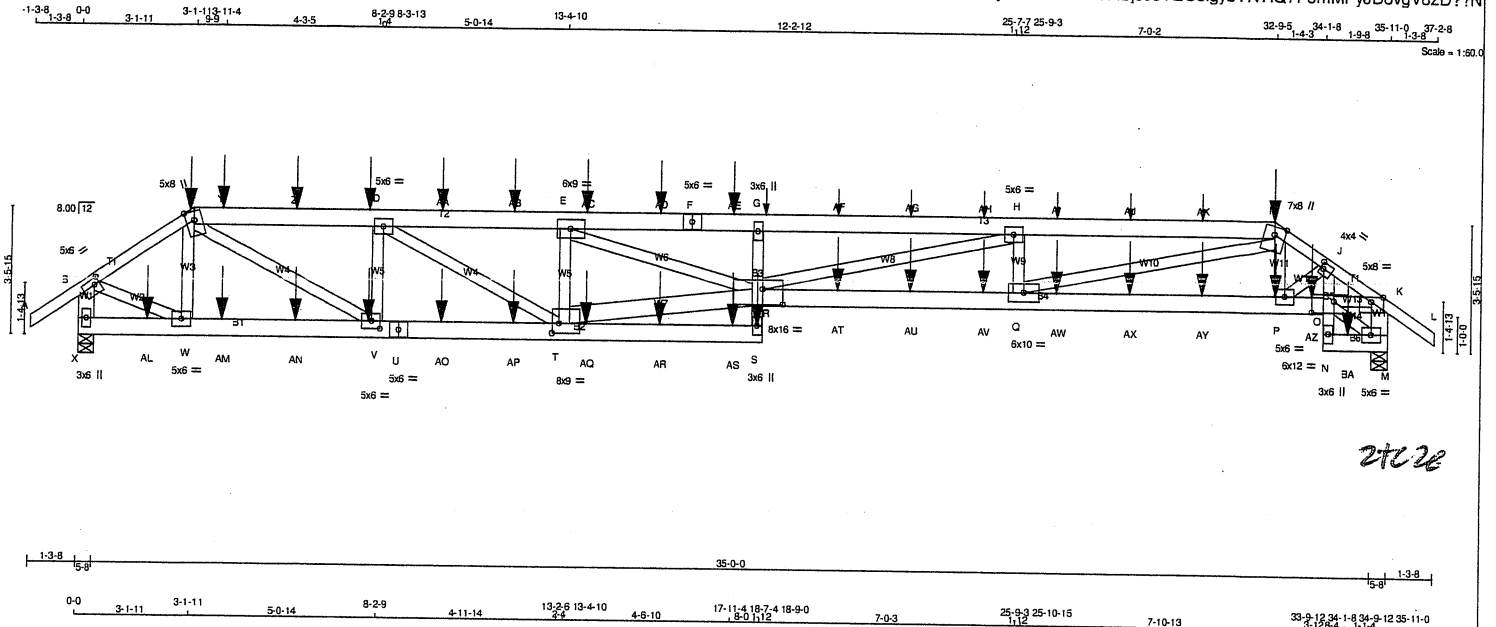

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF	
C - F	2x6	DRY	No.2	SPF	
F - I	2x6	DRY	No.2	SPF	
I - L	2x4	DRY	No.2	SPF	
X - B	2x6	DRY	No.2	SPF	
M - K	2x6	DRY	No.2	SPF	
X - U	2x6	DRY	No.2	SPF	
U - S	2x6	DRY	No.2	SPF	
S - G	2x4	DRY	No.2	SPF	
R - O	2x6	DRY	1650F 1.5E	SPF	
N - J	2x4	DRY	No.2	SPF	
N - M	2x6	DRY	No.2	SPF	
ALL WEBS	2x4	DRY	No.2	SPF	
EXCEPT					
T - R	2x6	DRY	No.2	SPF	

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A-C 1	12	SIDE(61.0)
I-L 1	12	SIDE(61.0)
C-F 2	12	SIDE(183.1)
F-I 2	12	SIDE(183.1)
X-B 2	12	SIDE(61.0)
M-K 2	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
X-U 2	12	SIDE(183.1)
U-S 2	12	SIDE(122.0)
R-O 2	12	SIDE(183.1)
N-M 2	12	SIDE(0.0)
S-G 1	12	TOP
J-N 1	12	TOP
WEBS : (0.122"x3") SPIRAL NAILS		
2x4 1	6	
2x6 2	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	HORZ	UP/LIFT	IN-SX
X	3686	0	3686	0
M	4323	0	4323	0

ALLOW FOR 0.3" OF HORIZONTAL MOVEMENT DUE TO TOTAL LOAD

UNFACTORED REACTIONS

	1ST LOASE	MAX. MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
X	2606	1715 / 0	0 / 0	0 / 0	0 / 0	891 / 0	0 / 0
M	3058	2001 / 0	0 / 0	0 / 0	0 / 0	1057 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) X, M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.42 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS				
MAX. FACTORED		FACTORED		MAX. FACTORED		FACTORED		
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	FORCE (LBS)	MAX CSI (LC)	
FR-TO		FROM	TO		FR-TO			
A-B	0 / 35	-91.8	-91.8	0.07 (1)	10.00	W-C	-966 / 0	0.07 (1)
B-C	-4112 / 0	-91.8	-91.8	0.15 (1)	4.58	P-I	0 / 1027	0.09 (1)
C-Y	-7677 / 0	-91.8	-91.8	0.24 (1)	4.19	P-J	0 / 149	0.01 (1)
Y-Z	-7677 / 0	-91.8	-91.8	0.24 (1)	4.19	B-W	0 / 3620	0.32 (1)
Z-D	-7677 / 0	-91.8	-91.8	0.24 (1)	4.19	O-M	-303 / 0	0.02 (1)
D-AA	-10350 / 0	-91.8	-91.8	0.33 (1)	3.61	O-K	0 / 5943	0.53 (1)
AA-AB	-10350 / 0	-91.8	-91.8	0.33 (1)	3.61	C-V	0 / 4913	0.43 (1)
AB-E	-10350 / 0	-91.8	-91.8	0.33 (1)	3.61	T-E	-3281 / 0	0.23 (1)
E-AC	-16669 / 0	-91.8	-91.8	0.70 (1)	2.56	V-D	-2434 / 0	0.17 (1)
AC-AD	-16669 / 0	-91.8	-91.8	0.70 (1)	2.56	D-T	0 / 3123	0.28 (1)
AD-F	-16669 / 0	-91.8	-91.8	0.70 (1)	2.56	T-R	0 / 10106	0.66 (1)
F-AE	-16669 / 0	-91.8	-91.8	0.70 (1)	2.56	E-R	0 / 6596	0.58 (1)
AE-G	-16669 / 0	-91.8	-91.8	0.70 (1)	2.56	Q-I	0 / 8532	0.75 (1)
G-AF	-16954 / 0	-91.8	-91.8	0.88 (1)	2.42	R-H	0 / 2629	0.23 (1)
AF-AG	-16954 / 0	-91.8	-91.8	0.88 (1)	2.42	Q-H	-1490 / 0	0.09 (1)
AG-AH	-16954 / 0	-91.8	-91.8	0.88 (1)	2.42			
AH-H	-16954 / 0	-91.8	-91.8	0.88 (1)	2.42			
H-AI	-14426 / 0	-91.8	-91.8	0.64 (1)	2.86			
AI-AJ	-14426 / 0	-91.8	-91.8	0.64 (1)	2.86			
AJ-AK	-14426 / 0	-91.8	-91.8	0.64 (1)	2.86			
AK-I	-14426 / 0	-91.8	-91.8	0.64 (1)	2.86			
I-J	-7460 / 0	-91.8	-91.8	0.31 (1)	3.34			
J-K	-7228 / 0	-91.8	-91.8	0.30 (1)	3.41			
K-L	0 / 35	-91.8	-91.8	0.07 (1)	10.00			
X-B	-3674 / 0	0.0	0.0	0.13 (1)	7.34			
M-K	-4134 / 0	0.0	0.0	0.15 (1)	7.01			

X-AL	0 / 0	-18.5	-18.5 0.04 (4)	10.00
AL-W	0 / 0	-18.5	-18.5 0.04 (4)	10.00
W-AM	0 / 3481	-18.5	-18.5 0.27 (1)	10.00
AM-AN	0 / 3481	-18.5	-18.5 0.27 (1)	10.00
AN-V	0 / 3481	-18.5	-18.5 0.27 (1)	10.00
V-U	0 / 7677	-18.5	-18.5 0.55 (1)	10.00
U-AO	0 / 7677	-18.5	-18.5 0.55 (1)	10.00
AO-AP	0 / 7677	-18.5	-18.5 0.55 (1)	10.00
AP-T	0 / 7677	-18.5	-18.5 0.55 (1)	10.00
T-AQ	0 / 580	-18.5	-18.5 0.08 (1)	10.00
AQ-AR	0 / 580	-18.5	-18.5 0.08 (1)	10.00
AR-AS	0 / 580	-18.5	-18.5 0.08 (1)	10.00
AS-S	0 / 580	-18.5	-18.5 0.08 (1)	10.00
S-R	0 / 342	0.0	0.0 0.46 (1)	10.00

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
	DL	= 6.0	PSF
BOT CH.	LL	= 0.0	PSF
	DL	= 7.4	PSF
TOTAL LOAD	= 39.0	PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

*** NON STANDARD GIRDER ***
ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD)
EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/740 (0.58")
ALLOWABLE DEFL.(TL)= L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/393 (1.10")

CSI: TC=0.88/1.00 (G-H:1), BC=0.79/1.00 (Q-R:1),
WB=0.75/1.00 (I-Q:1), SS=0.25/1.00 (R-S:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.



Structural component only
DWG# T-2115484 1/12

CONTINUED ON PAGE 2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411017	T30S	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MITek Industries, Inc. Tue May 25 10:54:30 2021 Page 2
ID:E?n9mn1Ky9qx7v78133uilyzsQn-x0WMDASic9oYEOeigybt1VHQ7P3mMPyJD8vgV8zD??N

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-t	MT20	5.0	6.0	2.00	1.75
C	TTWW+m	MT20	5.0	8.0	Edge	
D	TMVW-t	MT20	5.0	6.0		
E	TMVW-t	MT20	6.0	9.0		
F	TS-t	MT20	5.0	6.0		
G	TMV-p	MT20	3.0	6.0		
H	TMVW-t	MT20	5.0	6.0		
I	TTWW+m	MT20	7.0	8.0	Edge	
J	TMVW-t	MT20	4.0	4.0	2.00	1.00
K	TMVW-p	MT20	5.0	8.0	Edge	
M	BMVW-t	MT20	5.0	6.0		
N	BMV-p	MT20	3.0	6.0		
O	BVMWW-t	MT20	6.0	12.0	3.75	7.25
P	BMVW-t	MT20	5.0	6.0		
Q	BMVW-t	MT20	6.0	10.0		
R	BVMWWW-t	MT20	8.0	16.0	5.00	6.50
S	BMV-p	MT20	3.0	6.0		
T	BMVWW-t	MT20	8.0	9.0	3.25	2.25
U	BS-t	MT20	5.0	6.0		
V	BMVW-t	MT20	5.0	6.0	2.50	2.75
W	BMVW-t	MT20	5.0	6.0		
X	BMV1+p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX	MAX. MEMB. FORCE (LBS)	MAX. FACTORED UNBRACED LENGTH	FR-TO	CS1 (LC)
FR-TO							
R-G	-585 / 0	0.0	0.0	0.44 (1)	7.81		
R-AT	0 / 14425	-18.5	-18.5	0.79 (1)	10.00		
AT-AU	0 / 14425	-18.5	-18.5	0.79 (1)	10.00		
AU-AV	0 / 14425	-18.5	-18.5	0.79 (1)	10.00		
AV-Q	0 / 14425	-18.5	-18.5	0.79 (1)	10.00		
Q-AW	0 / 6241	-18.5	-18.5	0.44 (1)	10.00		
AW-AX	0 / 6241	-18.5	-18.5	0.44 (1)	10.00		
AX-AY	0 / 6241	-18.5	-18.5	0.44 (1)	10.00		
AY-P	0 / 6241	-18.5	-18.5	0.44 (1)	10.00		
P-AZ	0 / 6182	-18.5	-18.5	0.44 (1)	10.00		
AZ-O	0 / 6182	-18.5	-18.5	0.44 (1)	10.00		
N-O	0 / 40	0.0	0.0	0.20 (1)	10.00		
O-J	-93 / 0	0.0	0.0	0.20 (1)	7.81		
N-BA	0 / 256	-18.5	-18.5	0.02 (1)	10.00		
BA-M	0 / 256	-18.5	-18.5	0.02 (1)	10.00		

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	3-1-11	-30	-30		FRONT	VERT	DEAD		C1
C	3-1-11	-127	-127		FRONT	VERT	SNOW		C1
D	7-11-4	-76	-76		BACK	VERT	TOTAL		C1
G	18-9-12	1	1		BACK	VERT	TOTAL		C1
I	32-9-5	-30	-30		FRONT	VERT	DEAD		C1
I	32-9-5	1	1		BACK	VERT	TOTAL		C1
P	32-9-12	-171	-171		FRONT	VERT	SNOW		C1
S	18-7-4	-177	-177		BACK	VERT	TOTAL		C1
V	7-11-4	-21	-21		BACK	VERT	TOTAL		C1
Y	3-11-4	-82	-82		BACK	VERT	TOTAL		C1
Z	5-11-4	-76	-76		BACK	VERT	TOTAL		C1
AA	9-11-4	-76	-76		BACK	VERT	TOTAL		C1
AB	11-11-4	-76	-76		BACK	VERT	TOTAL		C1
AC	13-11-4	-76	-76		BACK	VERT	TOTAL		C1
AD	15-11-4	-76	-76		BACK	VERT	TOTAL		C1
AE	17-11-4	-76	-76		BACK	VERT	TOTAL		C1
AF	20-9-12	1	1		BACK	VERT	TOTAL		C1
AG	22-9-12	1	1		BACK	VERT	TOTAL		C1
AH	24-9-12	1	1		BACK	VERT	TOTAL		C1
AI	26-9-12	1	1		BACK	VERT	TOTAL		C1
AJ	28-9-12	1	1		BACK	VERT	TOTAL		C1
AK	30-9-12	1	1		BACK	VERT	TOTAL		C1
AL	1-11-4	-21	-21		BACK	VERT	TOTAL		C1
AM	3-11-4	-21	-21		BACK	VERT	TOTAL		C1
AN	5-11-4	-21	-21		BACK	VERT	TOTAL		C1
AO	9-11-4	-21	-21		BACK	VERT	TOTAL		C1
AP	11-11-4	-21	-21		BACK	VERT	TOTAL		C1
AQ	13-11-4	-21	-21		BACK	VERT	TOTAL		C1
AR	15-11-4	-21	-21		BACK	VERT	TOTAL		C1
AS	17-11-4	-23	-23		BACK	VERT	TOTAL		C1
AT	20-9-12	-171	-171		BACK	VERT	TOTAL		C1
AU	22-9-12	-171	-171		BACK	VERT	TOTAL		C1
AV	24-9-12	-171	-171		BACK	VERT	TOTAL		C1
AW	26-9-12	-171	-171		BACK	VERT	TOTAL		C1
AX	28-9-12	-171	-171		BACK	VERT	TOTAL		C1
AY	30-9-12	-171	-171		BACK	VERT	TOTAL		C1
AZ	33-9-12	-175	-175		BACK	VERT	TOTAL		C1
BA	34-9-12	-24	-24		BACK	VERT	TOTAL		C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

JSI GRIP= 0.89 (V) (INPUT = 0.90)
JSI METAL= 0.94 (I) (INPUT = 1.00)




Structural component only
DWG# T-2115484

JOB NAME 411017	TRUSS NAME T31	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	-------------------------------	-------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:31 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-PD4kQWSLNTwPrYDvDg7GFjqc4pQQ5whTSoeE1azD??M

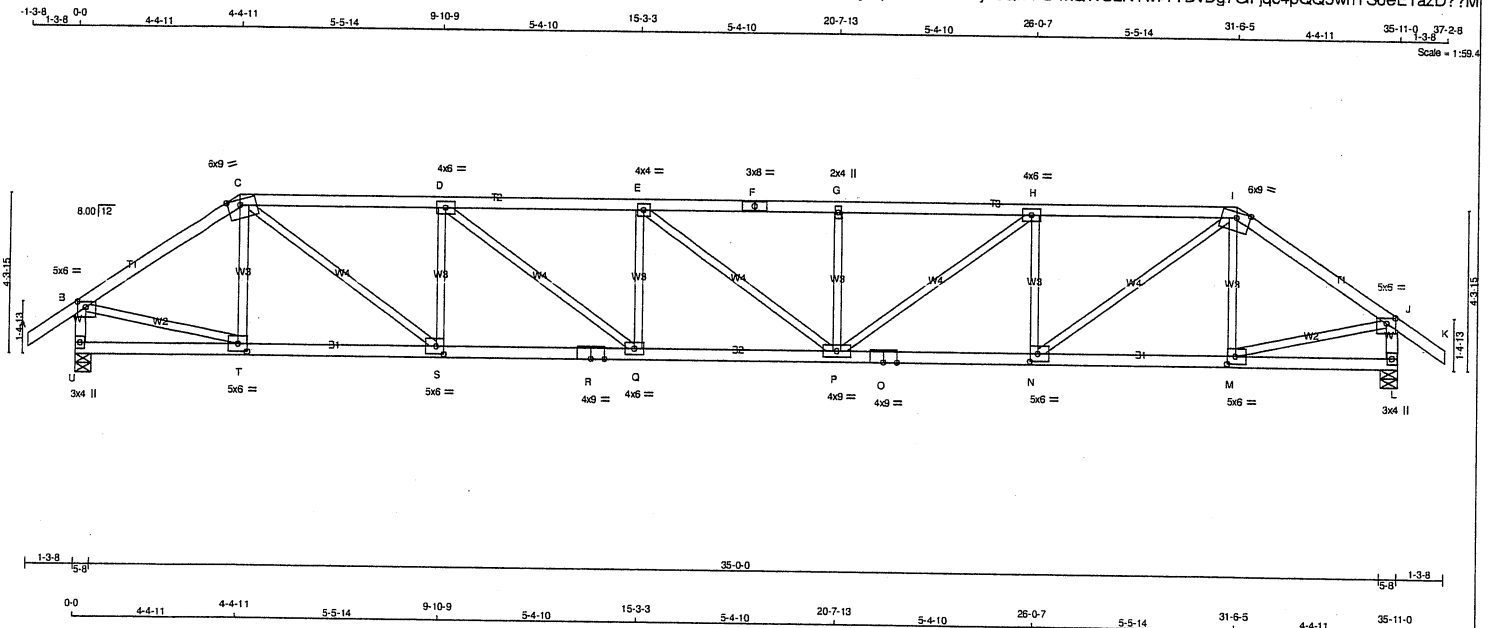

LUMBER				N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF			
C - F	2x4	DRY	No.2	SPF			
F - I	2x4	DRY	No.2	SPF			
I - K	2x4	DRY	No.2	SPF			
U - B	2x4	DRY	No.2	SPF			
L - J	2x4	DRY	No.2	SPF			
U - R	2x4	DRY	No.2	SPF			
R - O	2x4	DRY	No.2	SPF			
O - L	2x4	DRY	No.2	SPF			
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF			

DRY: SEASONED LUMBER.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD	
JT	GROSS REACTION	VERT	HORZ	DOWN	HORZ	BRG	IN-SX	BRG	IN-SX
U	2106	0	2106	0	0	5-8	5-8	5-8	5-8
L	2106	0	2106	0	0	5-8	5-8	5-8	5-8

UNFACTORED REACTIONS

1ST LCASE	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
JT	1487	989 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0
U	1487	989 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0
L	1487	989 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.77 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)
FR-TO		FROM TO		FR-TO		FROM TO	
A-B	0 / 35	-91.8	-91.8 0.12 (1)	10.00	T-C	-356 / 0	0.10 (1)
B-C	-2310 / 0	-91.8	-91.8 0.42 (1)	4.10	C-S	0 / 2077	0.47 (1)
C-D	-3585 / 0	-91.8	-91.8 0.68 (1)	3.16	S-D	-1131 / 0	0.32 (1)
D-E	-4359 / 0	-91.8	-91.8 0.80 (1)	2.78	D-Q	0 / 967	0.22 (1)
E-F	-4358 / 0	-91.8	-91.8 0.67 (1)	2.94	Q-E	-480 / 0	0.13 (1)
F-G	-4358 / 0	-91.8	-91.8 0.67 (1)	2.94	E-P	-2 / 0	0.00 (1)
G-H	-4358 / 0	-91.8	-91.8 0.80 (1)	2.77	P-G	-479 / 0	0.13 (1)
H-I	-3586 / 0	-91.8	-91.8 0.68 (1)	3.16	P-H	0 / 965	0.22 (1)
I-J	-2310 / 0	-91.8	-91.8 0.42 (1)	4.10	N-H	-1131 / 0	0.32 (1)
J-K	0 / 35	-91.8	-91.8 0.12 (1)	10.00	N-I	0 / 2078	0.47 (1)
U-B	-2074 / 0	0.0	0.0 0.21 (1)	5.87	M-I	-357 / 0	0.10 (1)
L-J	-2074 / 0	0.0	0.0 0.21 (1)	5.87	B-T	0 / 1974	0.44 (1)
					M-J	0 / 1974	0.44 (1)
U-T	0 / 0	-18.5	-18.5 0.11 (4)	10.00			
T-S	0 / 1910	-18.5	-18.5 0.37 (1)	10.00			
S-R	0 / 3585	-18.5	-18.5 0.63 (1)	10.00			
R-Q	0 / 3585	-18.5	-18.5 0.63 (1)	10.00			
Q-P	0 / 4359	-18.5	-18.5 0.76 (1)	10.00			
P-O	0 / 3586	-18.5	-18.5 0.63 (1)	10.00			
O-N	0 / 3586	-18.5	-18.5 0.63 (1)	10.00			
N-M	0 / 1910	-18.5	-18.5 0.37 (1)	10.00			
M-L	0 / 0	-18.5	-18.5 0.10 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6	PSF
DL	= 6.0	PSF
BOT CH. LL	= 0.0	PSF
DL	= 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.20")
CALCULATED VERT. DEFL.(LL)= L/999 (0.30")
ALLOWABLE DEFL.(TL)= L/360 (1.20")
CALCULATED VERT. DEFL.(TL)= L/776 (0.56")

CSI: TC=0.80/1.00 (G-H:1), BC=0.76/1.00 (P-Q:1), WB=0.47/1.00 (I-N:1), SSI=0.23/1.00 (H-I:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.86 (B) (INPUT = 0.90)
JSI METAL = 0.80 (O) (INPUT = 1.00)




Structural component only
DWG# T-2115485

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411017	T31S	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:32 2021 Page 1
ID:E?n9mn1Ky9qxx7V78133ulyzsQn-tPe6esTz8n2GTio5nNeVnwMn9DiyqKrchSOna0zD??L

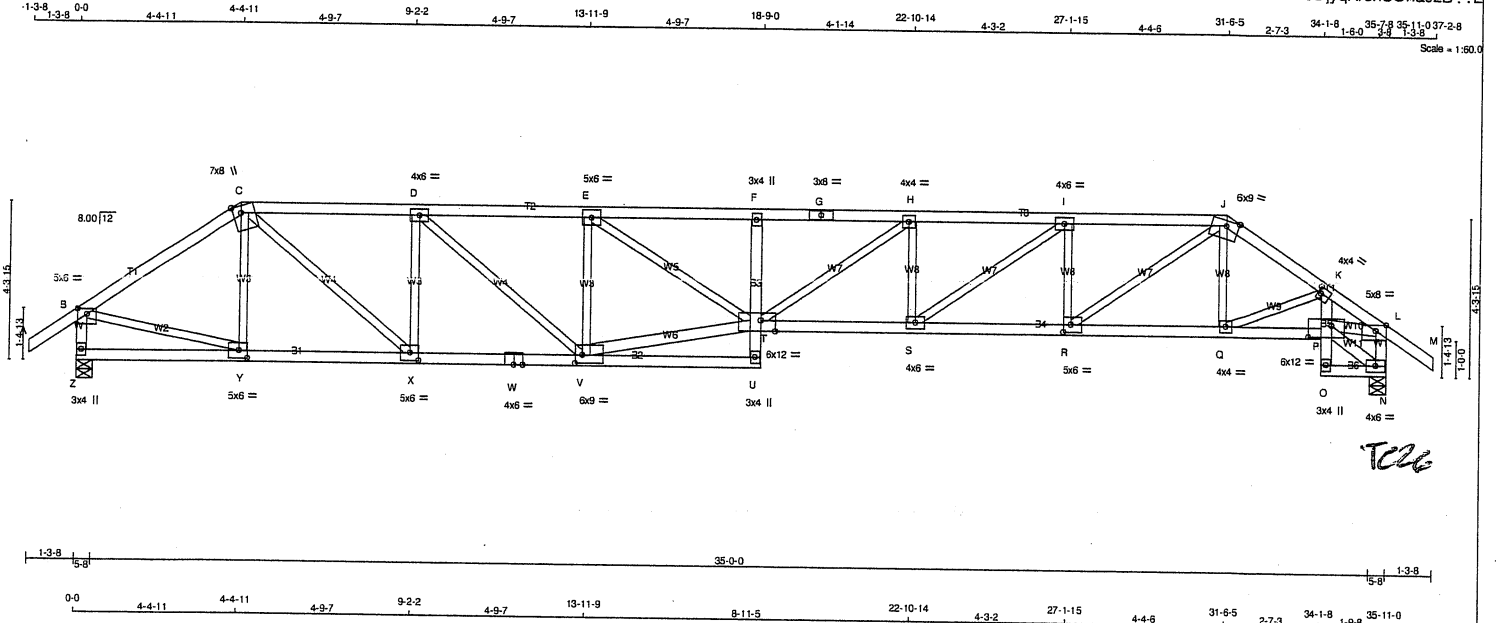

LUMBER				N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF			
C - G	2x4	DRY	No.2	SPF			
G - J	2x4	DRY	No.2	SPF			
J - M	2x4	DRY	No.2	SPF			
Z - B	2x4	DRY	No.2	SPF			
N - L	2x4	DRY	No.2	SPF			
Z - W	2x4	DRY	No.2	SPF			
W - U	2x4	DRY	No.2	SPF			
U - F	2x4	DRY	No.2	SPF			
T - P	2x4	DRY	No.2	SPF			
O - K	2x4	DRY	No.2	SPF			
O - N	2x4	DRY	No.2	SPF			
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF			
V - T	2x4	DRY	No.2	SPF			
P - N	2x4	DRY	No.2	SPF			
P - L	2x4	DRY	No.2	SPF			

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	1.75	3.00
C	TTWW+m	MT20	7.0	8.0	Edge	2.50
D	TMVW-t	MT20	4.0	6.0		
E	TMVW-t	MT20	5.0	6.0		
F	TMV+p	MT20	3.0	4.0		
G	TS-t	MT20	3.0	8.0		
H	TMVW-t	MT20	4.0	4.0		
I	TMVW-t	MT20	4.0	6.0		
J	TTWW-m	MT20	6.0	9.0	1.75	4.00
K	TMVW-t	MT20	4.0	4.0	2.00	1.00
L	TMVW-p	MT20	5.0	8.0	Edge	3.50
N	BMVW-t	MT20	4.0	6.0		
O	BMV+p	MT20	3.0	4.0		
P	BMVW-t	MT20	6.0	12.0	3.75	7.75
Q	BMVW-t	MT20	4.0	4.0		
R	BMVW-t	MT20	5.0	6.0	2.50	2.50
S	BMVW-t	MT20	4.0	6.0		
T	BMVW-t	MT20	6.0	12.0	Edge	4.75
U	BMV+p	MT20	3.0	4.0		
V	BMVW-t	MT20	6.0	9.0	2.75	2.25

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REORD BRG
JT	VERT	HORZ	DOWN	HORZ
Z	2103	0	2103	0
N	2108	0	2108	0

ALLOW FOR 0.3" OF HORIZONTAL MOVEMENT DUE TO TOTAL LOAD

UNFACTORED REACTIONS

	1ST LOASE	MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
Z	1485	988 / 0	0 / 0	0 / 0	0 / 0	497 / 0	0 / 0
N	1489	990 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) Z, N

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.42 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED HORZ. LOAD (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED HORZ. LOAD (LC)	
FR-TO		FROM	TO	FR-TO			
A-B	0 / 35	-91.8	-91.8 0.12 (1)	Y-C	-361 / 0	0.10 (1)	
B-C	-2305 / 0	-91.8	-91.8 0.42 (1)	C-X	0 / 1958	0.44 (1)	
C-D	-3411 / 0	-91.8	-91.8 0.51 (1)	X-D	-1174 / 0	0.33 (1)	
D-E	-4209 / 0	-91.8	-91.8 0.61 (1)	D-V	0 / 1056	0.24 (1)	
E-F	-5806 / 0	-91.8	-91.8 0.78 (1)	V-E	-1454 / 0	0.41 (1)	
F-G	-5868 / 0	-91.8	-91.8 0.69 (1)	V-T	0 / 4140	0.67 (1)	
G-H	-5868 / 0	-91.8	-91.8 0.69 (1)	E-T	0 / 1873	0.42 (1)	
H-I	-5425 / 0	-91.8	-91.8 0.68 (1)	Q-J	0 / 97	0.03 (4)	
I-J	-4345 / 0	-91.8	-91.8 0.52 (1)	Q-K	-411 / 0	0.08 (1)	
J-K	-3015 / 0	-91.8	-91.8 0.26 (1)	B-Y	0 / 1970	0.44 (1)	
K-L	-3365 / 0	-91.8	-91.8 0.24 (1)	P-N	-137 / 0	0.01 (1)	
L-M	0 / 35	-91.8	-91.8 0.12 (1)	P-L	0 / 2767	0.44 (1)	
Z-B	-2071 / 0	0.0	0.0 0.21 (1)	R-J	0 / 2229	0.50 (1)	
N-L	-2015 / 0	0.0	0.0 0.21 (1)	T-H	0 / 542	0.12 (1)	
Z-Y	0 / 0	-18.5	-18.5 0.09 (4)	R-I	-1197 / 0	0.23 (1)	
Y-X	0 / 1906	-18.5	-18.5 0.36 (1)	S-H	-692 / 0	0.13 (1)	
X-W	0 / 3412	-18.5	-18.5 0.59 (1)	S-I	0 / 1327	0.30 (1)	
W-V	0 / 3412	-18.5	-18.5 0.59 (1)				
V-U	0 / 189	-18.5	-18.5 0.11 (4)				
U-T	0 / 40	0.0	0.0 0.26 (1)				
T-F	-402 / 0	0.0	0.0 0.27 (1)				
T-S	0 / 5425	-18.5	-18.5 0.93 (1)				
S-R	0 / 4345	-18.5	-18.5 0.76 (1)				
R-Q	0 / 2513	-18.5	-18.5 0.45 (1)				
Q-P	0 / 2892	-18.5	-18.5 0.51 (1)				
O-P	0 / 17	0.0	0.0 0.18 (1)				
P-K	0 / 202	0.0	0.0 0.21 (1)				
O-N	0 / 112	-18.5	-18.5 0.03 (1)				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.43")
ALLOWABLE DEFL.(TL)= L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/542 (0.80")

CSI: TC=0.78/1.00 (E-F:1), BC=0.93/1.00 (S-T:1), WB=0.67/1.00 (T-V:1), SS=0.21/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.89 (J) (INPUT = 0.90)
JSI METAL = 0.82 (T) (INPUT = 1.00)



Structural component only
DWG# T-2115486

CONTINUED ON PAGE 2

JOB NAME 411017	TRUSS NAME T31S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES TRUSS DESC.	DRWG NO.
---------------------------	---------------------------	----------------------	-----------------	---	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:32 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-tPe6esTz8n2GTio5nNeVnwMn9DiyqKrchSONaOzD??L

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
W	BS-t	MT20	4.0	6.0		
X	BMWVW-t	MT20	5.0	6.0	2.50	2.75
Y	BMWVW-t	MT20	5.0	6.0	2.50	2.75
Z	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2



Structural component only
DWG# T-2115486 *2/2*

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:33 2021 Page 1

ID:E?n9mn1Ky9qxx7v78133ulyzsQn-LbCUrCUbv4A75rNHL59kK8vwdc8UYpUmv67K6TzD?K

The diagram shows a side elevation of a roof truss. The top chord is a horizontal line with several vertical lines extending downwards to the bottom chord, representing the truss members. The dimensions are as follows:

- Top chord segments: 1-3-8, 0-0, 5-7-11, 5-7-11, 6-2-9, 11-10-3, 6-1-5, 17-11-8, 6-1-5, 24-0-13, 6-2-9, 30-3-5, 5-7-11, 35-11-0, 37-2-8.
- Bottom chord segments: 1-3-8, 5-7-11, 6-2-9, 11-10-3, 6-1-5, 17-11-8, 6-1-5, 24-0-13, 6-2-9, 30-3-5, 5-7-11, 35-11-0, 37-2-8.
- Labels: 1-3-8, 0-0, 5-7-11, 5-7-11, 6-2-9, 11-10-3, 6-1-5, 17-11-8, 6-1-5, 24-0-13, 6-2-9, 30-3-5, 5-7-11, 35-11-0, 37-2-8.
- Scale: 1" = 5'-0"



NOTES- (1)
(1) Lateral braces to be a minimum of 2x4 SPF #2

TOTAL LOAD CASES: (4)									
C H O R D S					W E B S				
MEMB.		MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)		MAX. UNBRAC. LENGTH	MEMB.		MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
FR-TO			FROM	TO		FR-TO			
A-B	0 / 35		-91.8	-91.8	0.12 (1)	10.00	R-C	-244 / 11	0.10 (1)
B-C	-2357 / 0		-91.8	-91.8	0.74 (1)	3.70	C-Q	0 / 1723	0.39 (1)
C-D	-3310 / 0		-91.8	-91.8	0.86 (1)	3.08	Q-D	-951 / 0	0.37 (1)
D-E	-3705 / 0		-91.8	-91.8	0.93 (1)	2.86	D-O	0 / 505	0.11 (1)
E-F	-3705 / 0		-91.8	-91.8	0.93 (1)	2.86	O-E	-517 / 0	0.20 (1)
F-G	-3705 / 0		-91.8	-91.8	0.93 (1)	2.86	O-G	0 / 505	0.11 (1)
G-H	-3310 / 0		-91.8	-91.8	0.86 (1)	3.08	M-G	-951 / 0	0.37 (1)
H-I	-2357 / 0		-91.8	-91.8	0.74 (1)	3.70	M-H	0 / 1723	0.39 (1)
I-J	0 / 35		-91.8	-91.8	0.12 (1)	10.00	L-H	-244 / 11	0.10 (1)
S-B	-2064 / 0	0.0	0.0	0.0	0.21 (1)	5.89	B-R	0 / 1993	0.45 (1)
K-I	-2064 / 0	0.0	0.0	0.0	0.21 (1)	5.89	L-I	0 / 1993	0.45 (1)
S-R	0 / 0	-18.5	-18.5	0.15 (4)	10.00				
R-Q	0 / 1953	-18.5	-18.5	0.40 (1)	10.00				
Q-P	0 / 3311	-18.5	-18.5	0.59 (1)	10.00				
P-O	0 / 3311	-18.5	-18.5	0.59 (1)	10.00				
O-N	0 / 3311	-18.5	-18.5	0.59 (1)	10.00				
N-M	0 / 3311	-18.5	-18.5	0.59 (1)	10.00				
M-L	0 / 1953	-18.5	-18.5	0.40 (1)	10.00				
L-K	0 / 0	-18.5	-18.5	0.15 (4)	10.00				

TRUSS PLATE MANUFACTURER IS NOT
RESPONSIBLE FOR QUALITY CONTROL IN THE
TRUSS MANUFACTURING PLANT .


NAIL VALUES

PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)	(PLI)	(PSI)	(PLI)	(PSI)	(PLI)
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP = 0.85 (I) (INPUT = 0.90)
JSI METAL= 0.76 (P) (INPUT = 1.00)



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411017	T32S	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:35 2021 Page 1
ID:E?n9mn1Ky9qx7v78133ulyzsQn-H_KFGtVsRiQrK9XgSWBCPZ_HPQnj0iG3NQcRBLzD??!

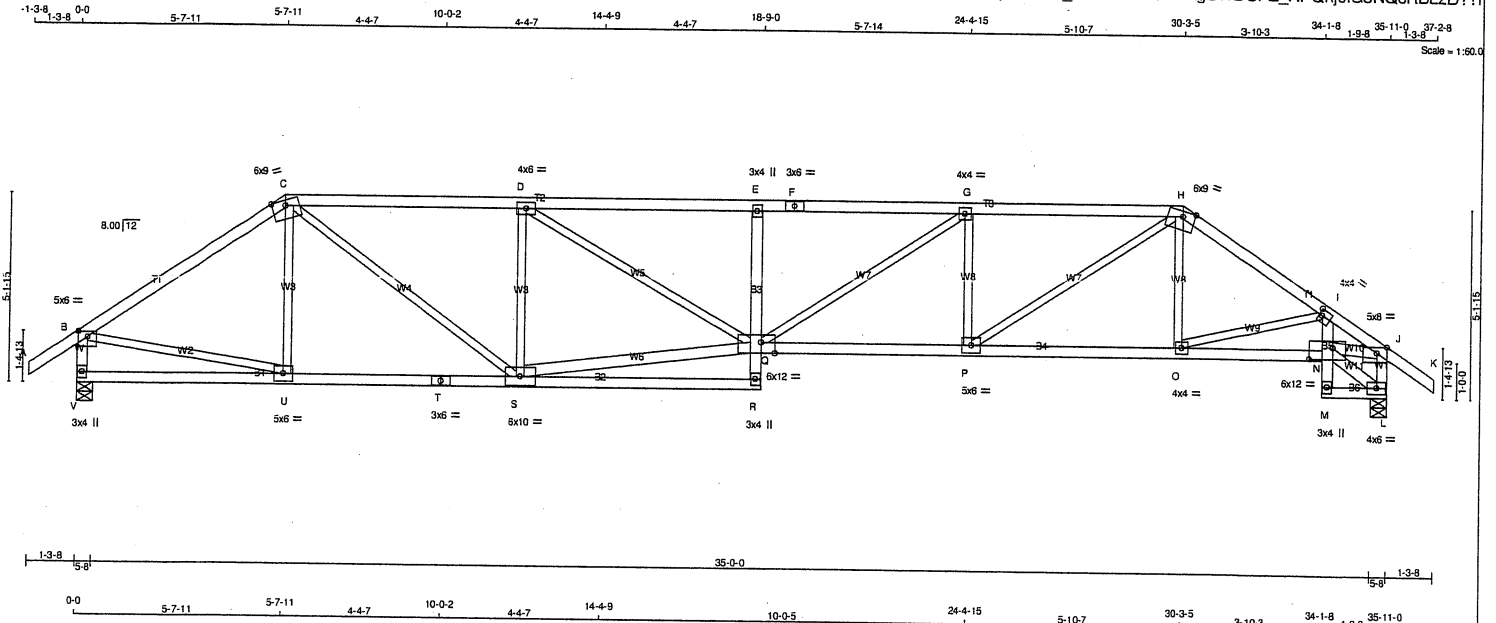

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	DRY	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF		
C - F	2x4	DRY	1650F 1.5E	SPF		
F - H	2x4	DRY	1650F 1.5E	SPF		
H - K	2x4	DRY	No.2	SPF		
V - B	2x4	DRY	No.2	SPF		
L - J	2x4	DRY	No.2	SPF		
V - T	2x4	DRY	No.2	SPF		
T - R	2x4	DRY	No.2	SPF		
R - E	2x4	DRY	No.2	SPF		
Q - N	2x4	DRY	No.2	SPF		
M - I	2x4	DRY	No.2	SPF		
M - L	2x4	DRY	No.2	SPF		
ALL WEBS	2x3	DRY	No.2	SPF		
EXCEPT						
S - Q	2x4	DRY	No.2	SPF		
N - L	2x4	DRY	No.2	SPF		
N - J	2x4	DRY	No.2	SPF		

DRY: SEASONED LUMBER.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	HORZ	UP/LIFT	IN-SX
V	2103	0	2103	0
L	2108	0	2108	0

UNFACTORED REACTIONS

	1ST LCASE	MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
V	1485	988 / 0	0 / 0	0 / 0	0 / 0	497 / 0	0 / 0
L	1489	990 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) V, L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.15 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED HORIZ. LOAD (PLF)	MAX. FACTORED UNBRACED LENGTH (FT)	WEBS	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED HORIZ. LOAD (PLF)
FR-TO						FR-TO			
A-B	0 / 35	-91.8	-91.8	0.12 (1)	10.00	U-C	-247 / 8	0.10 (1)	
B-C	-2353 / 0	-91.8	-91.8	0.74 (1)	3.71	C-S	0 / 1746	0.39 (1)	
C-D	-3343 / 0	-91.8	-91.8	0.70 (1)	3.71	S-D	-1415 / 0	0.56 (1)	
D-E	-4594 / 0	-91.8	-91.8	0.85 (1)	3.15	S-Q	0 / 3258	0.52 (1)	
E-F	-4632 / 0	-91.8	-91.8	0.62 (1)	3.34	D-Q	0 / 1430	0.32 (1)	
F-G	-4632 / 0	-91.8	-91.8	0.62 (1)	3.34	O-H	0 / 154	0.04 (4)	
G-H	-4075 / 0	-91.8	-91.8	0.57 (1)	3.56	O-I	-554 / 0	0.17 (1)	
H-I	-2934 / 0	-91.8	-91.8	0.37 (1)	3.76	B-U	0 / 1989	0.45 (1)	
I-J	-3427 / 0	-91.8	-91.8	0.24 (1)	3.60	N-L	-139 / 0	0.01 (1)	
J-K	0 / 35	-91.8	-91.8	0.12 (1)	10.00	N-J	0 / 2841	0.46 (1)	
V-B	-2061 / 0	0.0	0.0	0.21 (1)	5.89	P-H	0 / 1960	0.44 (1)	
L-J	-2014 / 0	0.0	0.0	0.21 (1)	5.95	Q-G	0 / 670	0.15 (1)	
						P-G	-964 / 0	0.25 (1)	
V-U	0 / 0	-18.5	-18.5	0.15 (4)	10.00				
U-T	0 / 1950	-18.5	-18.5	0.40 (1)	10.00				
T-S	0 / 1950	-18.5	-18.5	0.40 (1)	10.00				
S-R	0 / 148	-18.5	-18.5	0.19 (4)	10.00				
R-Q	0 / 55	0.0	0.0	0.21 (1)	10.00				
Q-E	-517 / 0	0.0	0.0	0.23 (1)	7.81				
Q-P	0 / 4075	-18.5	-18.5	0.74 (1)	10.00				
P-O	0 / 2437	-18.5	-18.5	0.46 (1)	10.00				
O-N	0 / 2966	-18.5	-18.5	0.54 (1)	10.00				
M-N	0 / 17	0.0	0.0	0.18 (1)	10.00				
N-I	0 / 173	0.0	0.0	0.21 (1)	10.00				
M-L	0 / 114	-18.5	-18.5	0.03 (1)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 8.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= $L/360$ (1.20")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.30")
ALLOWABLE DEFL.(TL)= $L/360$ (1.20")
CALCULATED VERT. DEFL.(TL) = $L/774$ (0.56")

CSI: TO=0.85/1.00 (D-E:1), BC=0.74/1.00 (P-Q:1), WB=0.56/1.00 (D-S:1), SSI=0.28/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY)	SHEAR (PSI)	SECTION (PLI)	MAX MIN	MAX MIN	MAX MIN
MT20	650	371	1747	788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (P) (INPUT = 0.90)
JSI METAL= 0.65 (Q) (INPUT = 1.00)




Structural component only
DWG# T-2115488

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411017	T33	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:36 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-mAudUDWUC?ZiyJ6s0DiRymXVHqAPI3QCb4M?jnzD??H

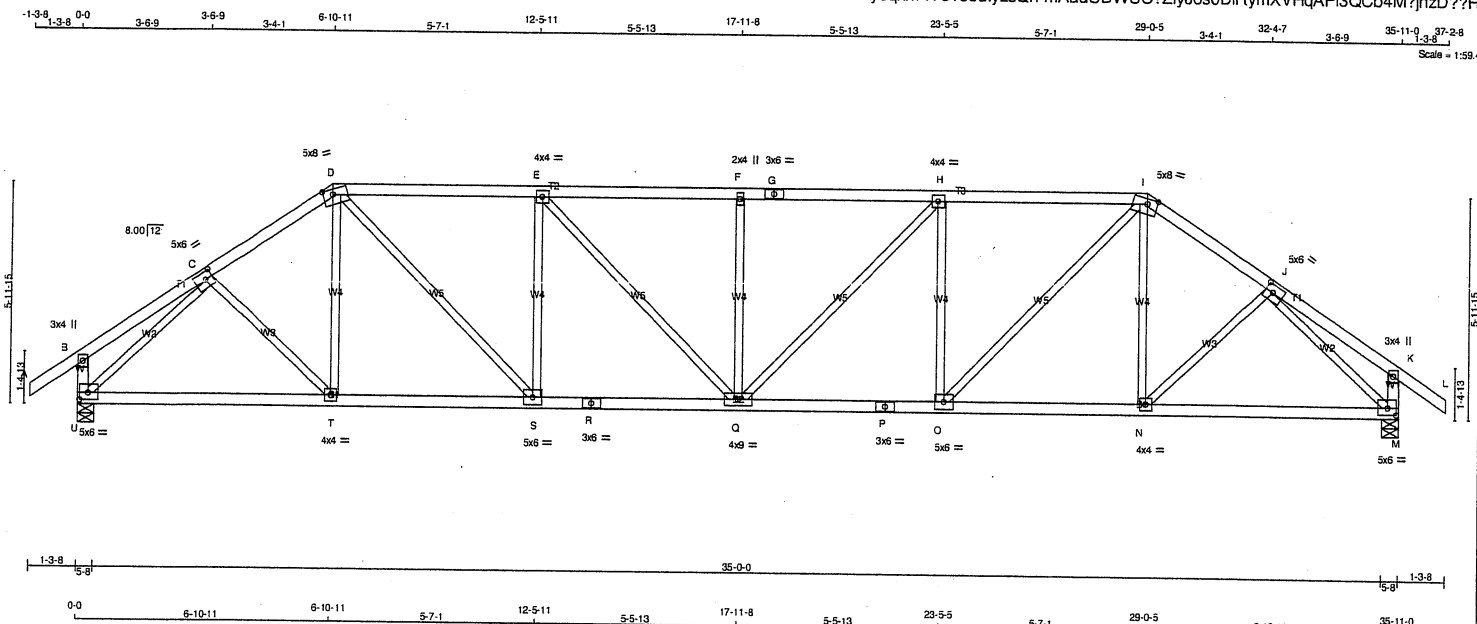

LUMBER					
N. L. G. A. RULES					
CHORDS		SIZE	LUMBER		DESCR.
A - D	2x4	DRY	No.2		SPF
D - G	2x4	DRY	No.2		SPF
G - I	2x4	DRY	No.2		SPF
I - L	2x4	DRY	No.2		SPF
U - B	2x4	DRY	No.2		SPF
M - K	2x4	DRY	No.2		SPF
U - R	2x4	DRY	No.2		SPF
R - P	2x4	DRY	No.2		SPF
P - M	2x4	DRY	No.2		SPF
ALL WEBS EXCEPT		2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.					

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
C	TMVW-t	MT20	5.0	6.0	2.50	2.50
D	TTWW-m	MT20	5.0	8.0	1.75	3.25
E	TMVW-t	MT20	4.0	4.0		
F	TMVW-w	MT20	2.0	4.0		
G	TS-t	MT20	3.0	6.0		
H	TMVW-t	MT20	4.0	4.0		
I	TTWW-m	MT20	5.0	8.0	1.75	3.25
J	TMVW-t	MT20	5.0	6.0	2.50	2.50
K	TMV+p	MT20	3.0	4.0		
M	BMVW1-t	MT20	5.0	6.0	2.25	2.75
N	BMVW-t	MT20	4.0	4.0		
O	BMVW-t	MT20	5.0	6.0		
P	BS-t	MT20	3.0	6.0		
Q	BMVW-t	MT20	4.0	9.0		
R	BS-t	MT20	3.0	6.0		
S	BMVW-t	MT20	5.0	6.0		
T	BMVW-t	MT20	4.0	4.0		
U	BMVW1-t	MT20	5.0	6.0	2.25	2.75

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	RECORD BRG
JT	VERT	HORZ	DOWN	HORZ
U	2106	0	2106	0
M	2106	0	2106	0

UNFACTORED REACTIONS

1ST LCASE	MAX./MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
U	1487	989 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0
M	1487	989 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.35 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX LC1 (LC)	MAX. UNBRACED LENGTH	WEBS	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)
FR-TO					FR-TO		
A-B	0 / 35	-91.8	-91.8 0.12 (1)	10.00	C-T	0 / 163	0.04 (1)
B-C	0 / 17	-91.8	-91.8 0.15 (1)	10.00	T-D	0 / 83	0.03 (4)
C-D	-2368 / 0	-91.8	-91.8 0.22 (1)	4.27	D-S	0 / 1326	0.30 (1)
D-E	-2882 / 0	-91.8	-91.8 0.62 (1)	3.52	S-E	-855 / 0	0.48 (1)
E-F	-3155 / 0	-91.8	-91.8 0.65 (1)	3.35	E-Q	0 / 393	0.09 (1)
F-G	-3155 / 0	-91.8	-91.8 0.65 (1)	3.35	Q-F	-463 / 0	0.26 (1)
G-H	-3155 / 0	-91.8	-91.8 0.65 (1)	3.35	Q-H	0 / 393	0.09 (1)
H-I	-2882 / 0	-91.8	-91.8 0.62 (1)	3.52	O-H	-855 / 0	0.48 (1)
I-J	-2368 / 0	-91.8	-91.8 0.22 (1)	4.27	O-I	0 / 1326	0.30 (1)
J-K	0 / 17	-91.8	-91.8 0.15 (1)	10.00	N-I	0 / 83	0.03 (4)
K-L	0 / 35	-91.8	-91.8 0.12 (1)	10.00	N-J	0 / 163	0.04 (1)
U-B	-253 / 0	0.0	0.0 0.03 (1)	7.81	U-C	-2570 / 0	0.95 (1)
M-K	-253 / 0	0.0	0.0 0.03 (1)	7.81	J-M	-2570 / 0	0.95 (1)
U-T	0 / 1834	-18.5	-18.5 0.40 (1)	10.00			
T-S	0 / 1953	-18.5	-18.5 0.42 (1)	10.00			
S-R	0 / 2883	-18.5	-18.5 0.52 (1)	10.00			
R-Q	0 / 2883	-18.5	-18.5 0.52 (1)	10.00			
Q-P	0 / 2883	-18.5	-18.5 0.52 (1)	10.00			
P-O	0 / 2883	-18.5	-18.5 0.52 (1)	10.00			
O-N	0 / 1953	-18.5	-18.5 0.42 (1)	10.00			
N-M	0 / 1834	-18.5	-18.5 0.40 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
	DL	= 6.0	PSF
BOT CH.	LL	= 0.0	PSF
	DL	= 7.4	PSF
TOTAL LOAD		= 39.0	PSF

SPACING = 24.0 IN./C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 088-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.20")
CALCULATED VERT. DEFL.(LL)= L/999 (0.17")
ALLOWABLE DEFL.(TL)= L/360 (1.20")
CALCULATED VERT. DEFL.(TL)= L/999 (0.32")

CSI: TC=0.65/1.00 (E-F:1), BC=0.52/1.00 (O-Q:1),
WB=0.95/1.00 (J-M:1), SS=0.24/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.85 (I) (INPUT = 0.90)
JSI METAL= 0.87 (R) (INPUT = 1.00)




Structural component only
DWG# T-2115489

JOB NAME 411017	TRUSS NAME T33S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
---------------------------	---------------------------	----------------------	-----------------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:37 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-EMR?hZX6ZJhZaTh3axEgU_4dqEV3UJ2Lqk5YFEzD??G

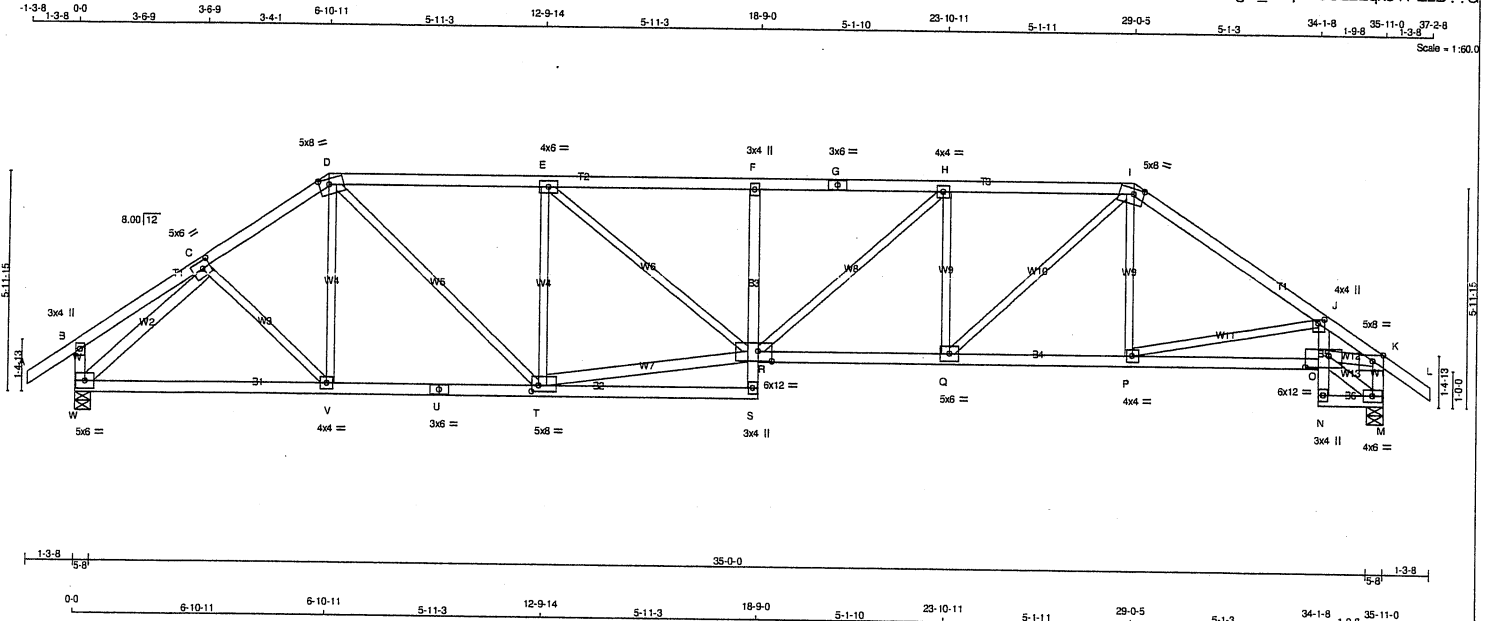

JOB NAME 411017	TRUSS NAME T33S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:37 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-EMR?hZX6zJhZaTh3axEqU 4dqEV3UZ2Lqk5YFEzD??G

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
V	BMWV1-t	MT20	4.0	4.0		
W	BMWV1-t	MT20	5.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2




Structural component only
DWG# T-2115490 2/2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411017	T34	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:38 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-IZ?NuvYkdpQBdGF8eiv1Bcp4dsVd4IV3Or5ngzD??F

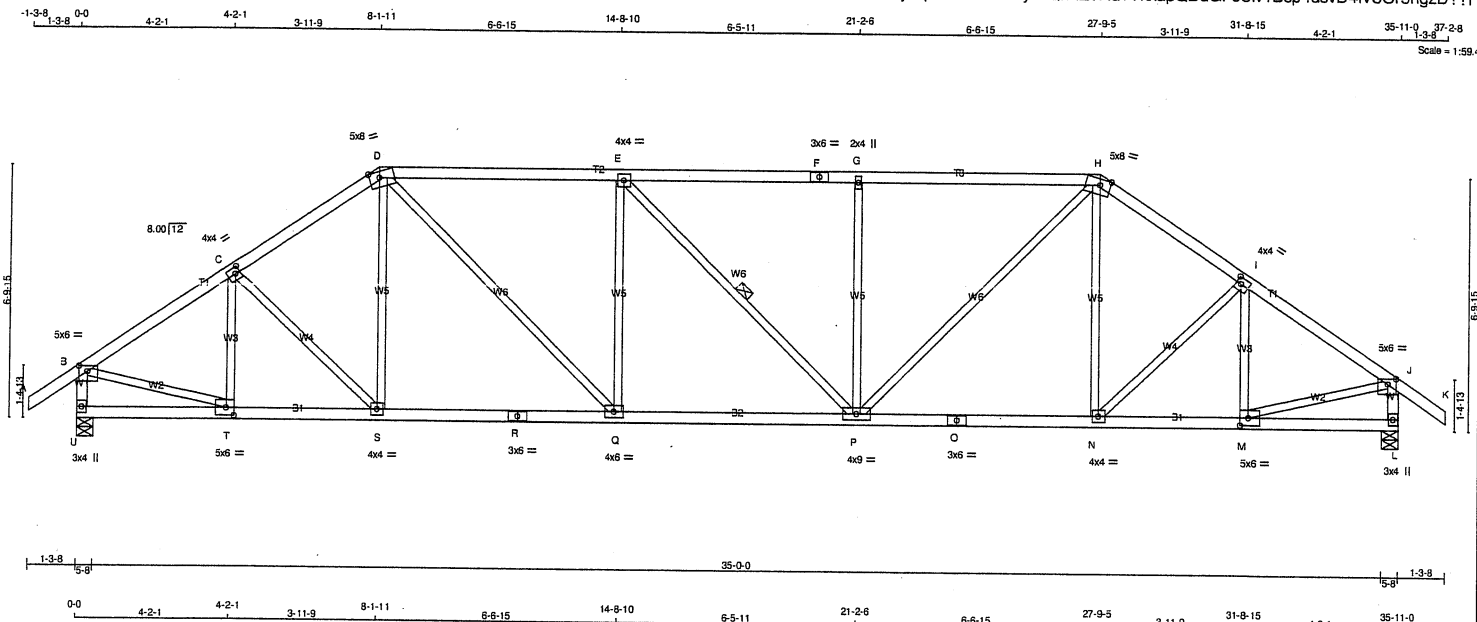

TOTAL WEIGHT = 155 lb

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF	
D - F	2x4	DRY	No.2	SPF	
F - H	2x4	DRY	No.2	SPF	
H - K	2x4	DRY	No.2	SPF	
U - B	2x4	DRY	No.2	SPF	
L - J	2x4	DRY	No.2	SPF	
U - R	2x4	DRY	No.2	SPF	
R - O	2x4	DRY	No.2	SPF	
O - L	2x4	DRY	No.2	SPF	

ALL WEBS 2x3 DRY No.2 SPF
EXCEPT

DRY: SEASONED LUMBER.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

FACTORED	MAXIMUM FACTORED	INPUT	REQD
GROSS REACTION	GROSS REACTION	BRG	BRG
JT VERT HORZ	DOWN HORZ UPLIFT	IN-SX	IN-SX
U 2106 0	2106 0 0	5-8	5-8
L 2106 0	2106 0 0	5-8	5-8

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
U	1487	989 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0
L	1487	989 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) U, L

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.40 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-P.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX	MAX. UNBRACED LENGTH	WEBS	MEMB.	FORCE (LBS)	MAX. FACTORED
FR-TO			FROM TO	CSI (LC)		FR-TO			CSI (LC)
A-B	0 / 35	-91.8	-91.8	0.12 (1)	10.00	T-C	-435 / 0	0.12 (1)	
B-C	-2304 / 0	-91.8	-91.8	0.33 (1)	4.21	C-S	-25 / 2	0.01 (1)	
C-D	-2333 / 0	-91.8	-91.8	0.33 (1)	4.18	S-D	0 / 125	0.04 (4)	
D-E	-2699 / 0	-91.8	-91.8	0.82 (1)	3.40	D-Q	0 / 1096	0.25 (1)	
E-F	-2697 / 0	-91.8	-91.8	0.81 (1)	3.40	Q-E	-650 / 0	0.51 (1)	
F-G	-2697 / 0	-91.8	-91.8	0.81 (1)	3.40	E-P	-2 / 0	0.00 (1)	
G-H	-2697 / 0	-91.8	-91.8	0.81 (1)	3.41	P-G	-650 / 0	0.51 (1)	
H-I	-2334 / 0	-91.8	-91.8	0.33 (1)	4.18	P-H	0 / 1094	0.25 (1)	
I-J	-2304 / 0	-91.8	-91.8	0.33 (1)	4.21	N-H	0 / 126	0.04 (4)	
J-K	0 / 35	-91.8	-91.8	0.12 (1)	10.00	N-I	-24 / 2	0.01 (1)	
U-B	-2068 / 0	0.0	0.0	0.21 (1)	5.88	M-I	-436 / 0	0.12 (1)	
L-J	-2068 / 0	0.0	0.0	0.21 (1)	5.88	B-T	0 / 2000	0.45 (1)	
						M-J	0 / 2000	0.45 (1)	
U-T	0 / 0	-18.5	-18.5	0.07 (4)	10.00				
T-S	0 / 1936	-18.5	-18.5	0.38 (1)	10.00				
S-R	0 / 1920	-18.5	-18.5	0.39 (1)	10.00				
R-Q	0 / 1920	-18.5	-18.5	0.39 (1)	10.00				
Q-P	0 / 2699	-18.5	-18.5	0.51 (1)	10.00				
P-O	0 / 1920	-18.5	-18.5	0.38 (1)	10.00				
O-N	0 / 1920	-18.5	-18.5	0.38 (1)	10.00				
N-M	0 / 1936	-18.5	-18.5	0.38 (1)	10.00				
M-L	0 / 0	-18.5	-18.5	0.07 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6 PSF
DL = 6.0 PSF	
BOT CH.	LL = 0.0 PSF
DL = 7.4 PSF	
TOTAL LOAD = 39.0 PSF	

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.14")
ALLOWABLE DEFL.(TL) = L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/999 (0.27")

CSI: TC=0.82/1.00 (D-E:1), BC=0.51/1.00 (P-Q:1),
WB=0.51/1.00 (E-Q:1), SSI=0.28/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.85 (B) (INPUT = 0.90)
JSI METAL = 0.65 (O) (INPUT = 1.00)



Structural component only
DWG# T-2115491

[illegible]

Structural component only
DWG# T-2115492

JOB NAME 411017	TRUSS NAME T34S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES TRUSS DESC.	DRWG NO.
---------------------------	---------------------------	----------------------	-----------------	---	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:39 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-AIZI6FZMVwxGpmqRhLG8ZP9yQ1BcyQ9el2afK6zD??E

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
W	BMW-t	MT20	5.0	6.0	2.50	2.75
X	BMV1+p	MT20	3.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2




Structural component only
DWG# T-2115492 *W*

Structural component only
DWG# T-2115493

JOB NAME 411017	TRUSS NAME T36	QUANTITY 2	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:41 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-68hWXxac1YB_24_qpmiceqELFvGQRFXIL3mO?zD??C

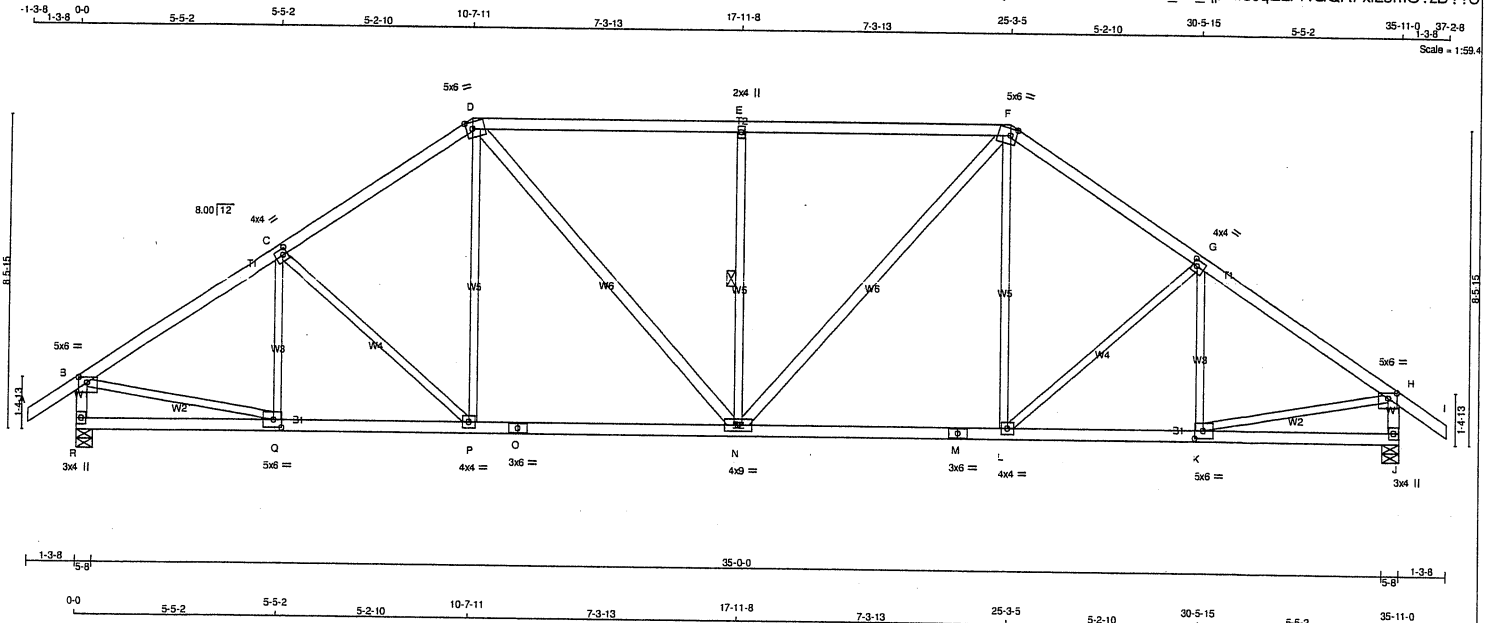

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
F - I	2x4	DRY	No.2
R - B	2x4	DRY	No.2
J - H	2x4	DRY	No.2
R - O	2x4	DRY	No.2
O - M	2x4	DRY	No.2
M - J	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			
D - N	2x4	DRY	No.2
N - F	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMVW-p	MT20	5.0	6.0 1.75 2.75
C	TMVW-t	MT20	4.0	4.0 2.00 1.50
D	TTWW-m	MT20	5.0	6.0 2.25 2.00
E	TMVW-w	MT20	2.0	4.0
F	TTWW-m	MT20	5.0	6.0 2.25 2.00
G	TMVW-t	MT20	4.0	4.0 2.00 1.50
H	TMVW-p	MT20	5.0	6.0 1.75 2.75
J	BMV1-p	MT20	3.0	4.0
K	BMVW-t	MT20	5.0	6.0 2.50 2.75
L	BMVW-t	MT20	4.0	4.0
M	BS-t	MT20	3.0	6.0
N	BMVW-t	MT20	4.0	9.0
O	BS-t	MT20	3.0	6.0
P	BMVW-t	MT20	4.0	4.0
Q	BMVW-t	MT20	5.0	6.0 2.50 2.75
R	BMV1-p	MT20	3.0	4.0

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		RECORD	
JT	GROSS REACTION	VERT	HORZ	GROSS REACTION	DOWN	UPLIFT	BRG	BRG	IN-SX
R	2106	0	0	2106	0	0	5-8	5-8	5-8
J	2106	0	0	2106	0	0	5-8	5-8	5-8

UNFACTORED REACTIONS

1ST LOOSE		MAX./MIN. COMPONENT REACTIONS							
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL		
R	1487	989 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0		
J	1487	989 / 0	0 / 0	0 / 0	0 / 0	498 / 0	0 / 0		

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.60 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS		FACTORED		WEBS		FACTORED	
MEMB.	MAX. FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX (LC)	MEMB.	MAX. FORCE (LBS)	MAX. UNBRACED LENGTH	MAX. FORCE (LBS)
FR-TO		FROM	TO	FR-TO			
A-B	0 / 35	-91.8	-91.8 0.12 (1)	10.00	Q-C	-302 / 0	0.11 (1)
B-C	-2389 / 0	-91.8	-91.8 0.44 (1)	4.05	C-P	-264 / 0	0.25 (1)
C-D	-2217 / 0	-91.8	-91.8 0.41 (1)	4.20	P-D	0 / 294	0.07 (1)
D-E	-2250 / 0	-91.8	-91.8 0.76 (1)	3.60	D-N	0 / 647	0.10 (1)
E-F	-2250 / 0	-91.8	-91.8 0.76 (1)	3.60	N-E	-827 / 0	0.38 (1)
F-G	-2217 / 0	-91.8	-91.8 0.41 (1)	4.20	N-F	0 / 647	0.10 (1)
G-H	-2389 / 0	-91.8	-91.8 0.44 (1)	4.05	L-F	0 / 294	0.07 (1)
H-I	0 / 35	-91.8	-91.8 0.12 (1)	10.00	L-G	-264 / 0	0.25 (1)
R-B	-2061 / 0	0.0	0.0 0.21 (1)	5.89	K-G	-302 / 0	0.11 (1)
J-H	-2061 / 0	0.0	0.0 0.21 (1)	5.89	B-Q	0 / 2053	0.46 (1)
					K-H	0 / 2053	0.46 (1)
R-Q	0 / 0	-18.5	-18.5 0.11 (4)	10.00			
Q-P	0 / 2014	-18.5	-18.5 0.41 (1)	10.00			
P-O	0 / 1819	-18.5	-18.5 0.40 (1)	10.00			
O-N	0 / 1819	-18.5	-18.5 0.40 (1)	10.00			
N-M	0 / 1819	-18.5	-18.5 0.40 (1)	10.00			
M-L	0 / 1819	-18.5	-18.5 0.40 (1)	10.00			
L-K	0 / 2014	-18.5	-18.5 0.41 (1)	10.00			
K-J	0 / 0	-18.5	-18.5 0.11 (4)	10.00			

TOTAL WEIGHT = 2 X 163 = 326 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
	DL	= 6.0	PSF
BOT CH.	LL	= 0.0	PSF
	DL	= 7.4	PSF
TOTAL LOAD		= 39.0	PSF

SPACING = 24.0 IN./C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.11")
ALLOWABLE DEFL.(TL) = L/360 (1.20")
CALCULATED VERT. DEFL.(TL) = L/999 (0.22")

CSI: TC=0.76/1.00 (E-F:1), BC=0.41/1.00 (K-L:1), WB=0.46/1.00 (B-Q:1), SSI=0.33/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PS) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.85 (H) (INPUT = 0.90)
JSI METAL= 0.52 (O) (INPUT = 1.00)




Structural component only
DWG# T-2115494

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:42 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-aKfukHbFnRjrgEZ0NUpRb1nZ6FFg9uE4_?pJwRzD??B

JOB NAME 411017	TRUSS NAME T38	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:44 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-XjNe9ycVTZZvYjPUvsJGSSuY2tLdiYNRJQ?KzD??9

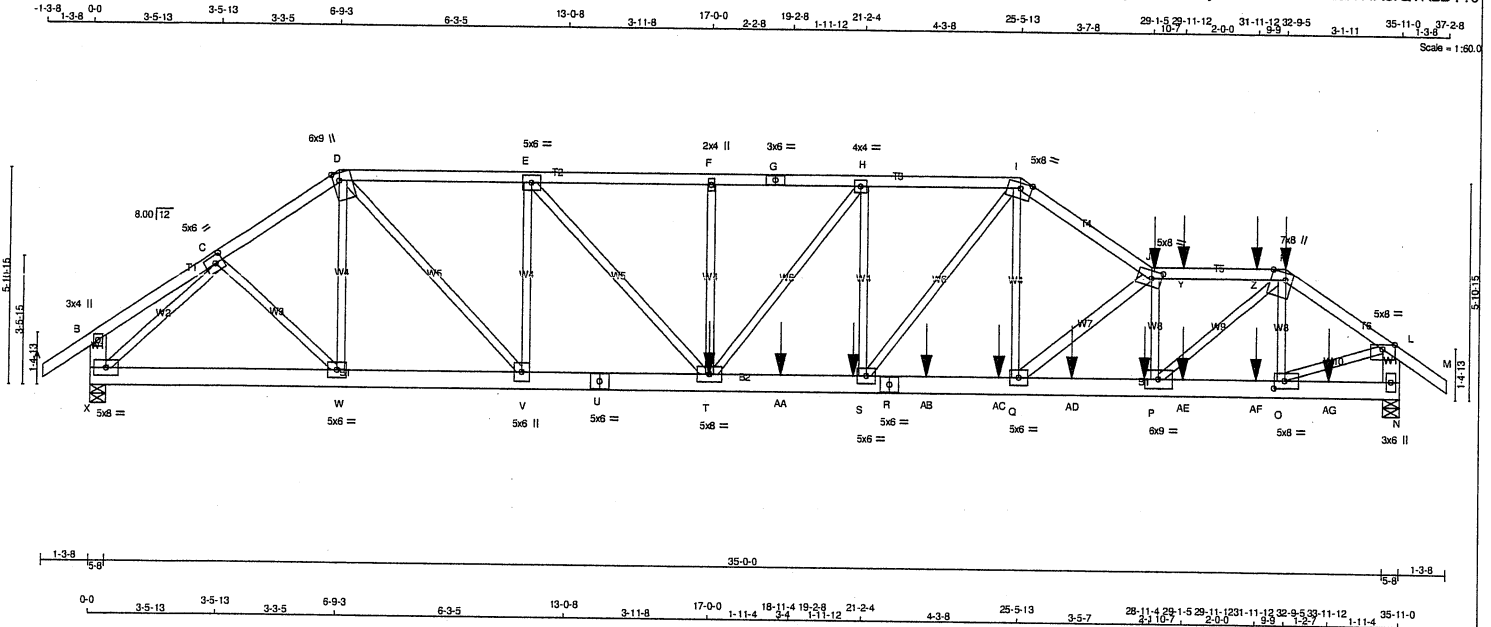

LUMBER	CHORDS	SIZE	LUMBER	DESCR.
N. L. G. A. RULES				
A - D	2x4	DRY	No.2	SPF
D - G	2x4	DRY	No.2	SPF
G - I	2x4	DRY	No.2	SPF
I - J	2x4	DRY	No.2	SPF
J - K	2x4	DRY	No.2	SPF
K - M	2x4	DRY	No.2	SPF
X - B	2x6	DRY	No.2	SPF
N - L	2x6	DRY	No.2	SPF
X - U	2x6	DRY	No.2	SPF
U - R	2x6	DRY	No.2	SPF
R - N	2x6	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				
Q - J	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A-D	12	TOP
D-G	12	TOP
G-I	12	TOP
I-J	12	SIDE(61.0)
J-K	12	SIDE(61.0)
K-M	12	TOP
X-B	12	TOP
N-L	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
X-U	12	TOP
U-R	12	SIDE(183.1)
R-N	12	SIDE(183.1)
WEBS : (0.122"x3") SPIRAL NAILS		
2x3	6	SIDE(337.4)
T-F	6	
2x4	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	HORZ	UPLIFT	IN-SX
N	4801	0	4801	0
X	3893	0	3893	0

UNFACTORED REACTIONS

	1ST CASE	MAX./MIN.	COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL	
N	3385	2281 / 0	0 / 0	0 / 0	0 / 0	1104 / 0	0 / 0	
X	2745	1846 / 0	0 / 0	0 / 0	0 / 0	899 / 0	0 / 0	

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N, X

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.95 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED MEMB. FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (FT)	WEBS	MAX. FACTORED MEMB. FORCE (LBS)	MAX. UNBRACED LENGTH (FT)
FR-TO				FR-TO		
A-B	0 / 35	-91.8	-91.8 0.07 (1)	W-D	-295 / 0	0.08 (1)
B-C	0 / 13	-91.8	-91.8 0.07 (1)	D-V	0 / 3773	0.47 (1)
C-D	-5041 / 0	-91.8	-91.8 0.17 (1)	V-E	-2641 / 0	0.68 (1)
D-E	-6748 / 0	-91.8	-91.8 0.43 (1)	Q-I	0 / 2494	0.31 (1)
E-F	-8683 / 0	-91.8	-91.8 0.57 (1)	Q-J	-2471 / 0	0.35 (1)
F-G	-8683 / 0	-91.8	-91.8 0.42 (1)	P-J	-3611 / 0	0.38 (1)
G-H	-8683 / 0	-91.8	-91.8 0.42 (1)	P-K	0 / 5477	0.68 (1)
H-I	-8361 / 0	-91.8	-91.8 0.41 (1)	Q-K	-1156 / 0	0.12 (1)
I-J	-8337 / 0	-91.8	-91.8 0.39 (1)	O-L	0 / 4838	0.60 (1)
J-Y	-8714 / 0	-91.8	-91.8 0.47 (1)	T-F	-384 / 0	0.10 (1)
Y-Z	-8714 / 0	-91.8	-91.8 0.47 (1)	E-T	0 / 2866	0.35 (1)
Z-K	-8714 / 0	-91.8	-91.8 0.47 (1)	S-H	-829 / 0	0.21 (1)
K-L	-5570 / 0	-91.8	-91.8 0.20 (1)	T-H	0 / 532	0.07 (1)
L-M	0 / 35	-91.8	-91.8 0.07 (1)	S-I	0 / 2245	0.28 (1)
X-B	-258 / 0	0.0	0.0 0.01 (1)	C-W	0 / 620	0.08 (1)
N-L	-4795 / 0	0.0	0.0 0.17 (1)	X-C	-5163 / 0	0.87 (1)

CHORDS	MAX. FACTORED MEMB. FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (FT)	WEBS	MAX. FACTORED MEMB. FORCE (LBS)	MAX. UNBRACED LENGTH (FT)
FR-TO				FR-TO		
X-W	0 / 3721	-18.5	-18.5 0.27 (1)	10.00		
W-V	0 / 4170	-18.5	-18.5 0.29 (1)	10.00		
V-U	0 / 6748	-18.5	-18.5 0.49 (1)	10.00		
U-T	0 / 6748	-18.5	-18.5 0.49 (1)	10.00		
T-AA	0 / 8361	-18.5	-18.5 0.68 (1)	10.00		
AA-S	0 / 8361	-18.5	-18.5 0.68 (1)	10.00		
S-R	0 / 6983	-18.5	-18.5 0.55 (1)	10.00		
R-AB	0 / 6983	-18.5	-18.5 0.55 (1)	10.00		
AB-AC	0 / 6983	-18.5	-18.5 0.55 (1)	10.00		
AC-Q	0 / 6983	-18.5	-18.5 0.55 (1)	10.00		
Q-AD	0 / 8835	-18.5	-18.5 0.70 (1)	10.00		
AD-P	0 / 8835	-18.5	-18.5 0.70 (1)	10.00		
P-AE	0 / 4586	-18.5	-18.5 0.42 (1)	10.00		
AE-AF	0 / 4586	-18.5	-18.5 0.42 (1)	10.00		
AF-O	0 / 4586	-18.5	-18.5 0.42 (1)	10.00		
O-AG	0 / 0	-18.5	-18.5 0.04 (1)	10.00		
AG-N	0 / 0	-18.5	-18.5 0.04 (1)	10.00		

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
J	29-1-5	-81	-91	---	FRONT	VERT	TOTAL	---	C1
K	32-9-5	-30	-30	---	FRONT	VERT	DEAD	---	C1
P	32-9-5	-127	-127	---	FRONT	VERT	SNOW	---	C1
S	28-11-4	-21	-21	---	FRONT	VERT	TOTAL	---	C1
T	20-11-4	-253	-253	---	FRONT	VERT	TOTAL	---	C1
T	17-0-0	-1406	-1406	---	FRONT	VERT	TOTAL	---	C1

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***

GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.

LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
	DL	= 6.0	PSF
BOT CH.	LL	= 0.0	PSF
	DL	= 7.4	PSF
TOTAL LOAD		= 39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN ALL FLAT SECTIONS BASED ON A SLOPE OF 6.00/12

*** NON STANDARD GIRDER ***

ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (1.20")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.24")
ALLOWABLE DEFL.(TL) = $L/360$ (1.20")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.43")

CSI: TC=0.57/1.00 (E-F:1), BC=0.70/1.00 (P-Q:1),
WB=0.87/1.00 (C-X:1), SS=0.17/1.00 (Q-S:1)

DOL LUMBER=1.00 NAIL=1.00 LBS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)
MAX	MIN	MAX
MT20	650	371
	1747	1987

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.

JSI GRIP = 0.90 (J) (INPUT = 0.90)
JSI METAL = 0.69 (I) (INPUT = 1.00)



Structural component only
DWG# T-2115496

CONTINUED ON PAGE 2

JOB NAME 411017	TRUSS NAME T38	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	---	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:44 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-XjNe9ycVJTZZvYjPUvsJGSsuY2tLdiYNRJIQ?KzD??9

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
C	TMWW-t	MT20	5.0	6.0	2.50	2.50
D	TTWW+m	MT20	6.0	9.0	Edge	2.00
E	TMWW-t	MT20	5.0	6.0		
F	TMW+w	MT20	2.0	4.0		
G	TS-t	MT20	3.0	6.0		
H	TMWW-t	MT20	4.0	4.0		
I	TTWW-m	MT20	5.0	8.0	1.75	3.75
J	TTWW-m	MT20	5.0	8.0	2.50	3.25
K	TTWW+m	MT20	7.0	8.0	Edge	4.75
L	TMV-p	MT20	5.0	8.0	Edge	
N	BMV1+p	MT20	3.0	5.0		
O	BMWW-t	MT20	5.0	8.0	2.50	3.50
P	BMWW-t	MT20	6.0	9.0		
Q, S, W						
Q	BMWW-t	MT20	5.0	6.0		
R	BS-t	MT20	5.0	6.0		
T	BMWWW-t	MT20	5.0	8.0		
U	BS-t	MT20	5.0	6.0		
V	BMWW-t	MT20	5.0	6.0		
X	BMV1-t	MT20	5.0	8.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

SPECIFIED CONCENTRATED LOADS (LBS)


JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
Y	29-11-12	-80	-80	---	FRONT	VERT	TOTAL	---	C1
Z	31-11-12	-82	-82	---	FRONT	VERT	TOTAL	---	C1
AA	18-11-4	-253	-253	---	FRONT	VERT	TOTAL	---	C1
AB	22-11-4	-253	-253	---	FRONT	VERT	TOTAL	---	C1
AC	24-11-4	-253	-253	---	FRONT	VERT	TOTAL	---	C1
AD	26-11-4	-253	-253	---	FRONT	VERT	TOTAL	---	C1
AE	29-11-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AF	31-11-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
AG	33-11-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

NOTES- (1)

- 1) Lateral braces to be a minimum of 2x4 SPF #2




Structural component only
DWG# T-2115496

JOB NAME 411017	TRUSS NAME T39	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:45 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-?vw1Nid74mhQXilb2cNYpgP_5SBEMF1Xgz1zXmzD???

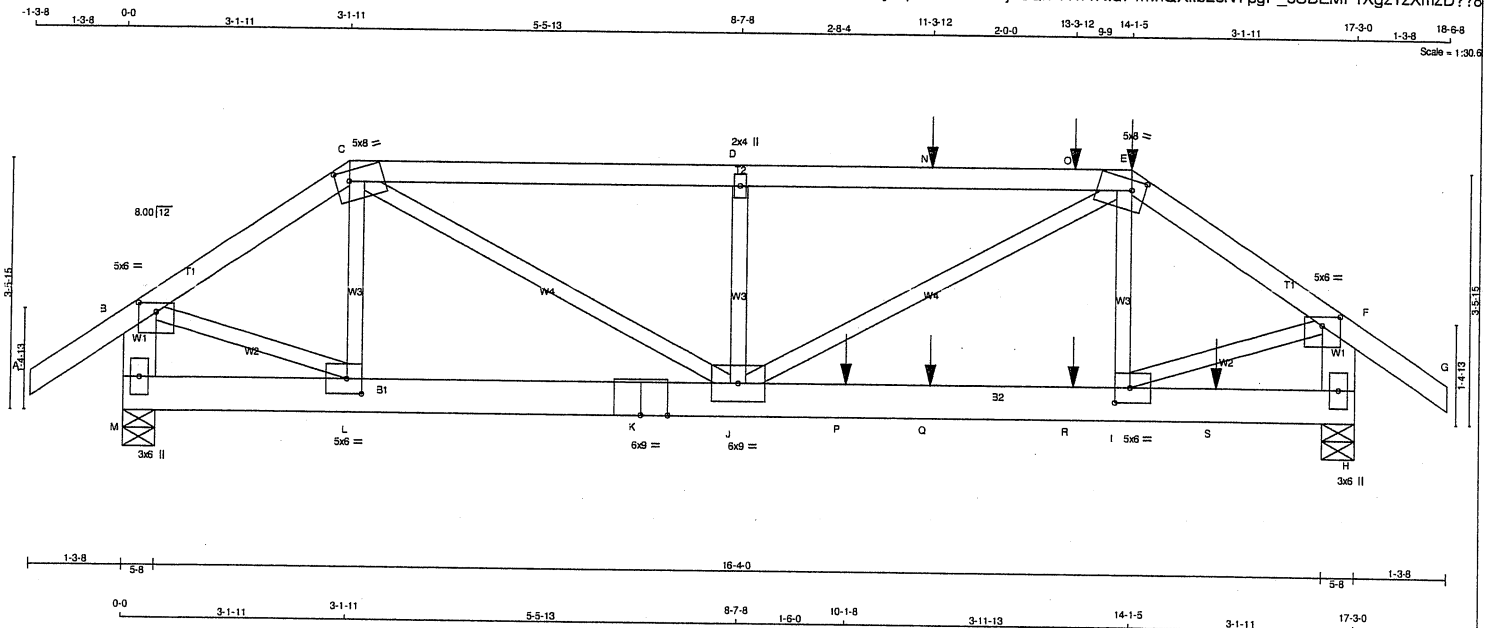

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2
C - E	2x4	DRY	No.2
E - G	2x4	DRY	No.2
G - I	2x4	DRY	No.2
I - K	2x4	DRY	No.2
K - L	2x4	DRY	No.2
L - M	2x4	DRY	No.2
M - N	2x4	DRY	No.2
N - O	2x4	DRY	No.2
O - P	2x4	DRY	No.2
P - Q	2x4	DRY	No.2
Q - R	2x4	DRY	No.2
R - S	2x4	DRY	No.2
S - T	2x4	DRY	No.2
T - U	2x4	DRY	No.2
U - V	2x4	DRY	No.2
V - W	2x4	DRY	No.2
W - X	2x4	DRY	No.2
X - Y	2x4	DRY	No.2
Y - Z	2x4	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2
SPF			
DRY: SEASONED LUMBER.			

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
B	TMVW-p	MT20	5.0	6.0 1.50 3.00
C	TTWW-m	MT20	5.0	8.0 1.75 2.25
D	TMW-w	MT20	2.0	4.0
E	TTWW-m	MT20	5.0	8.0 1.75 2.25
F	TMVW-p	MT20	5.0	6.0 1.50 3.00
H	BMV1-p	MT20	3.0	6.0
I	BMWW-t	MT20	5.0	6.0 2.50 2.50
J	BMWW-t	MT20	6.0	9.0
K	BS-t	MT20	6.0	9.0
L	BMWW-t	MT20	5.0	6.0 2.50 2.50
M	BMV1-p	MT20	3.0	6.0

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD	
JT	VERT	GROSS REACTION	HORZ	GROSS REACTION	HORZ	BRG	IN-SX	BRG	IN-SX
M	1565	0	1565	0	0	5-8	5-8	5-8	5-8
H	2005	0	2005	0	0	5-8	5-8	5-8	5-8

UNFACTORED REACTIONS

1ST LOASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
M	1102	748 / 0	0 / 0	0 / 0	0 / 0	354 / 0	0 / 0
H	1412	959 / 0	0 / 0	0 / 0	0 / 0	453 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) M, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.06 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS					WEBS				
MAX. FACTORED		FACTORED			MAX. FACTORED		MAX. FACTORED		
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1	MAX CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	FORCE (LBS)	MAX CSI (LC)	
FR-TO		FROM	TO			FR-TO			
A-B	0 / 35	-91.8	-91.8	0.14 (1)	10.00	L-C	-375 / 0	0.08 (1)	
B-C	-1548 / 0	-91.8	-91.8	0.21 (1)	5.04	C-J	0 / 1835	0.45 (1)	
C-D	-2870 / 0	-91.8	-91.8	0.83 (1)	3.06	J-D	-702 / 0	0.15 (1)	
D-N	-2870 / 0	-91.8	-91.8	0.83 (1)	3.06	J-E	0 / 1189	0.29 (1)	
N-O	-2870 / 0	-91.8	-91.8	0.83 (1)	3.06	I-E	-70 / 87	0.03 (4)	
O-E	-2870 / 0	-91.8	-91.8	0.83 (1)	3.06	B-L	0 / 1345	0.33 (1)	
E-F	-2214 / 0	-91.8	-91.8	0.25 (1)	4.32	I-F	0 / 1923	0.48 (1)	
F-G	0 / 35	-91.8	-91.8	0.14 (1)	10.00				
M-B	-1528 / 0	0.0	0.0	0.11 (1)	7.81				
H-F	-2068 / 0	0.0	0.0	0.15 (1)	7.01				
M-L	0 / 0	-18.5	-18.5	0.03 (1)	10.00				
L-K	0 / 1273	-18.5	-18.5	0.36 (1)	10.00				
K-J	0 / 1273	-18.5	-18.5	0.36 (1)	10.00				
J-P	0 / 1835	-18.5	-18.5	0.79 (1)	10.00				
P-Q	0 / 1835	-18.5	-18.5	0.79 (1)	10.00				
Q-R	0 / 1835	-18.5	-18.5	0.79 (1)	10.00				
R-I	0 / 1835	-18.5	-18.5	0.79 (1)	10.00				
I-S	0 / 0	-18.5	-18.5	0.25 (1)	10.00				
S-H	0 / 0	-18.5	-18.5	0.25 (1)	10.00				

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
E	14-1-5	-30	-30	---	FRONT	VERT	DEAD	---	C1
E	14-1-5	-127	-127	---	FRONT	VERT	SNOW	---	C1
N	11-3-12	-76	-76	---	FRONT	VERT	TOTAL	---	C1
O	13-3-12	-82	-82	---	FRONT	VERT	TOTAL	---	C1
P	10-1-8	-618	-618	---	FRONT	VERT	TOTAL	---	C1
Q	11-3-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
R	13-3-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1
S	15-3-12	-21	-21	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

*** NON STANDARD GIRDER ***

ADD'L USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.57")
CALCULATED VERT. DEFL.(LL)= L/999 (0.10")
ALLOWABLE DEFL.(TL)= L/360 (0.57")
CALCULATED VERT. DEFL.(TL)= L/999 (0.18")

CSI: TC=0.83/1.00 (D-E:1), BC=0.79/1.00 (I-J:1),
WB=0.48/1.00 (F-I:1), SS=0.46/1.00 (I-J:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.86 (C) (INPUT = 0.90)
JSI METAL= 0.74 (K) (INPUT = 1.00)




Structural component only
DWG# T-2115497

amarack Road, Burlington

Structural component only
DWG# T-2115498

JOB NAME 411017	TRUSS NAME T41	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:47 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-xl2nn_fNcOx8m?S_91P0u5URyG?pqEDq7HW4cfzD??6

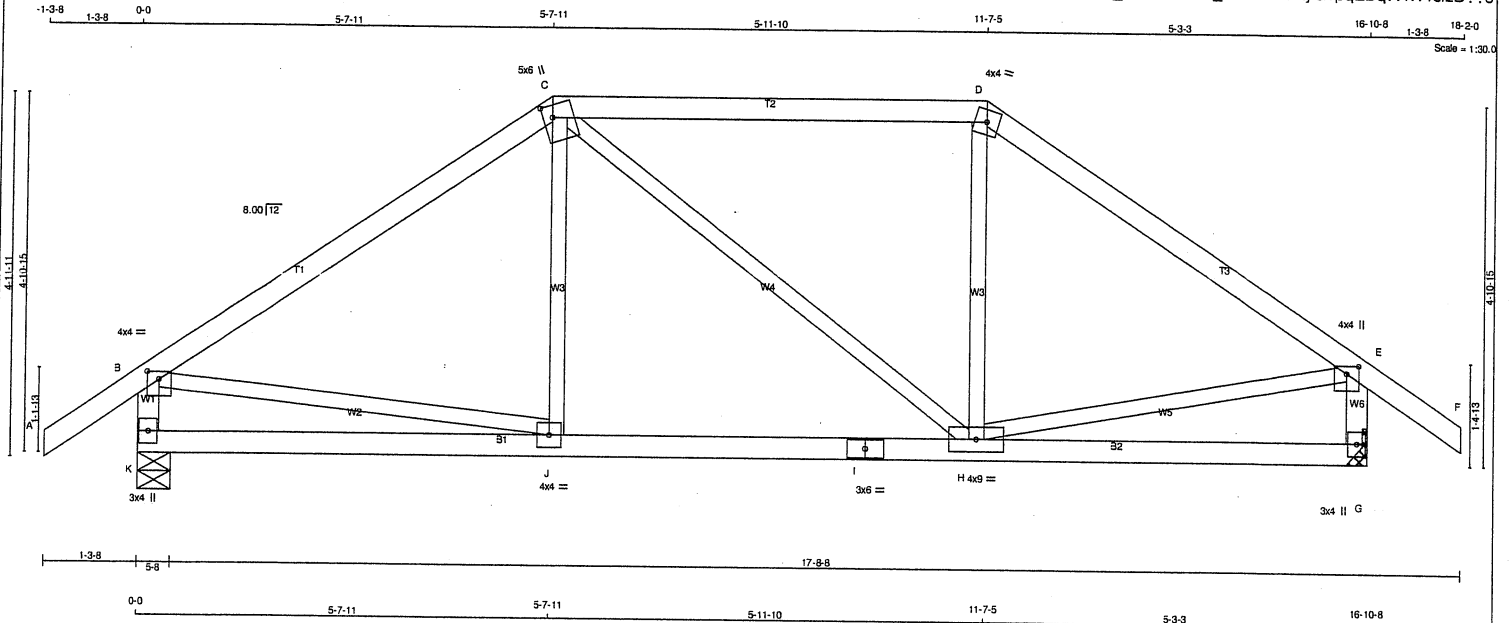

LUMBER				N. L. G. A. RULES	
CHORDS	SIZE	LUMBER	DESCR.	SPF	SPF
A - C	2x4	DRY	No.2	SPF	SPF
C - D	2x4	DRY	No.2	SPF	SPF
D - F	2x4	DRY	No.2	SPF	SPF
K - B	2x4	DRY	No.2	SPF	SPF
G - E	2x4	DRY	No.2	SPF	SPF
K - I	2x4	DRY	No.2	SPF	SPF
I - G	2x4	DRY	No.2	SPF	SPF
ALL WEBS	2x3	DRY	No.2	SPF	SPF
EXCEPT					

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	4.0	4.0	1.25	2.00
C	TTWW+m	MT20	5.0	6.0	2.00	1.50
D	TTW-m	MT20	4.0	4.0		
E	TMVW-p	MT20	4.0	4.0	1.25	2.00
G	BMV1+p	MT20	3.0	4.0		
H	BMVWW-t	MT20	4.0	9.0		
I	BS-t	MT20	3.0	6.0		
J	BMVW-t	MT20	4.0	4.0		
K	BMV1+p	MT20	3.0	4.0		

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY

BUILDING DESIGNER

BEARINGS

	FACTORED	MAXIMUM FACTORED	INPUT	REQD
	GROSS REACTION	GROSS REACTION	BRG	BRG
	VERT	DOWN	IN-SX	IN-SX
JT	1056	0	5-8	5-8
K	1056	0	MECHANICAL	
G	1056	0		

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT G. MINIMUM BEARING LENGTH AT JOINT G = 3-8.

UNFACTORED REACTIONS

JT	1ST LCASE	MAX/MIN. COMPONENT REACTIONS					
	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
K	745	502 / 0	0 / 0	0 / 0	0 / 0	243 / 0	0 / 0
G	745	502 / 0	0 / 0	0 / 0	0 / 0	243 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.90 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 35	-91.8 -91.8	0.12 (1)	J-C	0 / 92	0.03 (4)	
B-C	-929 / 0	-91.8 -91.8	0.39 (1)	C-H	-33 / 0	0.04 (1)	
C-D	-746 / 0	-91.8 -91.8	0.43 (1)	H-D	-16 / 81	0.03 (4)	
D-E	-898 / 0	-91.8 -91.8	0.34 (1)	B-J	0 / 780	0.18 (1)	
E-F	0 / 35	-91.8 -91.8	0.12 (1)	H-E	0 / 761	0.17 (1)	
K-B	-1013 / 0	0.0 0.0	0.10 (1)				
G-E	-1015 / 0	0.0 0.0	0.10 (1)				
K-J	0 / 0	-18.5 -18.5	0.14 (4)				
J-I	0 / 772	-18.5 -18.5	0.21 (4)				
I-H	0 / 772	-18.5 -18.5	0.21 (4)				
H-G	0 / 0	-18.5 -18.5	0.13 (4)				

TOTAL WEIGHT = 68 lb

(M/F)

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD	=	39.0	PSF	

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.56")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.56")
CALCULATED VERT. DEFL.(TL) = L/999 (0.04")

CSI: TC=0.43/1.00 (C-D:1), BC=0.21/1.00 (H-J:4), WB=0.18/1.00 (B-J:1), SSI=0.21/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MAX	MIN	MAX	MIN
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.84 (B) (INPUT = 0.90)


JSI METAL= 0.29 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115499

JOB NAME 411017	TRUSS NAME T42	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:48 2021 Page 1	

ID:E?n9mn1Ky9qx7v78133ulyzsQn-PUC9?Kg?Nh3?O91AkwFRl1gkILSZdzMxGd85zD??5

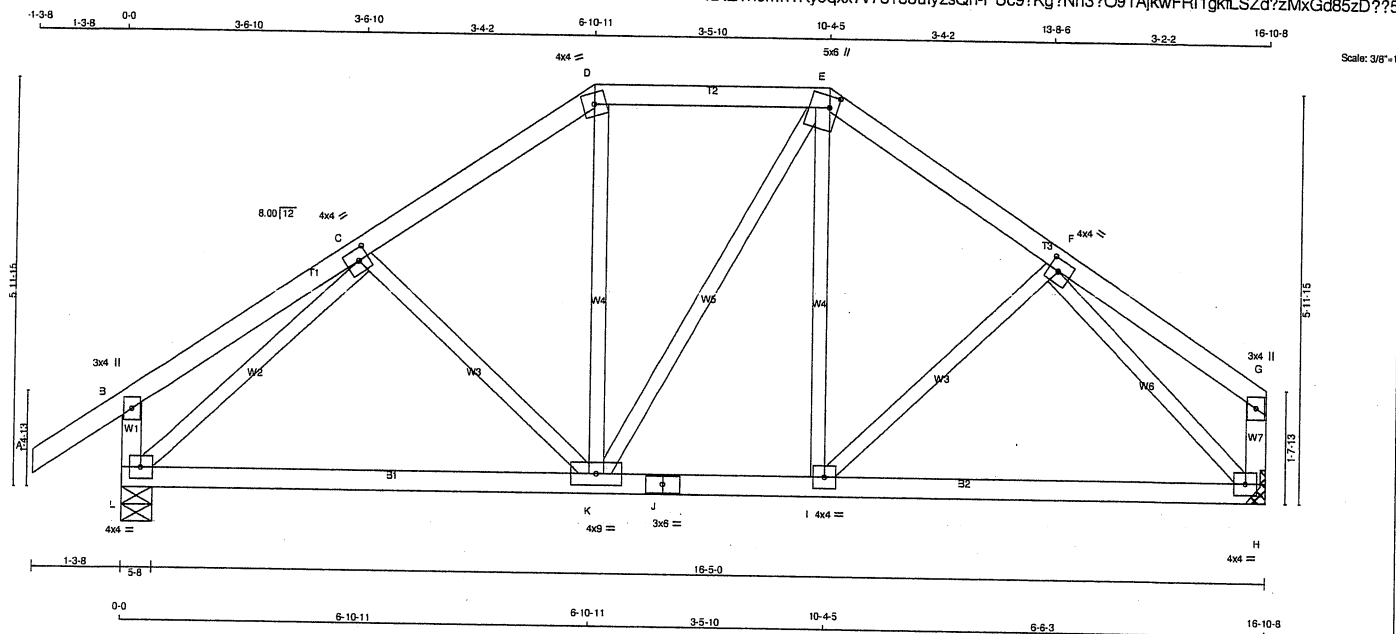

LUMBER

N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF
D - E	2x4	DRY	No.2	SPF
E - G	2x4	DRY	No.2	SPF
H - G	2x4	DRY	No.2	SPF
L - J	2x4	DRY	No.2	SPF
J - H	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT	2x3	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
C	TMW-t	MT20	4.0	4.0	2.00	1.75
D	TTW-m	MT20	4.0	4.0		
E	TTW+m	MT20	5.0	6.0	2.00	1.50
F	TMW-t	MT20	4.0	4.0	2.00	1.75
G	TMV+p	MT20	3.0	4.0		
H	BMVW1-t	MT20	4.0	4.0		
I	BMW-t	MT20	4.0	4.0		
J	BS-t	MT20	3.0	6.0		
K	BMVW-t	MT20	4.0	9.0		
L	BMVW1-t	MT20	4.0	4.0		

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQD BRG
	VERT	HORZ	DOWN	HORZ UPLIFT		
L	1056	0	1056	0	5-8	5-8
H	930	0	930	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 3-8.

UNFACTORED REACTIONS							
1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
L	745	502 / 0	0 / 0	0 / 0	0 / 0	243 / 0	0 / 0
H	658	432 / 0	0 / 0	0 / 0	0 / 0	226 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) L

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

MEMB.	CHORDS			WEBS		
	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	MAX. FACTORED CSI (LC)
FR-TO		FROM TO		FR-TO		
A-B	0 / 35	-91.8 -91.8	0.12 (1)	10.00	C-K	-126 / 3
B-C	0 / 20	-91.8 -91.8	0.17 (1)	10.00	K-D	0 / 171
C-D	-834 / 0	-91.8 -91.8	0.14 (1)	6.25	K-E	0 / 28
D-E	-679 / 0	-91.8 -91.8	0.15 (1)	6.25	E-F	0 / 134
E-F	-815 / 0	-91.8 -91.8	0.12 (1)	6.25	F-G	-54 / 23
F-G	0 / 20	-91.8 -91.8	0.15 (1)	10.00	L-C	-1075 / 0
L-B	-248 / 0	0.0 0.0	0.03 (1)	7.81	F-H	-1044 / 0
H-G	-105 / 0	0.0 0.0	0.01 (1)	7.81		
L-K	0 / 768	-18.5 -18.5	0.24 (4)	10.00		
K-J	0 / 665	-18.5 -18.5	0.23 (4)	10.00		
J-I	0 / 665	-18.5 -18.5	0.23 (4)	10.00		
I-H	0 / 702	-18.5 -18.5	0.22 (4)	10.00		

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.56")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL)= L/360 (0.56")
CALCULATED VERT. DEFL.(TL) = L/999 (0.09")

CSI: TC=0.17/1.00 (B-C:1), BC=0.24/1.00 (K-L:4), WB=0.40/1.00 (C-L:1), SS=0.13/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.86 (L) (INPUT = 0.90)
JSI METAL= 0.35 (C) (INPUT = 1.00)



JOB NAME 411017	TRUSS NAME T43	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:49 2021 Page 1
ID:E?n9mn1Ky9qxx7V78133ulyzsQn-tgAXCgge8?Bs0JbMHSRUzWZq_3ipl8V6bb?BgXzD??4

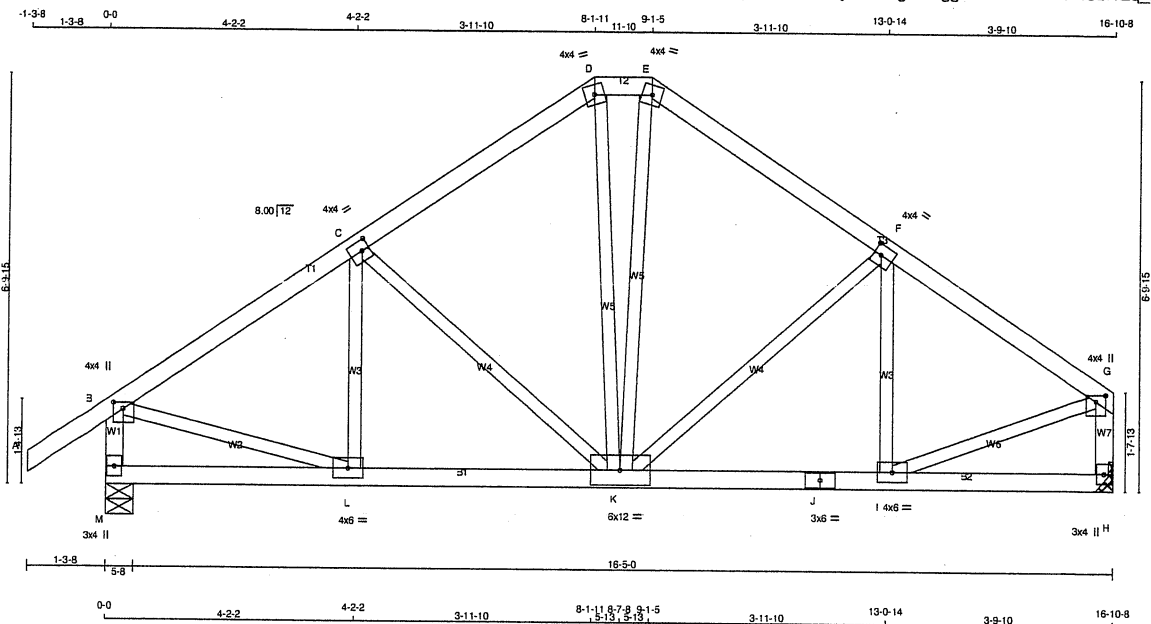

TOTAL WEIGHT = 78 b
[M/F]

LUMBER				DESCR.	
N. L. G. A. RULES	CHORDS	SIZE	LUMBER		
A - D	2x4	DRY	No.2	SPF	
D - E	2x4	DRY	No.2	SPF	
E - G	2x4	DRY	No.2	SPF	
M - B	2x4	DRY	No.2	SPF	
H - G	2x4	DRY	No.2	SPF	
M - J	2x4	DRY	No.2	SPF	
J - H	2x4	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
EXCEPT					

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	4.0	1.25	2.00
C	TMVW-t	MT20	4.0	4.0	2.00	1.50
D	TTW-m	MT20	4.0	4.0		
E	TTW-m	MT20	4.0	4.0		
F	TMVW-t	MT20	4.0	4.0	2.00	1.50
G	TMVW+p	MT20	4.0	4.0	1.25	2.00
H	BMV1+p	MT20	3.0	4.0		
I	BMVW-t	MT20	4.0	6.0		
J	BS-t	MT20	3.0	6.0		
K	BMVWWW-t	MT20	6.0	12.0		
L	BMVW-t	MT20	4.0	6.0		
M	BMV1+p	MT20	3.0	4.0		

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQ'D
JT	GROSS REACTION	VERT	HORZ	BRG	BRG
M	1056	0	1056	0	5-8
H	930	0	930	0	MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT H. MINIMUM BEARING LENGTH AT JOINT H = 3-8.

UNFACTORED REACTIONS

1ST LCASE	MAX./MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
M	745	502 / 0	0 / 0	0 / 0	0 / 0	243 / 0	0 / 0
H	658	432 / 0	0 / 0	0 / 0	0 / 0	226 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) M

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.13 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH	MEMB.	FORCE (LBS)	MAX. UNBRACED LENGTH	
A-B	0 / 35	-91.8	10.00	L-C	-126 / 27	0.03 (1)	
B-C	-949 / 0	-91.8	6.13	C-K	-292 / 0	0.17 (1)	
C-D	-734 / 0	-91.8	6.25	K-F	-222 / 0	0.13 (1)	
D-E	-605 / 0	-91.8	6.25	I-F	-185 / 4	0.05 (1)	
E-F	-732 / 0	-91.8	6.25	B-L	0 / 836	0.19 (1)	
F-G	-886 / 0	-91.8	6.25	I-G	0 / 802	0.18 (1)	
M-B	-1023 / 0	0.0	7.75	D-K	0 / 214	0.05 (1)	
H-G	-901 / 0	0.0	7.81	K-E	0 / 210	0.05 (1)	
M-L	0 / 0	-18.5	10.00				
L-K	0 / 809	-18.5	10.00				
K-J	0 / 757	-18.5	10.00				
J-I	0 / 757	-18.5	10.00				
I-H	0 / 0	-18.5	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.56")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.56")
CALCULATED VERT. DEFL.(TL) = L/999 (0.04")

CSI: TC=0.20/1.00 (B-C:1), BC=0.17/1.00 (K-L:1),
WB=0.19/1.00 (B-L:1), SSI=0.15/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.84 (B) (INPUT = 0.90)
JSI METAL = 0.25 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115501

JOB NAME 411017	TRUSS NAME T44	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MITek Industries, Inc. Tue May 25 10:54:50 2021 Page 1
ID:E?n9mnt1Ky9qxxv78133ulyzsQn-LskwQ0HgVJjdTAYr9yJW6_bt1W1U4GpFikCzzD???

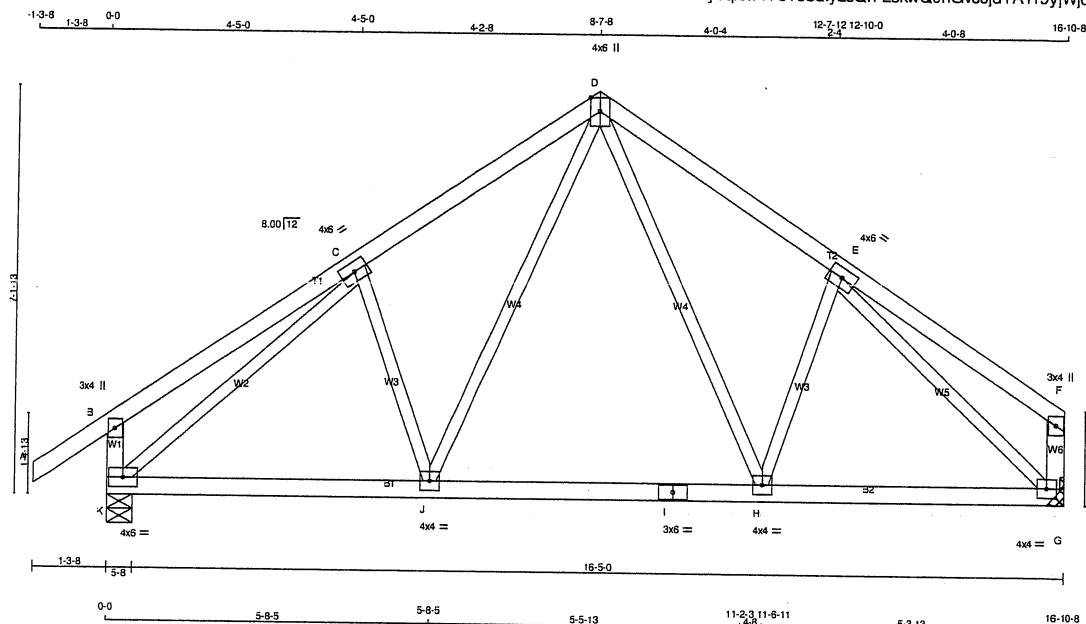

TOTAL WEIGHT = 74 lb
[M][F]

LUMBER				
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2	SPF
D - F	2x4	DRY	No.2	SPF
K - B	2x4	DRY	No.2	SPF
G - F	2x4	DRY	No.2	SPF
K - I	2x4	DRY	No.2	SPF
I - G	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMV+p	MT20	3.0	4.0		
C	TMWW-t	MT20	4.0	6.0		
D	TTWW+p	MT20	4.0	6.0	Edge	
E	TMWW-t	MT20	4.0	6.0		
F	TMV+p	MT20	3.0	4.0		
G	BMVW1-t	MT20	4.0	4.0		
H	BMVW-t	MT20	4.0	4.0		
I	BS-t	MT20	3.0	6.0		
J	BMVW-t	MT20	4.0	4.0		
K	BMVW1-t	MT20	4.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES: (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
K	1056	0	1056	0	5-8
G	930	0	930	0	MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT G. MINIMUM BEARING LENGTH AT JOINT G = 3-8.

UNFACTORED REACTIONS

JT	1ST CASE	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
K	745	502 / 0	0 / 0	0 / 0	0 / 0	0 / 0	243 / 0	0 / 0
G	658	432 / 0	0 / 0	0 / 0	0 / 0	0 / 0	226 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) K

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	
FR-TO				FR-TO			
A-B	0 / 35	-91.8	-91.8 0.12 (1)	10.00	C-J	-245 / 0	0.07 (1)
B-C	0 / 26	-91.8	-91.8 0.27 (1)	10.00	J-D	0 / 379	0.09 (1)
C-D	-890 / 0	-91.8	-91.8 0.22 (1)	6.25	D-H	0 / 307	0.07 (1)
D-E	-854 / 0	-91.8	-91.8 0.20 (1)	6.25	H-E	-181 / 0	0.05 (1)
E-F	0 / 26	-91.8	-91.8 0.25 (1)	10.00	K-C	-1089 / 0	0.62 (1)
K-B	-276 / 0	0.0	0.0 0.03 (1)	7.81	E-G	-1068 / 0	0.54 (1)
G-F	-133 / 0	0.0	0.0 0.01 (1)	7.81			
K-J	0 / 802	-18.5	-18.5 0.21 (4)	10.00			
J-I	0 / 570	-18.5	-18.5 0.19 (4)	10.00			
I-H	0 / 570	-18.5	-18.5 0.19 (4)	10.00			
H-G	0 / 753	-18.5	-18.5 0.19 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.56")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL)= L/360 (0.56")
CALCULATED VERT. DEFL.(TL) = L/999 (0.05")

CSI: TC=0.27/1.00 (B-C:1), BC=0.21/1.00 (J-K:4), WB=0.62/1.00 (C-K:1), SSI=0.16/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.85 (G) (INPUT = 0.90)
JSI METAL= 0.26 (C) (INPUT = 1.00)



Structural component only
DWG# T-2115502

JOB NAME 411017	TRUSS NAME T45	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:51 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-p3lIdMugcRZFdlOtUy2xf7etOwm1kP2vUHIQzD??2

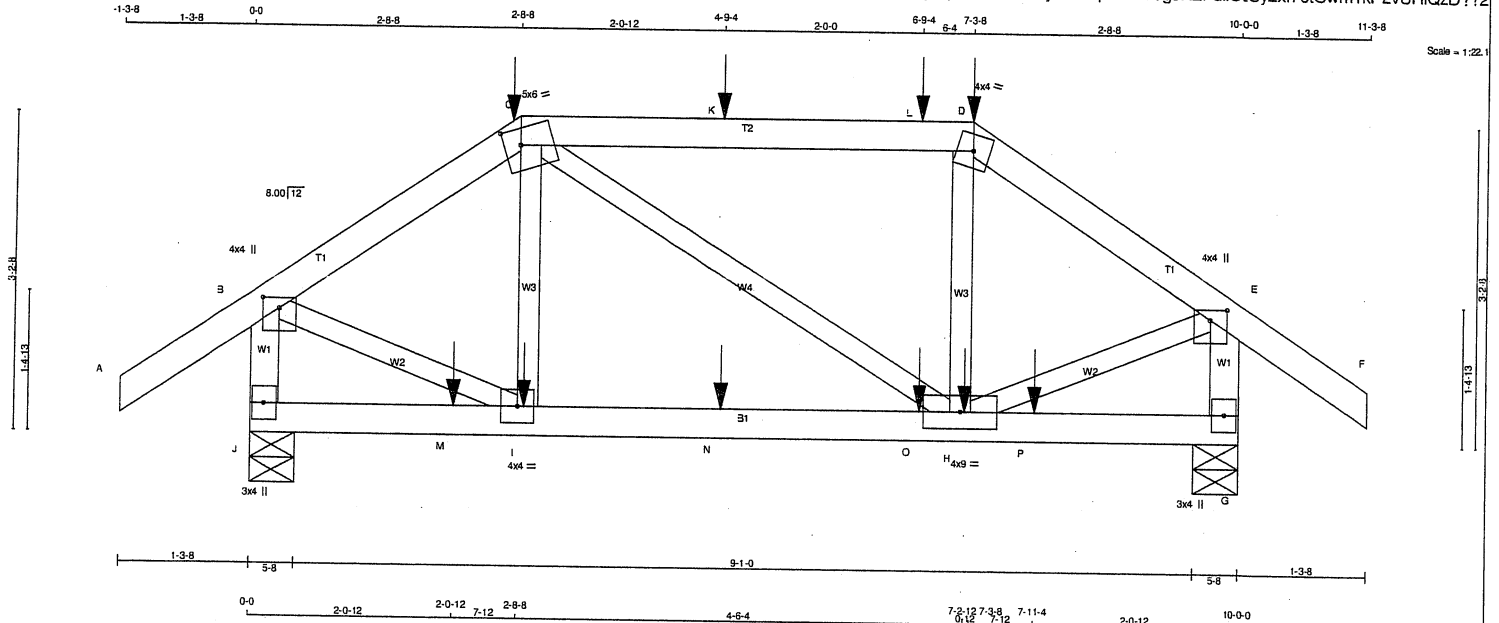

LUMBER				DESCR.	
N. L. G. A. RULES	SIZE	LUMBER			
CHORDS				SPF	
A - C	2x4	DRY	No.2	SPF	
C - D	2x4	DRY	No.2	SPF	
D - F	2x4	DRY	No.2	SPF	
J - B	2x4	DRY	No.2	SPF	
G - E	2x4	DRY	No.2	SPF	
J - G	2x4	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
EXCEPT					

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	4.0	1.25 2.00
C	TTWW-m	MT20	5.0	6.0	2.00 2.00
D	TTW-m	MT20	4.0	4.0	
E	TMVW+p	MT20	4.0	4.0	1.25 2.00
G	BMV1+p	MT20	3.0	4.0	
H	BMVWW-t	MT20	4.0	9.0	
I	BMVWW-t	MT20	4.0	4.0	
J	BMV1+p	MT20	3.0	4.0	

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQRD	
JT	VERT	GROSS REACTION	DOWN	GROSS REACTION	UP	BRG	IN-SX	BRG	IN-SX
J	813	0	813	0	0	5-8	5-8	5-8	5-8
G	833	0	833	0	0	5-8	5-8	5-8	5-8

UNFACTORED REACTIONS		1ST LCASE		MAX/MIN. COMPONENT REACTIONS	
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND
J	573	388 / 0	0 / 0	0 / 0	0 / 0
G	587	396 / 0	0 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) J, G
BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING		TOTAL LOAD CASES: (7)	
CHORDS		WEBS	
MEMB.	MAX. FACTORED FORCE (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)
FR-TO		FR-TO	
A-B	0 / 35	I-C	-104 / 34
B-C	-620 / 0	C-H	0 / 21
C-K	-528 / 0	H-D	-119 / 34
K-L	-528 / 0	B-I	0 / 551
L-D	-528 / 0	H-E	0 / 570
D-E	-642 / 0		
E-F	0 / 35		
J-B	-793 / 0		
G-E	-813 / 0		
J-M	0 / 0		
M-I	0 / 0		
I-N	0 / 510		
N-O	0 / 510		
O-H	0 / 510		
H-P	0 / 0		
P-G	0 / 0		

SPECIFIED CONCENTRATED LOADS (LBS)		FACE		TYPE		HEEL		CONN.	
JT	LOC.	LOC1	MAX-	MAX+	FRONT	VERT	TOTAL		
C	2-8-8	-56	-56	100	FRONT	VERT	TOTAL		C1
D	7-3-8	-56	-56	100	FRONT	VERT	TOTAL		C1
H	7-2-12	-5	-5	---	FRONT	VERT	TOTAL		C1
I	2-9-4	-5	-5	---	FRONT	VERT	TOTAL		C1
K	4-9-4	-22	-22	---	FRONT	VERT	TOTAL		C1
L	6-9-4	-38	-38	---	FRONT	VERT	TOTAL		C1
M	2-0-12	-7	-7	---	FRONT	VERT	TOTAL		C1
N	4-9-4	-5	-5	---	FRONT	VERT	TOTAL		C1
O	6-9-4	-5	-5	---	FRONT	VERT	TOTAL		C1
P	7-11-4	-7	-7	---	FRONT	VERT	TOTAL		C1

CONNECTION REQUIREMENTS
1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA	
SPECIFIED LOADS:	
TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C
LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12
THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014
(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.33")
CALCULATED VERT. DEFL.(LL) = L/999 (0.01")
ALLOWABLE DEFL.(TL) = L/360 (0.33")
CALCULATED VERT. DEFL.(TL) = L/999 (0.02")
CSI: TC=0.45/1.00 (C-D:1), BC=0.13/1.00 (H-I:1), WB=0.14/1.00 (E-H:1), SSI=0.23/1.00 (C-D:1)
DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00
COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES		PLATE GRIP(DRY)		SHEAR		SECTION	
(PSI)	(PLI)	(PSI)	(PLI)	(PSI)	(PLI)	(PSI)	(PLI)
MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873	


PLATE PLACEMENT TOL. = 0.250 inches
PLATE ROTATION TOL. = 5.0 Deg.
JSI GRIP= 0.61 (I) (INPUT = 0.90)
JSI METAL= 0.17 (E) (INPUT = 1.00)



Structural component only
DWG# T-2115503

JOB NAME 411017	TRUSS NAME T46	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:52 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-IFgrhjWRwaQtmKxya?Bb8BKmhK7VvZHZErHszD??1

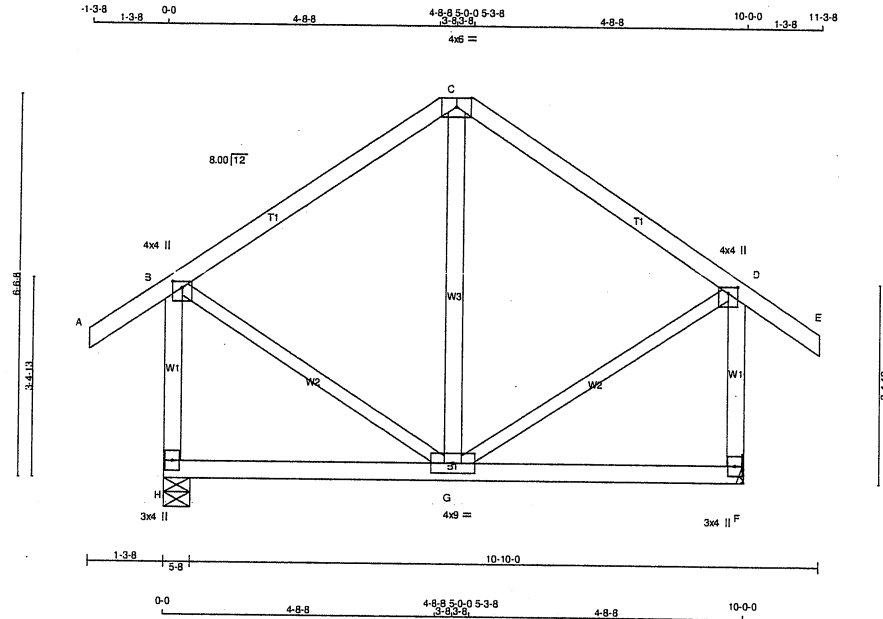

Scale = 1/32"

LUMBER				DESCR.
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	
A - C	2x4	DRY	No.2	SPF
C - E	2x4	DRY	No.2	SPF
H - B	2x4	DRY	No.2	SPF
F - D	2x4	DRY	No.2	SPF
H - F	2x4	DRY	No.2	SPF
ALL WEBS EXCEPT G - C	2x3	DRY	No.2	SPF
	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	4.0	1.25 2.00
C	TMTMWm	MT20	4.0	6.0	Edge
D	TMVW+p	MT20	4.0	4.0	1.25 2.00
F	BMV1+p	MT20	3.0	4.0	
G	BMVWW-t	MT20	4.0	9.0	
H	BMV1+p	MT20	3.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG IN-SX	REQRD BRG IN-SX
	VERT	HORZ	DOWN	HORZ		
H	677	0	677	0	5-8	5-8
F	677	0	677	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
H	477	326 / 0	0 / 0	0 / 0	0 / 0	150 / 0	0 / 0
F	477	326 / 0	0 / 0	0 / 0	0 / 0	150 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX (LC)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS1 (LC)
FR-TO		FROM	TO		FR-TO		
A-B	0 / 35	-91.8	-91.8 0.12 (1)	10.00	B-G	0 / 262	0.06 (1)
B-C	-268 / 0	-91.8	-91.8 0.29 (1)	6.25	G-D	0 / 262	0.06 (1)
C-D	-268 / 0	-91.8	-91.8 0.29 (1)	6.25	G-C	-161 / 27	0.08 (1)
D-E	0 / 35	-91.8	-91.8 0.12 (1)	10.00			
H-B	-642 / 0	0.0	0.0 0.13 (1)	7.81			
F-D	-642 / 0	0.0	0.0 0.13 (1)	7.81			
H-G	0 / 0	-18.5	-18.5 0.13 (4)	10.00			
G-F	0 / 0	-18.5	-18.5 0.13 (4)	10.00			

TOTAL WEIGHT = 51 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.33")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.33")
CALCULATED VERT. DEFL.(TL) = L/999 (0.02")

CSI: TC=0.29/1.00 (B-C:1); BC=0.13/1.00 (G-H:4);
WB=0.08/1.00 (C-G:1); SS=0.15/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.43 (B) (INPUT = 0.90)
JSI METAL = 0.13 (B) (INPUT = 1.00)




Structural component only
DWG# T-2115504

JOB NAME 411017	TRUSS NAME T47	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	-------------------------------	-------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:53 2021 Page 1
ID:E?n9mn1Ky9qx7v78133ulyzsQn-mRP221j8CEiHUwv7WlWQ8MkXeg5OEyliWDzOplzD??0

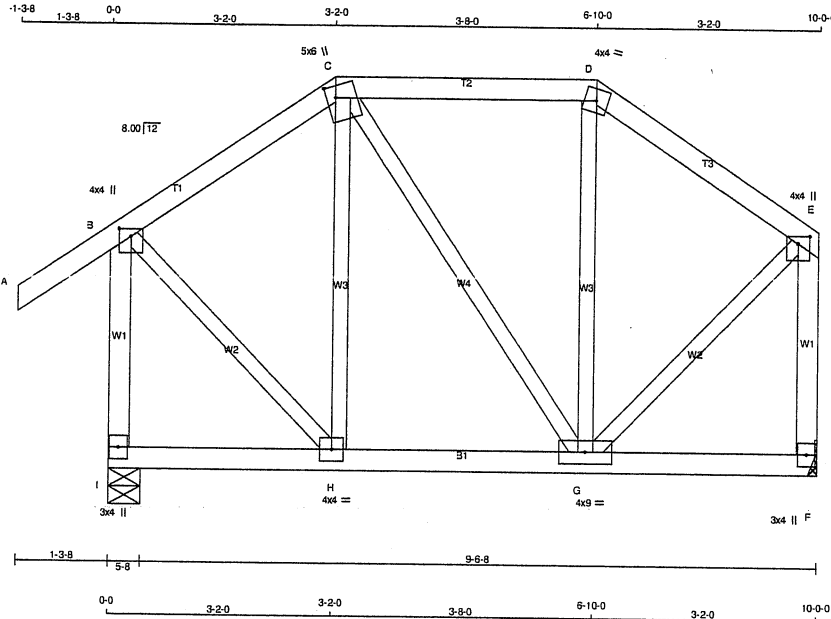

Scale = 1/32

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x4	DRY	No.2
C - D	2x4	DRY	No.2
D - E	2x4	DRY	No.2
I - B	2x4	DRY	No.2
F - E	2x4	DRY	No.2
I - F	2x4	DRY	No.2

ALL WEBS 2x3 DRY No.2 SPF
EXCEPT

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	4.0	4.0	1.25	2.00
C	TTWW+m	MT20	5.0	6.0	2.00	1.50
D	TTW-m	MT20	4.0	4.0		
E	TMVW+p	MT20	4.0	4.0	1.25	2.00
F	BMV1+p	MT20	3.0	4.0		
G	BMWWW-t	MT20	4.0	9.0		
H	BMWW-t	MT20	4.0	4.0		
I	BMV1+p	MT20	3.0	4.0		

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT REQRD	
	VERT	HORZ	DOWN	HORZ	BRG	BRG
I	677	0	677	0	5-8	5-8
F	551	0	551	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

JT	1ST CASE	MAX./MIN. COMPONENT REACTIONS					
I	477	326 / 0	0 / 0	0 / 0	0 / 0	150 / 0	0 / 0
F	390	256 / 0	0 / 0	0 / 0	0 / 0	134 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. LC1 (LC)
FR-TO		FROM	TO		FR-TO		
A-B	0 / 35	-91.8	-91.8 0.12 (1)	10.00	H-C	-154 / 0	0.07 (1)
B-C	-285 / 0	-91.8	-91.8 0.12 (1)	6.25	C-G	0 / 0	0.00 (1)
C-D	-233 / 0	-91.8	-91.8 0.16 (1)	6.25	G-D	-155 / 0	0.07 (1)
D-E	-284 / 0	-91.8	-91.8 0.12 (1)	6.25	B-H	0 / 325	0.07 (1)
I-B	-653 / 0	0.0	0.0 0.13 (1)	7.81	G-E	0 / 324	0.07 (1)
F-E	-526 / 0	0.0	0.0 0.10 (1)	7.81			
I-H	0 / 0	-18.5	-18.5 0.05 (4)	10.00			
H-G	0 / 233	-18.5	-18.5 0.07 (4)	10.00			
G-F	0 / 0	-18.5	-18.5 0.05 (4)	10.00			

TOTAL WEIGHT = 53 lb (M/F)

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN./C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.33")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.33")
CALCULATED VERT. DEFL.(TL) = L/999 (0.01")

CSI: TC=0.16/1.00 (C-D:1), BC=0.07/1.00 (G-H:4),
WB=0.07/1.00 (B-H:1), SSI=0.13/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR (PSI)	SECTION (PLI)
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP= 0.43 (B) (INPUT = 0.90)
JSI METAL= 0.13 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115505

JOB NAME 411017	TRUSS NAME T48	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:54 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-EezQFNkmzXq864UK4?1fgZHj64NOzLQrktjyLtzD???

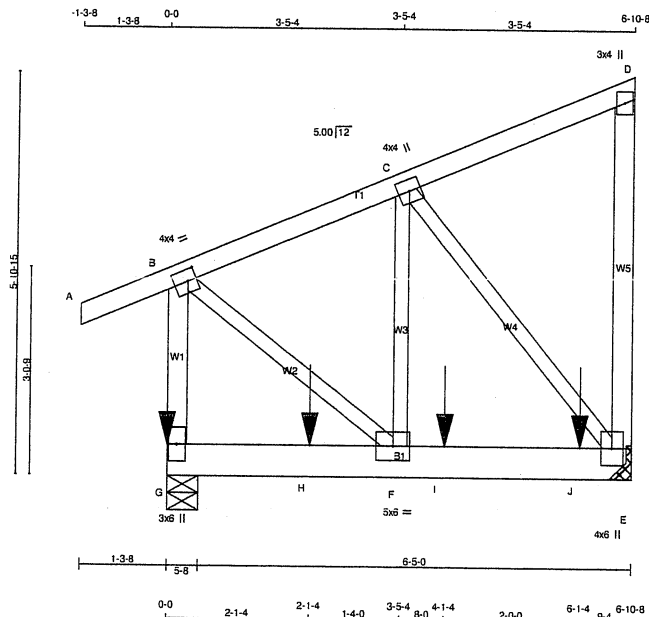

TOTAL WEIGHT = 2 X 41 = 83 lb [M]

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
G - B	2x4	DRY	No.2	SPF
A - D	2x4	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF
G - E	2x6	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
G-B 1	12	TOP
A-D 1	12	TOP
D-E 1	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
G-E 2	12	SIDE (0.0)
WEBS : (0.122"x3") SPIRAL NAILS		
2x3 1	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

PLATES (table is in inches)

JT TYPE	PLATES	W	LEN	Y	X
B TMVW-t	MT20	4.0	4.0	2.00	1.50
C TMVW+t	MT20	4.0	4.0		
D TMV+p	MT20	3.0	4.0		
E BMVW1+p	MT20	4.0	6.0		
F BMVW-t	MT20	5.0	6.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD	
JT	VERT	GROSS REACTION	HORZ	GROSS REACTION	DOWN	BRG	UP	BRG	DOWN
G	2651	0	0	2651	0	0	5-8	5-8	
E	2014	0	0	2014	0	0	MECHANICAL		

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 4-0.

UNFACTORED REACTIONS

1ST LCASE	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
JT	1867	1269 / 0	0 / 0	0 / 0	0 / 0	598 / 0	0 / 0
E	1421	949 / 0	0 / 0	0 / 0	0 / 0	472 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) G

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		MAX. FACTORED		FACTORED		WEBS		MAX. FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD	LC1	MAX	CS1 (LC)	MEMB.	FORCE (LBS)	MAX	CS1 (LC)
FR-TO		FROM	TO			FR-TO			
G-B	-1387 / 0	0.0	0.0	0.11 (1)	7.81	B-F	0 / 1211	0.15 (1)	
A-B	0 / 24	-91.8	-91.8	0.06 (1)	10.00	F-C	0 / 1155	0.14 (1)	
B-C	-1024 / 0	-91.8	-91.8	0.09 (1)	6.25	C-E	-1489 / 0	0.34 (1)	
C-D	-13 / 0	-91.8	-91.8	0.09 (1)	6.25				
E-D	-123 / 0	0.0	0.0	0.04 (1)	7.81				
G-H	0 / 0	-18.5	-18.5	0.21 (1)	10.00				
H-F	0 / 0	-18.5	-18.5	0.21 (1)	10.00				
F-I	0 / 958	-18.5	-18.5	0.27 (1)	10.00				
I-J	0 / 958	-18.5	-18.5	0.27 (1)	10.00				
J-E	0 / 958	-18.5	-18.5	0.27 (1)	10.00				

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
G	0-0	-736	-736		BACK	VERT	TOTAL		C1
H	2-1-4	-643	-643		BACK	VERT	TOTAL		C1
I	4-1-4	-643	-643		BACK	VERT	TOTAL		C1
J	6-1-4	-645	-645		BACK	VERT	TOTAL		C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN./C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.23")
CALCULATED VERT. DEFL.(LL) = L/999 (0.01")
ALLOWABLE DEFL.(TL)= L/360 (0.23")
CALCULATED VERT. DEFL.(TL) = L/999 (0.02")

CSI: TC=0.11/1.00 (B-G:1), BC=0.27/1.00 (E-F:1),
WB=0.34/1.00 (C-E:1), SSI=0.38/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX	MIN	MAX MIN
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.79 (C) (INPUT = 0.90)
JSI METAL= 0.22 (E) (INPUT = 1.00)



Structural component only
DWG# T-2115506 1/12

CONTINUED ON PAGE 2

JOB NAME 411017	TRUSS NAME T48	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	---	----------

Tamarack Roof Truss, Burlington


Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:54 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-EezQFNkmzXq864UK4?1fgZH64NOzLQrktjyLzD???

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
G	BMV1+p	MT20	3.0	6.0		

NOTES- (1)


1) Lateral braces to be a minimum of 2x4 SPF #2



Structural component only
DWG# T-2115506 *en*

JOB NAME 411017	TRUSS NAME T49S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington		TRUSS DESC.			

Version 8.420 S Jan 21 2021 MITek Industries, Inc. Tue May 25 10:54:55 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-iqXoTjIOkry?kE3WdfYuDnpucUmoirV?zXSvUBzD??

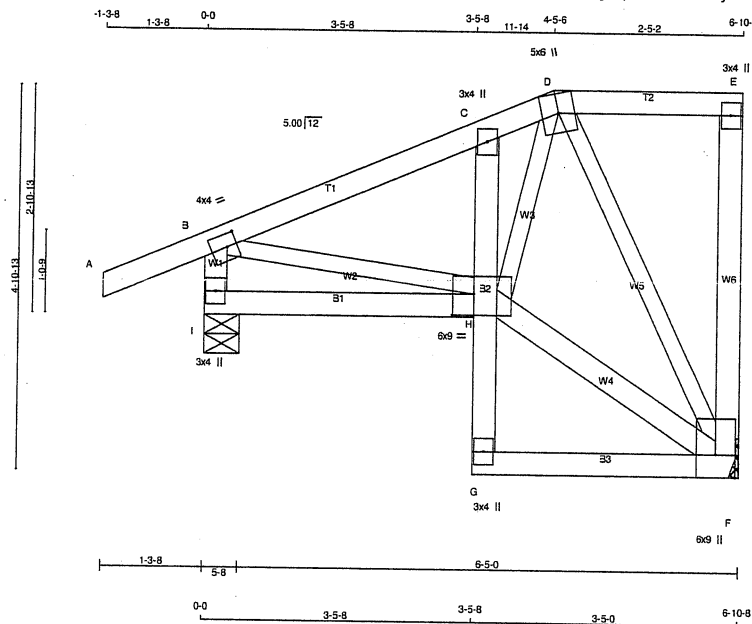

Scale = 1/28.0

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - D	2x4	DRY	No.2
D - E	2x4	DRY	No.2
F - H	2x4	DRY	No.2
I - H	2x4	DRY	No.2
G - C	2x4	DRY	No.2
G - F	2x4	DRY	No.2
ALL WEBS EXCEPT H - F	2x3	DRY	No.2
	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW-I	MT20	4.0	4.0	2.00 1.50
C	TMV+p	MT20	3.0	4.0	
D	TTWW+m	MT20	5.0	6.0	
E	TMV+p	MT20	3.0	4.0	
F	BMVWW1+p	MT20	6.0	9.0	Edge
G	BMV+p	MT20	3.0	4.0	
H	BMVWWW-I	MT20	6.0	9.0	3.25 3.25
I	BMV1+p	MT20	3.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
F	379	0	379	0	0
I	503	0	503	0	0

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT F. MINIMUM BEARING LENGTH AT JOINT F = 1-8.

UNFACTORED REACTIONS

1ST LCASE	MAX./MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	268	176 / 0	0 / 0	0 / 0	0 / 0	92 / 0	0 / 0
I	353	245 / 0	0 / 0	0 / 0	0 / 0	108 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)	
FR-TO		FROM TO	LENGTH	FR-TO			
A-B	0 / 24	-91.8	-91.8 0.12 (1)	10.00	H-F	0 / 198	0.03 (1)
B-C	-354 / 0	-91.8	-91.8 0.13 (1)	6.25	H-D	0 / 448	0.10 (1)
C-D	-386 / 0	-91.8	-91.8 0.10 (1)	6.25	D-F	-386 / 0	0.16 (1)
D-E	0 / 0	-91.8	-91.8 0.09 (1)	10.00	B-H	0 / 344	0.08 (1)
F-E	-110 / 0	0.0	0.0 0.04 (1)	7.81			
I-B	-469 / 0	0.0	0.0 0.05 (1)	7.81			
I-H	0 / 0	-18.5	-18.5 0.07 (4)	10.00			
G-H	0 / 34	0.0	0.0 0.03 (1)	10.00			
H-C	-328 / 0	0.0	0.0 0.02 (1)	7.81			
G-F	0 / 9	-18.5	-18.5 0.06 (4)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6 PSF
	DL = 6.0 PSF
BOT CH.	LL = 0.0 PSF
	DL = 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.23")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.01")
ALLOWABLE DEFL.(TL)= L/360 (0.23")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.01")

CSI: TC=0.13/1.00 (B-C:1) , BC=0.07/1.00 (H-I:4) , WB=0.16/1.00 (D-F:1) , SSI=0.14/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.46 (B) (INPUT = 0.90)
JSI METAL= 0.16 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115507

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411069	T50	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:23 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133uivzsqn-v8svvK2yroxx5dpZRGQambD_vjwu0BtgZixtlMozD Vc

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	5.0	6.0	2.00	2.25
C	TMWW-t	MT20	4.0	6.0	2.00	2.75
D	TTWW-m	MT20	5.0	8.0	Edge	3.00
E	TMW+w	MT20	2.0	4.0		
F	TTWW-m	MT20	5.0	8.0	Edge	3.00
G	TMWWW-t	MT20	8.0	12.0	3.75	4.75
G	TP-m	MT20	4.0	9.0	33.75	3.50
H	TMBW1-l	MT20	8.0	12.0	3.75	3.25
I	BMW+w	MT20	3.0	6.0		
J, N, O						
J	BMWW-t	MT20	5.0	6.0		
K	BS-t	MT20	6.0	9.0		
L	BMWWW-t	MT20	5.0	8.0		
M	BS-t	MT20	6.0	9.0		
P	BMV1+p	MT20	3.0	8.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)


1) Lateral braces to be a minimum of 2x4 SPF #2



Structural component only
DWG# T-2115518 2/1

JOB NAME 411017	TRUSS NAME T50S	QUANTITY 4	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:56 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-A05Bg3m1U94sLOeIBQ371_M1su61RJS8CBC2PdZ?_z

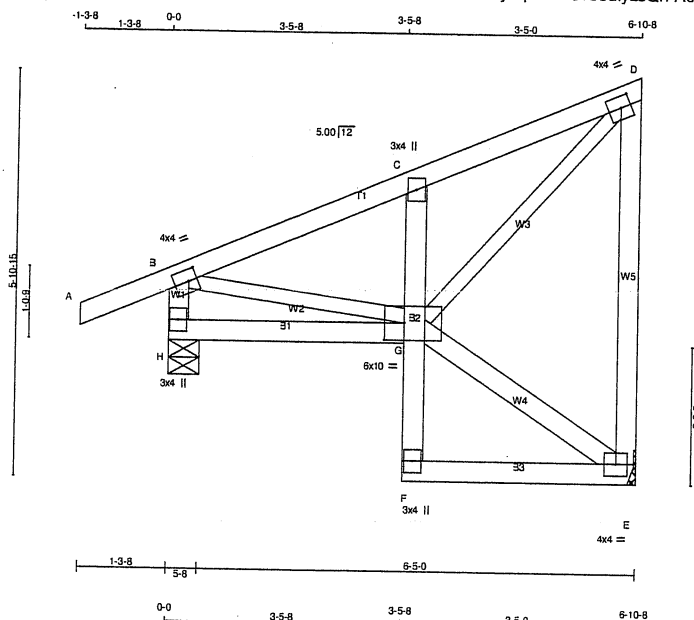

TOTAL WEIGHT = 4 X 39 = 157 lb

LUMBER				DESCR.
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	
H - B	2x4	DRY	No.2	SPF
A - D	2x4	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF
H - G	2x4	DRY	No.2	SPF
F - C	2x4	DRY	No.2	SPF
F - E	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				
G - E	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-t	MT20	4.0	4.0	2.00	1.50
C	TMV+p	MT20	3.0	4.0		
D	TMVW-t	MT20	4.0	4.0	2.00	1.75
E	BMVW1-t	MT20	4.0	4.0		
F	BMV+p	MT20	3.0	4.0		
G	BMVWWW-I	MT20	6.0	10.0	3.00	3.50
H	BMV1+p	MT20	3.0	4.0		

NOTES- (1)

- 1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG IN-SX	REQRD BRG IN-SX
	VERT	HORZ	DOWN	HORZ		
H	503	0	503	0	5-8	5-8
E	379	0	379	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT E. MINIMUM BEARING LENGTH AT JOINT E = 1-8.

UNFACTORED REACTIONS

JT	1ST CASE COMBINED		MAX./MIN. COMPONENT REACTIONS				
	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL	
H	353	245 / 0	0 / 0	0 / 0	108 / 0	0 / 0	
E	268	176 / 0	0 / 0	0 / 0	92 / 0	0 / 0	

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS MAX. FACTORED FORCE (LBS)		FACTORED VERT. LOAD (PLF)		MAX. CSI (LC)	UNBRACED LENGTH	FR-TO	MEMB.	WEBS MAX. FACTORED FORCE (LBS)		MAX. CSI (LC)
	FROM	TO	FROM	TO					FROM	TO	
H-B	-469 / 0		0.0	0.0	0.05 (1)	7.81	B-G	0 / 356		0.08 (1)	
A-B	0 / 24		-91.8	-91.8	0.12 (1)	10.00	G-E	-11 / 0		0.00 (1)	
B-C	-365 / 0		-91.8	-91.8	0.13 (1)	6.25	G-D	0 / 493		0.11 (1)	
C-D	-373 / 0		-91.8	-91.8	0.13 (1)	6.25					
E-D	-343 / 0		0.0	0.0	0.22 (1)	7.81					
H-G	0 / 0		-18.5	-18.5	0.07 (4)	10.00					
F-G	0 / 34		0.0	0.0	0.03 (1)	10.00					
G-C	-379 / 0		0.0	0.0	0.02 (1)	7.81					
F-E	0 / 9		-18.5	-18.5	0.06 (4)	10.00					

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.23")
CALCULATED VERT. DEFL.(LL) = L/999 (0.01")
ALLOWABLE DEFL.(TL)= L/360 (0.23")
CALCULATED VERT. DEFL.(TL) = L/999 (0.01")

CSI: TO=0.22/1.00 (D-E:1), BC=0.07/1.00 (G-H:4),
WB=0.11/1.00 (D-G:1), SS=0.14/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX	MIN	MAX	MIN
MT20	650	371	1747
		788	1987

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.49 (D) (INPUT = 0.90)
JSI METAL = 0.16 (B) (INPUT = 1.00)




Structural component only
DWG# T-2115508

JOB NAME 411017	TRUSS NAME T51	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:57 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-eDfZuPmfFSCjzYDvI7aMICvFCIR_AILRnxc4zD?_y

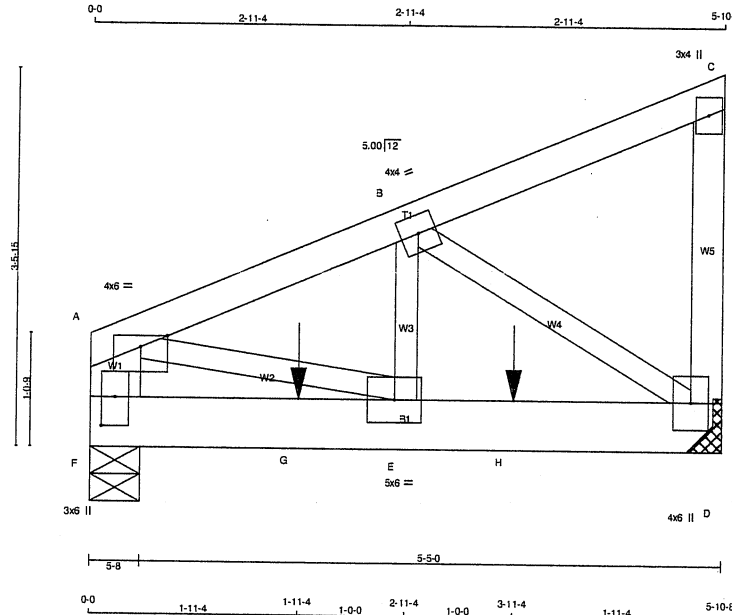

Scale = 1:20.3

LUMBER				
N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
F - A	2x6	DRY	No.2	SPF
A - C	2x4	DRY	No.2	SPF
D - C	2x4	DRY	No.2	SPF
F - D	2x6	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
F-A 2	12	TOP
A-C 1	12	TOP
C-D 1	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
F-D 2	12	SIDE (0.0)
WEBS : (0.122"x3") SPIRAL NAILS		
2x3 1	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQD BRG
	VERT	HORZ	DOWN	HORZ		
F	941	0	941	0	5-8	5-8
D	898	0	898	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT D. MINIMUM BEARING LENGTH AT JOINT D = 4-0.

UNFACTORED REACTIONS

JT	1ST LCASE	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
F	662	453 / 0	0 / 0	0 / 0	0 / 0	209 / 0	0 / 0
D	633	429 / 0	0 / 0	0 / 0	0 / 0	203 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS		WEBS	
	MAX. FACTORED FORCE (LBS)	VERT. LOAD LC1 MAX (PLF)	MAX. FACTORED FORCE (LBS)	MAX. FACTORED FORCE (LBS)
FR-TO		FROM TO	FR-TO	
F-A	-758 / 0	0.0 0.0 0.03 (1)	7.81	A-E 0 / 1035 0.13 (1)
A-B	-1085 / 0	-91.8 -91.8 0.06 (1)	6.25	E-B 0 / 751 0.09 (1)
B-C	-9 / 0	-91.8 -91.8 0.05 (1)	10.00	B-D -1200 / 0 0.13 (1)
D-C	-110 / 0	0.0 0.0 0.01 (1)	7.81	
F-G	0 / 0	-18.5 -18.5 0.12 (1)	10.00	
G-E	0 / 0	-18.5 -18.5 0.12 (1)	10.00	
E-H	0 / 1010	-18.5 -18.5 0.15 (1)	10.00	
H-D	0 / 1010	-18.5 -18.5 0.15 (1)	10.00	

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
G	1-11-4	-462	-462	---	BACK	VERT	TOTAL	---	C1
H	3-11-4	-375	-375	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 28 = 55 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (0.20")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.01")
ALLOWABLE DEFL.(TL) = $L/360$ (0.20")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.01")

CSI: TC=0.06/1.00 (A-B:1), BC=0.15/1.00 (D-E:1), WB=0.13/1.00 (B-D:1), SSI=0.18/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP (DRY)	SHEAR (PSI)	SECTION (PLI)
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.57 (B) (INPUT = 0.90)
JSI METAL = 0.23 (D) (INPUT = 1.00)



Structural component only
DWG# T-2115509

CONTINUED ON PAGE 2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411017	T51	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:57 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulvzsQn-eDfZuPmfFSCjzYDvI7aMlCvFCIR_AILIRxcx4zD? y

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
F	BMV1+p	MT20	3.0	6.0	3.25	1.50

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

NOTES- (1)


1) Lateral braces to be a minimum of 2x4 SPF #2



Structural component only
DWG# T-2115509 *mn*

JOB NAME 411069	TRUSS NAME T51S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:25 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-rW_gK04CNQBpt7jqNrcEhe3CTki8f8sAFMsQhzD_Va

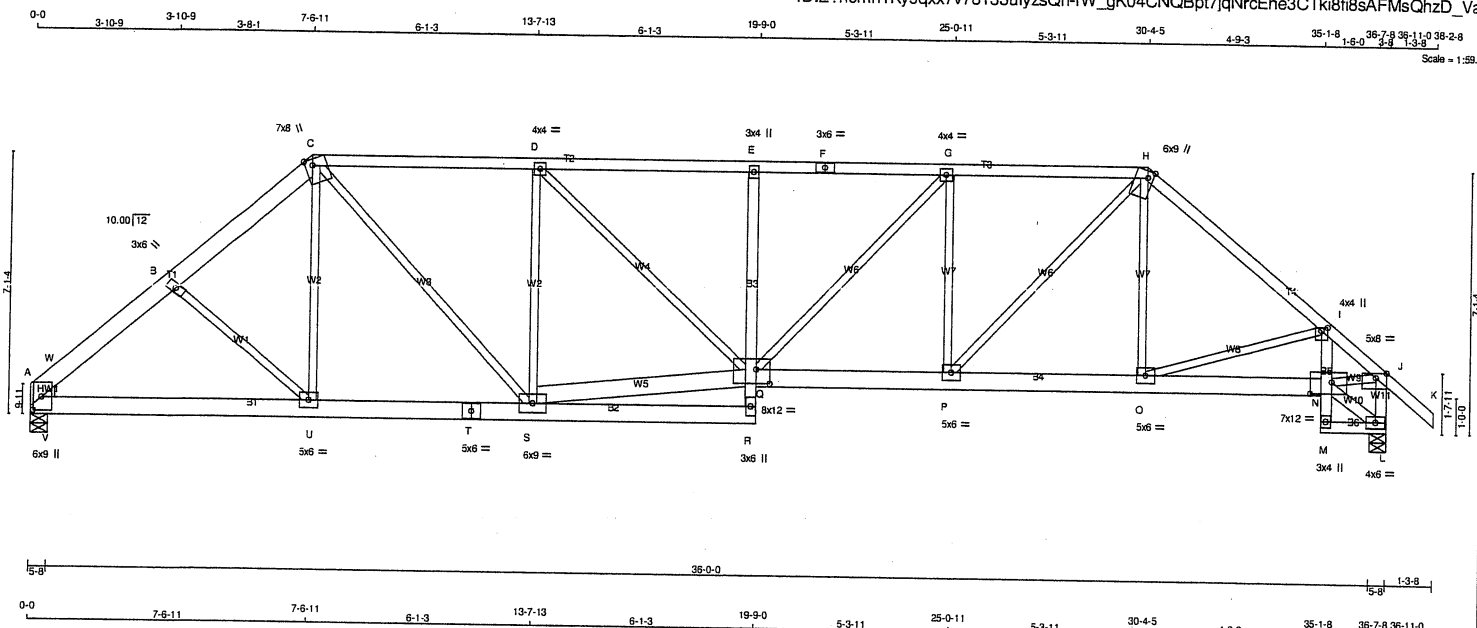

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - C	2x6	DRY	No.2
C - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
H - K	2x4	DRY	No.2
L - J	2x4	DRY	No.2
A - T	2x6	DRY	No.2
T - R	2x6	DRY	No.2
R - E	2x4	DRY	No.2
Q - N	2x6	DRY	No.2
M - I	2x4	DRY	No.2
M - L	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			
S - Q	2x6	DRY	No.2
N - L	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)				
JT	TYPE	PLATES	W	LEN Y X
A	TMBH1+I	MT20	6.0	9.0 4.25 2.75
B	TMW+W	MT20	3.0	6.0
C	TTWW+m	MT20	7.0	8.0 Edge 2.25
D	TMW+W-t	MT20	4.0	4.0
E	TMV+p	MT20	3.0	4.0
F	TS-t	MT20	3.0	6.0
G	TMW+W-t	MT20	4.0	4.0
H	TTWW+m	MT20	6.0	9.0 Edge 1.75
I	TMV+W-p	MT20	4.0	4.0 1.00 2.00
J	TMV+W-t	MT20	5.0	8.0 1.50 3.50
L	BMVW1-t	MT20	4.0	6.0
M	BMV+p	MT20	3.0	4.0
N	BVMW+W-t	MT20	7.0	12.0 3.75 7.00
O, P, U				
Q	BMW+W-t	MT20	5.0	6.0
R	BVMW+W-t	MT20	8.0	12.0 4.50 4.50
S	BMV+p	MT20	3.0	6.0
T	BS-t	MT20	6.0	9.0

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD		HEEL	
JT	VERT	GROSS REACTION	HORZ	GROSS REACTION	DOWN	BRG	UPLIFT	BRG	IN-SX	WEDGE	
A	2033	0	2033	0	0	5-8	5-8	5-8	5-8	2x4 L	
L	2165	0	2165	0	0	5-8	5-8	5-8	5-8		

UNFACTORED REACTIONS		1ST LCASE		MAX./MIN. COMPONENT REACTIONS							
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL				
A	1438	943 / 0	0 / 0	0 / 0	0 / 0	494 / 0	0 / 0				
L	1528	1017 / 0	0 / 0	0 / 0	0 / 0	512 / 0	0 / 0				

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, L

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.09 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.
ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		MAX. FACTORED		FACTORED		WEBS		MAX. FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1 (LBS)	MAX (LBS)	UNBRACED LENGTH	MEMB.	FORCE (LBS)	MAX (LBS)	CS1 (LBS)
FR-TO						FR-TO			
A-W	-3019 / 0	-91.8	-91.8	0.21 (1)	4.65	B-U	-219 / 0	0.09 (1)	
W-B	-2659 / 0	-91.8	-91.8	0.21 (1)	4.90	U-C	0 / 247	0.06 (4)	
B-C	-2416 / 0	-91.8	-91.8	0.14 (1)	5.18	C-S	0 / 1204	0.27 (1)	
C-D	-2649 / 0	-91.8	-91.8	0.73 (1)	3.50	S-D	-1202 / 0	0.98 (1)	
D-E	-3281 / 0	-91.8	-91.8	0.82 (1)	3.09	S-Q	0 / 2641	0.31 (1)	
E-F	-3291 / 0	-91.8	-91.8	0.62 (1)	3.32	Q-Q	0 / 859	0.19 (1)	
F-G	-3291 / 0	-91.8	-91.8	0.62 (1)	3.32	Q-G	0 / 556	0.13 (1)	
G-H	-2911 / 0	-91.8	-91.8	0.58 (1)	3.55	P-G	-953 / 0	0.52 (1)	
H-I	-2523 / 0	-91.8	-91.8	0.46 (1)	3.97	P-H	0 / 1441	0.32 (1)	
I-J	-2694 / 0	-91.8	-91.8	0.31 (1)	3.91	O-H	0 / 160	0.04 (4)	
J-K	0 / 41	-91.8	-91.8	0.13 (1)	10.00	O-I	-236 / 0	0.11 (1)	
L-J	-2104 / 0	0.0	0.0	0.22 (1)	5.84	N-L	-79 / 0	0.01 (1)	
A-V	0 / 2003	-18.5	-18.5	0.33 (1)	10.00	N-J	0 / 2104	0.47 (1)	
V-U	0 / 2003	-18.5	-18.5	0.33 (1)	10.00	V-W	0 / 359	0.00 (1)	
U-T	0 / 1841	-18.5	-18.5	0.25 (1)	10.00				
T-S	0 / 1841	-18.5	-18.5	0.25 (1)	10.00				
S-R	0 / 56	-18.5	-18.5	0.07 (4)	10.00				
R-Q	0 / 51	0.0	0.0	0.08 (1)	10.00				
Q-E	-475 / 0	0.0	0.0	0.22 (1)	7.81				
Q-P	0 / 2911	-18.5	-18.5	0.38 (1)	10.00				
P-O	0 / 1920	-18.5	-18.5	0.26 (1)	10.00				
O-N	0 / 2142	-18.5	-18.5	0.29 (1)	10.00				
M-N	0 / 17	0.0	0.0	0.10 (1)	10.00				
N-I	-175 / 0	0.0	0.0	0.10 (1)	7.81				
M-L	0 / 65	-18.5	-18.5	0.02 (4)	10.00				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN./C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.23")
CALCULATED VERT. DEFL.(LL) = L/999 (0.16")
ALLOWABLE DEFL.(TL)= L/360 (1.23")
CALCULATED VERT. DEFL.(TL) = L/999 (0.30")

CS1: TC=0.82/1.00 (D-E:1), BC=0.38/1.00 (P-Q:1), WB=0.98/1.00 (D-S:1), SS1=0.26/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES			
PLATE	GRIP (DRY)	SHEAR (PSI)	SECTION (PLI)
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.88 (H) (INPUT = 0.90)
JSI METAL= 0.76 (A) (INPUT = 1.00)



Structural component only
DWG# T-2115519

JOB NAME 411070	TRUSS NAME T52	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:44:39 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-Kvrti2s9_gvcjpA0RP4e92PeBM8csG5D8niOoEzD_GM

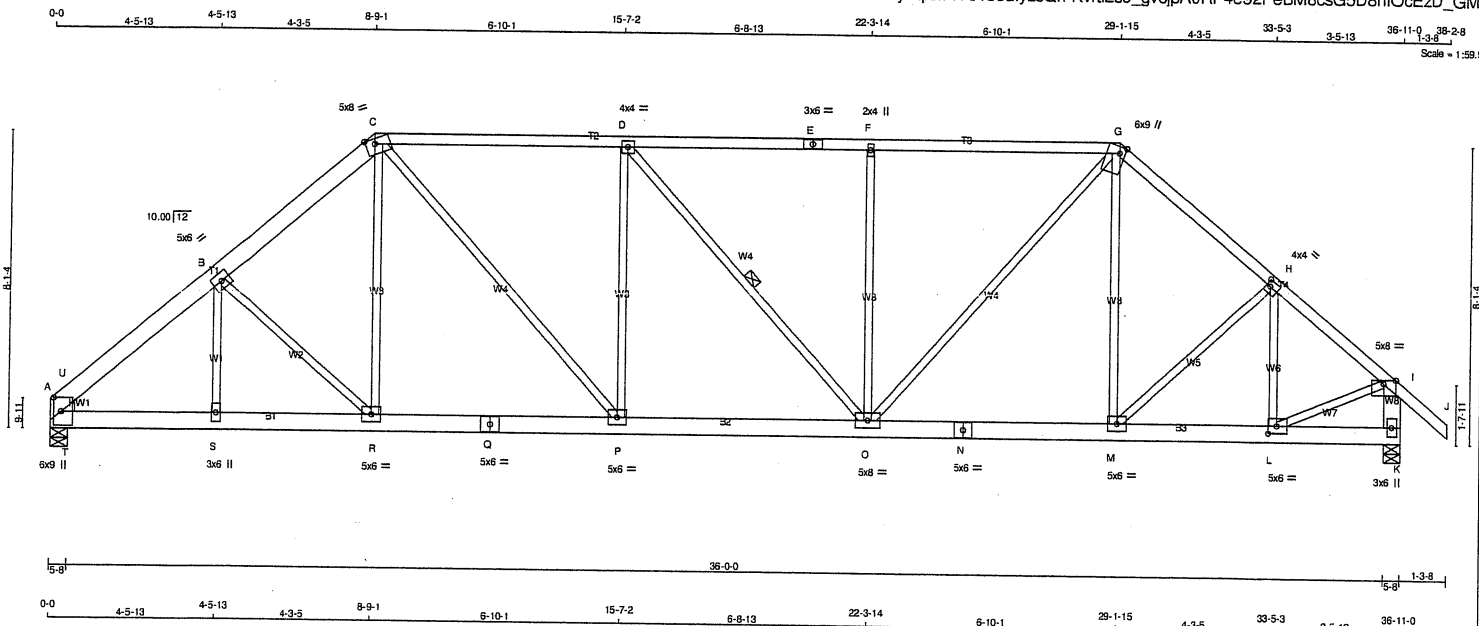

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
A - C	2x6	DRY	No.2
C - E	2x4	DRY	No.2
E - G	2x4	DRY	No.2
G - I	2x4	DRY	No.2
I - J	2x6	DRY	No.2
J - K	2x6	DRY	No.2
K - L	2x6	DRY	No.2
L - M	2x6	DRY	No.2
M - N	2x6	DRY	No.2
N - K	2x6	DRY	No.2

ALL WEBS 2x3 DRY No.2
EXCEPT
SPF
DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMBH1m	MT20	6.0	9.0	2.50	4.50
B	TMWW-t	MT20	5.0	6.0		
C	TTWW-m	MT20	5.0	8.0	Edge	3.00
D	TMWW-t	MT20	4.0	4.0		
E	TS-t	MT20	3.0	6.0		
F	TMWW-w	MT20	2.0	4.0		
G	TTWW+m	MT20	6.0	9.0	Edge	1.75
H	TMWW-t	MT20	4.0	4.0	2.00	1.25
I	TMWW-p	MT20	5.0	8.0	Edge	
K	BMV1+p	MT20	3.0	6.0		
L	BMWW-t	MT20	5.0	6.0	2.50	2.75
M, P, R						
M	BMWW-t	MT20	5.0	6.0		
N	BS-t	MT20	5.0	6.0		
O	BMWW-t	MT20	5.0	8.0		
Q	BS-t	MT20	5.0	6.0		
S	BMW-w	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD		HEEL	
JT	GROSS REACTION	VERT	HORZ	GROSS REACTION	DOWN	UP	BRG	BRG	IN-SX	WEDGE	
A	2035	0	0	2035	0	0	5-8	5-8	2x4 L		
K	2162	0	0	2162	0	0	5-8	5-8			

UNFACTORED REACTIONS

JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
A	1439	944 / 0	0 / 0	0 / 0	0 / 0	0 / 0	495 / 0	0 / 0
K	1527	1015 / 0	0 / 0	0 / 0	0 / 0	0 / 0	511 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, K

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.49 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF D-O.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (LC)	
FR-TO		FROM TO		FR-TO			
A-U	-3070 / 0	-91.8 -91.8	0.19 (1)	4.65	S-B	-31 / 45	0.02 (4)
U-B	-2614 / 0	-91.8 -91.8	0.19 (1)	4.97	B-R	-281 / 0	0.16 (1)
B-C	-2354 / 0	-91.8 -91.8	0.15 (1)	5.23	R-C	0 / 340	0.08 (1)
C-D	-2431 / 0	-91.8 -91.8	0.85 (1)	3.49	C-P	0 / 966	0.22 (1)
D-E	-2380 / 0	-91.8 -91.8	0.84 (1)	3.53	P-D	-598 / 0	0.71 (1)
E-F	-2380 / 0	-91.8 -91.8	0.84 (1)	3.53	D-O	-79 / 0	0.06 (1)
F-G	-2380 / 0	-91.8 -91.8	0.83 (1)	3.55	O-F	-674 / 0	0.80 (1)
G-H	-2148 / 0	-91.8 -91.8	0.33 (1)	4.35	C-G	0 / 1132	0.25 (1)
H-I	-2035 / 0	-91.8 -91.8	0.30 (1)	4.46	M-G	0 / 109	0.04 (4)
I-J	0 / 41	-91.8 -91.8	0.13 (1)	10.00	M-H	0 / 55	0.01 (1)
J-K	-2119 / 0	0.0 0.0	0.14 (1)	6.98	L-H	-521 / 0	0.15 (1)
					L-I	0 / 1682	0.38 (1)
					T-U	0 / 451	0.00 (1)
A-T	0 / 1991	-18.5 -18.5	0.35 (1)	10.00			
T-S	0 / 1991	-18.5 -18.5	0.35 (1)	10.00			
S-R	0 / 1991	-18.5 -18.5	0.30 (1)	10.00			
R-Q	0 / 1788	-18.5 -18.5	0.27 (1)	10.00			
Q-P	0 / 1788	-18.5 -18.5	0.27 (1)	10.00			
P-O	0 / 2431	-18.5 -18.5	0.33 (1)	10.00			
O-N	0 / 1629	-18.5 -18.5	0.24 (1)	10.00			
N-M	0 / 1629	-18.5 -18.5	0.24 (1)	10.00			
M-L	0 / 1587	-18.5 -18.5	0.24 (1)	10.00			
L-K	0 / 0	-18.5 -18.5	0.03 (1)	10.00			

TOTAL WEIGHT = 192 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
	DL	= 6.0	PSF
BOT CH.	LL	= 0.0	PSF
	DL	= 7.4	PSF
TOTAL LOAD	=	39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (1.23")
CALCULATED VERT. DEFL.(LL) = L/999 (0.10")
ALLOWABLE DEFL.(TL)= L/360 (1.23")
CALCULATED VERT. DEFL.(TL) = L/999 (0.20")

CSI: TC=0.85/1.00 (C-D:1), BC=0.35/1.00 (A-T:1),
WB=0.80/1.00 (F-O:1), SSI=0.29/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE LEFT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788
	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.78 (L) (INPUT = 0.90)
JSI METAL= 0.76 (A) (INPUT = 1.00)



Structural component only
DWG# T-2115535

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411069	T52S	1	1	TRUSS DESC.		

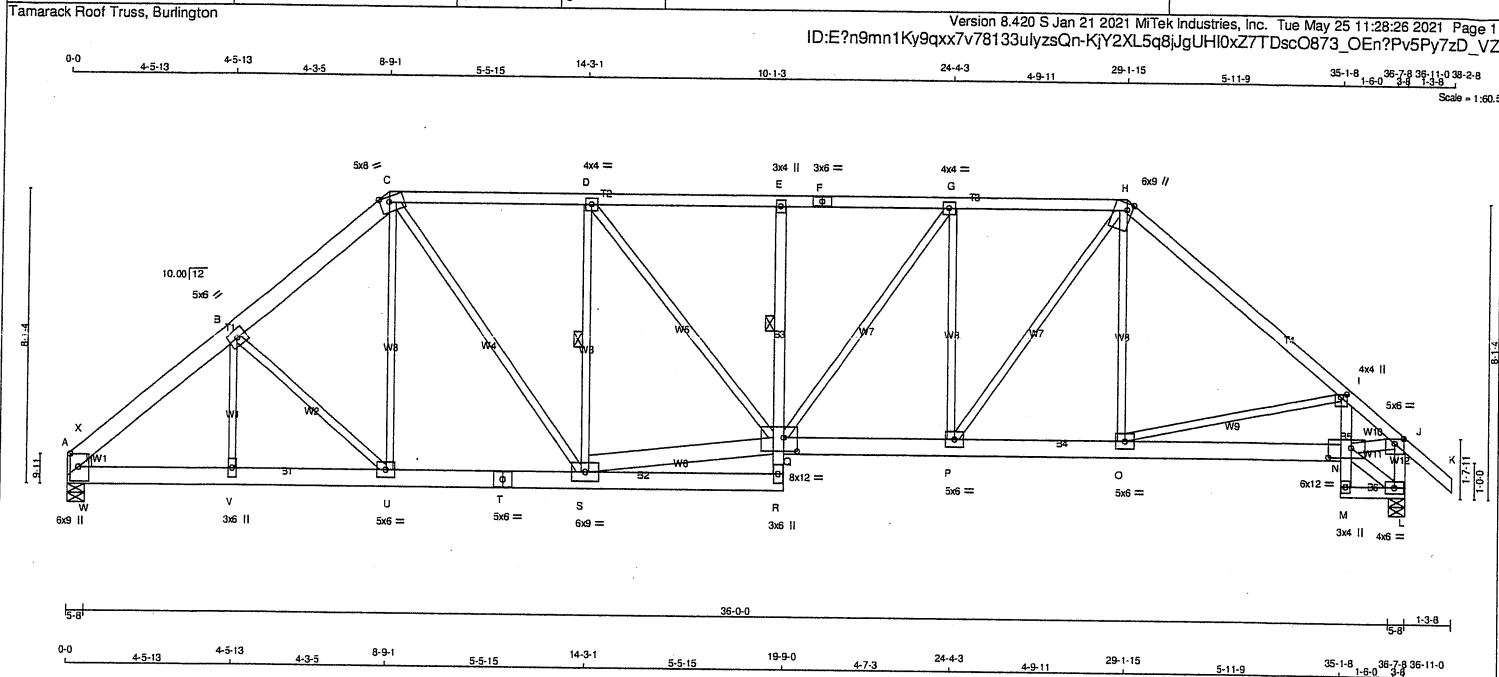

LUMBER										DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER										DESIGN CRITERIA										TOTAL WEIGHT = 210 lb											
N. L. G. A. RULES																																									
CHORDS SIZE										LUMBER										DESCR.																					
A - C 2x6 DRY No.2 SPF																																									
C - F 2x4 DRY No.2 SPF																																									
F - H 2x4 DRY No.2 SPF																																									
H - K 2x4 DRY No.2 SPF																																									
L - J 2x4 DRY No.2 SPF																																									
A - T 2x6 DRY No.2 SPF																																									
T - R 2x6 DRY No.2 SPF																																									
R - E 2x4 DRY No.2 SPF																																									
Q - N 2x6 DRY No.2 SPF																																									
M - I 2x4 DRY No.2 SPF																																									
M - L 2x4 DRY No.2 SPF																																									
ALL WEBS EXCEPT 2x3 DRY No.2 SPF																																									
S - Q 2x6 DRY No.2 SPF																																									
N - L 2x4 DRY No.2 SPF																																									
N - J 2x4 DRY No.2 SPF																																									
DRY: SEASONED LUMBER.																																									

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.							- PART 9 OF OBC 2012 (2019 AMENDMENT) - CSA 086-14 - TPIC 2014		
1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-Q, D-S.							DESIGN ASSUMPTIONS -OVERHANG NOT TO BE ALTERED OR CUT OFF.		
END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW							(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD		
LOADING							ALLOWABLE DEFL.(LL)= L/360 (1.23")		
TOTAL LOAD CASES: (4)							CALCULATED VERT. DEFL.(LL) = L/999 (0.13")		
							ALLOWABLE DEFL.(TL)= L/360 (1.23")		
							CALCULATED VERT. DEFL.(TL) = L/999 (0.24")		
							CSI: TC=0.77/1.00 (H+1:1), BC=0.35/1.00 (V-W:1:1), WB=0.70/1.00 (G-F:1), SSI=0.24/1.00 (C-D:1)		
							DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10		
							COMP=1.10 SHEAR=1.10 TENS= 1.10		
							COMPANION LIVE LOAD FACTOR = 1.00		
							AUTOSOLVE LEFT HEEL ONLY		
							TRUSS PLATE MANUFACTURER IS NOT		

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
A	TMBH1m	MT20	6.0	9.0	2.75	4.25
B	TMWW-t	MT20	5.0	6.0		
C	TTWW-m	MT20	5.0	8.0	Edge	3.00
D	TMWW-t	MT20	4.0	4.0		
E	TMV-p	MT20	3.0	4.0		
F	TS-t	MT20	3.0	6.0		
G	TMWW-t	MT20	4.0	4.0		
H	TTWW-m	MT20	6.0	9.0	Edge	1.75
I	TMVW-p	MT20	4.0	4.0	1.00	2.00
J	TMVW-p	MT20	5.0	6.0	1.50	3.00
K	BMVW1-t	MT20	4.0	6.0		
L	BMV-p	MT20	3.0	4.0		
M	BVMWW-I	MT20	6.0	12.0	3.25	7.50
N	P, U					
O	BMWW-t	MT20	5.0	6.0		
Q	BVMWW-W-I	MT20	8.0	12.0	4.50	4.50
R	BMV-p	MT20	3.0	6.0		
S	BVMWW-t	MT20	6.0	9.0		
T	BS-t	MT20	5.0	6.0		
V	BMW-w	MT20	3.0	6.0		


CHORDS							WEBS								
MEMB.			MAX. FACTORED		FACTORED		VERT. LOAD LC1 MAX			MAX. UNBRACED		MEMB.		MAX. FACTORED	
			FORCE (LBS)		(PLF)		CSI (LC)					FORCE (LBS)		MAX CSI (LC)	
FR-TO					FROM TO				LENGTH		FR-TO				
A-X			-3066 / 0		-91.8 -91.8 0.19 (1)		4.66		V-B		-24 / 53		0.02 (4)		
X-B			-2612 / 0		-91.8 -91.8 0.19 (1)		4.97		B-U		-286 / 0		0.17 (1)		
B-C			-2347 / 0		-91.8 -91.8 0.15 (1)		5.24		U-C		0 / 324		0.07 (1)		
C-D			-2336 / 0		-91.8 -91.8 0.54 (1)		3.92		C-S		0 / 956		0.22 (1)		
D-E			-2790 / 0		-91.8 -91.8 0.59 (1)		3.58		S-D		-1103 / 0		0.44 (1)		
E-F			-2796 / 0		-91.8 -91.8 0.44 (1)		3.75		S-Q		0 / 2344		0.28 (1)		
F-G			-2796 / 0		-91.8 -91.8 0.44 (1)		3.75		D-Q		0 / 714		0.16 (1)		
G-H			-2531 / 0		-91.8 -91.8 0.42 (1)		3.94		O-H		0 / 196		0.05 (4)		
H-I			-2451 / 0		-91.8 -91.8 0.77 (1)		3.80		O-I		-385 / 0		0.29 (1)		
I-J			-2759 / 0		-91.8 -91.8 0.50 (1)		3.58		N-L		-73 / 0		0.01 (1)		
J-K			0 / 41		-91.8 -91.8 0.13 (1)		10.00		N-J		0 / 2194		0.35 (1)		
L-J			-2107 / 0		0.0 0.0 0.22 (1)		5.84		P-H		0 / 1154		0.26 (1)		
									C-G		0 / 453				



Structural component only
DWG# T-2115520

JOB NAME 411069	TRUSS NAME T53	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:27 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-ov6Qkh5Su1RW6RtCVGeim38dfXQj7l_8dZryVZzD_VY

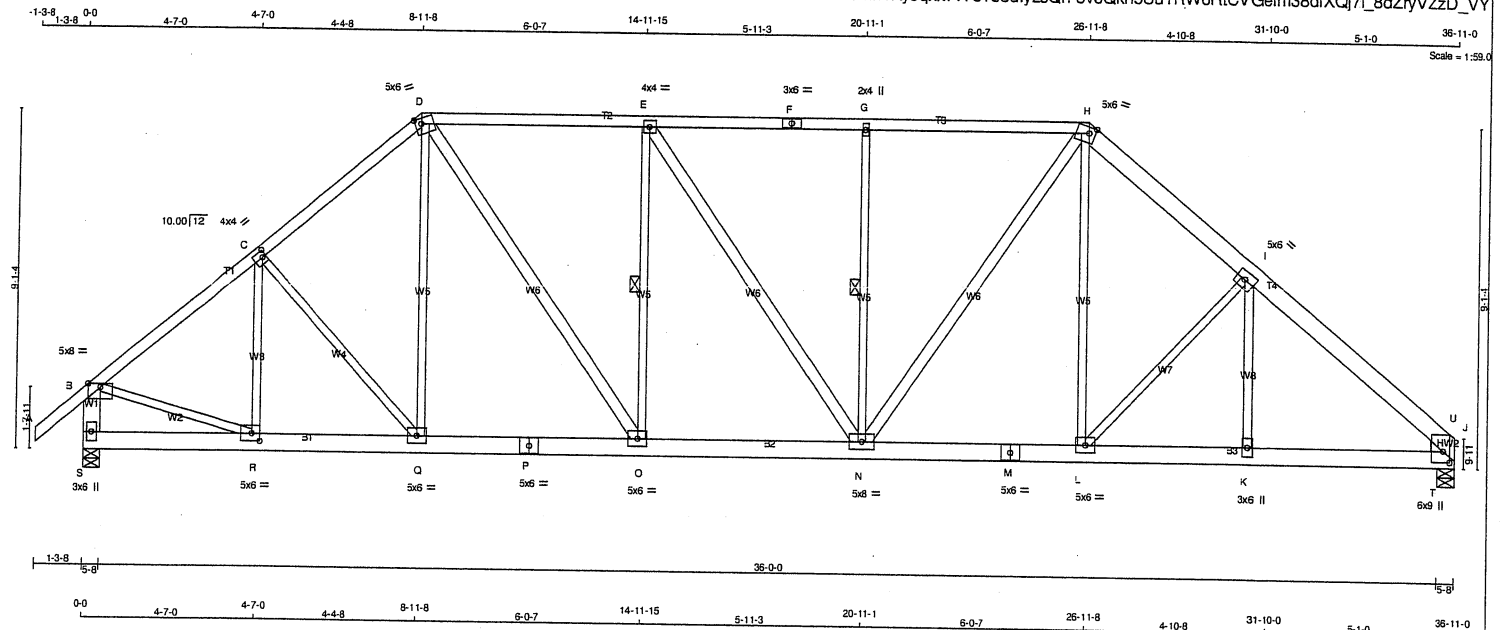

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - D	2x4	DRY	No.2
D - F	2x4	DRY	No.2
F - H	2x4	DRY	No.2
H - J	2x6	DRY	No.2
S - B	2x6	DRY	No.2
S - P	2x6	DRY	No.2
P - M	2x6	DRY	No.2
M - J	2x6	DRY	No.2
ALL WEBS EXCEPT	2x3	DRY	No.2
D - O	2x4	DRY	No.2
E - N	2x4	DRY	No.2
N - H	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	8.0	Edge	
C	TMVW-t	MT20	4.0	4.0	2.00	1.25
D	TTWW-m	MT20	5.0	6.0	1.75	2.00
E	TMVW-t	MT20	4.0	4.0		
F	TS-t	MT20	3.0	6.0		
G	TMVW-w	MT20	2.0	4.0		
H	TTWW-m	MT20	5.0	6.0	2.00	2.00
I	TMVW-t	MT20	5.0	6.0		
J	TMBH-t	MT20	6.0	9.0	3.50	2.00
K	BMVW-w	MT20	3.0	6.0		
L	BMVW-t	MT20	5.0	6.0		
M	BS-t	MT20	5.0	6.0		
N	BMVW-t	MT20	5.0	6.0		
P	BS-t	MT20	5.0	6.0		
R	BMVW-t	MT20	5.0	6.0	2.50	2.50
S	BMV1-p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG	HEEL WEDGE
JT	VERT	HORZ	HORZ	UPLIFT	IN-SX	
S	2162	0	2162	0	5-8	
J	2035	0	2035	0	5-8	2x4 R

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
S	1527	1015 / 0	0 / 0	0 / 0	0 / 0	511 / 0	0 / 0
J	1439	944 / 0	0 / 0	0 / 0	0 / 0	495 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) S, J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.18 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-O, G-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH	MAX. LC1 (LC)
FR-TO		FROM	TO	FR-TO			
A-B	0 / 41	-91.8	-91.8 0.13 (1)	10.00	R-C	-377 / 0	0.16 (1)
B-C	-2130 / 0	-91.8	-91.8 0.31 (1)	4.40	C-Q	-106 / 0	0.09 (1)
C-D	-2105 / 0	-91.8	-91.8 0.30 (1)	4.43	Q-D	0 / 190	0.05 (4)
D-E	-2118 / 0	-91.8	-91.8 0.46 (1)	4.21	D-O	0 / 925	0.15 (1)
E-F	-2152 / 0	-91.8	-91.8 0.42 (1)	4.23	O-E	-645 / 0	0.33 (1)
F-G	-2152 / 0	-91.8	-91.8 0.42 (1)	4.23	E-N	0 / 59	0.01 (1)
G-H	-2151 / 0	-91.8	-91.8 0.46 (1)	4.18	N-G	-574 / 0	0.30 (1)
H-I	-2270 / 0	-91.8	-91.8 0.12 (1)	5.33	N-H	0 / 757	0.12 (1)
I-U	-2580 / 0	-91.8	-91.8 0.17 (1)	5.03	L-H	0 / 416	0.09 (1)
U-J	-2982 / 0	-91.8	-91.8 0.17 (1)	4.74	L-I	-383 / 0	0.30 (1)
S-B	-2115 / 0	0.0	0.0 0.14 (1)	6.99	K-I	0 / 76	0.03 (4)
					B-R	0 / 1718	0.39 (1)
					T-U	0 / 336	0.00 (1)
S-R	0 / 0	-18.5	-18.5 0.05 (4)	10.00			
R-Q	0 / 1660	-18.5	-18.5 0.23 (1)	10.00			
Q-P	0 / 1591	-18.5	-18.5 0.22 (1)	10.00			
P-O	0 / 1591	-18.5	-18.5 0.22 (1)	10.00			
O-N	0 / 2118	-18.5	-18.5 0.28 (1)	10.00			
N-M	0 / 1718	-18.5	-18.5 0.25 (1)	10.00			
M-L	0 / 1718	-18.5	-18.5 0.25 (1)	10.00			
L-K	0 / 1971	-18.5	-18.5 0.28 (1)	10.00			
K-T	0 / 1971	-18.5	-18.5 0.31 (1)	10.00			
T-J	0 / 1971	-18.5	-18.5 0.31 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.23")
CALCULATED VERT. DEFL.(LL) = L/999 (0.09")
ALLOWABLE DEFL.(TL) = L/360 (1.23")
CALCULATED VERT. DEFL.(TL) = L/999 (0.16")

CSI: TC=0.46/1.00 (G-H:1), BC=0.31/1.00 (K-T:1),
WB=0.39/1.00 (B-R:1), SSI=0.26/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.83 (H) (INPUT = 0.90)
JSI METAL = 0.76 (J) (INPUT = 1.00)



Structural component only
DWG# T-2115521

JOB NAME 411069	TRUSS NAME T54	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:28 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-G5goy164fLZNkbSO2ZAxIHhKxlCs9DIsDaW10zD_VX

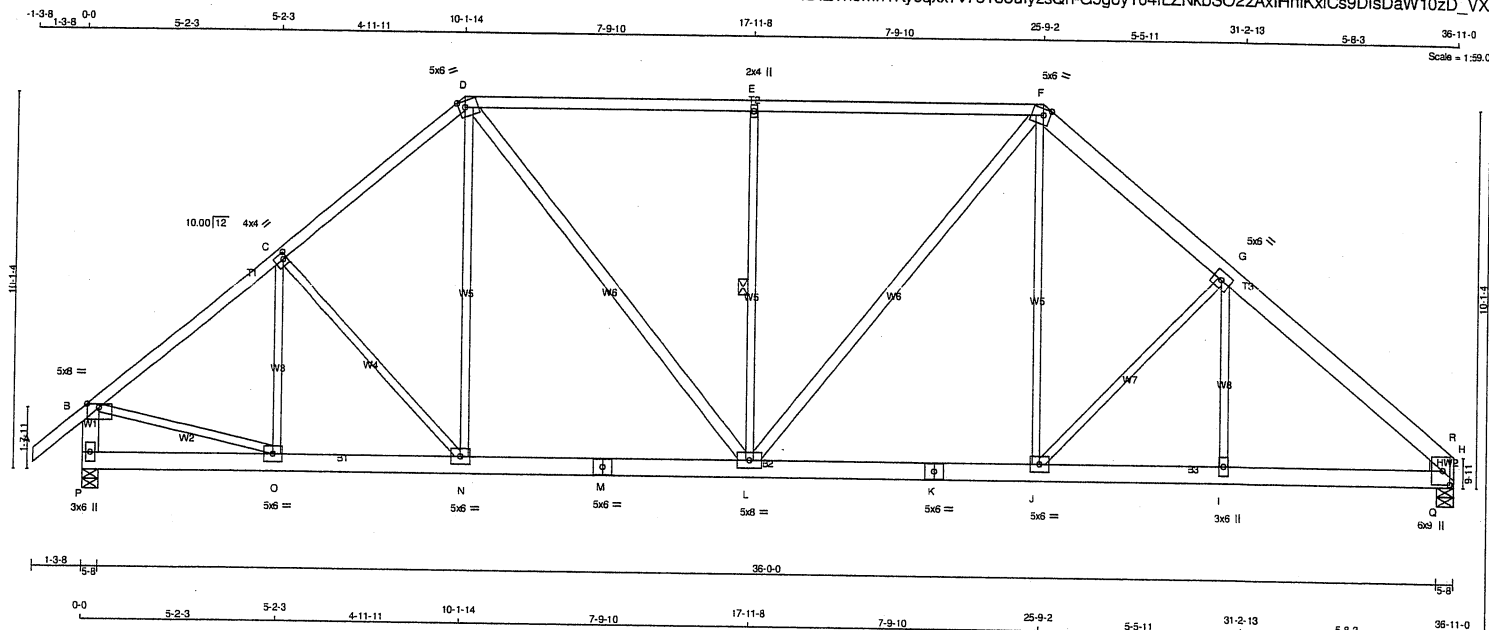

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
A - D	2x4	DRY	No.2	SPF
D - F	2x4	DRY	No.2	SPF
F - H	2x6	DRY	No.2	SPF
P - B	2x6	DRY	No.2	SPF
P - M	2x6	DRY	No.2	SPF
M - K	2x6	DRY	No.2	SPF
K - H	2x6	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
EXCEPT				
D - L	2x4	DRY	No.2	SPF
L - F	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG	HEEL WEDGE
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	
P	2162	0	2162	0	5-8	
H	2035	0	2035	0	5-8	2x4 R

UNFACTORED REACTIONS

JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
P	1527	1015 / 0	0 / 0	0 / 0	0 / 0	511 / 0	0 / 0
H	1439	944 / 0	0 / 0	0 / 0	0 / 0	495 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) P, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 3.53 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF E-L.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

CHORDS		WEBS	
MEMB.	MAX. FACTORED FORCE (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)
FR-TO		FR-TO	
A-B	0 / 41	O-C	-321 / 0
B-C	-2159 / 0	C-N	-202 / 0
C-D	-2057 / 0	N-D	0 / 284
D-E	-2007 / 0	D-L	0 / 727
E-F	-2006 / 0	L-E	-866 / 0
F-G	-2185 / 0	L-F	0 / 568
G-R	-2558 / 0	J-F	0 / 479
R-H	-2939 / 0	J-G	-461 / 0
P-B	-2112 / 0	I-G	0 / 91
		B-O	0 / 1732
		Q-R	0 / 285
P-O	0 / 0		
O-N	0 / 1685		
N-M	0 / 1552		
M-L	0 / 1552		
L-K	0 / 1650		
K-J	0 / 1650		
J-I	0 / 1960		
I-Q	0 / 1960		
Q-H	0 / 1960		

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	39.0	PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= $L/360$ (1.23")
CALCULATED VERT. DEFL.(LL)= $L/999$ (0.08")
ALLOWABLE DEFL.(TL)= $L/360$ (1.23")
CALCULATED VERT. DEFL.(TL)= $L/999$ (0.15")

CSI: TO=0.85/1.00 (D-E:1), BC=0.30/1.00 (I-Q:1), WB=0.58/1.00 (E-L:1), SSI=0.35/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MT20	650	371	788

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP= 0.83 (O) (INPUT = 0.90)
JSI METAL= 0.76 (H) (INPUT = 1.00)



Structural component only
DWG# T-2115522

JOB NAME 411069	TRUSS NAME T55	QUANTITY 2	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 Mitek Industries, Inc. Tue May 25 11:28:29 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-kHDA9N7iQehELk1bchArUExJL5hbaqR5tK3ZSzD_VW

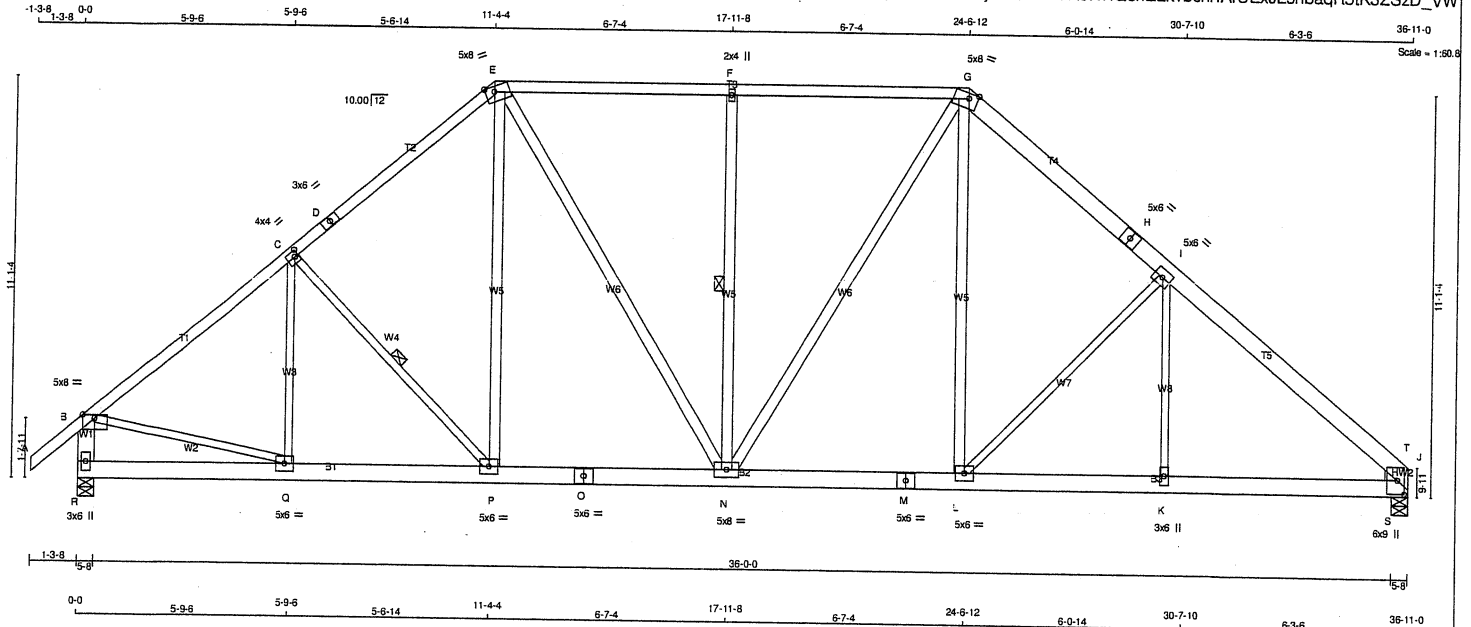

LUMBER				DESCR.	
N. L. G. A. RULES	SIZE	LUMBER		SPF	
CHORDS					
A - D	2x4	DRY	No.2	SPF	
D - E	2x4	DRY	No.2	SPF	
E - G	2x4	DRY	No.2	SPF	
G - H	2x6	DRY	No.2	SPF	
H - J	2x6	DRY	No.2	SPF	
R - B	2x6	DRY	No.2	SPF	
R - O	2x6	DRY	No.2	SPF	
O - M	2x6	DRY	No.2	SPF	
M - J	2x6	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
EXCEPT					
P - E	2x4	DRY	No.2	SPF	
E - N	2x4	DRY	No.2	SPF	
N - F	2x4	DRY	No.2	SPF	
N - G	2x4	DRY	No.2	SPF	
L - G	2x4	DRY	No.2	SPF	


DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT TYPE	PLATES	W	LEN	Y	X
B TMVW-p	MT20	5.0	8.0	Edge	
C TMVW-t	MT20	4.0	4.0	2.00	1.25
D TS-t	MT20	3.0	6.0		
E TTWW-m	MT20	5.0	8.0	Edge	3.00
F TMW-w	MT20	2.0	4.0		
G TTWW-m	MT20	5.0	8.0	Edge	3.00
H TS-t	MT20	5.0	6.0		
I TMVW-t	MT20	5.0	6.0		
J TMBH-t	MT20	6.0	9.0	4.50	2.25
K BMW-w	MT20	3.0	6.0		
L P-Q					
L BMW-w	MT20	5.0	6.0		
M BS-t	MT20	5.0	6.0		
N BMW-w	MT20	5.0	8.0		
O BS-t	MT20	5.0	6.0		
R BMV1-p	MT20	3.0	6.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES: (1)

1)



Structural component only
DWG# T-2115523

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	VERT	HORZ	MAXIMUM FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG	HEEL WEDGE
R	2162	0	2162	0	5-8	5-8	
J	2035	0	2035	0	5-8	5-8	2x4 R

UNFACTORED REACTIONS

JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
R	1527	1015 / 0	0 / 0	0 / 0	0 / 0	511 / 0	0 / 0
J	1439	944 / 0	0 / 0	0 / 0	0 / 0	495 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) R, J

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 4.14 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

1 LATERAL BRACE(S) AT 1/2 LENGTH OF C-P, F-N.

END VERTICAL(S) MUST BE SHEATHED OR HAVE BRACES AS INDICATED IN THE MAX. UNBRACED LENGTH COLUMN OF THE TABLE BELOW

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. UNBRACED LENGTH (LC)	MEMB.	WEBS	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (LC)
FR-TO			FROM	TO	FR-TO			
A-B	0 / 41	-91.8	-91.8	0.13 (1)	10.00	Q-C	-261 / 4	0.17 (1)
B-C	-2178 / 0	-91.8	-91.8	0.51 (1)	4.14	C-P	-302 / 0	0.14 (1)
C-D	-1993 / 0	-91.8	-91.8	0.48 (1)	4.32	P-E	0 / 344	0.06 (1)
D-E	-1993 / 0	-91.8	-91.8	0.48 (1)	4.32	E-N	0 / 568	0.09 (1)
E-F	-1799 / 0	-91.8	-91.8	0.58 (1)	4.28	N-F	-727 / 0	0.45 (1)
F-G	-1798 / 0	-91.8	-91.8	0.58 (1)	4.29	N-G	0 / 420	0.07 (1)
G-H	-2092 / 0	-91.8	-91.8	0.18 (1)	5.43	L-G	0 / 522	0.08 (1)
H-I	-2092 / 0	-91.8	-91.8	0.18 (1)	5.43	L-I	-546 / 0	0.75 (1)
I-T	-2535 / 0	-91.8	-91.8	0.20 (1)	5.04	K-I	0 / 116	0.04 (4)
T-J	-2894 / 0	-91.8	-91.8	0.19 (1)	4.78	B-Q	0 / 1742	0.39 (1)
R-B	-2110 / 0	0.0	0.0	0.14 (1)	6.99	S-T	0 / 233	0.00 (1)
R-Q	0 / 0	-18.5	-18.5	0.06 (4)	10.00			
Q-P	0 / 1704	-18.5	-18.5	0.24 (1)	10.00			
P-O	0 / 1501	-18.5	-18.5	0.22 (1)	10.00			
O-N	0 / 1501	-18.5	-18.5	0.22 (1)	10.00			
N-M	0 / 1578	-18.5	-18.5	0.23 (1)	10.00			
M-L	0 / 1578	-18.5	-18.5	0.23 (1)	10.00			
L-K	0 / 1949	-18.5	-18.5	0.28 (1)	10.00			
K-S	0 / 1949	-18.5	-18.5	0.28 (1)	10.00			
S-J	0 / 1949	-18.5	-18.5	0.28 (1)	10.00			

TOTAL WEIGHT = 2 X 221 = 443 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN FLAT SECTION BASED ON A SLOPE OF 6.00/12

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (1.23")
CALCULATED VERT. DEFL.(LL) = L/999 (0.07")
ALLOWABLE DEFL.(TL) = L/360 (1.23")
CALCULATED VERT. DEFL.(TL) = L/999 (0.13")

CSI: TC=0.58/1.00 (E-F:1), BC=0.28/1.00 (K-S:1), WB=0.75/1.00 (H-L:1), SS=0.29/1.00 (E-F:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.81 (Q) (INPUT = 0.90)
JSI METAL = 0.75 (J) (INPUT = 1.00)

JOB NAME 411069	TRUSS NAME T56S	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	TRUSS DESC.	DRWG NO.
---------------------------	---------------------------	----------------------	-----------------	-------------------------------	-------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:31 2021 Page 1
ID:E?n9mn1Ky9qxx7V78133ulyzsqn-ggLxa38zyGxyb2Azk6jewwJOF8oE3cEkYApAeLzD_VU

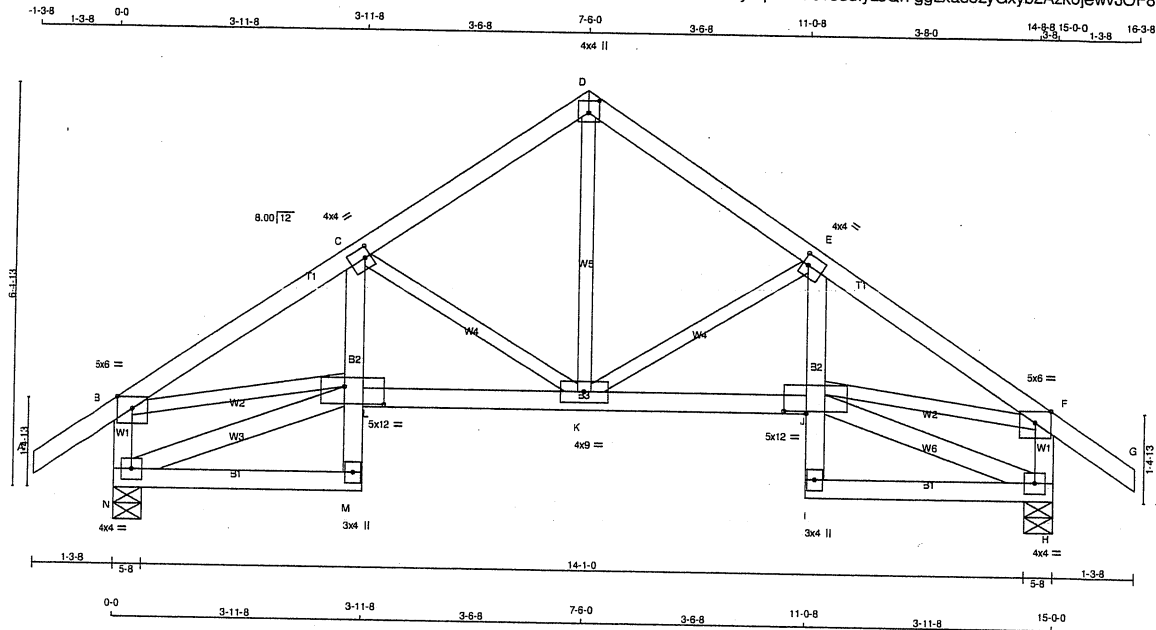

Scale = 1/32

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	DESCR.
A - D	2x4	DRY	No.2
D - G	2x4	DRY	No.2
N - B	2x4	DRY	No.2
H - F	2x4	DRY	No.2
N - M	2x4	DRY	No.2
M - C	2x4	DRY	No.2
L - J	2x4	DRY	No.2
I - E	2x4	DRY	No.2
I - H	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
EXCEPT			
N - L	2x4	DRY	No.2
J - H	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-p	MT20	5.0	6.0	Edge	
C	TMVW-t	MT20	4.0	4.0	2.00	1.00
D	TTW+p	MT20	4.0	4.0	2.25	2.00
E	TMVW-t	MT20	4.0	4.0	2.00	1.00
F	TMVW-p	MT20	5.0	6.0	Edge	
H	BMVW1-t	MT20	4.0	4.0		
I	BMV+p	MT20	3.0	4.0		
J	BMVW1-t	MT20	5.0	12.0	0.50	4.25
K	BMVW1-t	MT20	4.0	9.0		
L	BMVW1-t	MT20	5.0	12.0	3.25	7.50
M	BMV+p	MT20	3.0	4.0		
N	BMVW1-t	MT20	4.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT
N	953	0	953	0	0
H	953	0	953	0	0

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
N	671	454 / 0	0 / 0	0 / 0	0 / 0	217 / 0	0 / 0
H	671	454 / 0	0 / 0	0 / 0	0 / 0	217 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) N, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 5.55 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM TO		FR-TO			
A-B	0 / 35	-91.8	-91.8 0.12 (1)	K-D	0 / 616	0.14 (1)	
B-C	-1270 / 0	-91.8	-91.8 0.17 (1)	K-E	-505 / 0	0.16 (1)	
C-D	-813 / 0	-91.8	-91.8 0.15 (1)	C-K	-505 / 0	0.16 (1)	
D-E	-813 / 0	-91.8	-91.8 0.15 (1)	N-L	-27 / 0	0.01 (1)	
E-F	-1270 / 0	-91.8	-91.8 0.17 (1)	B-L	0 / 1076	0.24 (1)	
F-G	0 / 35	-91.8	-91.8 0.12 (1)	J-H	-27 / 0	0.01 (1)	
N-B	-909 / 0	0.0	0.0 0.09 (1)	J-F	0 / 1076	0.24 (1)	
H-F	-909 / 0	0.0	0.0 0.09 (1)				
N-M	0 / 25	-18.5	-18.5 0.08 (4)				
M-L	0 / 39	0.0	0.0 0.05 (1)				
L-C	0 / 124	0.0	0.0 0.07 (1)				
L-K	0 / 1088	-18.5	-18.5 0.21 (1)				
K-J	0 / 1088	-18.5	-18.5 0.21 (1)				
I-J	0 / 39	0.0	0.0 0.05 (1)				
J-E	0 / 124	0.0	0.0 0.07 (1)				
I-H	0 / 25	-18.5	-18.5 0.08 (4)				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 8.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.50")
CALCULATED VERT. DEFL.(LL) = L/999 (0.03")
ALLOWABLE DEFL.(TL) = L/360 (0.50")
CALCULATED VERT. DEFL.(TL) = L/999 (0.06")

CSI: TC=0.17/1.00 (E-F:1), BC=0.21/1.00 (K-L:1),
WB=0.24/1.00 (B-L:1), SSI=0.14/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MT20	650	371	1747
		788	1987

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.79 (D) (INPUT = 0.90)
JSI METAL= 0.24 (F) (INPUT = 1.00)



Structural component only
DWG# T-2115524

JOB NAME 411069	TRUSS NAME T57	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:32 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-8svJoP9bjZ3pDCIAHpEtT7sWbY5QoxtunqYjAnzD_VT

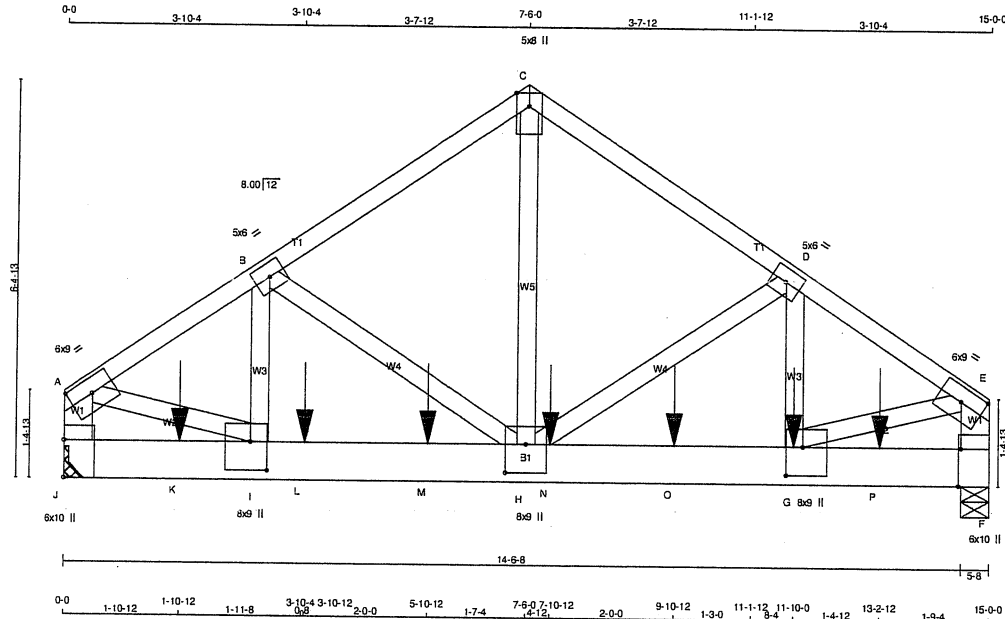

Scale = 1/32 = 1/32.5

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4 DRY	No.2	SPF		
C - E	2x4 DRY	No.2	SPF		
J - A	2x6 DRY	No.2	SPF		
F - E	2x6 DRY	No.2	SPF		
J - F	2x8 DRY	1950F 1.7E	SPF		

ALL WEBS 2x4 DRY No.2 SPF EXCEPT

DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A - C 1	12	TOP
C - E 1	12	TOP
J - A 2	12	TOP
F - E 2	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
J - F 2	12	SIDE (183.1)
WEBS : (0.122"x3") SPIRAL NAILS		
D - G 2	3	SIDE (733.8)
2x4 1	6	
B - I 2	3	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT VERT	7582	7582	0	0
JT HORZ	0	0	0	0
J F	8228	8228	0	0
J F	8228	8228	5-8	5-8

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT J. MINIMUM BEARING LENGTH AT JOINT J = 4-0.

UNFACTORED REACTIONS

	1ST LOASE	MAX. MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
J	5355	3552 / 0	0 / 0	0 / 0	0 / 0	1803 / 0	0 / 0
F	5810	3862 / 0	0 / 0	0 / 0	0 / 0	1948 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F
BEARING SIZE FACTOR = 1.15 AT JNT(S) F (BASED ON SUPPORT DEPTH = 1-8)

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.94 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED	VERT. LOAD	LC1	MAX	CS1 (LC)	UNBRAC	MEMB.	MAX. FACTORED	FORCE	MAX	CS1 (LC)
FR-TO		FROM	TO			LENGTH	FR-TO				
A - B	-8507 / 0	-91.8	-91.8	0.32 (1)	3.17	H - C	0 / 7397	0.65 (1)			
B - C	-7004 / 0	-91.8	-91.8	0.37 (1)	3.47	H - D	-2560 / 0	0.41 (1)			
C - D	-7002 / 0	-91.8	-91.8	0.37 (1)	3.47	G - D	0 / 2481	0.22 (1)			
D - E	-9500 / 0	-91.8	-91.8	0.38 (1)	2.94	B - H	-1553 / 0	0.25 (1)			
J - A	-6913 / 0	0.0	0.0	0.24 (1)	5.68	I - B	0 / 1348	0.12 (1)			
F - E	-7707 / 0	0.0	0.0	0.27 (1)	5.41	A - I	0 / 7386	0.65 (1)			
						G - E	0 / 8245	0.73 (1)			
J - K	0 / 0	-18.5	-18.5	0.15 (1)	10.00						
K - I	0 / 0	-18.5	-18.5	0.15 (1)	10.00						
I - L	0 / 7090	-18.5	-18.5	0.38 (1)	10.00						
L - M	0 / 7090	-18.5	-18.5	0.38 (1)	10.00						
M - H	0 / 7090	-18.5	-18.5	0.38 (1)	10.00						
H - N	0 / 7915	-18.5	-18.5	0.41 (1)	10.00						
N - O	0 / 7915	-18.5	-18.5	0.41 (1)	10.00						
O - G	0 / 7915	-18.5	-18.5	0.41 (1)	10.00						
G - P	0 / 0	-18.5	-18.5	0.11 (1)	10.00						
P - F	0 / 0	-18.5	-18.5	0.11 (1)	10.00						

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
G	11-10-0	-2481	-2481	---	BACK	VERT	TOTAL	---	C1
K	1-10-12	-1376	-1376	---	BACK	VERT	TOTAL	---	C1
L	3-10-12	-1376	-1376	---	BACK	VERT	TOTAL	---	C1
M	5-10-12	-1376	-1376	---	BACK	VERT	TOTAL	---	C1
N	7-10-12	-1370	-1370	---	BACK	VERT	TOTAL	---	C1
O	9-10-12	-1370	-1370	---	BACK	VERT	TOTAL	---	C1
P	13-2-12	-648	-648	---	TOP	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 88 = 177 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6	PSF
DL	= 6.0	PSF
BOT CH. LL	= 0.0	PSF
DL	= 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN./C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.50")
CALCULATED VERT. DEFL.(LL) = L/999 (0.07")
ALLOWABLE DEFL.(TL) = L/360 (0.50")
CALCULATED VERT. DEFL.(TL) = L/999 (0.14")

CSI: TC=0.38/1.00 (D-E:1), BC=0.41/1.00 (G-H:1),
WB=0.73/1.00 (E-G:1), SSI=0.92/1.00 (G-H:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS= 1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN
MT20	650 371 1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.88 (C) (INPUT = 0.90)
JSI METAL = 0.89 (I) (INPUT = 1.00)



Structural component only
DWG# T-2115525

CONTINUED ON PAGE 2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411069	T57	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:32 2021 Page 2
ID:E?n9mn1Ky9qxx/v78133ulyzsQn-8svJoP9bjZ3pDCIAHpEtT7sWbY5QoxtungYjAnzD VT

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-t	MT20	6.0	9.0	2.75	4.50
B	TMVW-t	MT20	5.0	6.0		
C	TTW+p	MT20	5.0	8.0	Edge	
D	TMVW-t	MT20	5.0	6.0		
E	TMVW-t	MT20	6.0	9.0	2.75	4.50
F	BMV1+t	MT20	6.0	10.0	Edge	0.50
G	BMVW+t	MT20	8.0	9.0	5.50	3.25
H	BMVW+t	MT20	8.0	9.0	5.50	4.00
I	BMVW+t	MT20	8.0	9.0	5.50	3.25
J	BMV1+t	MT20	6.0	10.0	7.25	

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

NOTES- (1)


1) Lateral braces to be a minimum of 2x4 SPF #2



Structural component only
DWG# T-2115525 *mn*

JOB NAME 411069	TRUSS NAME T58	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:33 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-c3Th?IADUtCgqMKMrXl6?KOItYSCXVZ10UIHIDzD_VS

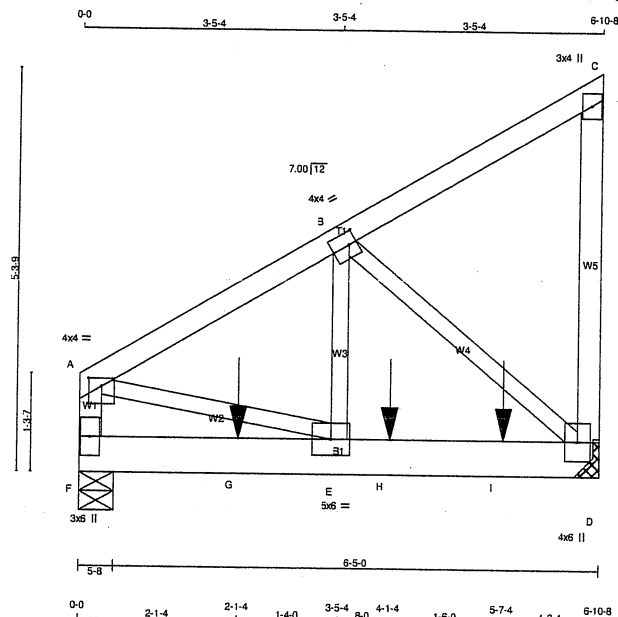

Scale = 1/2\"/>

LUMBER				
N. L. G. A. RULES				
CHORDS	SIZE	LUMBER	DESCR.	
F - A	2x4	DRY	No.2	SPF
A - C	2x4	DRY	No.2	SPF
D - C	2x4	DRY	No.2	SPF
F - D	2x6	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122\"X3\") SPIRAL NAILS		
F-A	1 12	TOP
A-C	1 12	TOP
C-D	1 12	TOP
BOTTOM CHORDS : (0.122\"X3\") SPIRAL NAILS		
F-D	2 12	SIDE(0.0)
WEBS : (0.122\"X3\") SPIRAL NAILS		
2x3	1 6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-p	MT20	4.0	4.0	1.25	2.00
B	TMVW-t	MT20	4.0	4.0	2.00	1.25
C	TMV+p	MT20	3.0	4.0		
D	BMVW1+p	MT20	4.0	6.0		
E	BMVW-t	MT20	5.0	6.0		

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		FACTORED GROSS REACTION		INPUT BRG IN-SX	REQRD BRG IN-SX
	VERT	HORZ	DOWN	HORZ		
F	1654	0	1654	0	5-8	5-8
D	2000	0	2000	0	MECHANICAL	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT D. MINIMUM BEARING LENGTH AT JOINT D = 4-0.

UNFACTORED REACTIONS

JT	1ST LOASE COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
F	1166	787 / 0	0 / 0	0 / 0	0 / 0	379 / 0	0 / 0
D	1411	947 / 0	0 / 0	0 / 0	0 / 0	464 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

C H O R D S				W E B S			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	MAX. CSI (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)	
FR-TO		FROM TO		FR-TO			
F-A	-1402 / 0	0.0 0.0	0.08 (1)	A-E	0 / 1565	0.19 (1)	
A-B	-1739 / 0	-91.8 -91.8	0.09 (1)	E-B	0 / 1782	0.22 (1)	
B-C	-16 / 0	-91.8 -91.8	0.08 (1)	B-D	-1981 / 0	0.32 (1)	
D-C	-126 / 0	0.0 0.0	0.03 (1)				
F-G	0 / 0	-18.5 -18.5	0.24 (1)				
G-E	0 / 0	-18.5 -18.5	0.24 (1)				
E-H	0 / 1516	-18.5 -18.5	0.37 (1)				
H-I	0 / 1516	-18.5 -18.5	0.37 (1)				
I-D	0 / 1516	-18.5 -18.5	0.37 (1)				

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
G	2-1-4	-745	-745	---	BACK	VERT	TOTAL	---	C1
H	4-1-4	-648	-648	---	BACK	VERT	TOTAL	---	C1
I	5-7-4	-648	-648	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

TOTAL WEIGHT = 2 X 35 = 71 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
	DL	= 6.0	PSF
BOT CH.	LL	= 0.0	PSF
	DL	= 7.4	PSF
TOTAL LOAD		= 39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (0.23")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.02")
ALLOWABLE DEFL.(TL) = $L/360$ (0.23")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.03")

CSI: TC=0.09/1.00 (A-B:1), BC=0.37/1.00 (D-E:1), WB=0.32/1.00 (B-D:1), SSI=0.43/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.84 (B) (INPUT = 0.90)
JSI METAL= 0.34 (D) (INPUT = 1.00)



Structural component only
DWG# T-2115526

CONTINUED ON PAGE 2

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411069	T58	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
F	BMV1+p	MT20	3.0	6.0		

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2




Structural component only
DWG# T-2115526 *mn*

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411071	T60	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:02:17 2021 Page 1
ID:E?n9mn1Ky9qxx7V78133ulyzsqn-MRmropgoqCufP3MQc3I19DUerCCIm_yQOaOkvzD_?q

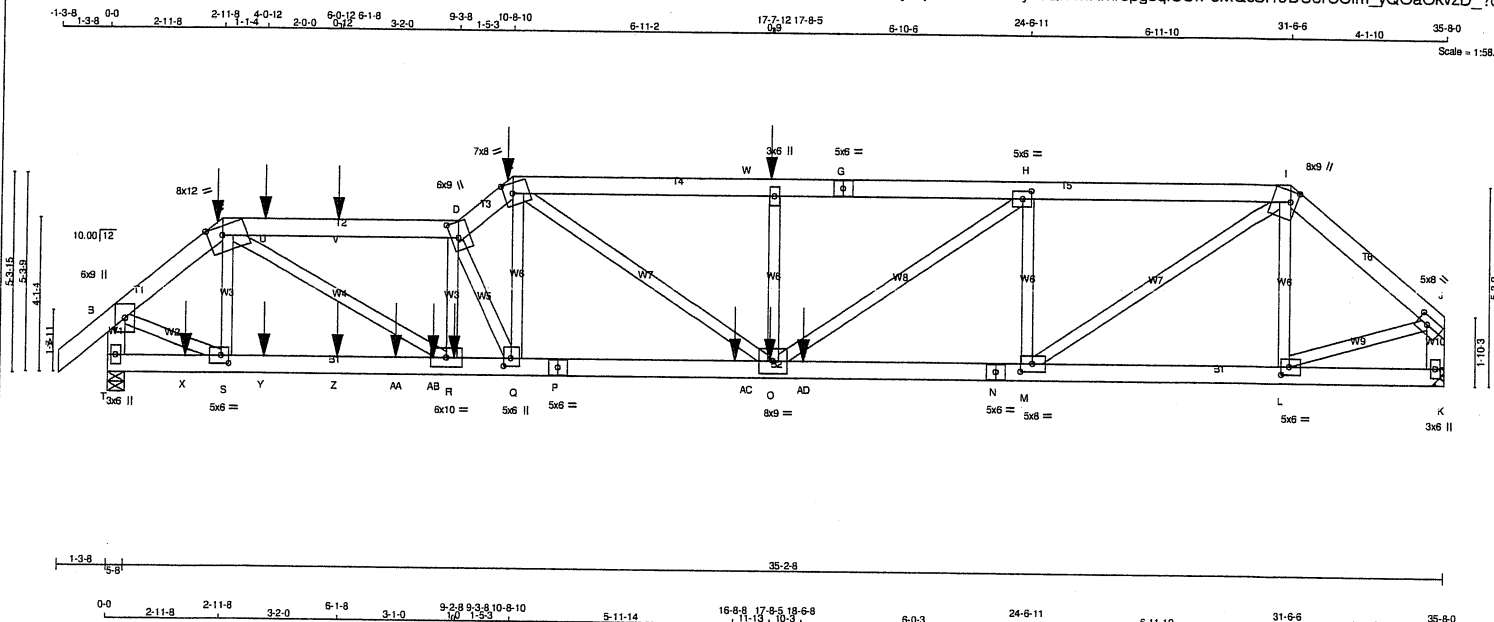

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x6	DRY	No.2	SPF	
C - D	2x6	DRY	No.2	SPF	
D - E	2x6	DRY	No.2	SPF	
E - G	2x6	DRY	No.2	SPF	
G - I	2x6	DRY	No.2	SPF	
I - J	2x6	DRY	No.2	SPF	
J - B	2x6	DRY	No.2	SPF	
K - J	2x6	DRY	No.2	SPF	
T - P	2x6	DRY	2100F 1.8E	SPF	
P - N	2x6	DRY	2100F 1.8E	SPF	
N - K	2x6	DRY	2100F 1.8E	SPF	

ALL WEBS 2x4 DRY No.2 SPF
EXCEPT
DRY: SEASONED LUMBER.

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD (PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
A - C 2	12	SIDE(122.0)
C - D 2	12	SIDE(61.0)
D - E 2	12	SIDE(85.2)
E - G 2	12	SIDE(183.1)
G - I 2	12	TOP
I - J 2	12	TOP
T - B 2	12	TOP
K - J 2	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
T - P 2	12	SIDE(197.8)
P - N 2	12	SIDE(197.8)
N - K 2	12	TOP
WEBS : (0.122"x3") SPIRAL NAILS		
2x4 1	6	SIDE(53.9)
Q - E 1	6	SIDE(66.2)
R - D 1	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

GIRDER NAILING ASSUMES NAILED HANGERS ARE FASTENED WITH MIN. 3-0 INCH NAILS.

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT 6032 0	DOWN 6032 0	UPLIFT 0 0	IN-SX 5-8 5-8
T	6032 0	6032 0	0 0	MECHANICAL
K	4491 0	4491 0	0 0	

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT K. MINIMUM BEARING LENGTH AT JOINT K = 4-0.

UNFACTORED REACTIONS

1ST LOASE	MAX. MIN. COMPONENT REACTIONS
JT COMBINED SNOW	LIVE PERMLIVE WIND DEAD SOIL
T 4274 2756 / 0	0 / 0 0 / 0 1518 / 0 0 / 0
K 3181 2059 / 0	0 / 0 0 / 0 1122 / 0 0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) T

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 2.79 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS			WEBS					
MAX. FACTORED		FACTORED	MAX. FACTORED			MAX. FACTORED		
MEMB.	FORCE (LBS)	VERT. LOAD (PLF)	LC1	MAX. CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	FORCE (LBS)	MAX CSI (LC)
FR-TO		FROM	TO			FR-TO		
A-B	0 / 42	-91.8	-91.8	0.04 (1)	10.00	S-C	-1281 / 0	0.11 (1)
B-C	-6378 / 0	-91.8	-91.8	0.09 (1)	4.66	C-R	0 / 9116	0.81 (1)
C-U	-12693 / 0	-91.8	-91.8	0.55 (1)	3.03	R-D	-4045 / 0	0.35 (1)
U-V	-12693 / 0	-91.8	-91.8	0.55 (1)	3.03	D-Q	-5754 / 0	0.53 (1)
V-D	-12693 / 0	-91.8	-91.8	0.55 (1)	3.03	Q-E	0 / 5975	0.53 (1)
D-E	-13738 / 0	-216.9	-216.9	0.25 (1)	3.17	L-I	-1037 / 0	0.14 (1)
E-W	-12948 / 0	-216.9	-216.9	0.76 (1)	2.79	B-S	0 / 5176	0.46 (1)
W-F	-12948 / 0	-91.8	-91.8	0.76 (1)	2.79	L-J	0 / 3894	0.34 (1)
F-G	-12948 / 0	-91.8	-91.8	0.57 (1)	3.04	M-I	0 / 6463	0.57 (1)
G-H	-12948 / 0	-91.8	-91.8	0.57 (1)	3.04	E-O	0 / 2682	0.24 (1)
H-I	-9021 / 0	-91.8	-91.8	0.33 (1)	3.84	M-H	-3381 / 0	0.45 (1)
I-J	-4864 / 0	-91.8	-91.8	0.11 (1)	5.18	O-F	-1201 / 0	0.16 (1)
T-B	-6133 / 0	0.0	0.0	0.22 (1)	5.98	O-H	0 / 4823	0.43 (1)
K-J	-4470 / 0	0.0	0.0	0.16 (1)	6.81			

T-X	0 / 0	-18.5 -18.5 0.09 (1)	10.00
X-S	0 / 0	-18.5 -18.5 0.09 (1)	10.00
S-Y	0 / 4820	-18.5 -18.5 0.26 (1)	10.00
Y-Z	0 / 4820	-18.5 -18.5 0.26 (1)	10.00
Z-AA	0 / 4820	-18.5 -18.5 0.26 (1)	10.00
AA-AB	0 / 4820	-18.5 -18.5 0.26 (1)	10.00
AB-R	0 / 4820	-18.5 -18.5 0.26 (1)	10.00
R-Q	0 / 12857	-56.0 -56.0 0.47 (1)	10.00
Q-P	0 / 10735	-56.0 -56.0 0.45 (1)	10.00
P-AC	0 / 10735	-56.0 -56.0 0.45 (1)	10.00
AC-O	0 / 10735	-18.5 -18.5 0.45 (1)	10.00
O-AD	0 / 9021	-18.5 -18.5 0.40 (1)	10.00
AD-N	0 / 9021	-18.5 -18.5 0.40 (1)	10.00
N-M	0 / 9021	-18.5 -18.5 0.40 (1)	10.00
M-L	0 / 3690	-18.5 -18.5 0.13 (1)	10.00
L-K	0 / 0	-18.5 -18.5 0.02 (4)	10.00

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
C	2-11-8	-30	-30	---	FRONT	VERT	DEAD	---	C1
C	2-11-8	-127	-127	---	FRONT	VERT	SNOW	---	C1
E	10-8-10	-54	-54	---	FRONT	VERT	DEAD	---	C1
E	10-8-10	-234	-234	---	FRONT	VERT	SNOW	---	C1
F	17-7-12	-100	-100	---	BACK	VERT	TOTAL	---	C1

DESIGN CRITERIA

*** SPECIAL LOADS ANALYSIS ***
GEOMETRY AND/OR BASIC LOADS CHANGED BY USER.
LOADS WERE DERIVED FROM USER INPUT
NO FURTHER MODIFICATIONS WERE MADE

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

LOADING IN ALL FLAT SECTIONS BASED ON A SLOPE OF 6.00/12

GIRDER TYPE: CStdGirder
START DISTANCE = 9-0-0
START SPAN CARRIED = 6-10-8
END DISTANCE = 17-0-0
END SPAN CARRIED = 6-10-8
END WALL WIDTH = 4-0
APPLIED TO FRONT SIDE OF TOP CHORD.
- ADDTL LOADS BASED ON 55 % OF G.S.L.

*** NON STANDARD GIRDER ***

ADDTL USER-DEFINED LOADS APPLIED TO ALL LOAD CASES.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL(LL)= L/360 (1.19")
CALCULATED VERT. DEFL(LL)= L/999 (0.26")
ALLOWABLE DEFL(TL)= L/360 (1.19")
CALCULATED VERT. DEFL(TL)= L/862 (0.50")

CS1: TC=0.76/1.00 (E-F:1), BC=0.47/1.00 (Q-R:1), WB=0.81/1.00 (C-R:1), SS=0.63/1.00 (M-O:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00
COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE HEELS OFF

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873

CONTINUED ON PAGE 2



Structural component only
DWG# T-2115536

JOB NAME 411071	TRUSS NAME T60	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	-------------------------------	-------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:02:17 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-MRmropqogICUfP3MQc3i19DUerCCIm yQOaOkvzD ?q

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	6.0	9.0		
C	TTWW-m	MT20	8.0	12.0	2.75	4.50
D	TTWW+m	MT20	6.0	9.0	5.00	2.25
E	TTWW-m	MT20	7.0	8.0	3.25	2.75
F	TMW+w	MT20	3.0	6.0		
G	TS-t	MT20	5.0	6.0		
H	TMWW-t	MT20	5.0	6.0	2.50	2.75
I	TTWW+m	MT20	8.0	9.0	3.50	2.00
J	TMVW-t	MT20	5.0	8.0	2.50	3.25
K	BMV1+p	MT20	3.0	6.0		
L	BMWW-t	MT20	5.0	6.0	2.50	2.50
M	BMWW-t	MT20	5.0	8.0	2.50	3.75
N	BS-t	MT20	5.0	6.0		
O	BMWW-t	MT20	8.0	9.0		
P	BS-t	MT20	5.0	6.0		
Q	BMWW-t	MT20	5.0	6.0	2.50	2.25
R	BMWW-t	MT20	6.0	10.0		
S	BMWW-t	MT20	5.0	6.0	2.50	2.50
T	BMV1+p	MT20	3.0	6.0		

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
O	17-7-12	-27	-27		BACK	VERT	TOTAL		C1
R	9-2-8	-714	-714		BACK	VERT	TOTAL		C1
U	4-0-12	-76	-76		BACK	VERT	TOTAL		C1
V	6-0-12	-76	-76		BACK	VERT	TOTAL		C1
X	2-0-12	-21	-21		BACK	VERT	TOTAL		C1
Y	4-0-12	-21	-21		BACK	VERT	TOTAL		C1
Z	6-0-12	-21	-21		BACK	VERT	TOTAL		C1
AA	7-7-12	-27	-27		BACK	VERT	TOTAL		C1
AB	8-7-12	-27	-27		BACK	VERT	TOTAL		C1
AC	16-8-8	-714	-714		BACK	VERT	TOTAL		C1
AD	18-6-8	-1396	-1396		BACK	VERT	TOTAL		C1

CONNECTION REQUIREMENTS

- 1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.89 (E) (INPUT = 0.90)
JSI METAL = 0.96 (E) (INPUT = 1.00)

NOTES- (1)

- 1) Lateral braces to be a minimum of 2x4 SPF #2



Structural component only
DWG# T-2115536 *W*

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:02:19 2021 Page 1
ID:E?n9mn1Ky9qpx7v78133ulyzsQn-lqucDvh3MMSCuiDkX06D6aJvmmemJDj9Eui3UpozD_?


-13-8 0-0
1-3-8 5-2-1 5-2-1 4-11-9 10-1-9 7-9-15 17-11-8 7-9-15 25-9-7 5-6-9 31-4-0 5-7-0 36-11-0
Scale = 1:59



TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

JSI GRIP= 0.61 (B) (INPUT = 0.90)
JSI METAL= 0.47 (H) (INPUT = 1.00)



JOB NAME 411071	TRUSS NAME T61	QUANTITY 1	PLY 2	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MITek Industries, Inc. Tue May 25 12:02:19 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-lqucDVh3MMSCuiDKX06D6aJvmmemJD19Eui3UpozD ?o

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW+p	MT20	5.0	6.0	2.00	2.25
C	TMWW-t	MT20	5.0	6.0	2.50	2.75
D	TTWW-m	MT20	6.0	10.0	Edge	
E	TMW+w	MT20	3.0	6.0		
F	TTWW-m	MT20	6.0	10.0	Edge	
G	TMWWWW-t	MT20	7.0	12.0	3.25	4.75
G	TP-m	MT20	3.0	10.0		
H	TMBW1-t	MT20	8.0	12.0	4.75	4.00
I	BMW+w	MT20	3.0	6.0		
J, N, O						
J	BMWW-t	MT20	5.0	6.0		
K	BS-t	MT20	6.0	9.0		
L	BMWWW-t	MT20	5.0	8.0		
M	BS-t	MT20	6.0	9.0		
P	BMV1+p	MT20	3.0	8.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2



Structural component only
DWG# T-2115537 *en*

Tamarack Roof Truss, Burlington




TOP COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

LOADING
TOTAL LOAD CASES: (4)

SPECIFIED CONCENTRATED LOADS (LBS)									
UT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
B	2-10-5	-6	-6	---	FRONT	VERT	DEAD	---	C1
B	2-10-5	-6	-6	---	FRONT	VERT	TOTAL	---	C1
B	2-10-5	-26	-26	---	FRONT	VERT	SNOW	---	C1
D	12-1-11	-6	-6	---	FRONT	VERT	DEAD	---	C1
D	12-1-11	-6	-6	---	FRONT	VERT	TOTAL	---	C1
D	12-1-11	-26	-26	---	FRONT	VERT	SNOW	---	C1
G	11-10-0	-3167	-3167	---	BACK	VERT	TOTAL	---	C1
G	12-1-4	1	1	---	FRONT	VERT	TOTAL	---	C1
K	2-11-4	1	1	---	FRONT	VERT	TOTAL	---	C1
K	1-10-12	-1376	-1376	---	BACK	VERT	TOTAL	---	C1
K	1-11-4	1	1	---	FRONT	VERT	TOTAL	---	C1
M	3-10-0	-238	-238	---	FRONT	VERT	TOTAL	---	C1
M	3-10-12	-1376	-1376	---	BACK	VERT	TOTAL	---	C1
N	5-10-12	-1376	-1376	---	BACK	VERT	TOTAL	---	C1
N	7-10-12	-1370	-1370	---	BACK	VERT	TOTAL	---	C1
O	9-10-12	-1370	-1370	---	BACK	VERT	TOTAL	---	C1
P	11-2-0	-238	-238	---	FRONT	VERT	TOTAL	---	C1

	GRIP(DRY)		SHEAR	SECTION
	(PSI)	(PLI)	(PLI)	(PLI)
	MAX	MIN	MAX	MIN
MT20	650	371	1747	798
			1087	1072



JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411071	T62	1	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:02:20 2021 Page 2
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-m0S Qrih7ga3Wsox5kdSfnr502Emy6WO6Lp2LEzD ?n

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW-p	MT20	6.0	9.0	1.75	4.50
B	TTWW-m	MT20	8.0	9.0	Edge	6.50
C	TMW+w	MT20	3.0	6.0		
D	TTWW-m	MT20	8.0	9.0	Edge	6.50
E	TMVW-p	MT20	6.0	9.0	1.75	4.50
F	BMV1+t	MT20	6.0	10.0	Edge	1.25
G	BMWW+t	MT20	10.0	12.0		
H	BMWWW+t	MT20	8.0	12.0	5.50	6.00
I	BMWW+t	MT20	10.0	12.0		
J	BMV1+t	MT20	6.0	10.0	7.25	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
Q	13-1-4	1	1	---	FRONT	VERT	TOTAL	---	C1
Q	13-2-12	-648	-648	---	TOP	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.89 (E) (INPUT = 0.90)

JSI METAL= 0.89 (G) (INPUT = 1.00)




Structural component only
DWG# T-2115538

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411071	T63	2	2	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:02:21 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-ED?MdBjJu_jw70M7fR8hc?OK?SgihmZXL?YbtgzD_?m

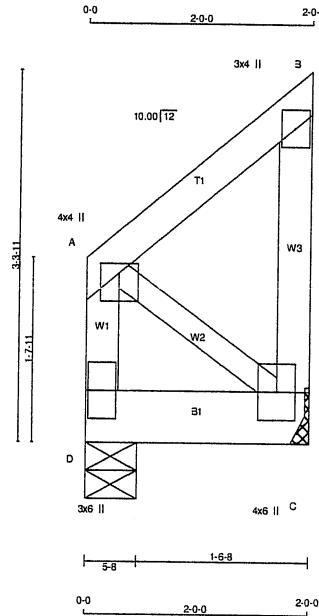

Scale = 1:19.6

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
D - A	2x4 DRY	No.2	SPF		
A - B	2x4 DRY	No.2	SPF		
C - B	2x4 DRY	No.2	SPF		
D - C	2x6 DRY	No.2	SPF		
ALL WEBS	2x3 DRY	No.2	SPF		
DRY: SEASONED LUMBER.					

DESIGN CONSISTS OF 2 TRUSSES BUILT SEPARATELY THEN FASTENED TOGETHER AS FOLLOWS:

CHORDS #ROWS	SURFACE SPACING (IN)	LOAD(PLF)
TOP CHORDS : (0.122"x3") SPIRAL NAILS		
D-A 1	12	TOP
A-B 1	12	TOP
B-C 1	12	TOP
BOTTOM CHORDS : (0.122"x3") SPIRAL NAILS		
D-C 2	12	SIDE(122.3)
WEBS : (0.122"x3") SPIRAL NAILS		
2x3 1	6	

NAILS TO BE DRIVEN FROM ONE SIDE ONLY.

TOP - COMPONENTS ARE LOADED FROM THE TOP AND MUST BE PLACED ON TOP EDGE OF ALL PLIES FOR THE LOAD TO BE TRANSFERRED TO EACH PLY.

SIDE - PLF SHOWN IS THE EQUIVALENT UDL APPLIED TO ONE SIDE THAT THE CORRESPONDING NAILING PATTERN SHALL BE CAPABLE OF TRANSFERRING. REMAINING PLF MUST BE APPLIED ON THE OPPOSITE SIDE OR ON THE TOP.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
A	TMVW+p	MT20	4.0	4.0	1.00	2.00
B	TMV+p	MT20	3.0	4.0		
C	BMVW1+p	MT20	4.0	6.0		
D	BMV1+p	MT20	3.0	6.0		

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

JT	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
D	355	355	5-8	5-8
C	355	355	MECHANICAL	MECHANICAL

A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED AT JOINT C. MINIMUM BEARING LENGTH AT JOINT C = 2-0.

UNFACTORED REACTIONS

JT	1ST LOASE	MAX./MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
D	251	165 / 0	0 / 0	0 / 0	0 / 0	0 / 0	86 / 0	0 / 0
C	251	165 / 0	0 / 0	0 / 0	0 / 0	0 / 0	86 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) D

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT. MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MAX. FACTORED	FACTORED	WEBS	MAX. FACTORED
MEMB.	FORCE (LBS)	VERT. LOAD LC1 (PLF)	MAX. MEMB. FORCE (LBS)	MAX. MEMB. FORCE (LBS)
FR-TO		FROM TO		
D-A	-92 / 0	0.0 0.0 0.01 (1)	7.81	A-C 0 / 0 0.00 (1)
A-B	0 / 0	-91.8 -91.8 0.03 (1)	10.00	
C-B	-92 / 0	0.0 0.0 0.01 (1)	7.81	
D-C	0 / 0	-263.1 -263.1 0.05 (1)	10.00	

TOTAL WEIGHT = 4 X 12 = 49 lb

[M]

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

GIRDER TYPE: CStdGirder
START DISTANCE = 0-0
START SPAN CARRIED = 11-0-0
END DISTANCE = 2-0-0
END SPAN CARRIED = 11-0-0
END WALL WIDTH = 1-8
APPLIED TO FRONT SIDE OF BOTTOM CHORD.
- ADD'TL LOADS BASED ON 55 % OF G.S.L.

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.03/1.00 (A-B:1), BC=0.05/1.00 (C-D:1), WB=0.00/1.00 (A-C:1), SSI=0.09/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.00 COMP=1.00 SHEAR=1.00 TENS=1.00

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MAX MIN	MAX MIN	MAX MIN	
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.03 (A) (INPUT = 0.90)
JSI METAL= 0.02 (B) (INPUT = 1.00)




Structural component only
DWG# T-2115539

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411070	T510	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington


Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu May 27 12:13:31 2021 Page 1
ID:E?n9mn1Ky9qxx7V78133ulyzsQn-5_kAbB2ySe5YVemgkEl2qJ_1VGeN?hxoJWasO5zCJfI

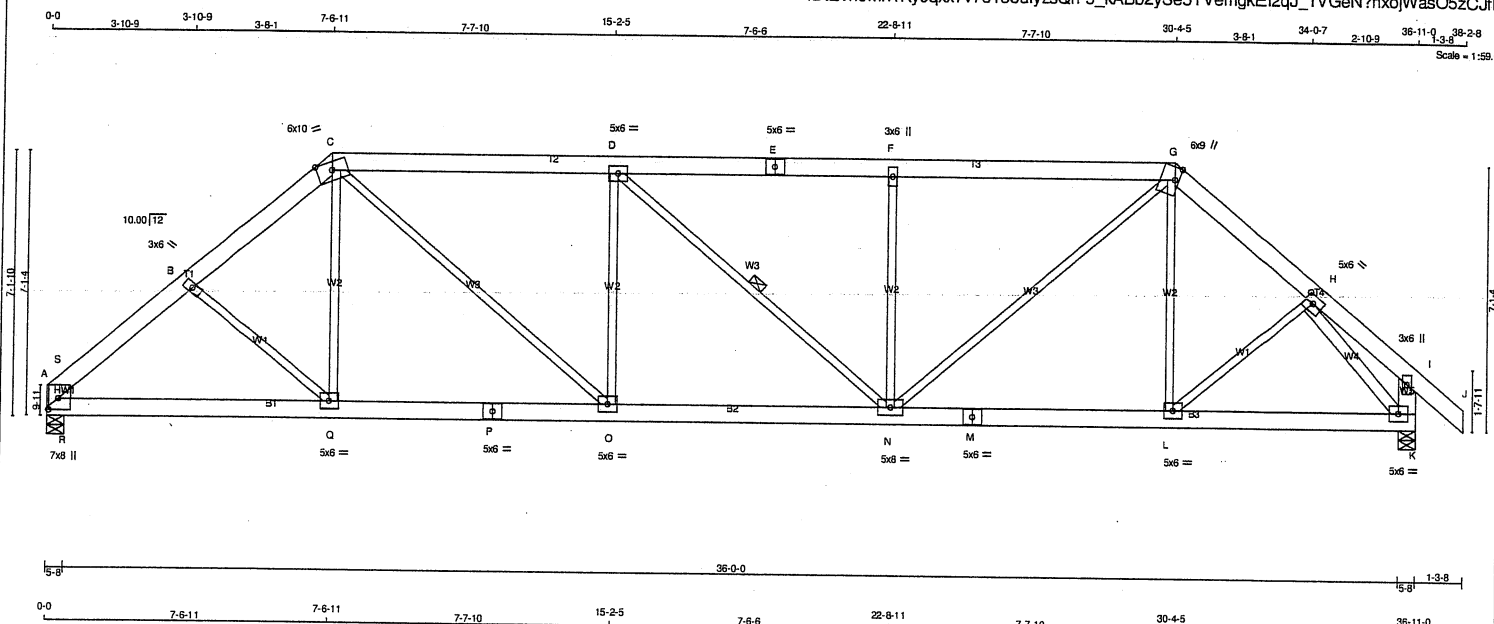

JOB NAME 411069	TRUSS NAME V01	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	TRUSS DESC.	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	-------------------------------	-------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 Mittek Industries, Inc. Tue May 25 11:28:34 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-5F13C4BrFBKXSWvYPEGLYYxuXMrFGyOAE81qFzD_VR

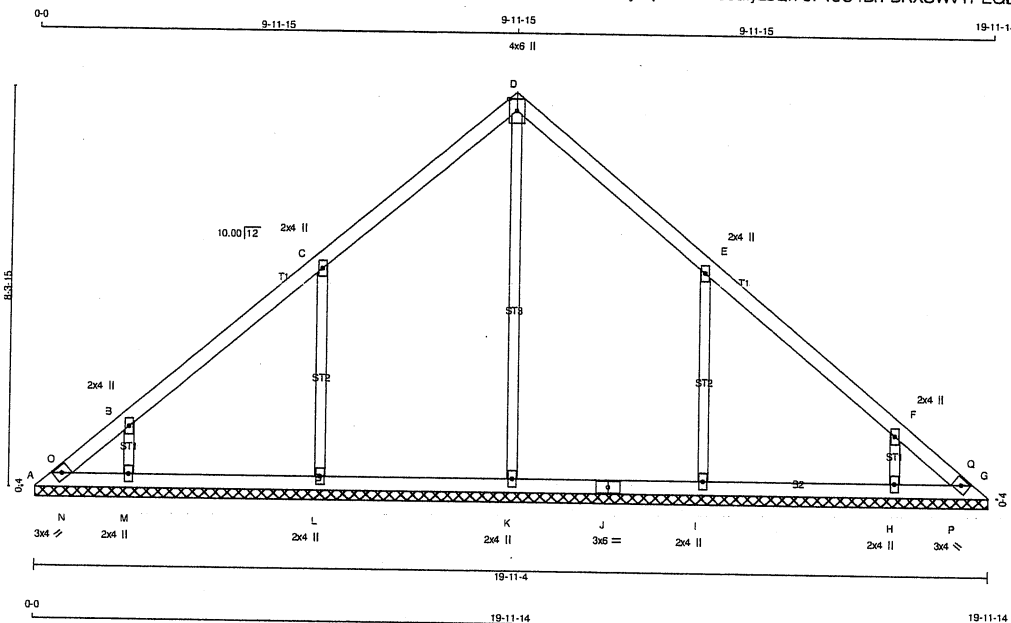

LUMBER				DESCR.			
N. L. G. A. RULES							
CHORDS	SIZE	LUMBER		SPF			
A - D	2x4	DRY	No.2	SPF			
D - G	2x4	DRY	No.2	SPF			
A - J	2x4	DRY	No.2	SPF			
J - G	2x4	DRY	No.2	SPF			
ALL WEBS	2x3	DRY	No.2	SPF			
DRY: SEASONED LUMBER.							

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TBM1-h	MT20	3.0	4.0	
B, C, E, F					
D	TMW+w	MT20	2.0	4.0	
B	TTW+p	MT20	4.0	6.0	Edge
G	TBM1-h	MT20	3.0	4.0	
H, I, K, L, M					
H	BMW1+w	MT20	2.0	4.0	
J	BS-t	MT20	3.0	6.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD	
		GROSS REACTION		GROSS REACTION		BRG		BRG	
JT		VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	
A	103	0	103	0	0	0	19-11-4 (7-11-4)	11-4	
G	103	0	103	0	0	0	19-11-4 (7-11-4)	11-4	
K	284	0	284	0	0	0	19-11-4 (7-11-4)	11-4	
L	501	0	501	0	0	0	19-11-4 (7-11-4)	11-4	
M	354	0	354	0	0	0	19-11-4 (7-11-4)	11-4	
I	501	0	501	0	0	0	19-11-4 (7-11-4)	11-4	
H	354	0	354	0	0	0	19-11-4 (7-11-4)	11-4	

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

1ST CASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
A	72	52/0	0/0	0/0	0/0	19/0	0/0
G	72	52/0	0/0	0/0	0/0	19/0	0/0
K	203	118/0	0/0	0/0	0/0	85/0	0/0
L	353	237/0	0/0	0/0	0/0	117/0	0/0
M	251	162/0	0/0	0/0	0/0	89/0	0/0
I	353	237/0	0/0	0/0	0/0	117/0	0/0
H	251	162/0	0/0	0/0	0/0	89/0	0/0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, G, K, L, M, I, H

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 MAX (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (LC)	FR-TO
FR-TO				FR-TO			
A-O	-105 / 0	-91.8	-91.8 0.02 (1)	6.25	K-D	-210 / 0	0.28 (1)
O-B	-52 / 0	-91.8	-91.8 0.11 (1)	6.25	L-C	-425 / 0	0.16 (1)
B-C	-64 / 0	-91.8	-91.8 0.23 (1)	6.25	M-B	-284 / 0	0.04 (1)
C-D	-92 / 0	-91.8	-91.8 0.23 (1)	6.25	I-E	-425 / 0	0.16 (1)
D-E	-92 / 0	-91.8	-91.8 0.23 (1)	6.25	H-F	-284 / 0	0.04 (1)
E-F	-64 / 0	-91.8	-91.8 0.23 (1)	6.25	N-O	-2 / 0	0.00 (1)
F-Q	-52 / 0	-91.8	-91.8 0.11 (1)	6.25	P-Q	-2 / 0	0.00 (1)
Q-G	-105 / 0	-91.8	-91.8 0.02 (1)	6.25			
A-N	0 / 79	-18.5	-18.5 0.03 (1)	10.00			
N-M	0 / 80	-18.5	-18.5 0.05 (4)	10.00			
M-L	0 / 59	-18.5	-18.5 0.06 (4)	10.00			
L-K	0 / 50	-18.5	-18.5 0.06 (4)	10.00			
K-J	0 / 50	-18.5	-18.5 0.06 (4)	10.00			
J-I	0 / 50	-18.5	-18.5 0.06 (4)	10.00			
I-H	0 / 59	-18.5	-18.5 0.06 (4)	10.00			
H-P	0 / 80	-18.5	-18.5 0.05 (4)	10.00			
P-G	0 / 79	-18.5	-18.5 0.03 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN./C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.23/1.00 (C-D:1), BC=0.06/1.00 (H-I:4), WB=0.28/1.00 (D-K:1), SSI=0.14/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.38 (F) (INPUT = 0.90)
JSI METAL= 0.23 (C) (INPUT = 1.00)



Structural component only
DWG# T-2115527

JOB NAME 411069	TRUSS NAME V02	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:35 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-ZRbSQQBT0USO4fUlyzoa4IU2NmBX?NoKTONnN6zD_VQ

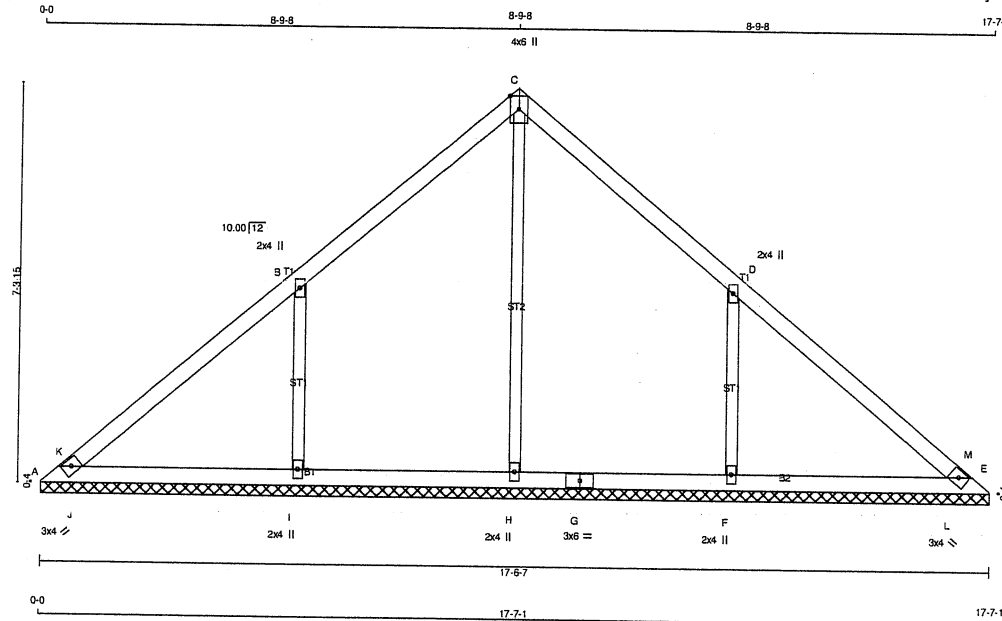

Scale = 1/40.4

LUMBER	N. L. G. A. RULES	CHORDS	SIZE	LUMBER	DESCR.
A - C	2x4	DRY	No.2	SPF	
C - E	2x4	DRY	No.2	SPF	
A - G	2x4	DRY	No.2	SPF	
G - E	2x4	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
DRY: SEASONED LUMBER.					

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQRD BRG
JT	VERT	HORZ	DOWN	UP/LIFT
A	143	0	143	0
E	143	0	143	0
H	472	0	472	0
I	587	0	587	0
F	587	0	587	0

VALUE IN PARENTHESIS INDICATES EFFECTIVE BEARING LENGTH

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
A	101	71 / 0	0 / 0	0 / 0	0 / 0	30 / 0	0 / 0
E	101	71 / 0	0 / 0	0 / 0	0 / 0	30 / 0	0 / 0
H	337	204 / 0	0 / 0	0 / 0	0 / 0	133 / 0	0 / 0
I	415	276 / 0	0 / 0	0 / 0	0 / 0	139 / 0	0 / 0
F	415	276 / 0	0 / 0	0 / 0	0 / 0	139 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, E, H, I, F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRACED LENGTH	WEBS	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
FR-TO						FR-TO			
A-K	0 / 92	-91.8	-91.8	0.04 (4)	10.00	H-C	-431 / 0	0.40 (1)	
K-B	0 / 132	-91.8	-91.8	0.28 (1)	10.00	I-B	-457 / 0	0.11 (1)	
B-C	0 / 87	-91.8	-91.8	0.28 (1)	10.00	F-D	-457 / 0	0.11 (1)	
C-D	0 / 87	-91.8	-91.8	0.28 (1)	10.00	J-K	-150 / 5	0.00 (1)	
D-M	0 / 132	-91.8	-91.8	0.28 (1)	10.00	L-M	-150 / 5	0.00 (1)	
M-E	0 / 92	-91.8	-91.8	0.04 (4)	10.00				
A-J	-110 / 0	-18.5	-18.5	0.13 (1)	6.25				
J-I	-78 / 0	-18.5	-18.5	0.13 (1)	6.25				
I-H	-90 / 0	-18.5	-18.5	0.09 (1)	6.25				
H-G	-90 / 0	-18.5	-18.5	0.09 (1)	6.25				
G-F	-90 / 0	-18.5	-18.5	0.09 (1)	6.25				
F-L	-78 / 0	-18.5	-18.5	0.13 (1)	6.25				
L-E	-110 / 0	-18.5	-18.5	0.13 (1)	6.25				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL LOAD		=	39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.28/1.00 (D-M:1), BC=0.13/1.00 (F-L:1), WB=0.40/1.00 (C-H:1), SSI=0.14/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10 COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP (DRY)	SHEAR (PSI)	SECTION (PLI)
MT20	650	371
	1747	788
	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.38 (B) (INPUT = 0.90)


JSI METAL= 0.24 (D) (INPUT = 1.00)



Structural component only
DWG# T-2115528

JOB NAME 411069	TRUSS NAME V03	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:36 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-1e9qdmC5noaFhp3xWfJpdz0E89YkkuMTiSWxJYzD_VP

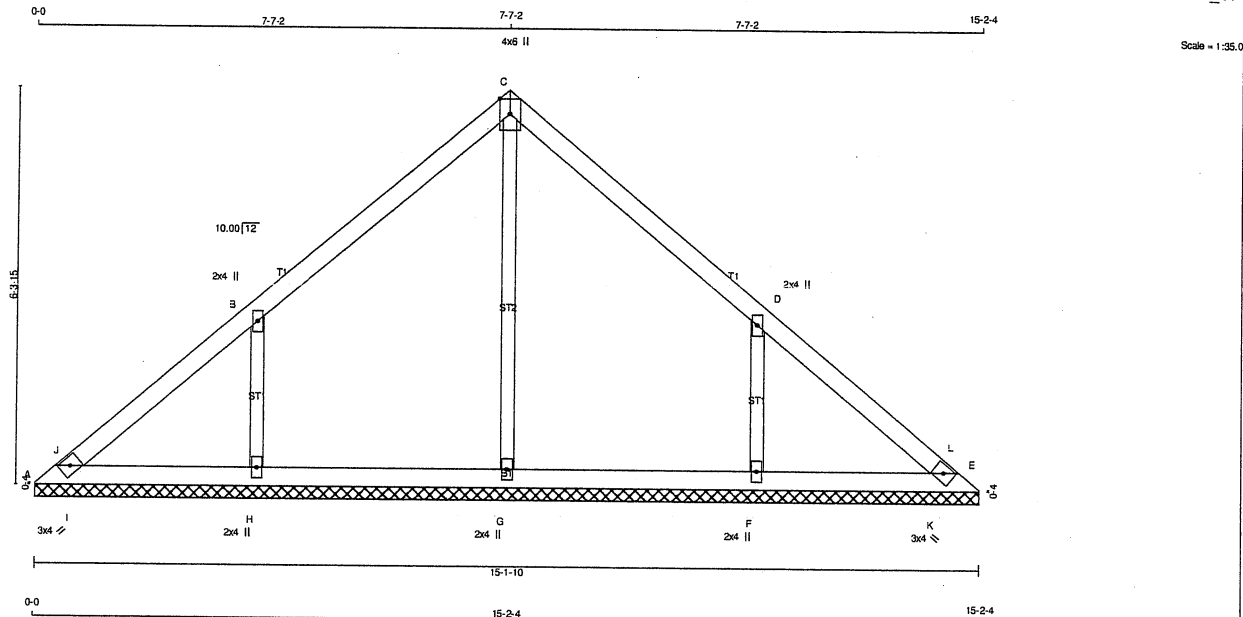

TOTAL WEIGHT = 47 b [M]

LUMBER	DESCR.
N. L. G. A. RULES	SPF
CHORDS SIZE	SPF
A - C 2x4 DRY No.2	SPF
C - E 2x4 DRY No.2	SPF
A - E 2x4 DRY No.2	SPF
ALL WEBS 2x3 DRY No.2	SPF
DRY: SEASONED LUMBER.	

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	HORZ	DOWN	HORZ
A	147	0	147	0
E	147	0	147	0
G	363	0	363	0
H	506	0	506	0
F	506	0	506	0

UNFACTORED REACTIONS

JT	1ST CASE	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
A	103	72 / 0	0 / 0	0 / 0	0 / 0	31 / 0	0 / 0
E	103	72 / 0	0 / 0	0 / 0	0 / 0	31 / 0	0 / 0
G	260	152 / 0	0 / 0	0 / 0	0 / 0	109 / 0	0 / 0
H	357	240 / 0	0 / 0	0 / 0	0 / 0	117 / 0	0 / 0
F	357	240 / 0	0 / 0	0 / 0	0 / 0	117 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, E, G, H, F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED CS1 (LC)	MAX. UNBRACED LENGTH	WEBS	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED CS1 (LC)
FR-TO						FR-TO			
A-J	-34 / 0	-91.8	-91.8	0.03 (1)	6.25	G-C	-300 / 0	0.19 (1)	
J-B	0 / 24	-91.8	-91.8	0.22 (1)	10.00	H-B	-409 / 0	0.07 (1)	
B-C	-24 / 8	-91.8	-91.8	0.22 (1)	6.25	F-D	-409 / 0	0.07 (1)	
C-D	-24 / 8	-91.8	-91.8	0.22 (1)	6.25	I-J	-61 / 6	0.00 (1)	
D-L	0 / 24	-91.8	-91.8	0.22 (1)	10.00	K-L	-61 / 6	0.00 (1)	
L-E	-34 / 0	-91.8	-91.8	0.03 (1)	6.25				
A-I	-11 / 0	-18.5	-18.5	0.06 (1)	6.25				
I-H	-7 / 14	-18.5	-18.5	0.06 (1)	10.00				
H-G	-10 / 0	-18.5	-18.5	0.06 (4)	6.25				
G-F	-10 / 0	-18.5	-18.5	0.06 (4)	6.25				
F-K	-7 / 14	-18.5	-18.5	0.06 (1)	10.00				
K-E	-11 / 0	-18.5	-18.5	0.06 (1)	6.25				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 0.0 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN./C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.22/1.00 (D-L:1), BC=0.06/1.00 (F-K:1), WB=0.19/1.00 (C-G:1), SS=0.14/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP (DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
MT20	650	371	1747


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.29 (B) (INPUT = 0.90)
JSI METAL = 0.22 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115529

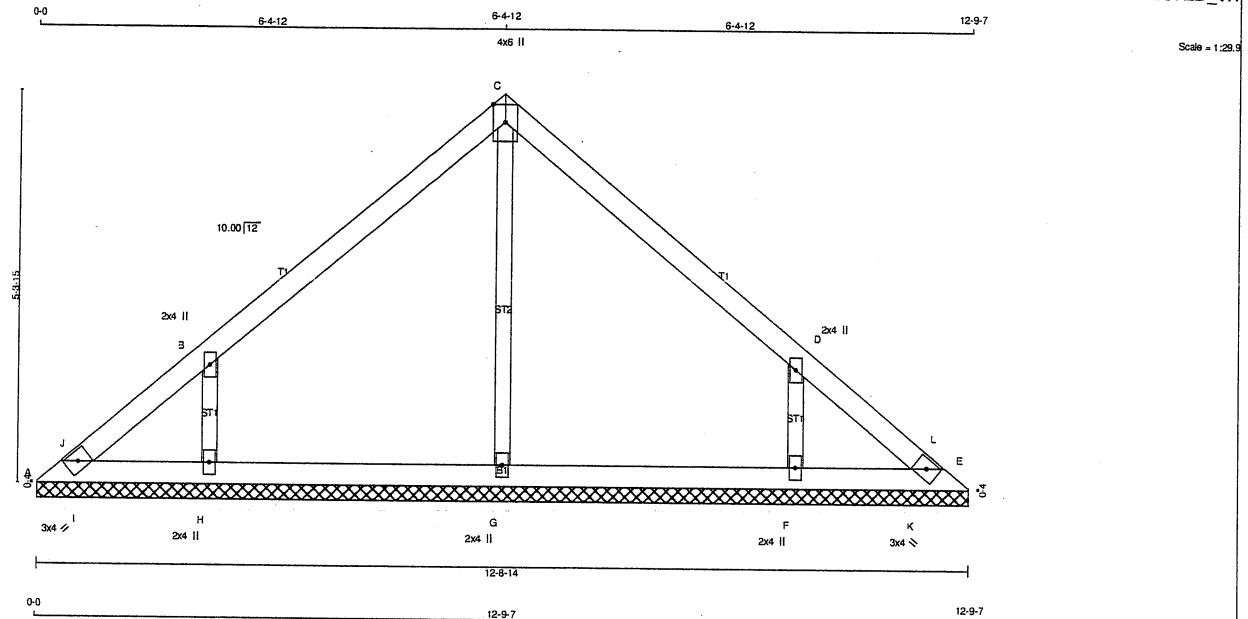

TOTAL WEIGHT = 38 lb

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR
A - C	2x4	No.2	SPF
C - E	2x4	DRY	SPF
A - E	2x4	DRY	SPF
ALL WEBS	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

PLATES (table is in inches)						
JT	TYPE	PLATES	W	LEN	Y	X
A	TBM1-h	MT20	3.0	4.0		
B	TMW+w	MT20	2.0	4.0		
C	TTW+p	MT20	4.0	6.0		Edge
D	TMW+w	MT20	2.0	4.0		
E	TBM1-h	MT20	3.0	4.0		
F, G, H						
F	BMW1+w	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE
TOUCHES EDGE OF CHORD.

NOTES- (1)

1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

		FACTORED		MAXIMUM FACTORED		INPUT	REQRD
		GROSS	REACTION	GROSS	REACTION	BRG	BRG
JT		VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX
E	107	0	107	0	0	12-8-14	12-8-14
	107	0	107	0	0	12-8-14	12-8-14
F	291	0	291	0	0	12-8-14	12-8-14
	450	0	450	0	0	12-8-14	12-8-14
H	450	0	450	0	0	12-8-14	12-8-14

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERMI.LIVE	WIND	DEAD	SOIL
A	75	52/0	0/0	0/0	0/0	23/0	0/0
E	75	52/0	0/0	0/0	0/0	23/0	0/0
G	209	117/0	0/0	0/0	0/0	92/0	0/0
H	317	215/0	0/0	0/0	0/0	102/0	0/0
F	317	215/0	0/0	0/0	0/0	102/0	0/0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, E, G, H, F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS				
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)	
FR-TO		FROM	TO		FR-TO			
A-J	-110 / 0	-91.8	-91.8	0.04 (1)	6.25	G-C	-212 / 0	0.09 (1)
J-B	-31 / 0	-91.8	-91.8	0.20 (1)	6.25	H-B	-389 / 0	0.06 (1)
B-C	-94 / 0	-91.8	-91.8	0.20 (1)	6.25	F-D	-389 / 0	0.06 (1)
C-D	-94 / 0	-91.8	-91.8	0.20 (1)	6.25	I-J	0 / 25	0.00 (1)
D-L	-31 / 0	-91.8	-91.8	0.20 (1)	6.25	K-L	0 / 25	0.00 (1)
L-E	-110 / 0	-91.8	-91.8	0.04 (1)	6.25			
A-I	0 / 79	-18.5	-18.5	0.02 (1)	10.00			
I-H	0 / 78	-18.5	-18.5	0.05 (4)	10.00			
H-G	0 / 55	-18.5	-18.5	0.07 (4)	10.00			
G-F	0 / 55	-18.5	-18.5	0.07 (4)	10.00			
F-K	0 / 78	-18.5	-18.5	0.05 (4)	10.00			
K-E	0 / 79	-18.5	-18.5	0.02 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:

TOP	CH.	LL	=	25.6	PSF
		DL	=	6.0	PSF
BOT	CH.	LL	=	0.0	PSF
		DL	=	7.4	PSF
TOTAL LOAD				=	39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR
SMALL BUILDING REQUIREMENTS OF PART 9,
NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.20/1.00 (B-C:1) , BC=0.07/1.00 (G-H:4) ,
WB=0.09/1.00 (C-G:1) , SS=0.13/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY) (PSI)		SHEAR (PLI)		SECTION (PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.28 (B) (INPUT = 0.90)

JSI METAL= 0.21 (B) (INPUT = 1.00)




Structural component only
DWG# T-2115530

JOB NAME	TRUSS NAME	QUANTITY	PLY	JOB DESC.	ROYAL PINE HOMES	DRWG NO.
411069	V05	1	1	TRUSS DESC.		

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MITek Industries, Inc. Tue May 25 11:28:39 2021 Page 1
ID:E?n9mn1Ky9qxx7V78133ulyzsQn-RDqyGoF_4jyqYHnWCnsWFbejINXrxD2vOQlbwtzD_VM

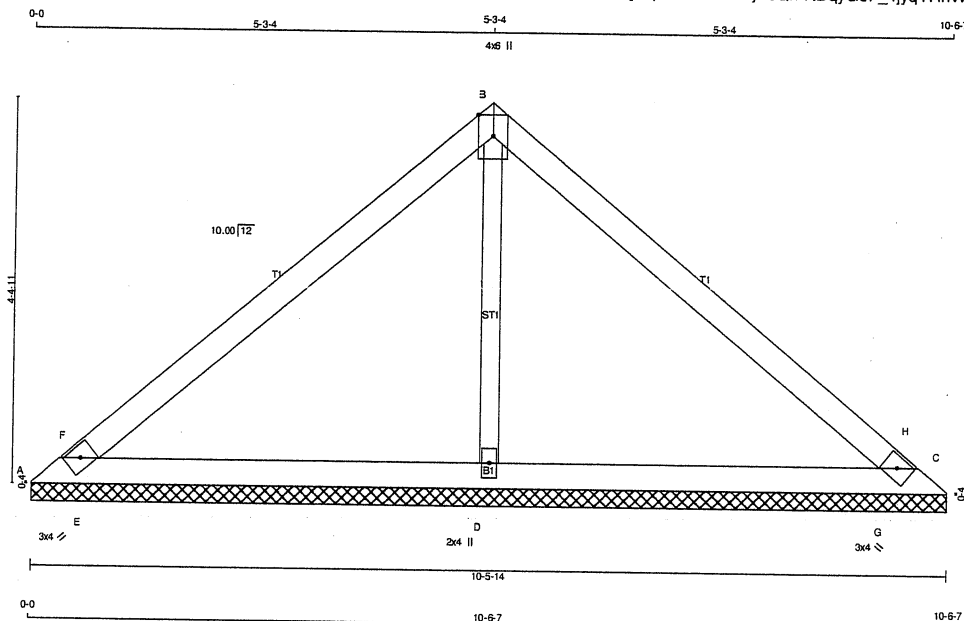

Scale = 1/25.0

LUMBER					
N. L. G. A. RULES					
CHORDS		SIZE	LUMBER		DESCR
A - B	2x4	DRY	No.2	SPF	
B - C	2x4	DRY	No.2	SPF	
A - C	2x4	DRY	No.2	SPF	
ALL WEBS		2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.					

PLATES (table is in inches)	JT	TYPE	PLATES	W	LEN	Y	X
A - B	TBM1-h	MT20	3.0	4.0			
B - C	TTW+p	MT20	4.0	6.0	Edge		
C - B	TBM1-h	MT20	3.0	4.0			
D - B	BMW1+w	MT20	2.0	4.0			

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES: (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG IN-SX	REQD BRG IN-SX
	VERT	HORZ	DOWN	HORZ		
A	9	0	9	0	10-5-14	10-5-14
C	9	0	9	0	10-5-14	10-5-14
D	1139	0	1139	0	10-5-14	10-5-14

UNFACTORED REACTIONS

1ST CASE COMBINED		MAX./MIN. COMPONENT REACTIONS					
JT		SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
A	6	3/0	0/0	0/0	0/0	3/0	0/0
C	6	3/0	0/0	0/0	0/0	3/0	0/0
D	805	530/0	0/0	0/0	0/0	275/0	0/0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, C, D

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS		FACTORED		MAX. UNBRACED LENGTH	WEBS	
	MAX. FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX	LC2 MAX		MAX. FORCE (LBS)	MAX. CSI (LC)
FR-TO							
A-F	0/456	-91.8	-91.8	0.22 (1)	10.00	D-B -916/0	0.25 (1)
F-B	0/409	-91.8	-91.8	0.32 (1)	10.00	E-F -340/0	0.00 (1)
B-H	0/409	-91.8	-91.8	0.32 (1)	10.00	G-H -340/0	0.00 (1)
H-C	0/456	-91.8	-91.8	0.22 (1)	10.00		
A-E	-386/0	-18.5	-18.5	0.23 (1)	6.25		
E-D	-325/0	-18.5	-18.5	0.23 (1)	6.25		
D-G	-325/0	-18.5	-18.5	0.23 (1)	6.25		
G-C	-386/0	-18.5	-18.5	0.23 (1)	6.25		

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.32/1.00 (B-H:1), BC=0.23/1.00 (D-G:1), WB=0.25/1.00 (B-D:1), SS=0.19/1.00 (A-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00


TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN
MT20 850 371 1747 788 1987 1873

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP = 0.46 (D) (INPUT = 0.90)
JSI METAL = 0.19 (D) (INPUT = 1.00)



Structural component only
DWG# T-2115531

JOB NAME 411069	TRUSS NAME V06	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington		TRUSS DESC.			

Version 8.420 S Jan 21 2021 Mitek Industries, Inc. Tue May 25 11:28:40 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-vPOLT8Fcr14gARmiiVNIpBxgnuPgIT3d4U8Sjzd_VL

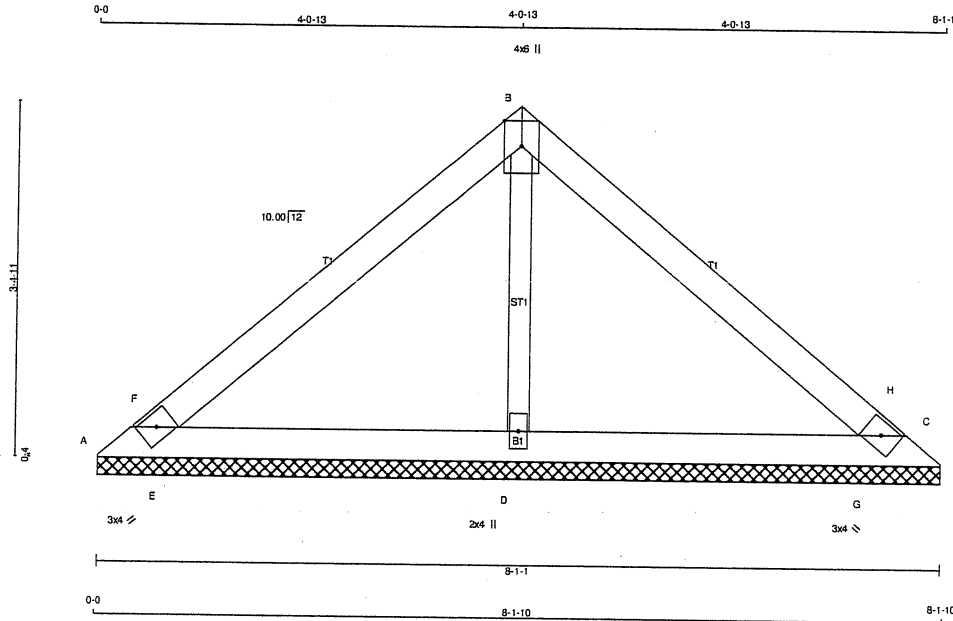

Scale = 1/2" = 1'-0"

TOTAL WEIGHT = 22 lb

LUMBER	CHORDS	SIZE	LUMBER	DESCR.
N. L. G. A. RULES	A - B	2x4	DRY	No.2
	B - C	2x4	DRY	No.2
	A - C	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

PLATES (table is in inches)	JT TYPE	PLATES	W	LEN	Y	X
A - B	TBM1-h	MT20	3.0	4.0		
B - C	TTW+p	MT20	4.0	6.0	Edge	
C - B	TBM1-h	MT20	3.0	4.0		
D - B	BMW1+w	MT20	2.0	4.0		

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES: (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	HORZ	DOWN	UP
A	60	0	0	8-1-1
C	60	0	0	8-1-1
D	772	0	0	8-1-1

UNFACTORED REACTIONS

1ST LCASE	MAX/MIN. COMPONENT REACTIONS	PERM. LIVE	WIND	DEAD	SOIL
JT	COMBINED	SNOW	LIVE		
A	42	28 / 0	0 / 0	0 / 0	14 / 0
C	42	28 / 0	0 / 0	0 / 0	14 / 0
D	548	357 / 0	0 / 0	0 / 0	189 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, C, D

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS	MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. FACTORED VERT. LOAD (LC)	MAX. FACTORED VERT. LOAD (LC)	MAX. FACTORED VERT. LOAD (LC)	MAX. FACTORED VERT. LOAD (LC)	MAX. FACTORED VERT. LOAD (LC)	MAX. FACTORED VERT. LOAD (LC)
FR-TO									
A - F	0 / 247	-91.8	-91.8	0.10 (1)	10.00				
F - B	0 / 231	-91.8	-91.8	0.19 (1)	10.00				
B - H	0 / 231	-91.8	-91.8	0.19 (1)	10.00				
H - C	0 / 247	-91.8	-91.8	0.10 (1)	10.00				
A - E	-222 / 0	-18.5	-18.5	0.14 (1)	6.25				
E - D	-184 / 0	-18.5	-18.5	0.14 (1)	6.25				
D - G	-184 / 0	-18.5	-18.5	0.14 (1)	6.25				
G - C	-222 / 0	-18.5	-18.5	0.14 (1)	6.25				

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
	DL	= 6.0	PSF
BOT CH.	LL	= 0.0	PSF
	DL	= 7.4	PSF
TOTAL LOAD		= 39.0	PSF

SPACING = 24.0 IN./C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCO 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.19/1.00 (B-H:1), BC=0.14/1.00 (D-G:1), WB=0.11/1.00 (B-D:1), SS=0.13/1.00 (C-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX	MIN	MAX
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.29 (D) (INPUT = 0.90)
JSI METAL= 0.12 (D) (INPUT = 1.00)




Structural component only
DWG# T-2115532

JOB NAME 411069	TRUSS NAME V07	QUANTITY 1	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
---------------------------	--------------------------	----------------------	-----------------	-------------------------------	----------

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 11:28:41 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-NbyjgUGebKCXoaxuJCu_K0k6?AEgPAjCrkEi_lzD_VK

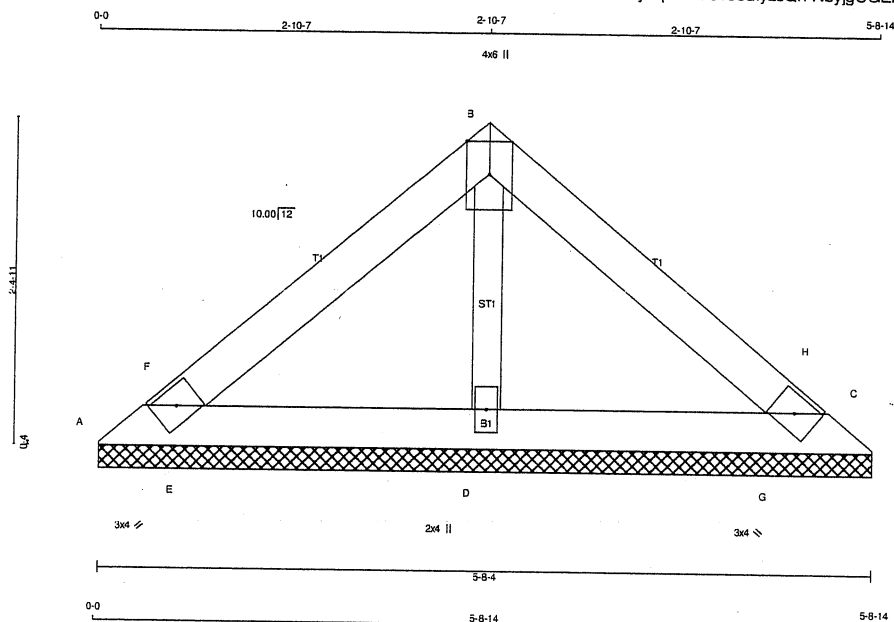

TOTAL WEIGHT = 15 lb

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
A - B	2x4 DRY	No.2	SPF
B - C	2x4 DRY	No.2	SPF
A - C	2x4 DRY	No.2	SPF
ALL WEBS	2x3 DRY	No.2	SPF
DRY: SEASONED LUMBER.			

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQRD	
		GROSS REACTION		GROSS REACTION		BRG		BRG	
JT		VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	
A		79	0	79	0	0	5-8-4	5-8-4	
C		79	0	79	0	0	5-8-4	5-8-4	
D		468	0	468	0	0	5-8-4	5-8-4	

UNFACTORED REACTIONS

1ST LOASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
A	56	38/0	0/0	0/0	0/0	18/0	0/0
C	56	38/0	0/0	0/0	0/0	18/0	0/0
D	332	215/0	0/0	0/0	0/0	116/0	0/0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A, C, D

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 6.25 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS		FACTORED				WEBS		MAX. FACTORED	
MEMB.	FORCE (LBS)	VERT.	LOAD (PLF)	LC1 MAX	LC2 MAX	MEMB.	FORCE (LBS)	MAX	CSI (LC)
FR-TO		FROM	TO	CS1 (LC)	UNBRAC	FR-TO			
A-F	0 / 101	-91.8	-91.8	0.03 (1)	10.00	D-B	-326 / 0	0.05 (1)	
F-B	0 / 102	-91.8	-91.8	0.08 (1)	10.00	E-F	-129 / 0	0.00 (1)	
B-H	0 / 102	-91.8	-91.8	0.08 (1)	10.00	G-H	-129 / 0	0.00 (1)	
H-C	0 / 101	-91.8	-91.8	0.03 (1)	10.00				
A-E	-101 / 0	-18.5	-18.5	0.08 (1)	6.25				
E-D	-81 / 0	-18.5	-18.5	0.08 (1)	6.25				
D-G	-81 / 0	-18.5	-18.5	0.08 (1)	6.25				
G-C	-101 / 0	-18.5	-18.5	0.08 (1)	6.25				

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

CSI: TC=0.08/1.00 (B-H:1), BC=0.08/1.00 (D-G:1),
WB=0.05/1.00 (B-D:1), SSI=0.07/1.00 (C-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MAX	MIN	MAX	MIN
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.16 (D) (INPUT = 0.90)
JSI METAL= 0.07 (D) (INPUT = 1.00)



Structural component only
DWG# T-2115533

JOB NAME 406403	TRUSS NAME J1	QUANTITY 14	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington		TRUSS DESC.			

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:20 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-8oiG58m7nVeq4qMVMY?jQXacpPvt?lgMTNQBFezCzky

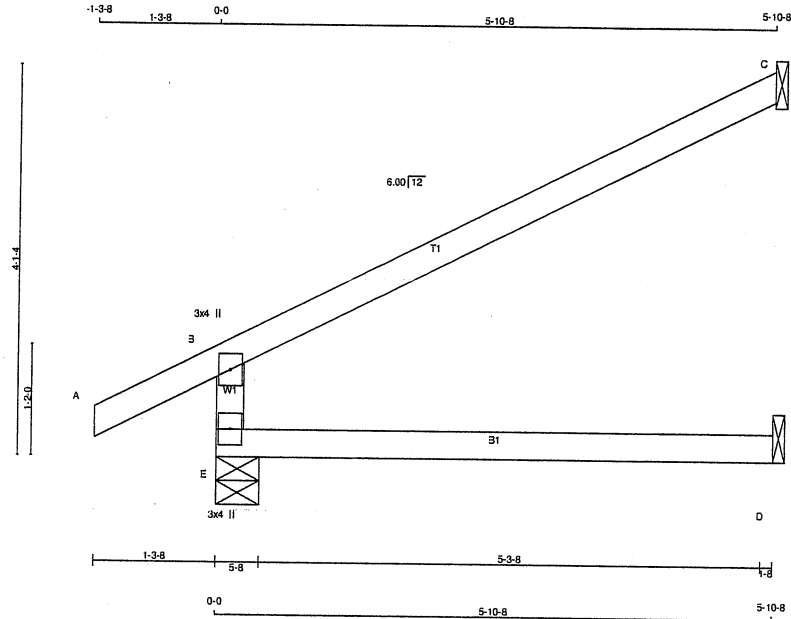

Scale = 1/2" = 1'

LUMBER				DESCR.
N. L. G. A. RULES	SIZE	LUMBER		
CHORDS				SPF
E - B	2x4	DRY	No.2	SPF
A - C	2x4	DRY	No.2	SPF
E - D	2x4	DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMV+p	MT20	3.0	4.0	
E	BMV1+p	MT20	3.0	4.0	

NOTES: (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	RECORD BRG
	VERT	HORZ	DOWN	HORZ	IN-SX	IN-SX
E	525	0	525	0	5-8	5-8
C	202	0	202	0	1-8	1-8
D	45	0	50	0	1-8	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED		MAX./MIN. COMPONENT REACTIONS		WIND	DEAD	SOIL
	SNOW	LIVE	PERM. LIVE	WIND			
E	369	257 / 0	0 / 0	0 / 0	111 / 0	0 / 0	0 / 0
C	139	113 / 0	0 / 0	0 / 0	26 / 0	0 / 0	0 / 0
D	36	0 / 0	0 / 0	0 / 0	36 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

MEMB.	CHORDS		VERT. LOAD	FACTORED		MAX. UNBRACED LENGTH	FR-TO	WEBS	
	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)		LC1 MAX	LC2 MAX			MAX. FACTORED FORCE (LBS)	MAX. FACTORED CSI (LC)
E-B	-461 / 0	0.0	0.0	0.13 (4)	7.81				
A-B	0 / 28	-91.8	-91.8	0.12 (1)	10.00				
B-C	-30 / 0	-91.8	-91.8	0.54 (1)	6.25				
E-D	0 / 0	-18.5	-18.5	0.13 (4)	10.00				

TOTAL WEIGHT = 14 X 17 = 235 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (0.20")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.00")
ALLOWABLE DEFL.(TL) = $L/360$ (0.20")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.03")

CSI: $TC=0.54/1.00$ (B-C:1), $BC=0.13/1.00$ (D-E:4), $WB=0.00/1.00$ (n/a:0), $SSI=0.24/1.00$ (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873


PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.18 (E) (INPUT = 0.90)
JSI METAL= 0.13 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115443

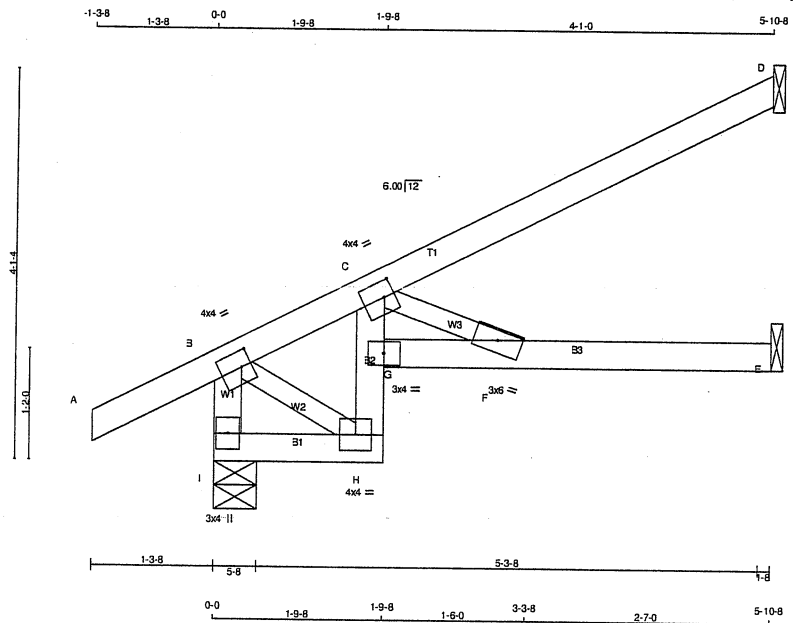

LUMBER
N. L. G. A. RULES

CHORDS	SIZE	LUMBER	DESCR.
I - B	2x4 DRY	No.2	SPF
A - D	2x4 DRY	No.2	SPF
I - H	2x4 DRY	No.2	SPF
H - C	2x4 DRY	No.2	SPF
G - E	2x4 DRY	No.2	SPF
ALL WEBS	2x3 DRY	No.2	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)

JT	TYPE	PLATES	W	LEN	Y	X
B	TMVW-t	MT20	4.0	4.0	2.00	1.25
C	TMVW-t	MT20	4.0	4.0	2.00	1.25
F	BMV-w	MT20	3.0	6.0		
G	BMV-H	MT20	3.0	4.0		
H	BMVW-t	MT20	4.0	4.0		
I	BMV1+p	MT20	3.0	4.0		

NOTES: (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS							
JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG	REQRD BRG	
	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX
I	463	0	463	0	0	5-8	5-8
D	196	0	196	0	0	1-8	1-8
E	113	0	113	0	0	1-8	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) D, E

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED		MAX./MIN. COMPONENT REACTIONS		WIND	DEAD	SOIL
	SNOW	LIVE	PERM.LIVE	WIND			
I	325	228 / 0	0 / 0	0 / 0	0 / 0	97 / 0	0 / 0
D	136	105 / 0	0 / 0	0 / 0	0 / 0	31 / 0	0 / 0
E	83	37 / 0	0 / 0	0 / 0	0 / 0	46 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING
TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING
TOTAL LOAD CASES: (4)

MEMB.	CHORDS		FACTORED		MAX. UNBRAC LENGTH	WEBS	FACTORED	
	MAX. FORCE (LBS)	VERT. LOAD (PLF)	LC1 (LC)	MAX. (LBS)			MAX. (LBS)	MAX. (LC)
FR-TO						FR-TO		
I-B	-448 / 0	0.0	0.0	0.05 (1)	7.81	B-H	0 / 210	0.05 (1)
A-B	0 / 28	-91.8	-91.8	0.12 (1)	10.00	C-F	-515 / 0	0.08 (1)
B-C	-234 / 0	-91.8	-91.8	0.12 (1)	6.25			
C-D	0 / 4	-91.8	-91.8	0.29 (1)	10.00			
I-H	0 / 0	-18.5	-18.5	0.01 (4)	10.00			
H-G	-82 / 0	0.0	0.0	0.25 (1)	7.81			
G-C	0 / 116	0.0	0.0	0.27 (1)	10.00			
G-F	0 / 460	-18.5	-18.5	0.41 (1)	10.00			
F-E	0 / 0	-18.5	-18.5	0.34 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN./C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS
- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.20")
CALCULATED VERT. DEFL.(LL) = L/999 (0.06")
ALLOWABLE DEFL.(TL) = L/360 (0.20")
CALCULATED VERT. DEFL.(TL) = L/567 (0.12")

CSI: TC=0.29/1.00 (C-D:1), BC=0.41/1.00 (F-G:1), WB=0.08/1.00 (C-F:1), SSI=0.21/1.00 (C-G:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION (PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.40 (C) (INPUT = 0.90)
JSI METAL= 0.16 (G) (INPUT = 1.00)



Structural component only
DWG# T-2115444

JOB NAME 406403	TRUSS NAME J2	QUANTITY 6	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Wed May 26 07:53:01 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-V5hdK?H6gwOQspoJh7pecFDurL_2Cpatyf1tJvzCiZW

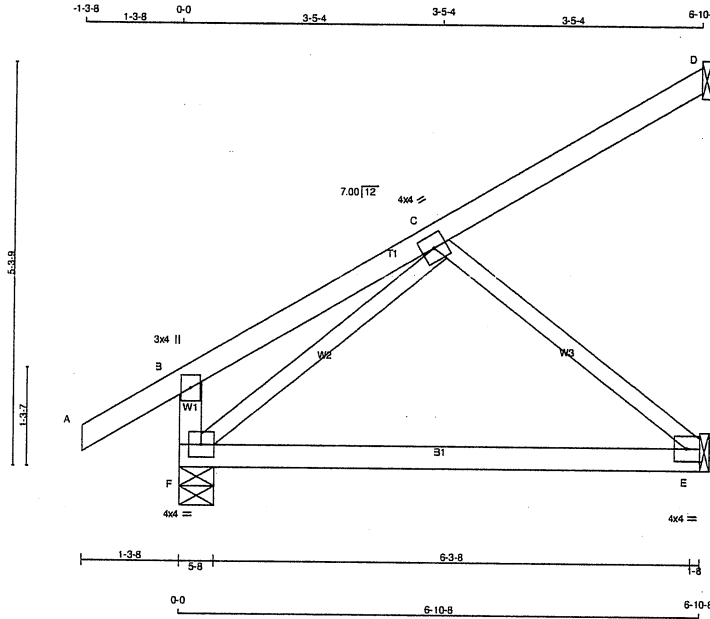

Scale = 1/8" = 1'-0"

LUMBER				DESCR.	
N. L. G. A. RULES	CHORDS	SIZE	LUMBER		
F - B	2x4	DRY	No.2	SPF	
A - D	2x4	DRY	No.2	SPF	
F - E	2x4	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
DRY: SEASONED LUMBER.					

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMV+p	MT20	3.0	4.0	
C	TMVW-t	MT20	4.0	4.0	
E	BMV1-t	MT20	4.0	4.0	2.00 Edge
F	BMVW1-t	MT20	4.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG IN-SX	REQRD BRG IN-SX
	VERT	HORZ	DOWN	HORZ		
F	501	0	501	0	5-8	5-8
D	126	0	126	0	1-8	1-8
E	255	0	255	0	1-8	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) D, E

UNFACTORED REACTIONS

JT	1ST LCASE COMBINED	MAX./MIN. COMPONENT REACTIONS					
		SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	352	244 / 0	0 / 0	0 / 0	0 / 0	108 / 0	0 / 0
D	86	70 / 0	0 / 0	0 / 0	0 / 0	16 / 0	0 / 0
E	183	107 / 0	0 / 0	0 / 0	0 / 0	75 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. LC1 (LC)
FR-TO					FR-TO		
F-B	-239 / 0	0.0	0.0	0.02 (1)	C-E	-298 / 0	0.11 (1)
A-B	0 / 32	-91.8	-91.8	0.12 (1)	F-C	-302 / 0	0.10 (1)
B-C	0 / 20	-91.8	-91.8	0.18 (1)			
C-D	-19 / 0	-91.8	-91.8	0.14 (1)			
F-E	0 / 228	-18.5	-18.5	0.26 (4)			

TOTAL WEIGHT = 6 X 27 = 160 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6 PSF
	DL = 6.0 PSF
BOT CH.	LL = 0.0 PSF
	DL = 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55% OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(TL) = L/360 (0.23")
CALCULATED VERT. DEFL.(TL) = L/850 (0.10")

CSI: TC=0.18/1.00 (B-C:1), BC=0.26/1.00 (E-F:4),
WB=0.11/1.00 (C-E:1), SSI=0.13/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE GRIP(DRY)	SHEAR (PSI)	SECTION (PLI)
MT20	650	371
	788	1987

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.27 (C) (INPUT = 0.90)
JSI METAL= 0.08 (E) (INPUT = 1.00)



Structural component only
DWG# T-2115445

JOB NAME 406403	TRUSS NAME J3	QUANTITY 2	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 Mitek Industries, Inc. Tue May 25 12:20:23 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-ZNOPj9p04Q0Px1441hYQ2ACBpcyLC6Qo9LfrsyZCzks

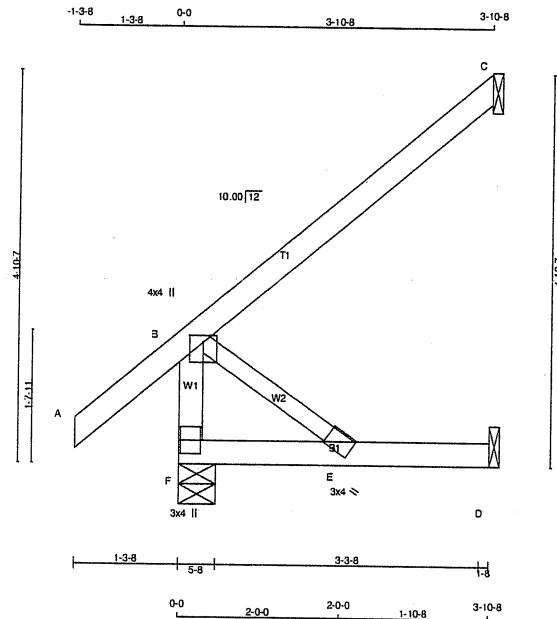

Scale = 1:27.3

LUMBER			
N. L. G. A. RULES			
CHORDS	SIZE	LUMBER	DESCR.
F - B	2x4	DRY	No.2
A - C	2x4	DRY	No.2
F - D	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	4.0	1.00 2.00
E	BMVW+w	MT20	3.0	4.0	
F	BMV1+p	MT20	3.0	4.0	

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

JT	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG UPLIFT	REQD BRG IN-SX	
	VERT	HORZ	DOWN	HORZ		IN-SX	IN-SX
F	341	0	341	0	5-8	5-8	
C	178	0	178	0	1-8	1-8	
D	36	0	40	0	1-8	1-8	

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST LOASE COMBINED		MAX./MIN. COMPONENT REACTIONS				DEAD	SOIL
	SNOW	LIVE	PERM. LIVE	WIND				
F	239	170 / 0	0 / 0	0 / 0	69 / 0	0 / 0		
C	122	99 / 0	0 / 0	0 / 0	23 / 0	0 / 0		
D	29	0 / 0	0 / 0	0 / 0	29 / 0	0 / 0		

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. CS1 (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. CS1 (LC)	
FR-TO		FROM	TO	FR-TO			
F-B	-305 / 0	0.0	0.0 0.03 (1)	7.81	B-E	0 / 0	0.00 (1)
A-B	0 / 41	-91.8	-91.8 0.14 (5)	10.00			
B-C	0 / 0	-91.8	-91.8 0.23 (1)	10.00			
F-E	0 / 0	-18.5	-18.5 0.08 (4)	10.00			
E-D	0 / 0	-18.5	-18.5 0.08 (4)	10.00			

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 2 X 16 = 31 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH. LL	= 25.6 PSF
DL	= 6.0 PSF
BOT CH. LL	= 0.0 PSF
DL	= 7.4 PSF
TOTAL LOAD	= 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = $L/360$ (0.19")
CALCULATED VERT. DEFL.(LL) = $L/999$ (0.00")
ALLOWABLE DEFL.(TL) = $L/360$ (0.19")
CALCULATED VERT. DEFL.(TL) = $L/999$ (0.01")

CSI: $TC=0.23/1.00$ (B-C:1), $BC=0.08/1.00$ (E-F:4), $WB=0.00/1.00$ (B-E:1), $SSI=0.11/1.00$ (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	
MAX	MIN	MAX	MIN
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.22 (B) (INPUT = 0.90)
JSI METAL = 0.06 (B) (INPUT = 1.00)




Structural component only
DWG# T-2115446

JOB NAME 406403	TRUSS NAME J4W	QUANTITY 4	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington					

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 12:20:24 2021 Page 1
ID:E?n9mn1Ky9qxx7V78133ulyzsQn-1ZynxVqerk9FZSfGbO3fbNINv0BSxXzxN?OOPzCzkr

Scale = 1:16.9

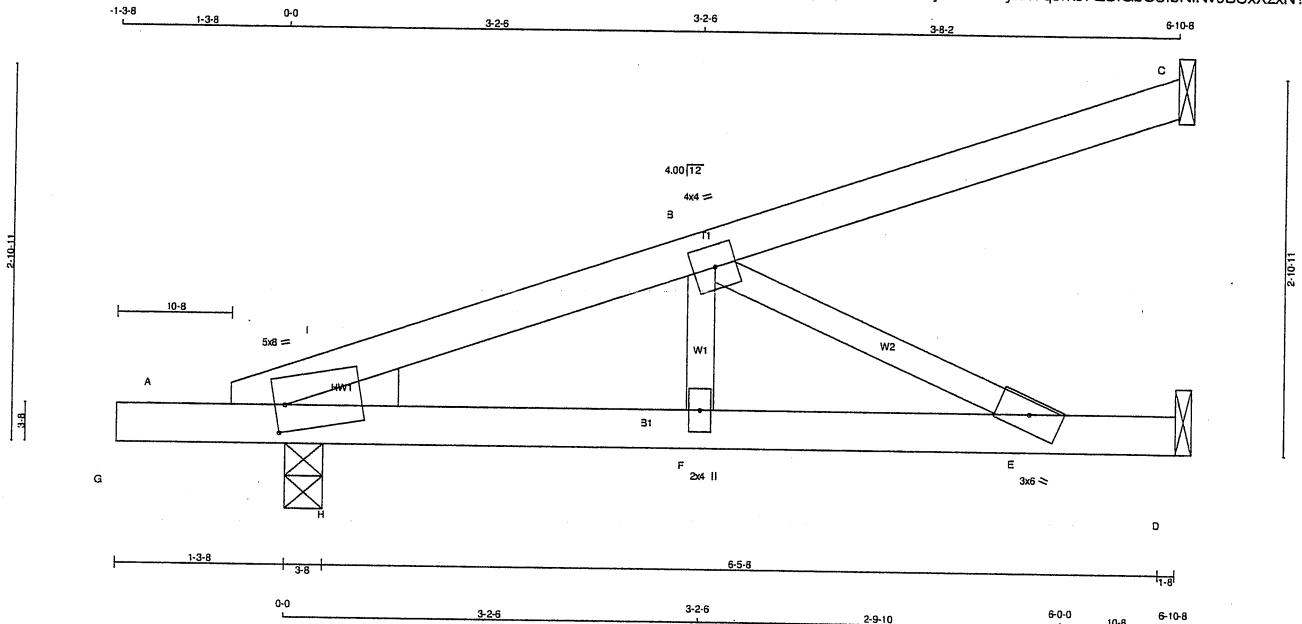

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS	2x4	DRY	SPF
A - C	2x4	DRY	No.2
G - D	2x4	DRY	No.2
ALL WEBS	2x3	DRY	SPF
DRY: SEASONED LUMBER.			

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
A	TBMH1m	MT20	5.0	8.0	2.50 1.00
B	TMWW-t	MT20	4.0	4.0	
E	BMW+w	MT20	3.0	6.0	
F	BMW+w	MT20	2.0	4.0	

NOTES: (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED	MAXIMUM FACTORED	INPUT	REQD		
JT	GROSS REACTION	GROSS REACTION	GROSS REACTION	BRG	BRG	HEEL	WEDGE
A	VERT	DOWN	DOWN	UPLIFT	IN-SX	IN-SX	
C	471	0	471	0	3-8	3-8	2x4 L
D	147	0	147	0	1-8	1-8	
D	282	0	282	0	1-8	1-8	

SEE MITTEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST LCASE	MAX./MIN. COMPONENT REACTIONS	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
A	333	218 / 0	0 / 0	0 / 0	0 / 0	114 / 0	0 / 0	0 / 0
C	102	81 / 0	0 / 0	0 / 0	0 / 0	21 / 0	0 / 0	0 / 0
D	202	119 / 0	0 / 0	0 / 0	0 / 0	83 / 0	0 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) A

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 (LC)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. LC1 (LC)
FR-TO		FROM	TO		FR-TO		
A-I	-792 / 0	-91.8	-91.8 0.07 (1)	6.25	F-B	0 / 285	0.06 (1)
I-B	-770 / 0	-91.8	-91.8 0.10 (1)	6.25	B-E	-843 / 0	0.17 (1)
B-C	-7 / 0	-91.8	-91.8 0.15 (1)	10.00	H-I	-117 / 0	0.00 (1)
G-A	0 / 0	-110.3	-110.3 0.01 (1)	10.00			
A-H	0 / 743	-18.5	-18.5 0.27 (1)	10.00			
H-F	0 / 743	-18.5	-18.5 0.27 (1)	10.00			
F-E	0 / 743	-18.5	-18.5 0.54 (1)	10.00			
E-D	0 / 0	-18.5	-18.5 0.42 (1)	10.00			

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.26")
CALCULATED VERT. DEFL.(LL)= L/999 (0.05")
ALLOWABLE DEFL.(TL)= L/360 (0.26")
CALCULATED VERT. DEFL.(TL)= L/999 (0.09")

CANTILEVER DEFLECTION:
ALLOWABLE DEFL.(LL)= L/120 (0.19")
CALCULATED VERT. DEFL.(LL)= L/999 (0.00")
ALLOWABLE DEFL.(TL)= L/120 (0.19")
CALCULATED VERT. DEFL.(TL)= L/999 (0.00")

CSI: TC=0.15/1.00 (B-C:1), BC=0.54/1.00 (E-F:1), WB=0.17/1.00 (B-E:1), SSI=0.22/1.00 (D-E:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.50 (B) (INPUT = 0.90)
JSI METAL= 0.24 (E) (INPUT = 1.00)



Structural component only
DWG# T-2115447

Tamarack Roof Truss, Burlington



NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED

LOADING

TOTAL LOAD CASES: (5)

CHORDS				WEBS			
MEMB.	MAX. FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX. CSI (LC)	MAX. UNBRAC LENGTH	MEMB. FR-TO	MAX. FORCE (LBS)	FACTORED MAX. CSI (LC)
FR-TO		FROM TO					
E-B	-448 / 0	0.0 0.0	0.09 (4)	7.81			
A-B	0 / 27	-91.8 -91.8	0.24 (5)	10.00			
B-C	-18 / 0	-91.8 -91.8	0.37 (1)	6.25			
E-D	0 / 0	-18.5 -18.5	0.09 (4)	10.00			

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:-

TOP	CH.	LL =	25.6	PSF
		DL =	6.0	PSF
BOT	CH.	LL =	0.0	PSF
		DL =	7.4	PSF
TOTAL LOAD		=	39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR
SMALL BUILDING REQUIREMENTS OF PART 9,
NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018 , ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.02")

CSI: TC=0.37/1.00 (B-C:1), BC=0.09/1.00 (D-E:4), WB=0.00/1.00 (n/a:0), SSI=0.21/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY) (PSI)		SHEAR (PLI)		SECTION (PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg

JSI GRIP= 0.18 (E) (INPUT = 0.90)
JSI METAL= 0.09 (B) (INPUT = 1.00)



JOB NAME 411017	TRUSS NAME J6	QUANTITY 6	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:25 2021 Page 1
ID:dUe55qQ4UglDof?jKp4h7uzFYDI-a3jTAT0aodAG7dmltP0s?SakWOYzhJVa4sBvqgzD??S

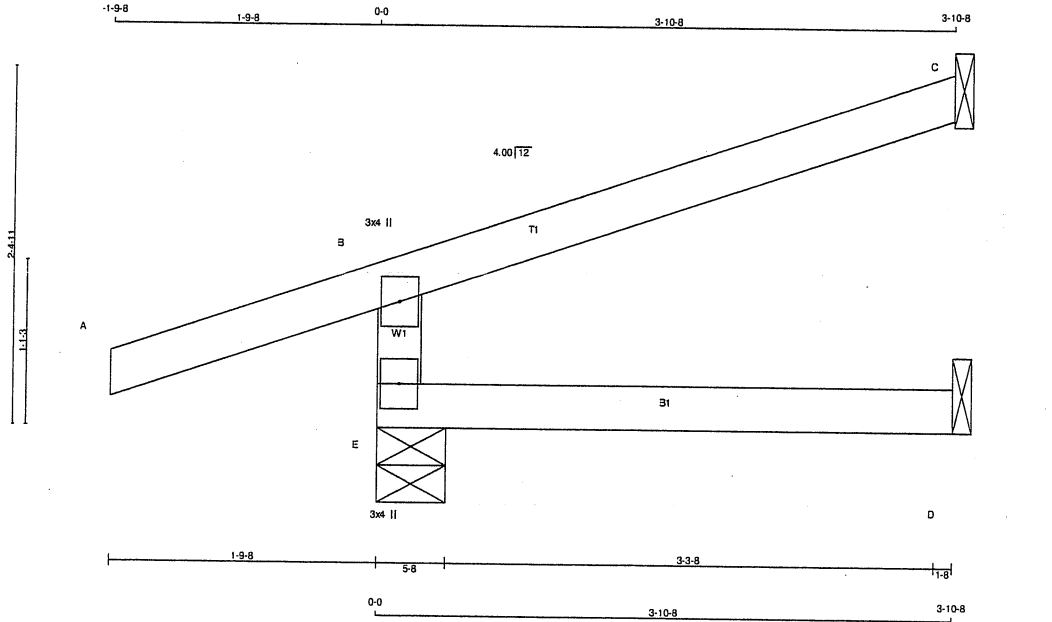

Scale = 1:14.7

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	DESCR.
CHORDS	2x4	DRY	SPF
E - B	2x4	DRY	SPF
A - C	2x4	DRY	SPF
E - D	2x4	DRY	SPF

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT TYPE	PLATES	W	LEN	Y	X
B TMV+p	MT20	3.0	4.0		
E BMV1+p	MT20	3.0	4.0		

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

	FACTORED GROSS REACTION		MAXIMUM FACTORED GROSS REACTION		INPUT BRG		REQRD BRG	
	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	
JT	432	0	432	0	0	5-8	5-8	
E	133	0	133	0	0	1-8	1-8	
C	30	0	34	0	0	1-8	1-8	

SEE MITTEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

	1ST LCASE	MAX./MIN. COMPONENT REACTIONS					
		COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD
JT	302	218 / 0	0 / 0	0 / 0	0 / 0	84 / 0	0 / 0
E	92	74 / 0	0 / 0	0 / 0	0 / 0	17 / 0	0 / 0
C	24	0 / 0	0 / 0	0 / 0	0 / 0	24 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

MEMB.	CHORDS		WEBS	
	MAX. FACTORED FORCE (LBS)	VERT. LOAD LC1 MAX (PLF)	MAX. FACTORED FORCE (LBS)	MAX. FACTORED FORCE (LBS)
FR-TO		FROM TO		
E-B	-391 / 0	0.0 0.0 0.05 (4)	7.81	
A-B	0 / 27	-91.8 -91.8 0.23 (5)	10.00	
B-C	-14 / 0	-91.8 -91.8 0.23 (1)	6.25	
E-D	0 / 0	-18.5 -18.5 0.06 (4)	10.00	

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 6 X 12 = 72 lb

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN./C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:
- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")
CALCULATED VERT. DEFL.(LL)= L/999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.19")
CALCULATED VERT. DEFL.(TL)= L/999 (0.01")

CSI: TC=0.23/1.00 (B-C:1), BC=0.06/1.00 (D-E:4),
WB=0.00/1.00 (n/a:0), SSI=0.16/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX MIN	MAX MIN	MAX MIN	MAX MIN
MT20	650 371	1747 788	1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.16 (E) (INPUT = 0.90)
JSI METAL= 0.08 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115480

JOB NAME 411017	TRUSS NAME J30	QUANTITY 17	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:26 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-2FhrNoOCZxI6InLxR7X5Yf6qJos?QmklWxTMNzD??R

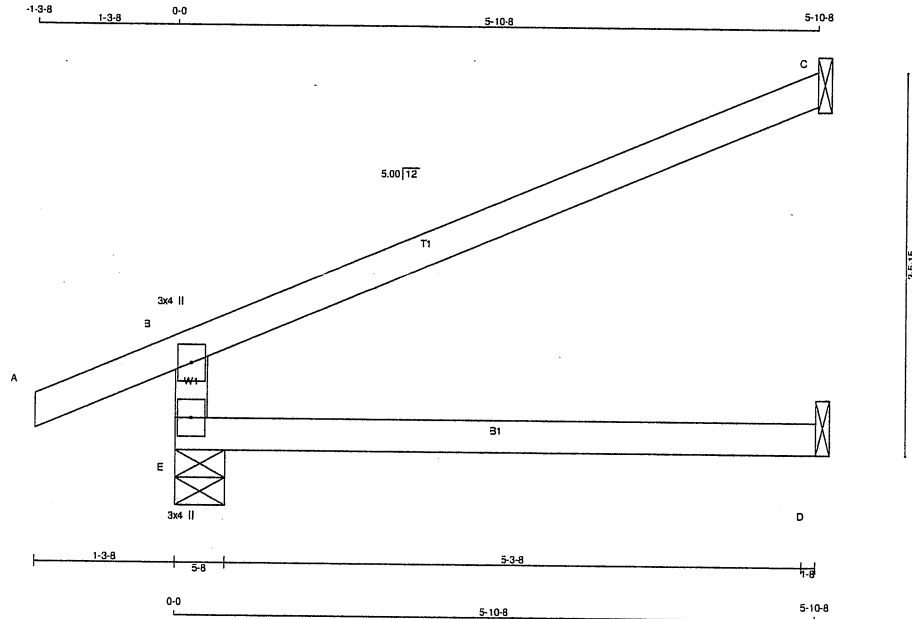

LUMBER			
N. L. G. A. RULES	CHORDS	SIZE	LUMBER
E - B	2x4	DRY	No.2
A - C	2x4	DRY	No.2
E - D	2x4	DRY	No.2

DRY: SEASONED LUMBER.

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMV+p	MT20	3.0	4.0	
E	BMV1+p	MT20	3.0	4.0	

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQRD	
JT	VERT	GROSS REACTION	HORZ	DOWN	HORZ	UPLIFT	IN-SX	BRG	IN-SX
E	525	0	525	0	0	0	5-8	5-8	5-8
C	202	0	202	0	0	0	1-8	1-8	1-8
D	44	0	50	0	0	0	1-8	1-8	1-8

SEE MITTEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST LCASE	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
E	368	257 / 0	0 / 0	0 / 0	0 / 0	112 / 0	0 / 0
C	139	113 / 0	0 / 0	0 / 0	0 / 0	26 / 0	0 / 0
D	36	0 / 0	0 / 0	0 / 0	0 / 0	36 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) E

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (LBS)	LC1 MAX (PLF)	MAX. UNBRAC LENGTH (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRAC LENGTH (LC)
FR-TO					FR-TO		
E-B	-461 / 0	0.0	0.0	0.14 (4)	7.81		
A-B	0 / 24	-91.8	-91.8	0.12 (1)	10.00		
B-C	-26 / 0	-91.8	-91.8	0.54 (1)	6.25		
E-D	0 / 0	-18.5	-18.5	0.14 (4)	10.00		

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL. (LL) = $L/360$ (0.20")
CALCULATED VERT. DEFL. (LL) = $L/999$ (0.00")
ALLOWABLE DEFL. (TL) = $L/360$ (0.20")
CALCULATED VERT. DEFL. (TL) = $L/999$ (0.03")

CSI: TC=0.54/1.00 (B-C:1), BC=0.14/1.00 (D-E:4), WB=0.00/1.00 (n/a:0), SSI=0.24/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX	MIN	MAX	MIN
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.18 (E) (INPUT = 0.90)


JSI METAL= 0.11 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115481

JOB NAME 411017	TRUSS NAME J30S	QUANTITY 9	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:27 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-WRrDb8PqKEQzNww8_q2K4tf5wCCV9CxtXAg0upzD??Q

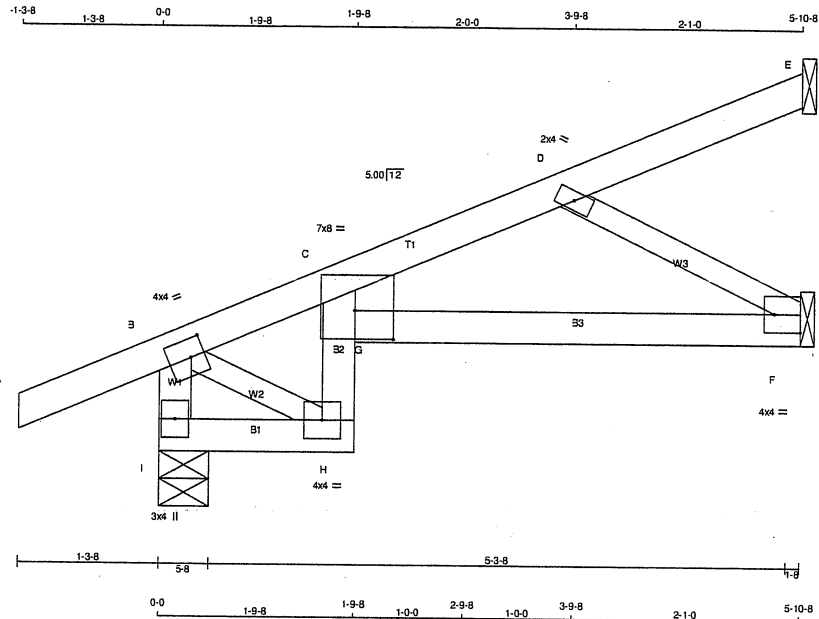

LUMBER				
N. L. G. A. RULES	SIZE	LUMBER	DESCR.	
CHORDS				
I - B	2x4	DRY	No.2	SPF
A - E	2x4	DRY	No.2	SPF
I - H	2x4	DRY	No.2	SPF
H - C	2x4	DRY	No.2	SPF
G - F	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW-t	MT20	4.0	4.0	2.00 1.50
C					
C	TMBV*m	MT20	7.0	8.0	3.25 4.25
D	TMVW+w	MT20	2.0	4.0	
F	BMV1-t	MT20	4.0	4.0	2.00 Edge
G					
H	BMVW-t	MT20	4.0	4.0	
I	BMV1+p	MT20	3.0	4.0	

Edge - INDICATES REFERENCE CORNER OF PLATE TOUCHES EDGE OF CHORD.

NOTES: (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQRD	
JT	VERT	GROSS REACTION	HORZ	DOWN	HORZ	BRG	IN-SX	BRG	IN-SX
I	456	0	456	0	0	5-8	5-8	5-8	5-8
E	53	0	53	0	0	1-8	1-8	1-8	1-8
F	259	0	259	0	0	1-8	1-8	1-8	1-8

SEE MITTEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) E, F

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
I	320	225 / 0	0 / 0	0 / 0	0 / 0	95 / 0	0 / 0
E	36	35 / 0	0 / 0	0 / 0	0 / 0	1 / 0	0 / 0
F	186	110 / 0	0 / 0	0 / 0	0 / 0	76 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) I

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 7.81 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE LATERALLY RESTRAINED.

LOADING

TOTAL LOAD CASES: (4)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	VERT. LOAD (PLF)	LC1 MAX (LC) (LBS)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. UNBRACED LENGTH (LBS)	FR-TO (LC) (LBS)
FR-TO				FR-TO			
I-B	-466 / 0	0.0	0.0 0.02 (4)	B-H	0 / 185	0.04 (1)	
A-B	0 / 24	-91.8	-91.8 0.12 (1)	D-F	-388 / 0	0.07 (1)	
B-C	-235 / 0	-91.8	-91.8 0.14 (1)				
C-D	-313 / 0	-91.8	-91.8 0.18 (1)				
D-E	-17 / 0	-91.8	-91.8 0.13 (1)				
I-H	0 / 18	-18.5	-18.5 0.06 (1)				
H-G	-36 / 7	0.0	0.0 0.18 (1)				
G-C	0 / 54	0.0	0.0 0.12 (1)				
G-F	0 / 326	-18.5	-18.5 0.14 (1)				

TOTAL WEIGHT = 9 X 21 = 187 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	= 25.6	PSF
	DL	= 6.0	PSF
BOT CH.	LL	= 0.0	PSF
	DL	= 7.4	PSF
TOTAL LOAD	= 39.0	PSF	

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF CBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.02")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.04")

CSI: TC=0.18/1.00 (C-D:1), BC=0.18/1.00 (G-H:1), WB=0.07/1.00 (D-F:1), SSI=0.15/1.00 (C-D:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
	(PSI)	(PLI)	(PLI)
	MAX	MIN	MAX MIN
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches


PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP = 0.29 (B) (INPUT = 0.90)
JSI METAL = 0.19 (D) (INPUT = 1.00)



Structural component only
DWG# T-2115482

JOB NAME 411017	TRUSS NAME J32	QUANTITY 4	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington		TRUSS DESC.		Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:28 2021 Page 1	

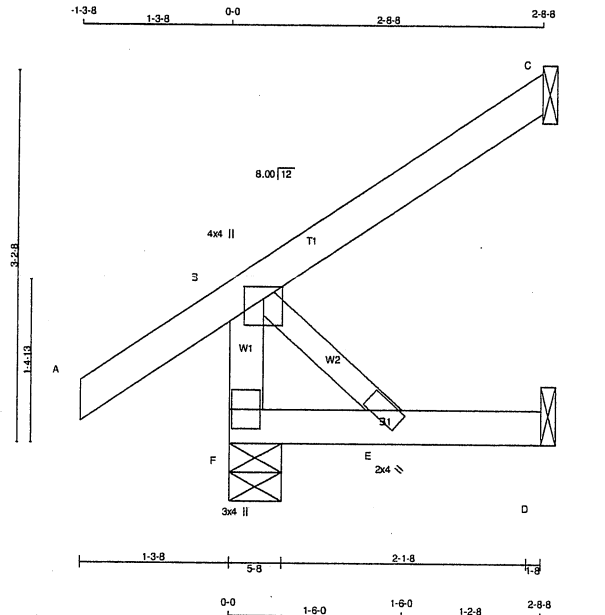

Scale = 1:19.0

LUMBER				DESCR.
N. L. G. A. RULES	SIZE	LUMBER		
CHORDS				
F - B	2x4	DRY	No.2	SPF
A - C	2x4	DRY	No.2	SPF
F - D	2x4	DRY	No.2	SPF
ALL WEBS	2x3	DRY	No.2	SPF
DRY: SEASONED LUMBER.				

PLATES (table in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	4.0	1.25 2.00
E	BMVW+w	MT20	2.0	4.0	
F	BMV1+p	MT20	3.0	4.0	

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQD	
JT	VERT	GROSS REACTION	HORZ	DOWN	HORZ	BRG	IN-SX	BRG	IN-SX
F	275	0	0	275	0	5-8	5-8	5-8	5-8
C	124	0	0	124	0	1-8	1-8	1-8	1-8
D	25	0	0	25	0	1-8	1-8	1-8	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS						
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL	
F	192	140 / 0	0 / 0	0 / 0	0 / 0	53 / 0	0 / 0	
C	86	69 / 0	0 / 0	0 / 0	0 / 0	16 / 0	0 / 0	
D	20	0 / 0	0 / 0	0 / 0	0 / 0	20 / 0	0 / 0	

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS		FACTORED		WEBS		FACTORED	
MEMB.	FORCE (LBS)	VERT. LOAD	LC1 MAX	MEMB.	FORCE (LBS)	MAX	CS1 (LC)
FR-TO				FR-TO			
F-B	-250 / 0	0.0	0.0 0.03 (1)	B-E	0 / 0	0.00 (1)	
A-B	0 / 35	-91.8	-91.8 0.13 (5)				
B-C	0 / 0	-91.8	-91.8 0.11 (1)				
F-E	0 / 0	-18.5	-18.5 0.04 (4)				
E-D	0 / 0	-18.5	-18.5 0.04 (4)				

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

TOTAL WEIGHT = 4 X 11 = 45 lb

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL) = L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL) = L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.13/1.00 (A-B:5), BC=0.04/1.00 (D-E:4), WB=0.00/1.00 (B-E:1), SSI=0.09/1.00 (A-B:5)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MAX	MIN	MAX	MIN
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP = 0.17 (B) (INPUT = 0.90)
JSI METAL = 0.05 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115483

JOB NAME 411071	TRUSS NAME J60	QUANTITY 4	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Thu May 27 12:11:46 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-gouU8in5BNsSPVEU4hwQ3A8AWxvUvKsLZgeoBgZCJgx

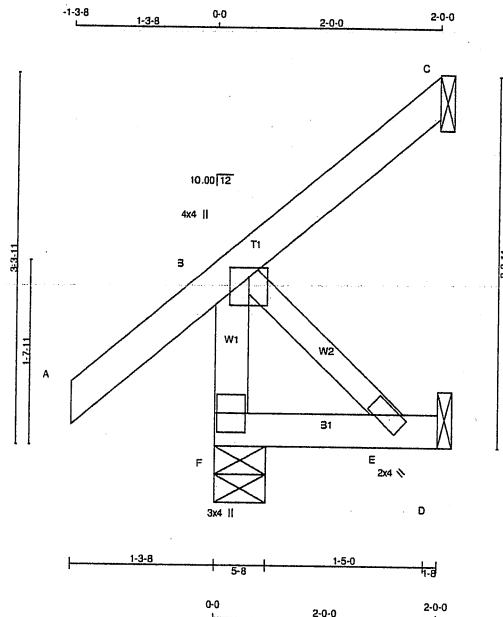

TOTAL WEIGHT = 4 X 10 = 41 lb

LUMBER				DESCR.	
N. L. G. A. RULES	SIZE	LUMBER		SPF	
CHORDS				SPF	
F - B	2x4	DRY	No.2	SPF	
A - C	2x4	DRY	No.2	SPF	
F - D	2x4	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
DRY: SEASONED LUMBER.					

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMVW+p	MT20	4.0	4.0	1.00 2.00
E	BMW+w	MT20	2.0	4.0	
F	BMV1+p	MT20	3.0	4.0	

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS				FACTORED				MAXIMUM FACTORED				INPUT		REQ'D	
JT	VERT	HORZ	GROSS REACTION	DOWN	HORZ	UPLIFT	IN-SX	BRG	BRG	IN-SX	BRG	BRG	IN-SX	BRG	IN-SX
F	237	0	237	0	0	0	5-8	5-8	5-8	5-8	5-8	5-8	5-8	5-8	5-8
C	92	0	92	0	0	0	1-8	1-8	1-8	1-8	1-8	1-8	1-8	1-8	1-8
D	18	0	21	0	0	0	1-8	1-8	1-8	1-8	1-8	1-8	1-8	1-8	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

UNFACTORED REACTIONS

JT	1ST CASE	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
F	165	122 / 0	0 / 0	0 / 0	0 / 0	43 / 0	0 / 0
C	63	51 / 0	0 / 0	0 / 0	0 / 0	12 / 0	0 / 0
D	15	0 / 0	0 / 0	0 / 0	0 / 0	15 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 10.00 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX (LC)	MAX. UNBRACED LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. FACTORED (LC)
FR-TO					FR-TO		
F-B	-219 / 0	0.0	0.0	0.02 (1)	7.81	0 / 0	0.00 (1)
A-B	0 / 41	-91.8	-91.8	0.13 (1)	10.00		
B-C	0 / 0	-91.8	-91.8	0.06 (1)	10.00		
F-E	0 / 0	-18.5	-18.5	0.02 (4)	10.00		
E-D	0 / 0	-18.5	-18.5	0.02 (4)	10.00		

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.13/1.00 (A-B:1), BC=0.02/1.00 (E-F:4),
WB=0.00/1.00 (B-E:1), SSI=0.08/1.00 (A-B:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MT20	650	371	1747
	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.16 (B) (INPUT = 0.90)
JSI METAL= 0.04 (B) (INPUT = 1.00)



Structural component only
DWG# T-2116275

JOB NAME 406516	TRUSS NAME C1	QUANTITY 3	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:19:32 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-MOIduo3jiYTEXzGUmLz1g4O37hBynjMWnkhftkzD?W9

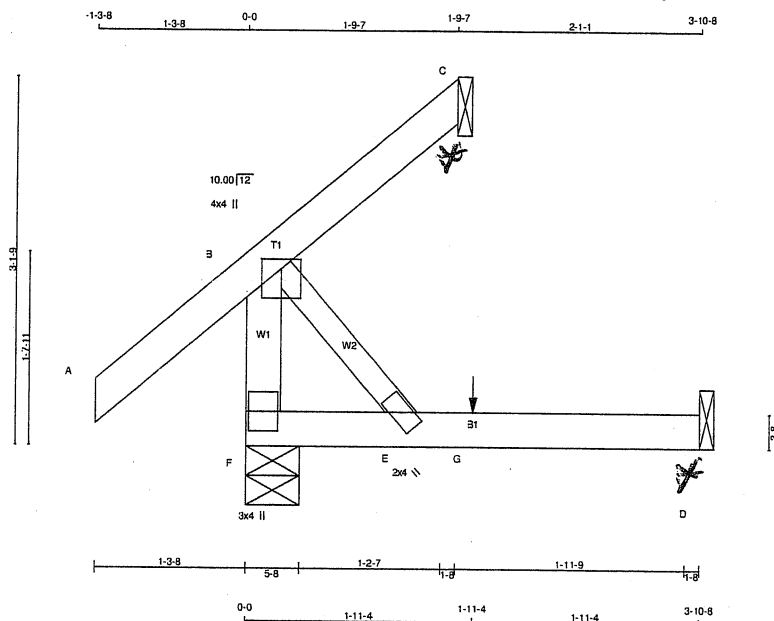

TOTAL WEIGHT = 3 X 12 = 36 lb

LUMBER				DESCR.	
N. L. G. A. RULES	SIZE	LUMBER		SPF	
CHORDS					
F - B	2x4	DRY	No.2	SPF	
A - C	2x4	DRY	No.2	SPF	
F - D	2x4	DRY	No.2	SPF	
ALL WEBS	2x3	DRY	No.2	SPF	
DRY: SEASONED LUMBER.					

PLATES (table is in inches)					
JT	TYPE	PLATES	W	LEN	Y X
B	TMW+p	MT20	4.0	4.0	1.00 2.00
E	BMW+w	MT20	2.0	4.0	
F	BMV1+p	MT20	3.0	4.0	

NOTES- (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		REQRD	
		GROSS REACTION		GROSS REACTION		BRG		BRG	
JT		VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX	IN-SX	
F		294	0	294	0	5-8	5-8	5-8	
C		33	0	33	0	-40	1-8	1-8	
D		36	0	40	0	1-8	1-8	1-8	

SEE MITTEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

PROVIDE ANCHORAGE AT BEARING JOINT C FOR 150 LBS. FACTORED UPLIFT

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS					
JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	207	144 / 0	0 / 0	0 / 0	0 / 0	62 / 0	0 / 0
C	23	18 / -27	0 / 0	0 / 0	0 / 0	4 / 0	0 / 0
D	29	0 / 0	0 / 0	0 / 0	0 / 0	29 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, C

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS		FACTORED		WEBS		FACTORED	
MEMB.	FORCE (LBS)	VERT.	LC1 MAX (PLF)	MAX. UNBRAC LENGTH	MEMB.	FORCE (LBS)	MAX (LC)
FR-TO		FROM	TO		FR-TO		
F-B	-258 / 0	0.0	0.0	0.03 (1)	B-E	0 / 0	0.00 (1)
A-B	0 / 41	-91.8	-91.8	0.14 (5)			
B-C	-32 / 0	-91.8	-91.8	0.14 (5)			
F-E	0 / 0	-18.5	-18.5	0.07 (4)			
E-G	0 / 0	-18.5	-18.5	0.08 (4)			
G-D	0 / 0	-18.5	-18.5	0.08 (4)			

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX-	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
G	1-11-4	1	1	---	FRONT	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL = 25.6	PSF
	DL = 6.0	PSF
BOT CH.	LL = 0.0	PSF
	DL = 7.4	PSF
TOTAL LOAD	= 39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.01")

CSI: TG=0.14/1.00 (A-B-5), BC=0.08/1.00 (D-E-4),
WB=0.00/1.00 (B-E-1), SSI=0.09/1.00 (A-B-5)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.


NAIL VALUES

PLATE	GRIP(DRY)	SHEAR	SECTION
(PSI)	(PLI)	(PLI)	(PLI)
MT20	650	371	1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.


JSI GRIP= 0.19 (B) (INPUT = 0.90)
JSI METAL= 0.05 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115471

JOB NAME 406516	TRUSS NAME C2	QUANTITY 3	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:19:33 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-qbJb683LTsb597rhK2UGDHwF85Y9WAcf0OQCPBzD?W8

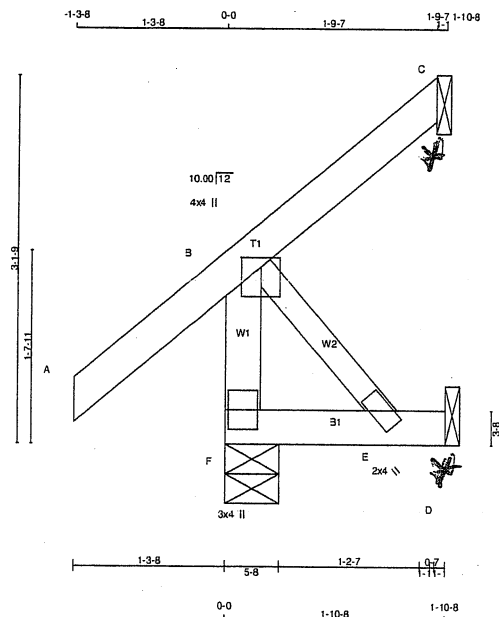

TOTAL WEIGHT = 3 X 10 = 29 lb

LUMBER		N. L. G. A. RULES		LUMBER		DESCR.	
CHORDS	SIZE						
F - B	2x4	DRY	No.2	SPF			
A - C	2x4	DRY	No.2	SPF			
F - D	2x4	DRY	No.2	SPF			
ALL WEBS	2x3	DRY	No.2	SPF			
DRY: SEASONED LUMBER.							

PLATES (table is in inches)		W		LEN		Y		X	
JT	TYPE	PLATES							
B	TMVW+p	MT20	4.0	4.0	1.00	2.00			
E	BMW+w	MT20	2.0	4.0					
F	BMV1+p	MT20	3.0	4.0					

NOTES: (1)
1) Lateral braces to be a minimum of 2x4 SPF #2

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS		FACTORED		MAXIMUM FACTORED		INPUT		RECORD	
JT	GROSS REACTION	VERT	HORZ	GROSS REACTION	DOWN	UP	IN-SX	BRG	IN-SX
F	276	0	0	276	0	0	5-8	5-8	
C	33	0	33	0	0	-40	1-8	1-8	
D	17	0	19	0	0	0	1-8	1-8	

SEE MITTEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

PROVIDE ANCHORAGE AT BEARING JOINT C FOR 150 LBS FACTORED UPLIFT

UNFACTORED REACTIONS

1ST LCASE		MAX./MIN. COMPONENT REACTIONS							
JT	COMBINED	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL		
F	192	144 / 0	0 / 0	0 / 0	0 / 0	48 / 0	0 / 0		
C	23	18 / -27	0 / 0	0 / 0	0 / 0	4 / 0	0 / 0		
D	14	0 / 0	0 / 0	0 / 0	0 / 0	14 / 0	0 / 0		

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, C

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX CSI (LC)	MAX. UNBRAC LENGTH	MEMB.	MAX. FACTORED FORCE (LBS)	MAX CSI (LC)
FR-TO		FROM	TO		FR-TO		
F-B	-258 / 0	0.0	0.0	0.03 (1)	7.81	B-E	0 / 0
A-B	0 / 41	-91.8	-91.8	0.13 (1)	10.00		0.00 (1)
B-C	-32 / 0	-91.8	-91.8	0.12 (1)	6.25		
F-E	0 / 0	-18.5	-18.5	0.02 (4)	10.00		
E-D	0 / 0	-18.5	-18.5	0.02 (4)	10.00		

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:

TOP CH.	LL	=	25.6	PSF
	DL	=	6.0	PSF
BOT CH.	LL	=	0.0	PSF
	DL	=	7.4	PSF
TOTAL	LOAD	=	39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.13/1.00 (A-B:1), BC=0.02/1.00 (E-F:4),
WB=0.00/1.00 (B-E:1), SSI=0.08/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES
PLATE GRIP(DRY) SHEAR SECTION
(PS) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL = 0.250 inches

PLATE ROTATION TOL = 5.0 Deg.


JSI GRIP= 0.19 (B) (INPUT = 0.90)
JSI METAL= 0.05 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115472

JOB NAME 411017	TRUSS NAME C30	QUANTITY 2	PLY 1	JOB DESC. ROYAL PINE HOMES	DRWG NO.
Tamarack Roof Truss, Burlington				TRUSS DESC.	

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:22 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-AU1KYRLViohG91ACHS9NpyEpBWWUyI8NuzFDzD??V

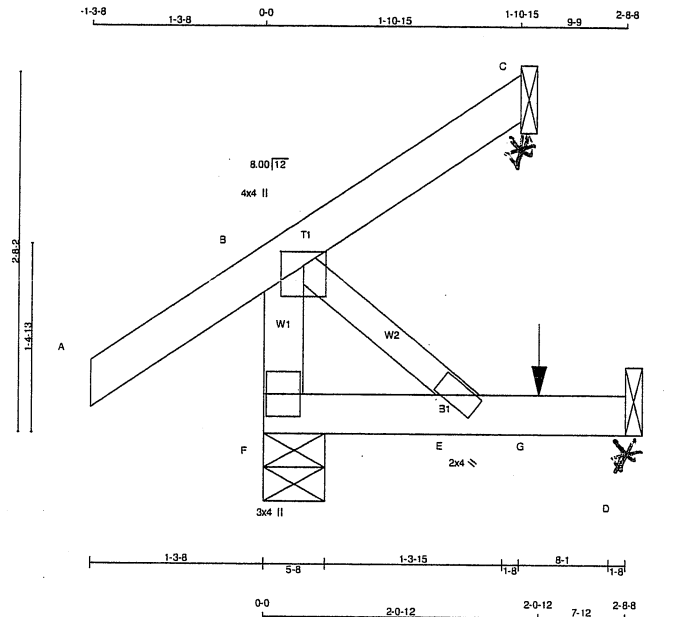

Scale = 1/16" = 1'-0"

LUMBER			
N. L. G. A. RULES	SIZE	LUMBER	
CHORDS			
F - B	2x4	DRY	No.2
A - C	2x4	DRY	No.2
F - D	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

DESCR.
SPF
SPF
SPF

DIMENSIONS, SUPPORTS AND LOADINGS SPECIFIED BY FABRICATOR TO BE VERIFIED BY BUILDING DESIGNER

BEARINGS

	FACTORED GROSS REACTION	MAXIMUM FACTORED GROSS REACTION	INPUT BRG	REQD BRG
JT	VERT	HORZ	DOWN	HORZ
F	285	0	285	0
C	42	0	42	0
D	28	0	31	0

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

PROVIDE ANCHORAGE AT BEARING JOINT C FOR 150 LBS. FACTORED UPLIFT

UNFACTORED REACTIONS

1ST LCASE	SNOW	LIVE	PERM. LIVE	WIND	DEAD	SOIL
JT	COMBINED					
F	199	144 / 0	0 / 0	0 / 0	55 / 0	0 / 0
C	29	24 / -25	0 / 0	0 / 0	6 / 0	0 / 0
D	22	0 / 0	0 / 0	0 / 0	22 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F, C

BRACING

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT. OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

LOADING

TOTAL LOAD CASES: (5)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	MAX. LC1 MAX (LC)	MEMB.	MAX. FACTORED FORCE (LBS)	MAX. LC1 MAX (LC)	
FR-TO		FROM TO		FR-TO			
F-B	-259 / 0	0.0	0.0 (1)	B-E	0 / 0	0.00 (1)	
A-B	0 / 35	-91.8	-91.8 (5)				
B-C	-25 / 0	-91.8	-91.8 (5)				
F-E	0 / 0	-18.5	-18.5 (4)				
E-G	0 / 0	-18.5	-18.5 (4)				
G-D	0 / 0	-18.5	-18.5 (4)				

SPECIFIED CONCENTRATED LOADS (LBS)

JT	LOC.	LC1	MAX.	MAX+	FACE	DIR.	TYPE	HEEL	CONN.
G	2-0-12	-3	-3	---	BACK	VERT	TOTAL	---	C1

CONNECTION REQUIREMENTS

1) C1: A SUITABLE HANGER/MECHANICAL CONNECTION IS REQUIRED.

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

DESIGN CRITERIA

SPECIFIED LOADS:
TOP CH. LL = 25.6 PSF
DL = 6.0 PSF
BOT CH. LL = 0.0 PSF
DL = 7.4 PSF
TOTAL LOAD = 39.0 PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR SMALL BUILDING REQUIREMENTS OF PART 9, NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

- OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/999 (0.00")

CSI: TC=0.14/1.00 (A-B:5), BC=0.04/1.00 (E-F:4),
WB=0.00/1.00 (B-E:1), SS=0.09/1.00 (A-B:5)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS=1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES

PLATE GRIP(DRY) SHEAR SECTION
(PSI) (PLI) (PLI)
MAX MIN MAX MIN MAX MIN
MT20 650 371 1747 788 1987 1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.17 (B) (INPUT = 0.90)
JSI METAL= 0.05 (B) (INPUT = 1.00)




Structural component only
DWG# T-2115477

Tamarack Roof Truss, Burlington

Version 8.420 S Jan 21 2021 MiTek Industries, Inc. Tue May 25 10:54:23 2021 Page 1
ID:E?n9mn1Ky9qxx7v78133ulyzsQn-egbilnMKG0wYuJcMI zOw1UQlas4DP?HcYipI?zD???

Scale = 1:16

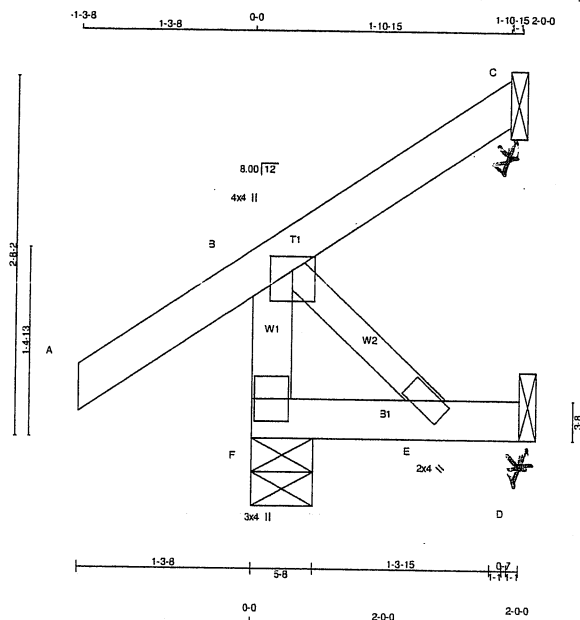

TOTAL WEIGHT = $2 \times 9 = 18 \text{ lb}$

N. L. G. A. RULES			
CHORDS	SIZE		LUMBER
F - B	2x4	DRY	No.2
A - C	2x4	DRY	No.2
F - D	2x4	DRY	No.2
ALL WEBS	2x3	DRY	No.2
DRY: SEASONED LUMBER.			

DESCR.	SPF
	SPF
	SPF
	SPF

BEARINGS

	FACTORED		MAXIMUM FACTORED		INPUT	REQRD
	GROSS	REACTION	GROSS	REACTION	BRG	BRG
JT	VERT	HORZ	DOWN	HORZ	UPLIFT	IN-SX
C	277	0	277	0	0	5-8
F	42	0	42	0	-35	1-8
D	18	0	21	0	0	1-8

SEE MITEK STANDARD DETAIL B97791H FOR CONNECTION TO JOINT(S) C, D

PROVIDE ANCHORAGE AT BEARING JOINT C FOR 150 LBS FACTORED UPLIFT

1ST LCASE MAX./MIN. COMPONENT REACTIONS

JT	COMBINED	SNOW	LIVE	PERM.LIVE	WIND	DEAD	SOIL
F	193	144 / 0	0 / 0	0 / 0	0 / 0	49 / 0	0 / 0
C	29	24 / -25	0 / 0	0 / 0	0 / 0	6 / 0	0 / 0
D	15	0 / 0	0 / 0	0 / 0	0 / 0	15 / 0	0 / 0

BEARING MATERIAL TO BE SPF NO.2 OR BETTER AT JOINT(S) F. C

TOP CHORD TO BE SHEATHED OR MAX. PURLIN SPACING = 6.25 FT.
MAX. UNBRACED BOTTOM CHORD LENGTH = 10.00 FT OR RIGID CEILING DIRECTLY APPLIED.

ALL PITCH BREAKS AND PERIMETER CORNER JOINTS MUST BE Laterally RESTRAINED.

TOTAL LOAD CASES: (5)

CHORDS				WEBS			
MEMB.	MAX. FACTORED FORCE (LBS)	FACTORED VERT. LOAD (PLF)	LC1 MAX. CSI (LC)	MAX. UNBRAC LENGTH	MEMB. FR-TO	MAX. FACTORED FORCE (LBS)	MAX. CSI (LC)
FR-TO		FROM TO					
F-B	-259 / 0	0.0 0.0	0.03 (1)	7.81	B-E	0 / 0	0.00 (1)
A-B	0 / 35	-91.8 -91.8	0.12 (1)	10.00			
B-C	-25 / 0	-91.8 -91.8	0.12 (1)	6.25			
F-E	0 / 0	-18.5 -18.5	0.02 (4)	10.00			
E-D	0 / 0	-18.5 -18.5	0.02 (4)	10.00			

CANTILEVER ANALYSIS HAS BEEN CONSIDERED IN THIS DESIGN

SPECIFIED LOADS:

TOP CH.	LL =	25.6	PSF
	DL =	6.0	PSF
BOT CH.	LL =	0.0	PSF
	DL =	7.4	PSF
TOTAL LOAD	=	39.0	PSF

SPACING = 24.0 IN. C/C

THIS TRUSS IS DESIGNED FOR RESIDENTIAL OR
SMALL BUILDING REQUIREMENTS OF PART 9,
NBCC 2015

THIS DESIGN COMPLIES WITH:

- PART 9 OF BCBC 2018, ABC 2019
- PART 9 OF OBC 2012 (2019 AMENDMENT)
- CSA 086-14
- TPIC 2014

DESIGN ASSUMPTIONS

-OVERHANG NOT TO BE ALTERED OR CUT OFF.

(55 % OF 31.3 P.S.F. G.S.L. PLUS 8.4 P.S.F. RAIN LOAD) EQUALS 25.6 P.S.F. SPECIFIED ROOF LIVE LOAD

ALLOWABLE DEFL.(LL)= L/360 (0.19")
CALCULATED VERT. DEFL.(LL) = L/ 999 (0.00")
ALLOWABLE DEFL.(TL)= L/360 (0.19")
CALCULATED VERT. DEFL.(TL) = L/ 999 (0.00")

CSI: TC=0.12/1.00 (A-B:1), BC=0.02/1.00 (E-F:4),
WB=0.00/1.00 (B-E:1), SSI=0.09/1.00 (B-C:1)

DOL LUMBER=1.00 NAIL=1.00 LS BEND=1.10
COMP=1.10 SHEAR=1.10 TENS= 1.10

COMPANION LIVE LOAD FACTOR = 1.00

AUTOSOLVE RIGHT HEEL ONLY

TRUSS PLATE MANUFACTURER IS NOT RESPONSIBLE FOR QUALITY CONTROL IN THE TRUSS MANUFACTURING PLANT.

NAIL VALUES						
PLATE	GRIP(DRY)		SHEAR		SECTION	
	(PSI)		(PLI)		(PLI)	
	MAX	MIN	MAX	MIN	MAX	MIN
MT20	650	371	1747	788	1987	1873

PLATE PLACEMENT TOL. = 0.250 inches

PLATE ROTATION TOL. = 5.0 Deg.

JSI GRIP= 0.17 (B) (INPUT = 0.90)
JSI METAL= 0.05 (B) (INPUT = 1.00)



Structural component only
DWG# T-2115478



Alves Engineering Services Inc.

5208 Easton road
Burlington, Ontario L7L 6N6
(289) 259 5455

RESPONSABILITIES

- 1-Alves Engineering Services Inc. is responsible for the design of trusses as individual components
- 2-It is the responsibility of others to ascertain that the design loads utilized on this drawing meet or exceed the actual dead load imposed by the structure and the live load imposed by the local building code or the authorities having jurisdictions.
- 3- All dimensions are to be verified by owner, contractor, architect or other authority before manufacture.
- 4- Alves Engineering Services Inc. bears no responsibility for the erection of the trusses. Persons erecting trusses are cautioned to seek professional advice regarding temporary and permanent bracing system. Bracing shown on Alves Engineering Services Inc. drawings is specified for the truss as a single component and forms an integral part of the truss design, but is not meant to represent the only required bracing for that truss when trusses are installed in a series of trusses forming a roof truss system.
- 5- It is the manufactures responsibility to ensure that the trusses are manufactured in conformance with Alves Engineering Services Inc. specifications outlined below.

SPECIFICATIONS

- 1-Truss components sealed by Alves Engineering Services Inc. conform to the relevant sections of the current Building Code of Ontario and Canada (part 4 or part 9) or the current Canadian code for Farm Buildings in accordance with the application specified on the sealed truss component drawing. All truss component design procedures must conform to the current design standard issued by the truss plate institute of Canada (TPIC). All lumber and nailing stresses to conform to the current CSA wood design standard identified on the current Building Code and TPIC.
- 2- Lumber is to be the sizes and grade specified on the truss drawing.
- 3- Moist content of lumber is not to exceed 19% in service unless otherwise specified.
- 4- Plates shall be applied to both faces of the each truss joint and shall be positioned as shown on the truss drawings
- 5- Lumber used on manufacture of trusses is not to be treated with chemicals unless otherwise specified on the truss drawings.
- 6- The top chord is assumed to be continuously laterally braced by the roof sheathing or purlins at intervals specified on the truss drawing but not exceeding 24" c/c for (part 9) and not exceeding 48" for (part 4 or farm design)
- 7- When rigid ceiling is not attached directly to the bottom chord, lateral bracing is required and it should not exceed more than 3m or 10' intervals.
- 8-Refer to Mitek sheet MII7473C REV.10-08 attached for information on symbols, numbering system and General Safety notes.

T-1800213

Feb 09, 2018

TOE-NAIL CAPACITY DETAILS

LATERAL AND WITHDRAWAL RESISTANCE OF BEARING ANCHORAGE BY TOE-NAILS

			SPF	D. FIR	SPF	D. FIR
COMMON WIRE	3.00	0.144	122	139	30	42
	3.25	0.144	127	144	32	45
	3.50	0.160	152	173	38	52
COMMON SPIRAL	3.00	0.122	96	108	26	36
	3.25	0.122	97	108	28	40
	3.50	0.152	142	161	36	50
3.25" Gun nail	3.25	0.120	94	105	28	39

Note: If using truss with D. Fir lumber and SPF bearing plate, use tabulated SPF values in table.

Nail type:	Common wire	Common spiral	Common wire	Common spiral	Gun Nail
Diameter (in.)	0.160	0.152	0.144	0.122	0.120
Length (in.)	3.50	3.50	3.00	3.00	3.25
Minimum Number of Nails					
2x4 SPF	2	2	3	3	3
2x6 SPF	4	4	4	5	5
2x4 D. FIR	2	2	2	2	2
2x6 D. FIR	3	3	3	4	4


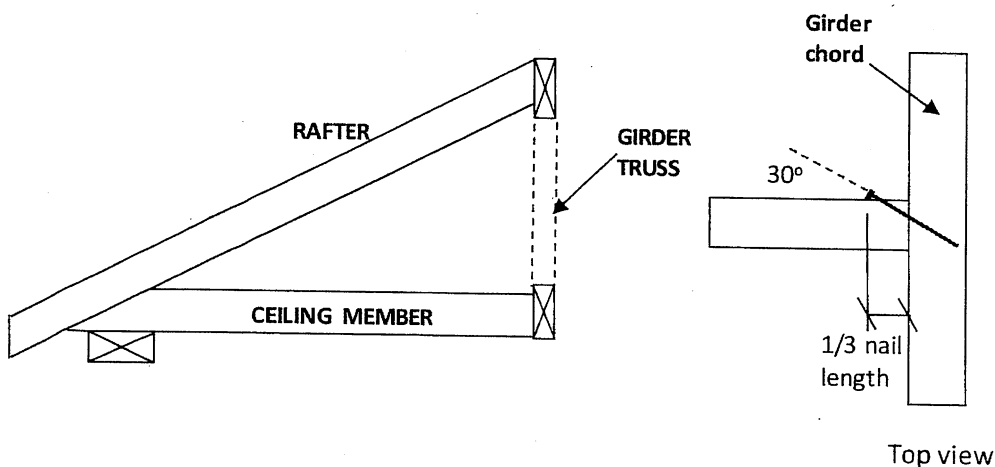


Figure 1: Toe-Nailing Rafter / Ceiling Member to Girder Truss



TOE-NAIL CAPACITY DETAILS

Figure 2: Toe-Nail Anchorage to Bearing Plate for Uplift

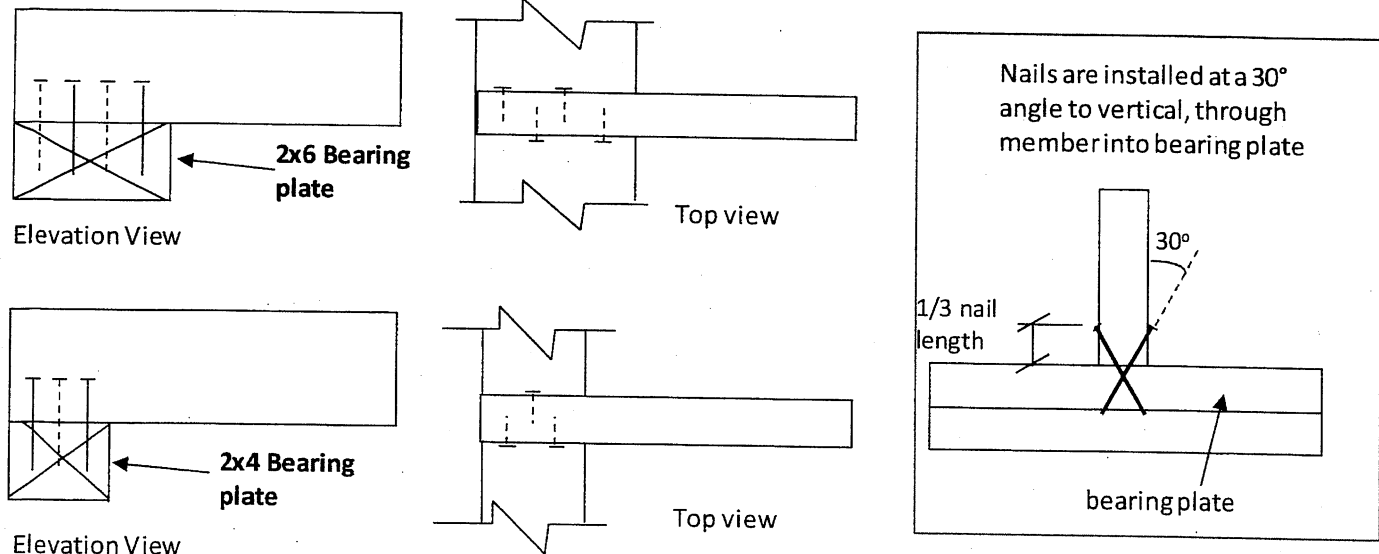

NOTES:

1. Rafter and ceiling members may be connected to top and bottom chords of girder truss by toe-nailing the members into the girder chords (see fig. 1), provided the factored vertical reactions of the supported members do not exceed the lateral resistance of the toe-nails. Mechanical connectors (hangers) are required if factored vertical reactions exceed the toe-nail capacity, or if the connection must resist horizontal loads (loads perpendicular to the face of girder or rafter).
2. Trusses, rafters or ceiling members may be anchored to the bearing plate with toe-nails (see fig. 2), provided that the factored uplift reactions due to **wind or earthquake loads** do not exceed the **withdrawal resistance of the toe-nails**. Mechanical anchors (tie-downs) are required for reactions that exceed the toe-nail withdrawal capacity. Toe-nail anchorage to bearing plates is **NOT** permitted if uplift reactions are generated from gravity loads (snow, floor live, dead).
3. Tabulated toe-nail resistances on page 1 are for **one** toe-nail. Multiply unit values by the number of nails used in the connection. Maximum number of nails in a connection shall not exceed the tabulated limits shown on page 1 for a given lumber size /species.
4. Nail values are based on specific gravity of $G = 0.42$ (SPF) and $G = 0.49$ (D. Fir).
5. Toe-nails shall be driven at approximately $1/3$ the nail length from the edge of the joist/truss chord and driven at an angle of 30° to the grain of the member.
6. For wind / earthquake loads, tabulated lateral resistances may be multiplied by 1.15 (K_D factor). No increases are permitted for tabulated withdrawal resistances.
7. Lumber must be dry ($< 19\%$ moisture content) at the time of nail installation.
8. Nail values in this table comply with CSA O86-19, Clause 12.9.

PEO
Certificate No. 10889485



LUL/LUS/LJS/HUS/HHUS/HGUS

Standard and Double-Shear Joist Hangers



This product is preferable to similar connectors because of
a) easier installation, b) higher capacities, c) lower installed
cost, or a combination of these features.

Most hangers in this series have double-shear nailing — an innovation that distributes the load through two points on each joist nail for greater strength. This allows for fewer nails, faster installation, and the use of all common nails for the same connection. (Do not bend or remove tabs)

Double-shear hangers range from the light capacity LUS hangers to the highest capacity HGUS hangers. For medium load truss applications, the HUS offers a lower cost alternative and easier installation than the HGUS hangers, while providing greater load capacity and bearing than the LUS.

Material: See table on pp. 217–218.


Finish: Galvanized. Some products available in stainless steel or ZMAX® coating; see Corrosion Information, pp. 18–20.

Installation:


- Use all specified fasteners; see General Notes.
- Nails must be driven at an angle through the joist or truss into the header to achieve the tabulated resistances (except LUL).
- Where 16d commons are specified, 10d commons may be used at 0.83 of the tabulated factored resistance.
- Not designed for welded or nailer applications.
- With single ply 2x carrying members, use 10d x 1 1/2" nails into the header and 10d commons into the joist, and reduce the resistance to 0.64 of the table value where 16d nails are specified and 0.77 where 10d nails are specified.

Options:


- LUS, LJS, LUL and HUS hangers cannot be modified.
- Other sizes available; consult your Simpson Strong-Tie representative.
- See Hanger Options information on pp. 105–107.




LUS28




LU26L




HUS210
(HUS26, HUS28,
and HHUS similar)




HGUS28-2




HHUS210-2




LJS26DS



Double-Shear
Nailing
Top View





Double-Shear
Nailing
Side View;
Do not
bend tab



Dome Double-Shear
Nailing
Side View
(available on
some models)

**Typical HUS26
Installation
with Reduced
Heel Height**
(Truss Designer
to provide
fastener quantity
for connecting
multiple members
together)

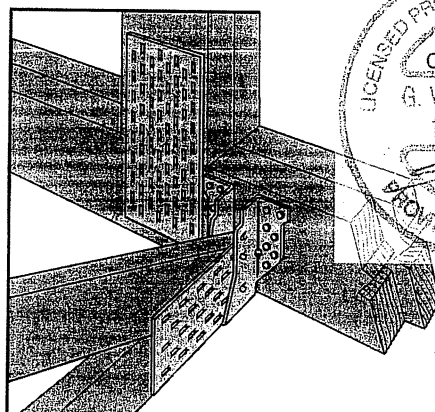

LUS – Double Shear Joist Hangers

SIMPSON
Strong-Tie

All LUS hangers have double shear nailing. This patented innovation distributes the load through two points on each joist nail for greater strength. It also allows the use of fewer nails, faster installation and the use of common nails for all connections.

Material: 18 gauge

Finish: G90 galvanized

Design:


- Factored resistances are in accordance with CSA O86-14.
- Uplift resistances have been increased 15%. No further increase is permitted.
- Wood shear is not considered in the factored resistances given. The specifier must ensure that the joist and header capacities are capable of withstanding these loads.

Installation:


- Use all specified fasteners.
- Nails: 16d = 0.162" dia. x 3½" long common wire,
10d = 0.148" x 3" long common wire.
- Double shear nails must be driven at an angle through the joist or truss into the header to achieve the table loads.
- Not designed for welded or nailer applications.

Options:

- These hangers cannot be modified




Typical LUS Installation

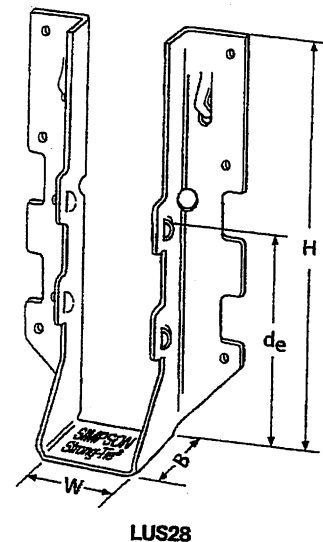


Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance (lb.)			
		W	H	B	d _e ¹	Face	Joist	D.Fir-L		S-P-F	
								Uplift (K _p =1.15)	Normal (K _p =1.00)	Uplift (K _p =1.15)	Normal (K _p =1.00)
LUS24	18	1⅞	3⅞	1¾	1⅞	(4) 10d	(2) 10d	710	1630	645	1155
LUS24-2	18	3⅞	3⅞	2	1⅞	(4) 16d	(2) 16d	835	2020	590	1435
LUS26	18	1⅞	4¾	1¾	3⅞	(4) 10d	(4) 10d	1420	2170	1290	1630
LUS26-2	18	3⅞	4¾	2	4	(4) 16d	(4) 16d	1720	2595	1545	1920
LUS26-3	18	4⅞	4¾	2	3¼	(4) 16d	(4) 16d	1720	2595	1545	2340
LUS28	18	1⅞	6⅞	1¾	3¾	(6) 10d	(6) 10d	1420	2520	1290	1790
LUS28-2	18	3⅞	7	2	4	(6) 16d	(4) 16d	1720	3325	1545	2575
LUS28-3	18	4⅞	6¼	2	3¼	(6) 16d	(4) 16d	1720	3325	1545	2375
LUS210	18	1⅞	7⅞	1¾	3⅞	(8) 10d	(4) 10d	1420	2785	1290	2210
LUS210-2	18	3⅞	9	2	6	(8) 16d	(6) 16d	2580	4500	2320	3195
LUS210-3	18	4⅞	8⅞	2	5¼	(8) 16d	(6) 16d	2580	3345	2320	2375

1. d_e is the distance from the seat of the hanger to the highest joist nail.




Dome Double Shear Nailing prevents tabs breaking off (available on some models).

U.S. Patent 5,603,580



Double Shear Nailing Top View.



LIMIT
STATES
DESIGN

This technical bulletin is effective until June 30, 2022, and reflects information available as of April 1, 2020. This information is updated periodically and should not be relied upon after June 30, 2022. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com.

© 2020 Simpson Strong-Tie Company Inc.

T-SPEC LUS20 3/20 exp. 6/22

(800) 999-5099
strongtie.com

HUS/LJS – Double Shear Joist Hangers

SIMPSON
Strong-Tie

All hangers have double shear nailing. This patented innovation distributes the load through two points on each joist nail for greater strength. It also allows the use of fewer nails, faster installation and the use of common nails for all connections. Do not bend or remove tabs.

Material: See table

Finish: G90 galvanized

Design:


- Factored resistances are in accordance with CSA O86 -14.
- Uplift resistances have been increased 15%. No further increase is permitted.
- Wood shear is not considered in the factored resistances given. The specifier must ensure that the joist and header capacities are capable of withstanding these loads.

Installation:


- Use all specified fasteners
- Nails: 16d = 0.162" dia. x 3 1/2" long common wire
- Double shear nails must be driven at an angle through the joist or truss into the header to achieve the table loads
- Not designed for welded or nailer applications

Options:


- See current catalogue for options




LJS26DS




HUS210
(HUS26, HUS28, similar)



Typical LJS26DS
Installation




Typical HUS
Installation



Typical HUS Installation
(Truss Designer to provide fastener
quantity for connecting multiple
members together)


Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance (lb.)			
		W	H	B	d _a ¹	Face	Joist	D.Fir-L		S-P-F	
								Uplift (K _u =1.15)	Normal (K _u =1.00)	Uplift (K _u =1.15)	Normal (K _u =1.00)
LJS26DS	18	1 1/16	5	3 1/2	4 3/8	(16) 16d	(6) 16d	2055	4265	1460	4115
HUS26	16	1 1/8	5 1/8	3	3 1/16	(14) 16d	(6) 16d	2705	4940	2065	3875
HUS28	16	1 1/8	7 3/32	3	6 3/32	(22) 16d	(8) 16d	3605	5365	2675	4345
HUS210	16	1 1/8	9 3/32	3	7 3/32	(30) 16d	(10) 16d	4505	5795	4010	4740
HUS1.81/10	16	1 1/16	9	3	8	(30) 16d	(10) 16d	4505	6450	4010	5200

1. d_a is the distance from the seat of the hanger to the highest joist nail.




Dome Double
Shear Nailing
prevents tabs
breaking off
(available on
some models).


U.S. Patent
5,603,580



Double
Shear
Nailing
Side View.
Do not
bend tab
back.



Double
Shear
Nailing
Top View.



LIMIT
STATES
DESIGN

This technical bulletin is effective until June 30, 2022, and reflects information available as of April 1, 2020. This information is updated periodically and should not be relied upon after June 30, 2022. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com.

© 2020 Simpson Strong-Tie Company Inc.

T-SPECHUS20 3/20 exp. 6/22

(800) 999-5099
strongtie.com

TECHNICAL BULLETIN

HGUS – Double Shear Joist Hangers

SIMPSON
Strong-Tie

All HGUS hangers have double shear nailing. This patented innovation distributes the load through two points on each joist nail for greater strength. It also allows the use of fewer nails, faster installation and the use of common nails for all connections. Do not bend or remove tabs.

Material: 12 gauge

Finish: G90 galvanized

Design:


- Factored resistances are in accordance with CSA O86-14.
- Uplift resistances have been increased 15%.
No further increase is permitted.
- Wood shear is not considered in the factored resistances given. The specifier must ensure that the joist and header capacities are capable of withstanding these loads.

Installation:


- Use all specified fasteners
- Nails: 16d = 0.162" dia x 3½" long common wire
- Double shear nails must be driven at an angle through the joist or truss into the header to achieve the table loads
- Not designed for welded or nailer applications

Options:


- See current catalogue for options



HGUS28-2




Typical HGUS
Installation



Typical HGUS Installation
(Truss Designer to
provide fastener quantity
for connecting multiple
members together)


Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance (lb.)			
		W	H	B	d _o ¹	Face	Joist	D.Fir-L		S-P-F	
								Uplift (K _o =1.15)	Normal (K _o =1.00)	Uplift (K _o =1.15)	Normal (K _o =1.00)
HGUS26	12	1½	5½	5	4½	(20) 16d	(8) 16d	2685	6625	2685	5700
HGUS26-2	12	3½	5½	4	4½	(20) 16d	(8) 16d	4385	8950	3100	6355
HGUS26-3	12	4½	5½	4	4½	(20) 16d	(8) 16d	4385	8950	3100	6355
HGUS26-4	12	6½	5½	4	4½	(20) 16d	(8) 16d	4385	8950	3100	6355
HGUS28	12	1½	7½	5	6½	(36) 16d	(12) 16d	3310	7675	3100	6900
HGUS28-2	12	3½	7½	4	6½	(36) 16d	(12) 16d	6070	12980	4310	9215
HGUS28-3	12	4½	7½	4	6½	(36) 16d	(12) 16d	6070	12980	4310	9215
HGUS28-4	12	6½	7½	4	6½	(36) 16d	(12) 16d	6070	12980	4310	9215
HGUS210	12	1½	9½	5	7½	(46) 16d	(16) 16d	3535	11070	2510	8090
HGUS210-2	12	3½	9½	4	8½	(46) 16d	(16) 16d	6840	14015	4855	10270
HGUS210-3	12	4½	9½	4	8½	(46) 16d	(16) 16d	6840	14645	4855	10400
HGUS210-4	12	6½	9½	4	8½	(46) 16d	(16) 16d	6840	14645	4855	10400
HGUS212-4	12	6½	10½	4	10½	(56) 16d	(20) 16d	7640	14995	5425	10645
HGUS214-4	12	6½	12½	4	11½	(66) 16d	(22) 16d	10130	16400	7195	11645

1. d_o is the distance from the seat of the hanger to the highest joist nail.




Dome Double
Shear Nailing
prevents tabs
breaking off
(available on
some models).


U.S. Patent
5,603,580



Double
Shear
Nailing
Side View.
Do not
bend tab
back.



Double
Shear
Nailing
Top View.



**LIMIT
STATES
DESIGN**

This technical bulletin is effective until June 30, 2022, and reflects information available as of April 1, 2020. This information is updated periodically and should not be relied upon after June 30, 2022. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com.

© 2020 Simpson Strong-Tie Company Inc.

T-SPECHGUS20 3/20 exp. 6/22

(800) 999-5099
strongtie.com

HHUS – Double Shear Joist Hangers

SIMPSON
Strong-Tie

All HHUS hangers have double shear nailing. This patented innovation distributes the load through two points on each joist nail for greater strength. It also allows the use of fewer nails, faster installation and the use of common nails for all connections. Do not bend or remove tabs.

Material: 14 gauge

Finish: G90 galvanized

Design:


- Factored resistances are in accordance with CSA O86-14.
- Uplift resistances have been increased 15%. No further increase is permitted.
- Wood shear is not considered in the factored resistances given. The specifier must ensure that the joist and header capacities are capable of withstanding these loads.

Installation:


- Use all specified fasteners
- Nails: 16d = 0.162" dia. x 3½" long common wire
- Double shear nails must be driven at an angle through the joist or truss into the header to achieve the table loads
- Not designed for welded or nailer applications

Options:

- See current catalogue for options

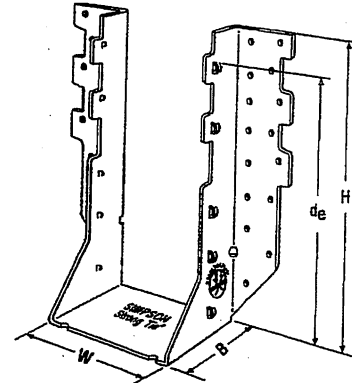


HHUS410

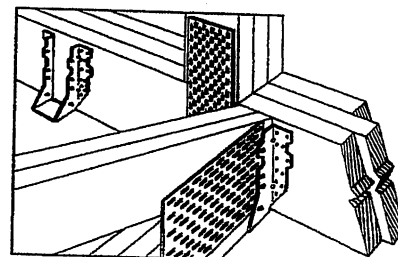


Typical HHUS Installation
(Truss Designer to provide
fastener quantity for connecting
multiple members together)

Model No.	Ga.	Dimensions (in.)				Fasteners		Factored Resistance (lb.)			
		W	H	B	d _e ¹	Face	Joist	D.Fir-L		S-P-F	
								Uplift (K _u =1.15)	Normal (K _n =1.00)	Uplift (K _u =1.15)	Normal (K _n =1.00)
HHUS26-2	14	3 ³ / ₁₆	5 ¹³ / ₁₆	3	3 ¹⁵ / ₁₆	(14) 16d	(6) 16d	2850	7335	2065	5205
HHUS28-2	14	3 ³ / ₁₆	7 ⁷ / ₃₂	3	6 ⁵ / ₃₂	(22) 16d	(8) 16d	3765	8940	2675	6345
HHUS210-2	14	3 ³ / ₁₆	9 ⁹ / ₃₂	3	8	(30) 16d	(10) 16d	4670	9660	4235	7000
HHUS210-3	14	4 ¹ / ₁₆	9	3	7 ¹⁵ / ₁₆	(30) 16d	(10) 16d	4670	9670	4235	6865
HHUS210-4	14	6 ¹ / ₁₆	8 ²⁹ / ₃₂	3	7 ²⁷ / ₃₂	(30) 16d	(10) 16d	4670	10155	4235	7210
HHUS46	14	3 ³ / ₁₆	5 ¹³ / ₃₂	3	3 ¹⁵ / ₁₆	(14) 16d	(6) 16d	2540	7335	2065	5205
HHUS48	14	3 ³ / ₁₆	7 ¹ / ₁₆	3	6 ¹ / ₁₆	(22) 16d	(8) 16d	3765	8940	2675	6345
HHUS410	14	3 ³ / ₁₆	9	3	8	(30) 16d	(10) 16d	4670	9855	4235	7000
HHUS5.50/10	14	5 ¹ / ₂	9	3	8	(30) 16d	(10) 16d	4670	10155	4235	7210
HHUS7.25/10	14	7 ¹ / ₄	9	3 ³ / ₁₆	7 ²⁹ / ₃₂	(30) 16d	(10) 16d	4670	10155	3370	7210


1. d_e is the distance from the seat of the hanger to the highest joist nail.




Dome Double Shear Nailing prevents tabs breaking off (available on some models).
U.S. Patent 5,603,580



Double Shear Nailing Side View. Do not bend tab back.



Double Shear Nailing Top View.



Typical HHUS Installation



LIMIT STATES DESIGN

This technical bulletin is effective until June 30, 2022, and reflects information available as of April 1, 2020. This information is updated periodically and should not be relied upon after June 30, 2022. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com.


© 2020 Simpson Strong-Tie Company Inc.

T-SPECHUS20 3/20 exp. 6/22


(800) 999-5099
strongtie.com

H/TSP


Seismic and Hurricane Ties (cont.)




1 H1 Installation




2 H2A Installation




3 TSP Installation




4 H2.5A Installation
(Nails into both top plates)




5 H2.5T Installation
(Nails into both top plates)




6 H2.5T Installation




7 H3 Installation
(Nails into upper top plate)




8 H6 Stud to Top Plate Installation




9 H6 Stud to Band Joist Installation




10 H7Z Installation




11 H8 Attaching Rafter to Double Top Plates




12 H8 attaching Stud to Sill
(4 8d into plate, 5 8d into stud)




13 H8 attaching I-Joist to Double Top Plates




14 H10A Field-Bent Installation



15 H10S Installation




16 H10S Installation with Stud Offset




17 H10A Installation

H10A optional positive angle nailing connects shear blocking to rafter. Use 8d common nails. Slot allows maximum field-bending up to a pitch of 6/12, use 75% of the table uplift value; bend one time only.




18 H14 Installation to Double Top Plates



19 H14 Installation to Double 2x Header

Avoid a Misinstallation



Do not make new holes or overdrive nails.

H/TSP

Seismic and Hurricane Ties

Simpson Strong-Tie® hurricane ties provide a positive connection between truss/rafter and the wall of the structure to resist wind and seismic forces. New additions to the line provide even more options.


- H10AR — The heavy-duty design of the H10A available with a 2" wide throat to accommodate rough lumber
- H10A-2 — The H10A design with a 3" throat for double 2x members
- H2ASS, H2.5ASS and H10ASS — Popular ties now available in stainless steel

Material: See table


Finish: Galvanized. H7Z and H11Z — ZMAX® coating. Some models available in stainless steel or ZMAX; see Corrosion Information, pp. 20–24 or visit strongtie.com.

Installation:


- Use all specified fasteners; see General Notes.
- H1 can be installed with flanges facing inward (reverse of H1 installation drawing; number 1).
- H2.5T, H3 and H6 ties are shipped in equal quantities of right and left versions (right versions shown).
- Hurricane ties do not replace solid blocking.
- When installing ties on plated trusses (on the side opposite the truss plate) do not fasten through the truss plate from behind. This can force the truss plate off of the truss and compromise truss performance.
- H10A optional nailing to connect shear blocking, use 8d nails. Slots allow maximum field bending up to a pitch of 6:12, use H10A sloped loads for field bent installation.




H1




H2A
(H2ASS similar)




H2.5A
(H2.5ASS similar)




H2.5T




H3




TSP




H6




H7Z




H8




H10S




H10A
(H10ASS similar)




H10A-2




H10AR



H11Z



H14



H14
Profile

H – Seismic and Hurricane Ties

SIMPSON
Strong-Tie

The H connector series provides wind and seismic ties for trusses and rafters.

Material: 18 gauge **Finish:** G90 galvanized


Design: • Factored resistances are in accordance with CSA 086-14
• Factored resistances have been increased 15%. No further increase is permitted.

Installation: • Use all specified fasteners

- Nails: 8d = 0.131" dia. x 2½" long common wire, 8d x 1½" = 0.131" x 1½" long, 10d x 1½" = 0.146" x 1½" long
- H1 can be installed with flanges facing outwards
- Hurricane ties do not replace solid blocking


Factored resistances for more than one direction for a single connection cannot be added together. A factored load which can be divided into components in the directions given must be evaluated as follows: Factored Shear/Resisting Shear + Factored Tension/Resisting Tension ≤ 1.0.

Hurricane Tie Installations to Achieve Twice the Load (Top View)

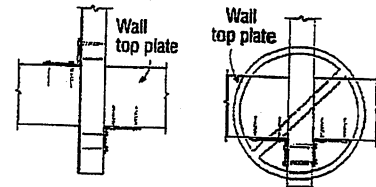


Install diagonally across from each other for minimum 2x truss.


Nailing into both sides of a single ply 2x truss may cause the wood to split.




H1




H1 Installation




H2A




H2A Installation




H2.5A




H2.5A Installation




H2.5T




H2.5T Installation
(Nails into both top plates)




H3



H3 Installation



H10A




H10A Installation

Model No.	Ga.	Fasteners			Factored Resistance (lb.)					
					D.Fir-L			S-P-F		
		To Rafter	To Plates	To Studs	Uplift	Normal		Uplift	Normal	
						F ₁	F ₂		F ₁	F ₂
										(K _p =1.15)
H1	18	(6) 8d x 1½"	(4) 8d	—	740	685	300	680	485	215
H2A	18	(5) 8d x 1½"	(2) 8d x 1½"	(5) 8d x 1½"	830	220	75	590	155	55
H2.5A	18	(5) 8d	(5) 8d	—	805	160	160	755	160	160
H2.5T	18	(5) 8d	(5) 8d	—	835	175	240	740	160	210
H3	18	(4) 8d	(4) 8d	—	740	180	265	615	125	190
H10A	18	(9) 10d x 1½"	(9) 10d x 1½"	—	1735	795	410	1505	565	290

1. Factored resistances have been increased 15% for earthquake or wind loading with no further increase allowed.
2. Factored resistances are for one anchor. A minimum rafter thickness of 2½" must be used when framing anchors are installed on each side of the joist and on the same side of the plate.

3. When cross-grain bending or cross-grain tension cannot be avoided, mechanical reinforcement to resist such forces should be considered.
4. Hurricane ties are shown installed on the outside of the wall for clarity. Installation on the inside of the wall is acceptable. For a Continuous Load Path, connections must be on same side of the wall.



LIMIT
STATES
DESIGN

This technical bulletin is effective until June 30, 2022, and reflects information available as of April 1, 2020. This information is updated periodically and should not be relied upon after June 30, 2022. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com.

© 2020 Simpson Strong-Tie Company Inc.

T-SPECH20 3/20 exp. 6/22

(800) 999-5099
strongtie.com

TC – Truss Connectors

SIMPSON
Strong-Tie

The TC truss connector is an ideal connector for scissor trusses and can allow horizontal movement up to 1¼". The TC also attaches trusses to top plates or sill plates to resist uplift forces. Typically used on one or both ends of truss as determined by the building designer.

Material: 16 gauge

Finish: G90 galvanized


Design: Factored resistances are in accordance with CSA 086-14

Installation:


- Use all specified fasteners.
- Nails: 10d = 0.148" dia. x 3" long common wire, 10d x 1½" = 0.148" dia. x 1½" long.
- Drive 10d nails into the truss at the inside end of the slotted holes (inside end is towards the centre of the truss) and clinch on the back side. Do not seat these nails into the truss—allow room under the nail head for movement of the truss with respect to the wall.

Optional TC Installation:


- Bend one flange up 90°. Drive specified nails into the top and face of the top plates or install Titen® screws into the top and face of masonry wall. See optional load tables and installation details.




TC24
U.S. Patent 4,932,173

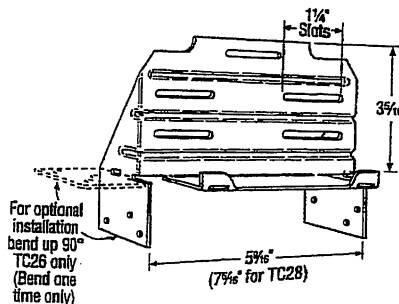


TC26
(TC28 Similar)

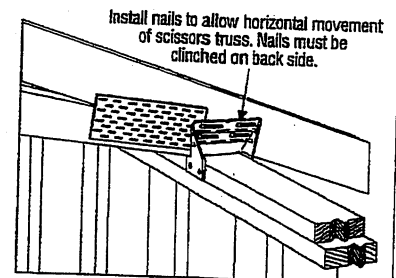

Typical TC24 Installation



Optional TC26 Installation for Grouted Concrete Block using a Wood Nailer (8", 10", 12" Wall Installation Similar)




Optional TC26 Installation for Grouted Concrete Block using Titen Screws

Model No.	Fasteners		Factored Resistance	
	Truss	Wall Plates	D.Fir-L	S-P-F
			Uplift (K _o =1.15)	Uplift (K _o =1.15)
TC24	(4) 10d	(4) 10d	605	430
TC26	(5) 10d	(6) 10d	1015	720
TC28	(5) 10d	(6) 10d	1015	720

Optional TC Installation Table

Model No.	Fasteners		Factored Resistance	
	Truss	Wall Plates	D.Fir-L	S-P-F
			Uplift (K _o =1.15)	Uplift (K _o =1.15)
TC26	(5) 10d	(6) 10d x 1½"	810	660
	(5) 10d	(6) 10d	930	660

1. Factored resistances have been increased 15% for earthquake or wind loading; no further increase allowed; reduce where other loads govern.
2. Grout strength is 15 MPa minimum.
3. Optional TC26 installation with 10d nails requires minimum 3" top plate thickness.
4. TC26 fastened to grouted concrete block with (6) – ¾" x 2¼" Titen screws has a factored uplift resistance of 275 lb.



LIMIT
STATES
DESIGN

This technical bulletin is effective until June 30, 2022, and reflects information available as of April 1, 2020. This information is updated periodically and should not be relied upon after June 30, 2022. Contact Simpson Strong-Tie for current information and limited warranty or see strongtie.com.

© 2020 Simpson Strong-Tie Company Inc.


T-SPECTC20 3/20 exp. 6/22

(800) 999-5099
strongtie.com

Symbols

PLATE LOCATION AND ORIENTATION

Center plate on joint unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths or mm. Apply plates to both sides of truss and fully embed teeth.



For 4 x 2 orientation, locate plates 0-1/4" from outside edge of truss.

== This symbol indicates the required direction of slots in connector plates.

* Plate location details available in Mitek software or upon request.

PLATE SIZE


4 X 4
The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T, I or Eliminator bracing if indicated.

BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur.

Industry Standards:

TPIC: Truss Design Procedures and Specifications for Light Metal Plate Connected Wood Trusses
DSB-89: Design Standard for Bracing.
BCSI: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

6-4-8 dimensions shown in ft-in-sixteenths or mm (Drawings not to scale)

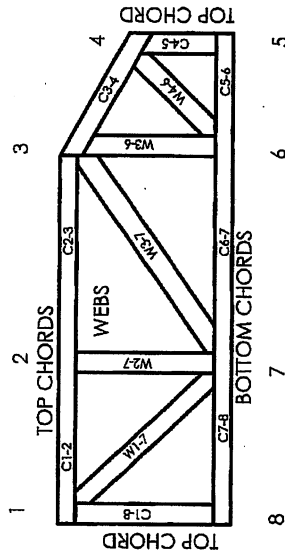

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

CCMC Reports:

11996-L, 10319-L, 13270-L, 12691-R

© 2007 Mitek® All Rights Reserved



Mitek

POWER TO PERFORM.™

Mitek Engineering Reference Sheet, MII-7473C rev. 10-08

General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative T, I, or Eliminator bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by TPIC.
7. Design assumes trusses will be suitably protected from the environment in accord with TPIC.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with TPIC Quality Criteria.