

Products				
PlotID	Length	Product	Plies	Net Qty
J1	14-00-00	11 7/8" NI-40x	1	9
J1DJ	14-00-00	11 7/8" NI-40x	2	2
J2	12-00-00	11 7/8" NI-40x	1	14
J2DJ	12-00-00	11 7/8" NI-40x	2	4
J3	10-00-00	11 7/8" NI-40x	1	14
J4	4-00-00	11 7/8" NI-40x	1	1
J5	2-00-00	11 7/8" NI-40x	1	6
B4	14-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2
B2	10-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1
B7	10-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1
B1	10-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2
B5	10-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2
B3	6-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2
B6	4-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	1	1

Connector Summary		
Qty	Manuf	Product
1	H1	IUS2.56/11.88
8	H1	IUS2.56/11.88
6	H1	IUS2.56/11.88
4	H1	IUS2.56/11.88
1	H2	HUS1.81/10
1	H3	HU312-2
1	H4	HGUS410



FROM PLAN DATED:

**BUILDER:** ROYAL PINE HOMES

**SITE:** CENTREFIELD WEST GORMLEY

**MODEL:** 2011

**ELEVATION:** A,B

**LOT:**

**CITY:** RICHMOND HILL

**SALESMAN:** MARIO DICIANO

**DESIGNER:** AJ

**REVISION:**

**NOTES:**  
REFER TO THE **NORDIC INSTALLATION** GUIDE FOR PROPER STORAGE AND INSTALLATION.  
**SQUASH BLOCKS** OF 2x4, 2x6, 2x8 #2 S.P.F REQ'D UNDER INTERIOR UNIFORM LOAD BEARING WALLS. **MULTIPLE SQUASH BLOCKS** REQ'D UNDER CONCENTRATED LOADS. SEE FIGURE 1. **CANTILEVERED JOISTS** INCLUDING **CANT' OVER BRICK** REQ. I-JOIST BLOCKING ALONG BEARING AND RIMBOARD CLOSURE AT ENDS. SEE FIGURES 4 & 5 FOR REINFORCEMENT REQUIREMENTS. FOR **HOLES** INCLUDING **DUCT CHASE** AND **FIELD CUT OPENINGS** SEE FIGURE 7, TABLES 1 & 2. **CERAMIC TILE** APPLICATION AS PER O.B.C 9.30.6.

**LOADING:**  
DESIGN LOADS: L/480.000  
LIVE LOAD: 40.0 lb/ft²  
DEAD LOAD: 20.0 lb/ft²

**SUBFLOOR:** 3/4" GLUED AND NAILED

**DATE:** 2020-07-23

# 1st FLOOR



FROM PLAN DATED:

BUILDER: ROYAL PINE HOMES

SITE: CENTREFIELD WEST GORMLEY

MODEL: 2011

ELEVATION: A,B

LOT:

CITY: RICHMOND HILL

SALESMAN: MARIO DICIANO

DESIGNER: AJ

REVISION:

NOTES:

REFER TO THE NORDIC **INSTALLATION GUIDE** FOR PROPER STORAGE AND INSTALLATION. **SQUASH BLOCKS** OF 2x4, 2x6, 2x8 #2 S.P.F. REQ'D UNDER INTERIOR UNIFORM LOAD BEARING WALLS. **MULTIPLE SQUASH BLOCKS** REQ'D UNDER CONCENTRATED LOADS. SEE FIGURE 1. **CANTILEVERED JOISTS** INCLUDING **CANT' OVER BRICK** REQ. I-JOIST BLOCKING ALONG BEARING AND RIMBOARD CLOSURE AT ENDS. SEE FIGURE 7 TABLES 4 & 5 FOR REINFORCEMENT REQUIREMENTS. FOR **HOLES** INCLUDING **DUCT CHASE** AND **FIELD CUT OPENINGS** SEE FIGURE 7 TABLES 1 & 2 OF THE INSTALLATION GUIDE. **CERAMIC TILE** APPLICATION AS PER O.B.C. 9.30.6

LOADING:

DESIGN LOADS: L/480.000


LIVE LOAD: 40.0 lb/ft²

DEAD LOAD: 20.0 lb/ft ²

SUBFLOOR: 5/8" GLUED AND NAILED

DATE: 2020-07-27

2nd FLOOR

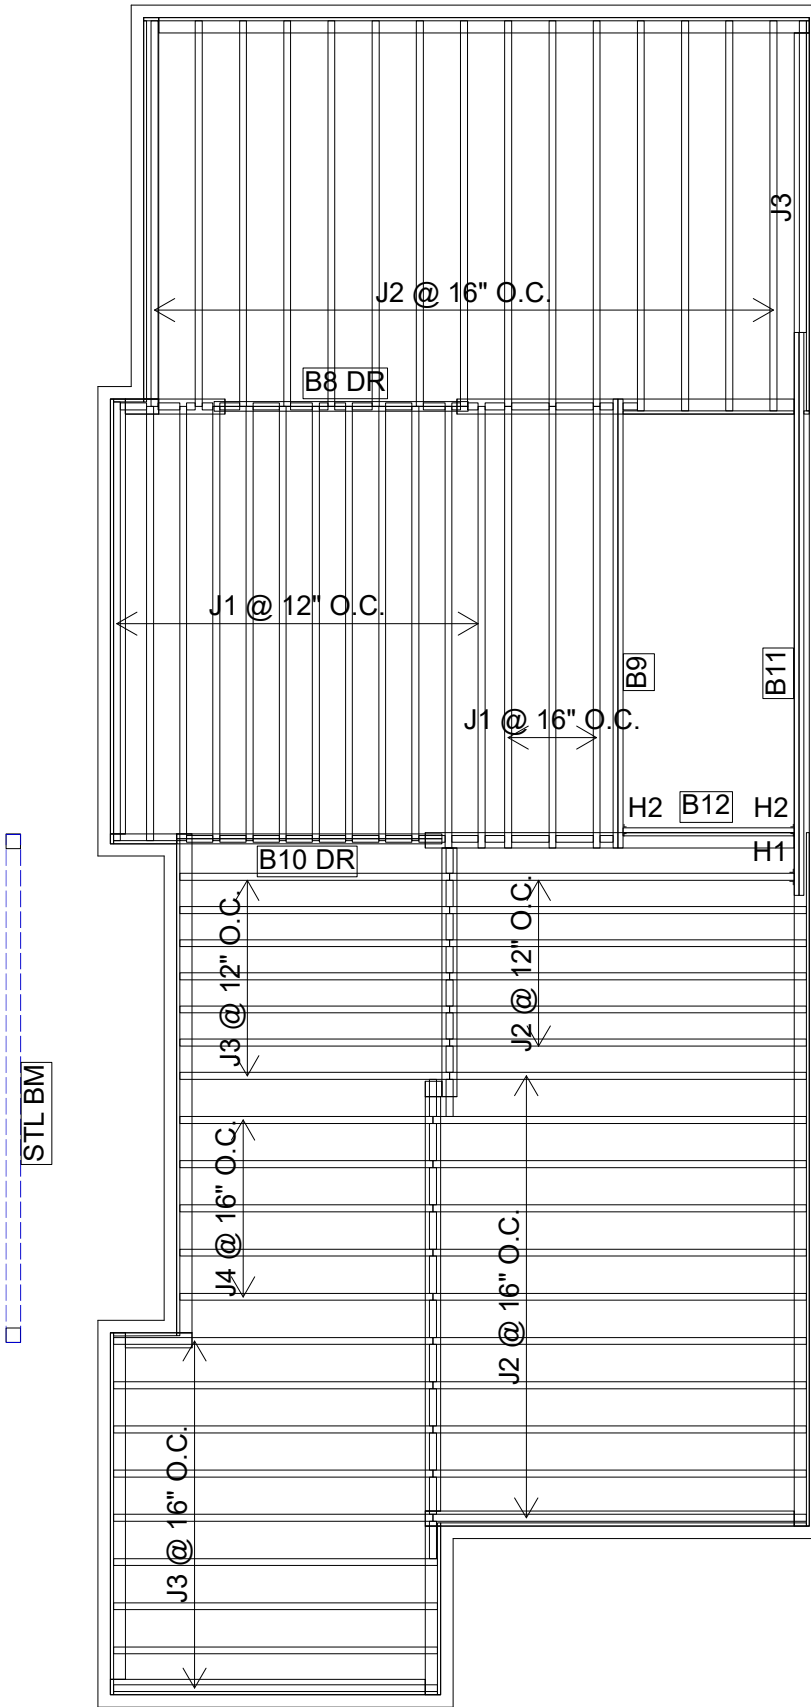

Products				
PlotID	Length	Product	Plies	Net Qty
J1	14-00-00	11 7/8" NI-40x	1	15
J2	12-00-00	11 7/8" NI-40x	1	32
J3	10-00-00	11 7/8" NI-40x	1	17
J4	8-00-00	11 7/8" NI-40x	1	5
B12	6-00-00	1-3/4" x 9-1/2" VERSA-LAM® 2.0 3100 SP	1	1
B11	18-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2
B9	14-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2
B10 DR	8-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2
B8 DR	8-00-00	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	2	2

Connector Summary		
Qty	Manuf	Product
1	H1	IUS2.56/11.88
2	H2	HUS1.81/10