

Maestrale Wall Hood

A stylish professional kitchen wall range hood











Stylish 3 speed Control with Blue LED Indicator Light

The Maestrale range hood from Faber is a professional hood with a sense of style. With top or direct rear venting and multiple chimney options makes the Maestrale the most versatile and easy to install Pro hood on the market.

Model #	Size Color	Performance Range	Sound Levels	
MAES30SS	30 Stainless	200 - 600 CFM	3.5 - 6.5 sones	
MAES36SS	36 Stainless	200 - 600 CFM	3.5 - 6.5 sones	
MAES ₄₂ SS	42 Stainless	200 - 600 CFM	3.5 - 6.5 sones	
MAES48SS	48 Stainless	400 -1,200 CFM	5.0 - 12.0 sones	




Feature Chart


N/A		
25" D / 18" H		
3 speed slider with blue LED backlight		
3 (30, 36,42") OR 4 (48") X 20 (W) Halogen		
6" Round or (2) - 6" Round on 48"		
6" Round or (2) - 6" Round on 48"		
dishwasher safe baffle filters		
Yes		
120 V - 60 hz		
Max 510 W at 4.3 A (30,36,42") Max 720 W at 7.7 A (48")		
\$5.73 / Year * (30,36,42")		

* Note - ran 30 minutes a day on low speed with the lights on, 365 days, using the North American average of 12.2 cents per kWh. p.o. box 435 • Wayland, MA 01778 • tel: (508) 358-5353 • fax: (508) 358-5730 • e-mail: info@faberonline.com • www.faberonline.com

Dimensional Diagrams


(see installation instructions for more information)



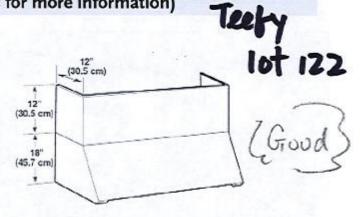

WITH TELESCOPIC CHIMNEY KIT

WITH FULL WIDTH DUCT COVER



ACCESSORIES

30" - # FULL30

#TRNSPRO

CFMRED

Telescopic Chimney Cover

24" wide, extends to accomodate 8 - 9 foot ceilings



Full Width Duct Cover

12" high, extends full width of the hood 36" - #FULL36
42" - #FULL42
48" - #FULL48



Duct Transition Kit

For 48" model only, transitions two 6" openings to one 10" round opening



CFM Reducer Kit

For use in make up air environments where an under 300 cfm hood is required. This kit reduces the ducting to 5" round and reduces the cfm to under 300. NOT FOR USE WITH 48" size hood



















WARNING! Product specifications are subject to change without notification. Consult the installation instructions before you begin installing this rangehood.

Rev. 11/12

HMWB30FS MASTERPIFCE®











66.45	MODE	•	DEN	HEITE'
	1100		121 24 67	IEFITS

- 600 CFM Integrated Blower included
- Recirculation possible with kit RECIRC_FS (max 600 CFM)
- Three fan speeds plus 10 minute high-power operation mode
- Built-in 'Clean Filter' reminder light illuminates after 40 hours of operation
- Delayed shut-off tackles lingering odors for up to 10 minutes

ACCESSORIES (OPTIONAL)	
Recirculation Kit	
RECIRC30FS - For 30" Hood Only	
Replacement Charcoal Filter - CHFILT3036	
For Use With Recirculation Kit RECIRC_FS	
30" W, 6" H Stainless Steel Duct Cover	DC30US
30" W, 12" H Stainless Steel Duct Cover	DCT30US
30" W Stainless Steel Backsplash	PA30JBS

GENERAL PROPERTIES		
Operating Mode	Convertible: Ducted / Recirculating	
Maximum CFM	600 CFM	
Number of Speed Settings	3-Stage	
Motor Location	Integrated	
Number Of Lights	Lights Sold Separately - 2	
Bulb Type	50 W - G10 Base	
Total Power Of The Lamps (W)	100 W	
Damper Included	Yes	
Grease Filter Material	Washable Synthetic	
Grease Filter Type	Multilayer Cassette	
TECHNICAL DETAILS		
Watts (W)	550 W	
Current (A)	15 A	
Volts (V)	120 V	
Frequency (Hz)	60 HZ	
Plug Type	Fixed Connection	
DIMENSIONS & WEIGHT		
Overall Appliance Dimensions (Width Of Canopy Included) (HxWxD) (in)	11" x 30" x 23 1/g"	
Required Distance Above Cooktop / Range Cooking Surface	30" / 30"	
Diameter of Air Duct (in) Top	10"	
Diameter of Air Duct (in) Back	N/A	
Net Weight (lbs)	35 lbs	
ACCESSORIES (REQUIRED)		
Recirculation Kit		
BLOWER OPTIONS		
Remote Blower	N/A	
(Mounted to Roof or External Wall)	N/A	
	N/A	
Inline Blower	N/A	
(Mounted Between Kitchen and External Wall)	N/A	

Page 1 of 3

WARRANTY

Integrated Blower (Mounted in Hood)

Limited Warranty Parts And Labor



N/A N/A

2 Year