

Steffannee Appio

From: Steffannee Appio
Sent: Thursday, December 15, 2016 12:03 PM
To: 'Sara Pitto'
Subject: RE: Lot 76, richvale homes

Hello Sara,

Thanks for sending your specs.

The sizes are fine :)

Have a great day

steff

-----Original Message-----
From: Sara Pitto [mailto:sarapitto@hotmail.com]
Sent: Wednesday, December 07, 2016 2:50 PM
To: Steffannee Appio <sappio@senatorhomes.com>
Subject: Lot 76, richvale homes

Hi Steffannee,

Please see attached dimensions for fridge and range and send confirmation that it's been received.

Thanks

--

Sent with Genius Scan for iOS.
<http://dl.tglapp.com/genius-scan>

Steffanne Appio

From: Sara Pitto <sarapitto@hotmail.com>
Sent: Wednesday, December 07, 2016 2:50 PM
To: Steffanne Appio
Subject: Lot 76, richvale homes
Attachments: 2016-12-07 14-46.pdf; ATT00001.txt


Hi Steffanne,

Please see attached dimensions for fridge and range and send confirmation that it's been received.

Thanks

—
Sent with Genius Scan for iOS.
<http://dl.tglapp.com/genius-scan>

hol 76-Caroline
12/2/16 ①

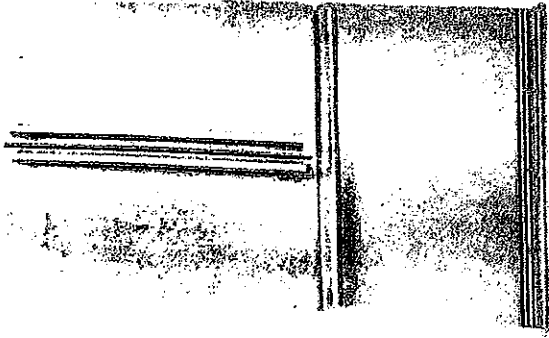

Custom Temp Drawer™

Enjoy the ultimate in versatility with 9 preset selections including White/Sparkling Wine, Fish/Shellfish, Cheese plus three customizable settings that ensure foods stay at the ideal temperature for serving and maintaining freshness.




Custom-Design™ Organization System

With our flexible Tri-Level freezer organization system you can keep your freezer well organized. The three Smooth-Glide® baskets with removable dividers and top removable baskets allow you to configure the space to neatly fit large and small items.



Theatre Lighting

Transition LED lighting gradually illuminates the interior with soft but ample light as you open the door.



PureAdvantage® Filtration Systems

Our filtration system keeps clean, filtered air circulated throughout to prevent odor transfer and keeps fresh, clean water and ice at your fingertips.



23 CU. FT. COUNTER-DEPTH
FRENCH DOOR REFRIGERATOR


CAPACITIES	
Total Capacity	22.8 Cu. Ft.
Fresh Food Volume	16.7 Cu. Ft.
Freezer Volume	6.9 Cu. Ft.
Total Shelf Area	28.46 Sq. Ft.
Fresh Food Shelf Area	18.72 Sq. Ft.
Freezer Shelf Area	7.7 Sq. Ft.
EXTERIOR	
Professional Doors and Handle Design	Yes
Custom-Set™ Electronic Controls	Yes
Door Hinge Covers	Yes
FRESH FOOD CONVENIENCES	
PureAdvantage® Water & Ice / Air Filtration	Yes
Water Filter Location	Bottom Left
Temp Alarm System / Door Ajar Alarm / Power Failure Alarm	Yes
Custom-Design™ Glass Shelves	4 Half Width
Smooth-Glide® Humidity-Controlled Left Crisper	Yes
Smooth-Glide® Humidity-Controlled Right Crisper	Yes
Custom Temp Drawer™	Yes
Wine Rack	2
Clear Gallon Adjustable Door Bins	3
Clear 1/2-Gallon Adjustable Door Bins	Yes
Locking Clear Utility Bin	2
Tilt-Out Can Racks	Yes
Theatre Ramp-Up Multilevel Lighting – LED	Yes
FREEZER CONVENIENCES	
Automatic Ice Maker	Yes
Ice Maker On/Off	Yes
Fast Ice™	Yes
Self-Closing Drawer	2 Full-Width Smooth-Glide® (with Dividers)
Sliding Freezer Baskets	1 Half-Width
Plastic Basket Tray	1
Tilt-Out Wire Door Racks	1
Theatre Ramp-Up Multilevel Lighting – LED	Yes
ADDITIONAL FEATURES	
ENERGY STAR®	Yes
Sabbath Mode (Star-K® Certified)	Yes
ACCESSORIES	
Collar Kit – PN# ECK23CDS*	Optional
Louvered Trim Kit – PN# 241T23001†	Optional
Water Filter Replacement Cartridge – PN# EMF01	Optional
Air Filter Replacement Cartridge – PN# EAF08F	Optional
SPECIFICATIONS	
Product Dimensions –	
Height (with Hinges and 3/8" Rollers)	69-1/2"
Cabinet Width/Door Width	35-5/8" /36"
Depth (Including Handle) (with 90° Doors Open)	29-1/2"
(with Drawer Fully Extended)	42-9/16"
Power Supply Connection Location	Right Bottom Rear
Water Inlet Location	Left Bottom Rear
Voltage Rating	120V/60Hz/15 or 20A
Connected Load (kW Rating) @ 120 Volts‡	1.02
Minimum Circuit Required (Amps)	15
Shipping Weight (Approx.)	348 Lbs.

* For detailed Louvered Trim Kit and Collar Kit installation instructions, refer to Product Installation Guides on the web at electrolux.com.


† An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.

NOTE: Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at electrolux.com.

Specifications subject to change.

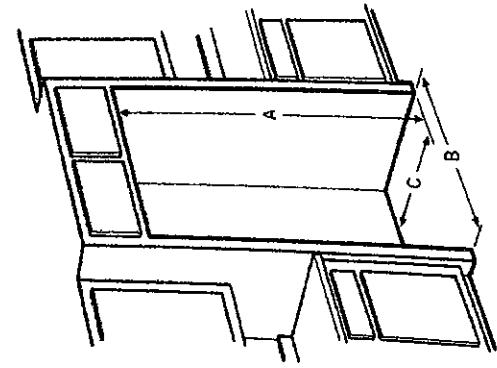


Standard Refrigerator Depth vs. Cabinet Depth

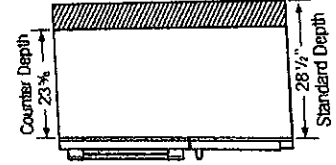

"Built-In Look" Cutout Dimensions


(A) 70 1/4" (B) 36" (C) 25"

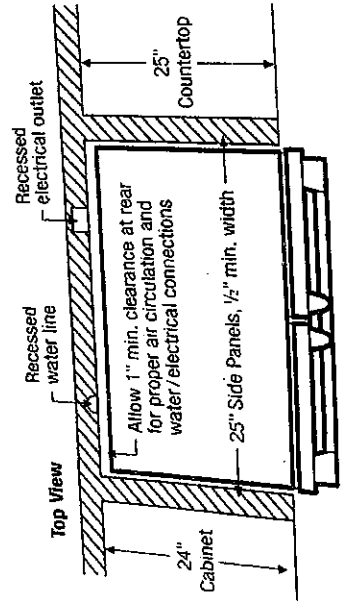

Counter-Depth French Door Refrigerator Specifications

- Product Weight – 338 Lbs.
 - An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and local codes & ordinances.
 - Voltage Rating – 120V/60-Hz/15 or 20 Amps
 - Connected Load (kW Rating) @ 120 Volts = 1.02 kW
 - Amps @ 120 Volts = 8.5 Amps
 - Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator.
- When installing refrigerator adjacent to wall, cabinet or other appliance that extends beyond front edge of unit, 20" minimum clearance recommended to allow for optimum 120° to 180° door swing, providing complete drawer/crisper access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for 90° door swing which will provide drawer/crisper access with restricted removal.)
- Ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.
- For proper ventilation, front grille MUST remain unobstructed.
- Access electrical outlet when possible.
- For recess on rear wall recommended to prevent water line damage.
- Pressure – Cold water line must provide between 30 and 100 pounds per sq. inch (psi).

Important Announcements

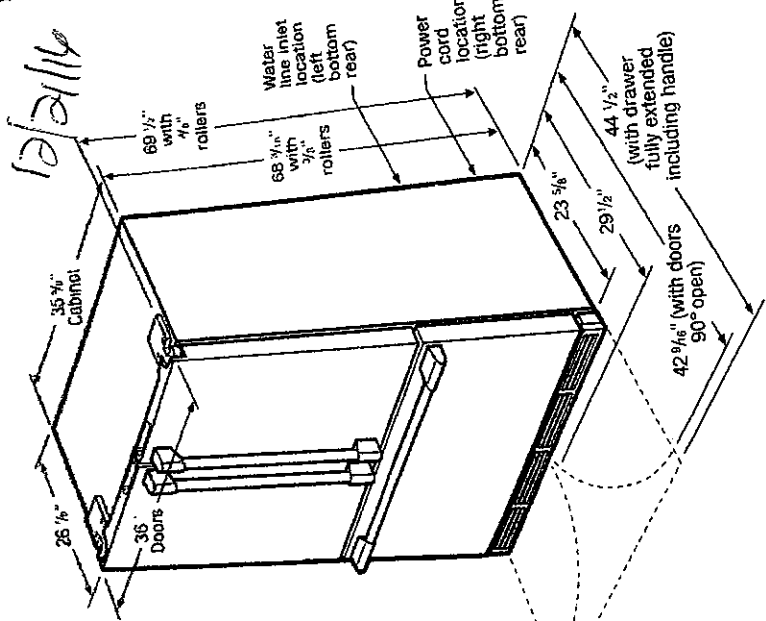

Note: Optional Louvered Trim Kit and Collar Kit available for French Door Counter-Depth Refrigerator. For specifications, refer to Louvered Trim Kit (241723001) Installation page or Collar Kit (ECK23CDS) Installation page on web.

- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- Adjustable front rollers to assist with door alignment.
- If optional Collar Kit (PN# ECK23CDS) is to be used, different cutout dimensions required. (Refer to Collar Kit ECK23CDS Installation Specifications page on web.)
- If optional Louvered Trim Kit (PN# 241723001) is to be used, different cutout dimensions are required. (Refer to Louvered Trim Kit 241723001 Installation Specifications page on web.)

"Built-In Look" Specifications

- Minimum opening of 70-1/4"H x 36"W x 25"D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.ca for detailed instructions.

Optional Accessories

- Collar Kit – (PN# ECK23CDS).
- Louvered Trim Kit – (PN# 241723001).
- PureAdvantage® Water Filter Replacement Cartridge – (PN# EWF01).
- PureAdvantage® Air Filter Replacement Cartridge – (PN# EAFCSF).


ELECTROLUX
12/21/16

not to be covered

GAS FREESTANDING RANGE

EI30GF45QS

Featuring IQ-Touch Electronic Controls

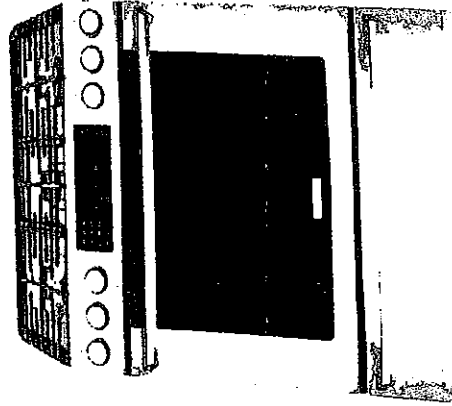

PRODUCT DIMENSIONS

Height	36 1/8"	36 1/8"
Width	29 7/8"	29 7/8"
Depth (including handle)	28 5/16"	28 5/16"

MORE EASY-TO-USE FEATURES

MIN-2-MAX® GAS BURNER

Designed with a dual-flame sealed burner, this cooktop provides exceptional power and precision to unlock new flavors.

A LUXURY-GLIDE® OVEN RACK

With a ball bearing system, the oven rack is so smooth it extends effortlessly so you can more easily manage the transfer of all dishes, even heavy ones.

CONTINUOUS GAS GRATES

Designed for cooking multiple dishes at a time, these grates allow easy movement of even the heaviest pots and pans from burner to burner — without lifting. Plus, they create a streamlined look.

DEEP-WELL DESIGN

Keeps spills contained for easy cleanup.

WARMER DRAWER

Maintain the perfect temperature of your food until serving time.

PLATINUM STAR® LIMITED WARRANTY

Our exclusive limited warranty that includes 3-year coverage on parts and one year on labor*.

CONVECTION CONVERSION

Automatically adjusts standard baking temperatures to convection temperatures, for perfect, consistent results.


6 COOKING MODES

Bake, Broil, Convection Bake, Convection Roast, Keep Warm and Slow Cook.

KEEP WARM SETTING

Maintain food at the perfect serving temperature with this setting — it's a great feature when you're entertaining.

Available in:




BURNER	BTU
Min-2-Max® Dual Flame Sealed Burner	750 - 18,000
Sealed Power Burner	14,200
Sealed Precision Burner	9,500
Centre Burner	16,000

*For best results, use large cookware in your power burner.
*Eligibility based on product registration with Electrolux North America within 60 days of purchase.
Have been purchased on or after July 1, 2013. Coverage includes normal parts for 3 years, or

ELECTROLUXAPPL

SIGNATURE FEATURES

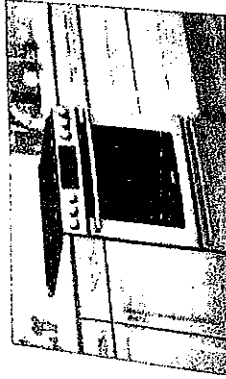

FRONT CONTROL DESIGN

Effortlessly upgrade your back-control range to built-in style. This range will easily replace traditional 30" freestanding ranges.



PERFECT TASTE™ CONVECTION

For consistently delicious taste and texture, home chefs rely on our convection heat, which circulates air evenly for better baking.



OVAL BURNER + INCLUDED GRIDDLE

Allows you to cook with larger pots and pans or use the complementary griddle to achieve a variety of perfect flavors!



PERFECT TASTE™ TEMP PROBE

The Perfect Taste™ Temp Probe lets you cook each dish to perfection. It does more than measure temperature — it alerts you when food has reached the desired temperature and automatically adjusts to the Keep Warm setting, so you never overcook your food and deliver perfect results every time.

Electrolux

G RANGE

E130GF45QS

PRODUCT DIMENSIONS

Height	36-1/8" - 36-5/8"
Width	29-7/8"
Depth (including handle)	28-5/16"

MORE EASY-TO-USE FEATURES

MIN-2-MAX® GAS BURNER

Designed with a dual-flame sealed burner, this cooktop provides exceptional power and precision to unlock new flavors.

A LUXURY-GLIDE® OVEN RACK

With a ball bearing system, the oven rack is so smooth it extends effortlessly so you can more easily manage the transfer of all dishes, even heavy ones.

CONTINUOUS GAS GRATES

Designed for cooking multiple dishes at a time, these grates allow easy movement of even the heaviest pots and pans from burner to burner — without lifting. Plus, they create a streamlined look.

DEEP-WELL DESIGN

Keeps spills contained for easy cleanup.

WARMER DRAWER

Maintain the perfect temperature of your food until serving time.

... LIMITED WARRANTY

GAS FREESTANDING RANGE

E180GF450S

WOLFE-Coville
1/2/21/16

30" GAS FREESTANDING RANGE

CONTROL PANEL FEATURES	
IQ-Touch™ Electronic Oven Control	Yes
Professional Grade Burner Controls	Yes
Glass Front Display	Yes
Electronic Clock & Timer	Yes
Temperature Display	Yes
Automatic Oven (Delay, Cook & Off)	Yes

COOKTOP FEATURES	
Sealed Power Burner – 18,000 BTU	1
Sealed Power Burner – 14,200 BTU	1
Sealed Precision Burner – 9,500 BTU	1
Sealed Precision Burner – 5,000 BTU	1
Centre Oval Burner – 10,000 BTU	1
Continuous Grates with Deep-Hot Top	Yes
Seamless Cooktop	Yes
Electric Pilotless Ignition	Yes

OVEN FEATURES	
Capacity	4.5 Cu Ft
Hidden Bake Burner	Yes
Bake Burner – 18,000 BTU	Yes
Broil Burner – 13,500 BTU	Yes
Convection Burner – 350 Watts	Yes
Cobalt Blue Interior	Yes
Self-Clean Options with Door Lock	Yes
Perfect Taste™ Convection	Yes


Cooling Modes	6
Bake, Broil, Convection Bake, Convection Roast, Keep Warm, Slow Cook	
Baked Options	3
Temperature Probe, Delay Bake, Convection Convert	
Oven Light	Yes
Luxury-Slide™ Rack	1
Conventional Racks	1
Convection Roasting Rack	1

ADDITIONAL FEATURES	
Luxury-Hold™ Oven Door	Yes
Extra-Large Glass Window	Yes
Warmer Drawer	Yes
Adjustable Leveling Legs	Yes
Subzero Mode (Star-K® Certified)	Yes

ACCESSORIES	
Griddle – PN# 318257608	Included
LP Gas Conversion Kit	Included
Meat Probe	Included
Stainless Steel Backguard – PN# A02535501	Optional

SPECIFICATIONS	
Colour –	Stainless Steel
Gas Inlet/Power Cord Location	Right Bottom Rear
Voltage Rating	120V 60Hz 15A
Connected Load (kW Rating) @ 120 Volts	1.80
Amps @ 120 Volts	15
Shipping Weight (Approx.)	285 Lbs.

*For use on adequately rated 120V dedicated circuit having 2-wire service with a separate ground wire. Appliances must be grounded for safe operation.
NOTE: Always consult local and national electric and gas codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxappliances.ca
Specifications subject to change

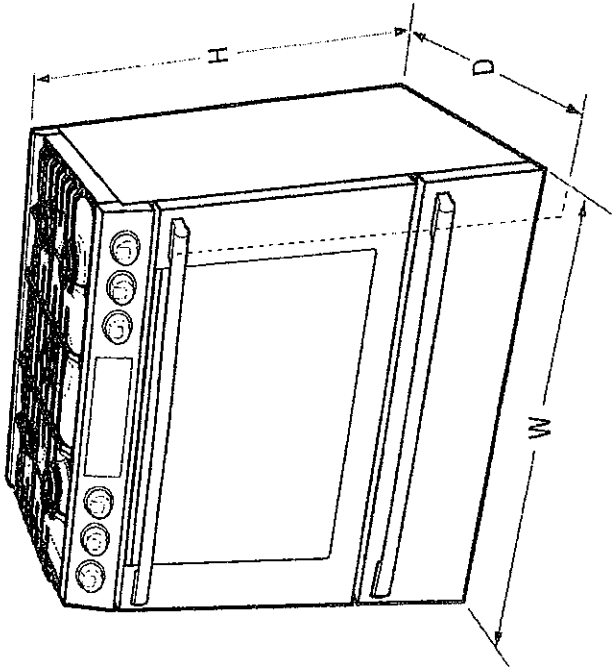

PRODUCT DIMENSIONS

Height (Adjustable)	36-1/8" - 38-5/8"
Width	29-7/8"
Depth (including handle) (with 90° Door Open)	28-5/16" 46"

OVEN CAVITY DIMENSIONS

Height	17-1/2"
Width	24-1/8"
Depth	18-3/4"