


French Door Remojacine

E4CECALICATION DESCRIPTION







Custom Temp Drawer"

Enjoy the ultimate in versatility with 9 preset selections including White/Sparkling Wine, Fish/Shellfish, Cheese plus three customizable settings that ensure foods stay at the ideal temperature for serving and maintaining freshness.



Custom-Design[™] Organization System

With our flexible Tri-Level freezer organization system you can keep your freezer well organized. The three Smooth-Glide® baskets with removable dividers and top removable baskets allow you to configure the space to neatly fit large and small items.



Theatre Lighting

Transition LED lighting gradually illuminates the interior with soft but ample light as you open the door.



PureAdvantage® Filtration Systems

Our filtration system keeps clean, filtered air circulated throughout to prevent odor transfer and keeps fresh, clean water and ice at your fingertips.

23 CU.FT. COUNTER-DEPTH FRENCH DOOR REFRIGERATOR


THE RESERVE OF THE PERSON OF T	AND DESCRIPTION OF THE PARTY OF
CAPACITIES	
Total Capacity	22.6 Cu, Ft.
Fresh Food Volume Freezer Volume	15.7 Cu.Ft.
Total Shelf Area	6.9 Cu, Ft.
Fresh Food Shelf Area	26.45 Sq. Ft.
Freezer Shelf Area	18.72 Sq. Ft.
	7.7 Sq. Ft,
EXTERIOR	
Professional Doors and Handle Design	Yes
Wave-Touch* Electronic Controls	Yes
Door Hinge Covers ice/Water Dispenser	Yes
Custom-Set* Temperature Control System and Display	Yes
Crushed/Cubes/Water	Yes Yes
Air and Water Filter Indicator/Reset	Yes
Ice Maker On/Off	Yes
Fast Freeze*	Yes
Lock/Dispenser Light Control	Yes/Yes
FRESH FOOD CONVENIENCES	
	· ·
PureAdvantage* Water & Ice / Air Filtration Water Filter Location	Yes
Temp Alarm System / Door Ajar Alarm / Power Failure Alarm	Bottom Left
Custom-Design* Glass Shelves	Yes 3 Half Width
	1 Quarter Width
Smooth-Glide* Humidity-Controlled Left Crisper	Yes
Smooth-Glide* Humidity-Controlled Right Crisper	Yes
Custom Temp Drawer	Yes
Wine Rack	Yes
Clear Gallon Adjustable Door Bins	1
Clear 1/2-Gallon Adjustable Door Bins	1
Clear 2-Liter/1/2-Gallon Removable Door Bins	2
Locking Clear Utility Bin	Yes
Till-Out Can Racks	2
Theatre Ramp-Up Multilevel Lighting LED Automatic Ice Maker	Yes
	Yes
FREEZER CONVENIENCES	
Self-Closing Drawer	Yes
Sliding Full-Width Freezer Baskets	3 Smooth-Glide* (2 with Dividers)
Plastic Basket Tray	
Filt-Out Wire Door Racks	
heatre Ramp-Up Multilevel Lighting - LED	Yes
	163
ADDITIONAL FEATURES	
NERGY STAR*	Yes
abbath Mode (Star-K° Certified)	Yes
CCESSORIES	
Collar Kit PN# ECK23CDS*	Optional
ouvered Trim Kit PN# 241723001*	Optional
Vater Filter Replacement Cartridge - PN# EWF01	Optional
ir Filler Replacement Cartridge – PN# EAFCBF	Optional
PECIFICATIONS	
verall Exterior Dimensions	
Height (with Hinges and 3/8" Rollers)	69-1/23
Cabinet Width/Door Width	35-5/81/36"
Depth (Including Handle) (with 90° Doors Open)	29-1/2*
(with 90° Doors Open)	42-9/16*
(with Drawer Fully Extended) ower Supply Connection Location	44-1/21
Ater Inlet Location	Right Bottom Rear
ollage Rating	Left Bottom Rear
onnected Load (kW Rating) @ 120 Volts‡	120V/60 Hz/15 or 20, 1.02
The state of the s	1.04
inimum Circuit Required (Amps)	15

*For detailed Louvered Trim Kit and Collar Kit installation instructions, refer to Product Installation Guides on the web at electroluxicon.com.

An electrical supply with grounded three-prong receptacle is required. The power supply circuit must be installed in accordance with current edition of National Electrical Code (NEPA 70) and local codes & ordinances.

NOTE: Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxicon.ca. Specifications subject to change.

French Beard Boulderate

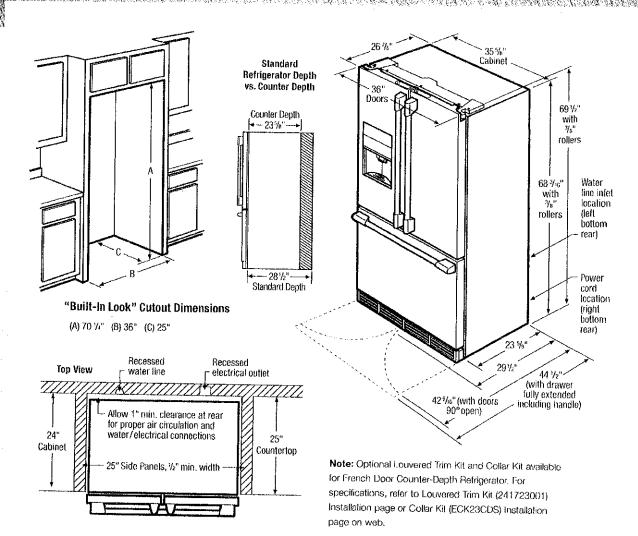

Counter-Depth French Door Refrigerator Specifications

- Product Weight 338 Lbs.
- An electrical supply with grounded three-prong receptacte is required.
 The power supply circuit must be installed in accordance with current edition of National Electrical Code (NFPA 70) and tocal codes & ordinances.
- Voltage Rating 120V/60Hz/15 or 20 Amps
- Connected Load (kW Rating) @120 Volts = 1.02kW
- Amps @120 Volts = 8.5 Amps
- Always consult local and national electric & plumbing codes.
- Floor should be level surface of hard material, capable of supporting fully loaded refrigerator;
- When installing refrigerator adjacent to wall, cabinet or other appliance that
 extends beyond front edge of unit, 20° minimum clearance recommended to
 allow for optimum 120° to 180° door swing, providing complete drawer/crisper
 access and removal. (Absolute 4-1/2" minimum clearance will ONLY allow for
 90° door swing which will provide drawer/crisper access with restricted removal.)
- To ensure optimum performance, avoid installing in direct sunlight or close proximity to range, dishwasher or other heat source.
- For proper ventilation, front grille MUST remain unobstructed.
- · Recess electrical outlet when possible.
- Water recess on rear wall recommended to prevent water line damage.
- Water Pressure Cold water line must provide between 30 and 100 pounds per square inch (psi).

- Copper tubing with 1/4" O.D. recommended for water supply line with length equal to distance from rear of unit to household water supply line plus 7 additional feet. Optional Water Supply Installation Kits available.
- · Adjustable front rollers to assist with door alignment.
- If optional Collar Kit (PN# ECK23CDS) is to be used, different cutout dimensions are required. (Refer to Collar Kit ECK23CDS Installation Specifications page on web.)
- If optional Louvered Trim Kit (PNII 241729001) is to be used, different cutout dimensions are required. (Refer to Louvered Trim Kit 241723001 Installation Specifications page on web.)

"Built-In Look" Specifications

- Minimum opening of 70-1/4"H x 36"W x 25"D required to allow for ease of installation, proper air circulation, and plumbing/electrical connections.
- Remove all wall/floor molding prior to installation.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxicon.ca for detailed instructions.

Optional Accessories

- Collar Kit (PN# ECK23CDS).
- Louvered Trim Kit (PN# 241723001).
- PureAdvantage* Water Filler Replacement Cartridge (PN# EWF01).
- PureAdvantage® Air Filter Replacement Cartridge (PN:II EAFCBF).






LOT 74.

Bulli-In Dishwasa







Signature Features



30-Minute Fast Wash Cycle Quick Wash Cycle allows you to thoroughly wash dishes in half the time.



SatelliteSpray™ Arm An innovative rotating wash zone gives you 400% more water coverage, targeting virtually every spot in your dishwasher for a truly professional-level clean.



Largest Usable Capacity Largest usable capacity in its class, so even your dinner party dishware fits.



Perfect Stemware[™] Cycle Ensures your stemware comes out spotless and clean.

PRODUCT DIMENSIONS

Height 33-3/4" - 35-3/4" Width 23-3/4"

Depth 24-1/4"

MORE EASY-TO-USE FEATURES

IQ-Touch™ Controls
For those who like to have their options always visible on their dishwasher, the IQ-Touch™ control panel displays all of your options, at all times.

Easy-Lift Adjustable Racks

Versatile racking system easily adjusts to provide the perfect place for all your dishware — no pinching, pulling, or toggling required.

Auto Wash Feature

A Smart Soil Sensor technology that determines how long the wash cycle should run, for a more effective operation.

AquaLux™ Wash System

A unique washing system that uses alternating wash arms, for a guieter and more efficient operation.

Luxury Soft Grip Racks Luxury Soft Grip Racks hold plastics and dishware in place, and prevent flipping, for a more thorough clean.

Perfect Stemware™ Grips

Six flexible grips gently hold stemware and other delicate items for a secure wash, every time.

Luxury-Glide® RacksWith our Luxury-Glide® technology, upper and lower racks are so smooth they extend effortlessly.


Sure-2-Fit® Racking System

The most versatile and adjustable racking system - there's a perfect place for over 180 items, from chopsticks to stockpots to stemware. In its lowest position, you can fit 10" dinner plates in the top rack and 12" dinner plates in the bottom.

More Cycles


With up to ten cycles — including Heavy, Normal, Fast Wash, Auto. Upper Rack Only, Eco Wash, Stemware. Rinse Only, Delicate, and "My Favourite" — you can choose the perfect wash for any occasion.

"My Favourite" SettingsA programmable setting that lots you customize the wash for your unique cleanup needs.



BUILT-IN DISHWASHER

FEATURES	
Stainless Steel Interior	Yes
Luxury-Hold* Door	Yes
Custom-Set Options	Yes
Theatre LED Lighting	Yos
Integrated IQ-Touch" Controls	Yes
LEO Indicator Lights	Yes
Tall-Tub Design	Yes
ProClean Wash System	Yes
SatelliteSpray* Arm	Yes
Luxury-Clean" Technology	Yes
Luxury-Quiot" Sound Package/(Approx. dBA)	Yes/43.0
Wash Levels	5
Aqua-Lux* Wash System	Yes
Leak-Detection System	Yes
Adjustable Rinse Aid Dispenser with Indicator	Yes
ENERGY STAR*	Yes
CYCLES	
Auto Wash	Yes
Delicate	Yes
Eco Wash	Yes
avourite	Yes
Heavy	Yes
Normal	Yes
Perfect Stemware*	Yes
30-Min, Fast Wash	Yes
Rinse Only	Yes
Upper Rack	Yes
OPTIONS	
Air Dry	Yes
NSF® Certified Sanitize Option	Yes
Delay Start	30 Min 24 Hrs.
	30 IWRI, - 24 Mrs.
RACK SYSTEM	
Sure-2-Fit ^o Rack System	Yes
Jpper Rack –	
-Adjustable Height	Yes
Cup Clips	4
Cup Shelf/Stemware Holder	2/Yes
Fold-Down Tines	4 Rows
Rack Handle	Yes
Versa-Tray	Yes
ower Rack –	
Fold-Down Tines	6 Rows
Knife Holder	Yes
Utility Tray/Shelf	Yes
Stemware/Champagne Glass Holders	4
Silverware Basket	3-Piece Split
Special Items Cover/Mesh Small Items Bag	Full Set
PECIFICATIONS	
ower Supply Connection Location	Dieler
/ater Inlet Location	Right Bottom From
eveling Legs	Left Bottom Front
Vater Usage (Gallons) - Normal Cycle	Yes
Vater Osage (Gallons) – Normal Cycle Vater Pressure (PSI)	4.0 - 8.0
	15 - 120
itegral Air Gap on Supply oftage Rating	Yes
	120V/60Hz
Connected Load RVM Dating) @ 100 Velled	

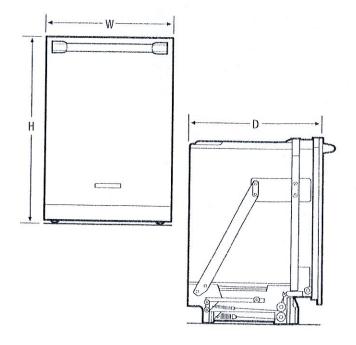


DDOBLION	
PRODUCT	DIMENSIONS
	DIMENTOIONS

łeight (Adjustable)	33-3/4' - 35-3/4"
Width	23-3/4
Depth (Including Door)	24-1/4*
(with Door 90° Open)	50-1/4"







Connected Load (kW Rating) @ 120 Volts*

From the teaching mody when EVDI, the death of closes the ring periods estimate with a superiod great date, American mean in superiods of a sub-decisional control and a few proceedings to sub-decisional control and a few tractional date, and exhibiting process. Hence to Prochect insulations Goods for the sub-decision method control and the exhibiting control and the control and t

Amps & 120 Volts Shipping Weight (Approx.)

Specifications subject to change,

1.44

9.0 115 Lbs

Printed in Canada



ELECTRIC FREESTANDING RANGE

El30EF4CQS

Featuring IQ-Touch" Electronic Controls



SIGNATURE FEATURES




FRONT CONTROL DESIGN

Effortlessly upgrade your back-control range to built-in style. This range will easily replace traditional 30" freestanding ranges.



PERFECT TASTE™ DUAL CONVECTION

For consistently delicious taste and texture, our dual-fan convection circulates air more evenly throughout the oven for an even cook. Two variable speeds work in fandem with three heating elements (bake, broil, and convection) to give you delicious results every time.



PERFECT TASTE™ TEMP PROBE

The Perfect Taste Temp Probe lets you cook each dish to perfection. It does more than measure temperature — it alerts you when food has reached the desired temperature and automatically adjusts to the Keep Warm setting, so you never overcook your food and deliver perfect results every time.



FLEX-2-FIT® HEATING ELEMENTS

Automatically expands up to three sizes, giving you precision and control with a variety of cookware.

PRODUCT DIMENSIONS

 Height
 36-1/8" - 36-5/8"

 Width
 29-7/8"

 Depth (including handle)
 28-31/32"

MORE EASY-TO-USE FEATURES

WARMER DRAWER

Maintain the perfect temperature of your food until serving time.

EASY-TO-CLEAN COOKTOP SURFACE

Smooth glass cooktop makes cleanup a breeze.

A LUXURY-GLIDE® OVEN RACK

With a ball bearing system, the oven rack is so smooth it extends effortlessly so you can more easily manage the transfer of all dishes, even heavy ones.

PLATINUM STAR® LIMITED WARRANTY

Our exclusive limited warranty that includes 3-year coverage on parts and one year on labor!.

CONVECTION CONVERSION

Automatically adjusts standard baking temperatures to convection temperatures, for perfect, consistent results.

6 COOKING MODES

Bake, Broll, Convection Bake, Convection Roast, Keep Warm and Slow Cook.

KEEP WARM SETTING

Maintain food at the perfect serving temperature with this setting — it's a great feature when you're entertaining. Additional warming zone on cooktop allows for ultimate flexibility.

IQ-TOUCH™ CONTROLS

The IQ-Touch™ control panel displays all of your options, at all times.

Available in:




ELEMENT	WATTS
6 to 9 to 12" Triple Expandable Element	1;200/2,000/3.000
9" Electric Element	3,200
6" Electric Element	1.200
6" Electric Element	1,200
Warming Zone	100

"Efigibility hased on product registration with Electrotox North America within 60 days of purchase. Products mus have been purchased on or after July 1, 2013. Constage mesodes straterist sads for 3 years and labor for 1 year

ELECTRIC FREESTANDING RANGE



30" ELECTRIC FREESTANDING RANGE	
CONTROL PANEL FFATURES	and the second production of the control of the con
C-Touch" Electronic Oven Control	
Professional-Grade Element Controls	Yes
Keypad Entry of Timo & Temperature	Yeş
Electronic Clock & Timer	Yes
Temperature Display	Yes
Automatic Oven (Delay, Cook & Off)	Yes
	Yos
COOKTOP FEATURES	
Flex-2-FH* Ceramic Gloss Smoothiop	1
6 to 9 to 12" Triple Expandable Flement 1,200W/2,000W/3,000W	1
9" Electric Element 3,200W	
6" Electric Element 1,200W	2
Warming Zone - 100W	Yes
OWEN PERTURNA	
OVEN FEATURES	-
Capacity	4.6 Cu, F1
Hidden Bake Element	Yes
Eight-Pass Gake Element – 2500 Watts	Yes
Eight-Pass Broil Hement - 4000 Walts	Yes
Convection Element - 2500 Watts	Yes
Cobalt Blue Interior	Yes
Solf-Clean Options with Door Lock	Yes
Porfect Taste" Convection	Yes
Cooking Modes – Bake, Broll, Convection Bake, Convection Roast, Keep Warm, Slow Cook	6
Temperature Probe, Delay Bake, Convection Convert	3
Luxury-Design® Lighting with Dual 40W Halogen Bulbs	Yes
Luxury-Glide® Rocks	1
Conventional Racks	
Convection Roasting Rack	
the state of the s	mandada and gamera in garagement is believed
AUDITIONAL FEATURES	
Luxury-Hold" Oven Door	
Extra-Large Glass Window	Yes
Warmer Drawer	Yes
Adjustable Leveling Legs	Yes
Sabbath Mode (Star-K3 Certified)	Yes
ACCESSORIES	
Meat Probe	And the state of t
Statoless Steet Backguard - PN # A02535501	Included
	Optional
SPECIFICATIONS	
Colori -	
Stainless Steel	· · · · · · · · · · · · · · · · · · ·
Power Supply Connection Localien	Right Boltom Rear
Connected Load (kW Baling) @ 2407208 Volts	13.8/10.4
Amps @ 240/208 Volts	57,5 / 50
Minimum Circuit Required (Amps)	40
Shipping Weight (Apprex.)	245 Lbs.
Marie Always coroun local and and and ask leading codes. Note: to drawer harmonics assess	43 F02
MOTO Alreage consult least and and action leaving codes. Hater to increase their literature fluids for delated excludings and method on action fluid and action fluid and action fluid and action fluid action for a fluid flui	

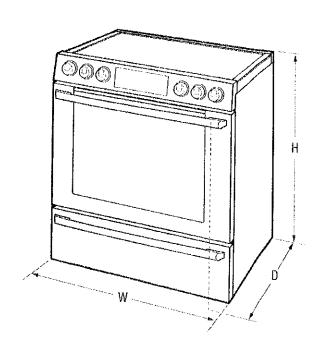

Hölyht (Adjúslab)	e)		36-1/8" - 36	5/8"
Width		 	29-7/8"	
Depth (including (with 90°)	handle) Xoor Open)	 	28-31/32" 46"	
JVEN CAVITY	DIMENSIONS	 		
leight		 - Terrend States and Australia	17-1/2"	
Vidth		 	24-1/8"	
Depth		 	18-3/4"	






FRONT LOAD WASHERS

5.0 Cu. Ft.

Perfect Steam " Washer with LuxCare" Wash and IQ-Touch " Controls







SIGNATURE FEATURES



PERFECT STEAM™ REMOVES TOUGH STAINS

Unlike many washers, our Perfect Steam™ rises from the bottom, gently lifting dirt and stains from fibers.



THOROUGH CLEANING WITH LUXCARE™ WASH SYSTEM Our LuxCare™ Wash System offers a

Our LuxCare" Wash System offers a thorough clean with improved wash actions, temperature control, and smart load sensing.



18-MINUTE FAST WASH!

Quickly deep cleans the items you need most,



SANITIZE OPTION

Certified to kill and remove 99% of bacteria and 95% of allergens?

EFLS517S TT/IW

PRODUCT DIMENSIONS

Height 38"
Width 27"
Depth 32"

MORE EASY-TO-USE FEATURES

STAINTREAT" II OPTION REMOVES SET-IN STAINS

Optimizes the temperature, tumbling actions, and cycle time based on the stain you select.

ENERGY STAR®-CERTIFIED MOST EFFICIENT

Electrolux washers meet strict criteria to guarantee high-quality energy efficient performance —- without sacrificing clean.

10-YEAR MOTOR WARRANTY PLUS LIFETIME TUB WARRANTY

Rest easy knowing your washer is backed by a 10-year motor and lifetime tub warranty.

PERFECT BALANCE® SYSTEM & SECOND FLOOR GUARANTEE

Balances loads for smooth, quiet operation. So quiet you can even run your washer on the second floor or near bedrooms without noticing it. 3

FRESH WATER RINSE REMOVES RESIDUAL DETERGENT

We use fresh water in our final rinse to ensure more detergent is removed, which is gentler on sensitive skin and provides better fabric care.

FITS MORE ROOMS WITH REVERSIBLE WASHER DOOR

With reversible washer door, four-way venting, and a standard 27" platform, our products are designed to fit just about anywhere you want to put them.

SPACIOUS CAPACITY

Easily cleans a king-sized comforter with specious 5.0 cu.ft. drum.

EXTENDED REFRESH OPTION

Adds a rinse and spin after the wash cycle to keep garments fresh until you can switch them to the dryer.

9 CYCLES TO CARE FOR EVERY FABRIC

Clean all your special items with tailored cycles for delicates, heavy duty, whitest whites, and more.

Available in:



(III) (IW)


The products men he life * losting standards 'As feeled on communical most they constitute with rangitum covering.

FRONT LOAD WASHERS

EFLS5178 TT/IW




Capacity	5.0 Cu FL
FEATURES	
Pull-to-Open Door	Yes
10-Touch Controls	Yas
Perfect Steam** Wash System	Yes
Balance System	I Van Materia and a series and
Sound System	Perfect Balance ³
	Luxury-Opict**
Lighting	Luxury-Design*
Pull-to-Open Dispenser Drawer	Yes
Wash System	LuxCare**
inlegral Water Heater	Yos
Wash Dunn	Stainless Steel
Automatic Temperature Control	Yes
Automatic Water Level Adjustment	Yes
Auto Prevash Detergent Dispenser (Liquid / Powder)	Yes
Auto Bleach Dispenser (Liquid Only)	Yes
Auto Delergent Dispenser (Liquid/Powder)	
Auto Cobrio Colleges (Secure Constant)	Yes
Auto Fabric Softerer Dispenser (Liquid Only)	Yes
Tumble Speed (RPM)	Variable
Spin Speed (RPM)	1,300
Reversible Door	Yes
Adjustable Leveling Legs	Yes
ENERGY STAR [®]	Most Efficient
NSP* Certified/Senitize	Yes
the state of the s	
CYCLES	
leavy Duly, Whitest Whites, Normal, Casual, Colours, 18-Min. Fast Wash, Delicales, Binsa & Spin, Clean Washer	9
PITIONS	***************************************
Wash/Rinse Temperature Combinations	
Temperatura Soloctions	
Add Steam	
Spin Speed Selections	Yes
	5
Soil Lavel Selections	5
Delay Start	Yes
nd-of-Cycle Claime	On/Off
NSTALLATION OPTIONS	ting to the second of the second seco
	en de de la companya del la companya de la companya
reestanding, Under Counter*, Stacked (Under Dryar), redestal, Hidden (In Closet), Second Filor	Yes
ACCESSORIES	er anders and a significant designation of
The state of the s	armenter of the second section of the section of the second section of the section of the second section of the
uxury-Gide* Pedestal with Spanious Storage Drawer-	
uxury-Glide* Pedestal with Spacieus Sterage Drawer- Titanium - PN# EPWD1578TT Island White - PN# EPWD1578tw	Optional
uxury-Gide" Pedestal with Spacious Storage Drawer- Titonium - PNA EPWD15781T Island White - PNA EPWD15781T Duc Startino Kit - PNA ETACOUTS	Optional
ryer Stacking Kit - PN# STACKIT7X	Optional Optional
ryer Stacking Kit - PN# STACKIT7X	Optional
ryw Stacking Kit – PN# STACKIT7X rain Hose Extonsion Kit – PN# 137698000	Optional Optional
ryur Stacking Kit - PH# STACKIT7X rain Hose Extonsion Kit - PH# 137698000 PECIFICATIONS	Optional Optional
ryu Stacking Kii - PN # STACKITX rain Nose Extonsion Kii - PN # 137698000 PECIFICATIONS Diote -	Optional Optional Optional
ryur Stacking Kü – PH & STACKITX roin Hose Extonsion Kii – PH # 137698000 PECIFICATIONS olour – Tifacium	Optional Optional Optional TT
ryur Stacking Kü – PH # STACKITX rain Hese Extonsion Kü – PH # 137698000 PECIFICATIONS olour – Tifanium Island White	Optional Optional Optional
ryur Stacking Kii – PN # STACKITX rain Rose Extonsion Kii – PN # 137698000 PECHECATIONS olour – Titacium island White ower Supply Location	Optional Optional Optional TT
ryer Stacking Kü – PH & STACKITX rain Hose Extension Kü – PH # 137698000 PECHFICATIONS olou – Titacium Island While ower Supply Location after Inlet Location	Optional Optional Optional Optional II W Top Right Rear
ryer Stacking Kü – PH & STACKITX rain Hose Extension Kü – PH # 137698000 PECHFICATIONS olou – Titacium Island While ower Supply Location after Inlet Location	Optional Optional Optional Optional II W Top Right Rear Top Left Rear
ryur Stacking Kil – PH # STACKIT7X roin Hose Extonsion Kit – PH # 197698000 PECIFICATIONS olotu – Tifanium Island White ower Supply Location after Intel Location Islang Rating	Optional Optional Optional TI NY Top Right Rear Top Left Rear 120V/601tz
ryter Stacking Kii – PH # STACKITX roin Hose Extonsion Kii – PH # 197698000 PECIFICATIONS olour – Trianium Island White ower Supply Location after inlet Location olitage Rating onnected Local (kW Rating) (% 120 Volts*	Optional Optional Optional TT NY Top Right Hear Top Leff Rea 120V/60Hz 1.2
rger Stacking Kit – PN # STACKITX rain Rose Extonsion Kit – PN # 137698000 PECIFICATIONS olou – Titaoium Istand White over Supply Location after inlet Location Juliage Rating onnected Locat Rely Rating) © 120 Volts* alis © 120 Volts	Optional Optional Optional TI W Top Right Hear Top Leff Rear 120V/60 Hz 1.2 1.200
ryer Stacking Kii — PN # STACKIT7X roin Hose Extension Kii — PN # 137698000 PECHFICATIONS olour — Titacium Island While ower Supply Location after Inlet Location ollage Rating onnected Loca (w/ Rating) @ 120 Volts' aris @ 120 Volts ups @ 120 Volts	Optional Optional Optional Optional TI IN Op Right Rear Top Right Rear Toy Leff Rear 120V/60Hz 1.2 1.200 12
Island White ower Supply Location After Inlet Location stage Rating onnected Loca (RW Rating) @ 120 Volls' alis @ 120 Volls upps @ 120 Volls uppsing Weight (Approx.)	Optional Optional Optional TI NV Top Right Rear Top Leff Rear 120V/60 Hz 1.2 1.200
ryur Stacking Kil – PH # STACKIT7X rain Hose Extonsion Kit – PH # 137698000 PECIFICATIONS olotu – Tifanium Island White ower Sugay Location itater Inlet Location itage Rating omeeted Load (kW Rating) (6) 120 Volts' allis (6) 120 Volts ups (9) 12	Optional Optional Optional Optional TI W Top Right Rear Top Left Rear 120V/60Hz 1.2 1.200 12 230 Lbs.
ryur Stacking Kil – PN # STACKITX roin Hose Extension Kil – PN # 137698000 PECIFICATIONS olour — Titanium island While wer Supply Location atter Inlet Location diage Rating onnecled Location atter (lot Location atter (lot Location diage Rating onnecled Location atter (lot Location diage Rating onnecled Location diage Pating onnecled Location atter (lot Location diage Pating onnecled Location atter (lot Lo	Optional Optional Optional Optional TI W Op Right Bear Top Right Bear Top Leff Bear 120V/601tz 1.2 1.200 12 2.330 Lbs.
ryer Stacking Kii – PH & STACKIT7X roin Hose Extension Kii – PH & 137698000 PECIFICATIONS olour – Titanium island White ower Supply Location after Inlet Location ollage Rating onnecled Loca (kW Rating) © 120 Volts' anis@ 120 Volts ups © 120 Volts ups © 120 Volts ipping Welght (Approx.)	Optional Optional Optional Optional TI W Top Right Rear Top Left Rear 120V/60Hz 1.2 1.200 12 230 Lbs.

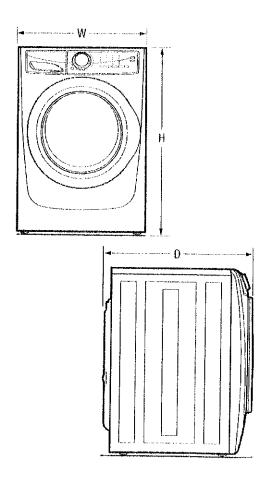

PRODUCT DIMENSIONS	
Heigill (without 15" Pedestal) (with 15" Podestal)	38" 53-1/4"
Width	ATT
Depth (to Centre of Arc Nat Including Hase) (with Door 90° Open)	32" 53-1/2*
The state of the s	And the second s

15" Pedestal Drawer Installation

Elevates washer height to 53 %? For detailed pedestal installation, refer to instructions included with pedestal or on web. Pedestal Installation may require modified utility hookup locations. For details, refer to Product Installation Guide on web.



	*
Side	15 %
Overall depth with drawer fully extended - 42 95"	









ELECTRIC FRONT LOAD DRYERS


8.0 Cu. Ft.

EFMC517S TT/IW

Perfect Steam™ Dryer with Instant Refresh™ and IQ-Touch™ Controls



SIGNATURE FEATURES




INSTANT REFRESH™ CYCLE **REVIVES FABRICS**

Remove wrinkles and quickly refresh items with steam in 10 minutes.



KEEPS CLOTHES LOOKING THEIR BEST

Clothes are gently tumbled while moisture sensors detect when clothes are dry to prevent over-drying. Customizable options and cycles allow you to care for every fabric.



18-MINUTE FAST DRY Quickly dry the items you need most.



ENERGY STAR®-CERTIFIED

Rigorously tested to do more with less. Electrolux dryers meet strict criteria to guarantee high-quality energy efficient performance.

PRODUCT DIMENSIONS

Height

38

Width

27"

Depth

31-5/8"

MORE EASY-TO-USE FEATURES

PERFECT STEAM™ WRINKLE RELEASE OPTION

Gently releases wrinkles and reduces static to keep clothes looking their best.

EXTENDED TUMBLE OPTION KEEPS CLOTHES TANGLE-FREE

Gently tumbles your clothes without heat to keep them tangle-free — perfect for when you cannot remove clothes right after the cycle ends.

LARGEST CAPACITY DRYER

Dry more in each load. Our 8,0 cu,ft. dryers have the largest capacity for a standard 27" platform.²

PLATINUM STAR® LIMITED WARRANTY

Our exclusive limited warranty that includes three-year coverage on parts and one year on labour.3

8 CYCLES TO CARE FOR EVERY FABRIC

Perfectly dry every item with tailored cycles for towels, delicates, and more.

REVERSIBLE DOOR FITS MORE ROOMS

Enjoy easy loading no matter how your washer and dryer are configured.

OPTIONAL PEDESTALS AND STACKING KIT FOR MORE INSTALLATION OPTIONS

Raise your units with optional pedestal drawers that provide extra storage, Or use the optional stacking kil for convenient placement in small spaces.

LUXURY-DESIGN® LIGHTING

Conveniently find any article of clothing with premium LED lighting that provides visibility inside your dryer.

BRILLIANT LED DISPLAY SHINES IN EVEN THE DARKEST LAUNDRY ROOMS

Our beautifully bright display illuminates information on cycles and lets you know how much time is left.

Available in:





Titanium

Island White

Fast trave based on 3 fb. DDE load.


Based on manufacturer specifications arreng common 27° plotforms

Eligibility based on product registration with Electrolica North Americas within 60 deps of policinase. Products usual base based punctussed on or acter than 1, 2013. See tendent wavenuty for decide.

ELECTRIC FRONT LOAD DRYERS




Capacity	8.0 Cu.Ft,
FEATURES	
Pull-to-Open Door	Yes
(Q-Touch" Controls	Yes
Perfect Steam ** Dry System	Yes
Dry Sysiam	
Sound System	Luxury-Dry *
Lighting	Luxury-Quiet"
Tumble System	Luxiny-Design*
Moisture Sensor	Geotle Tumble
and another references and project the result of the second section of the second second second second second	Yes
Oryer Drum	Stainless Steel / Painted Strel
Tumble Speed (RPM)	50.
Reversible Door	Yes
Adjustable Leveling Legs	Yes
ENERGY STARP	Yes
NSF® Certified/Sanifizo	
	للمالية والرجوع المستحدث فتنصب
CYCLES	
Timed Dry (30, 45, 60, 75), Heavy Duty, Towels, Normal, 18-Min, Fast Dry, Casual, Deficates, Instant Actiesh'''	
1B-Min, Fast Dry, Casual, Defeates, Instant Refresh"	8
OPTIONS	
Temperature Selections	
Add Steam	
	Yes
lectronic Auto Dry System	Yes
Manual Timed Dry Selections	4
Delay Slart (Hours)	12
nd-of-Cycle Chline	On/Oll
Extended Tumble	Yes
Inti-Static	Yos
ine Dry	Yes
Shrink Guard	Yes
Dryness Levels	5
LIPTER ATTENT CONTINUES	The second secon
NSTALLATION OPTIONS	et transmission and administration of the control o
reestanding, Under Counter*, Stacked (Ahove Washer), edestal, Hidden (In Closet), Second Floo:	Yes
Cocessiv Linders for Closest Vescolid Flods	
-Woy Dryer Venting	Yes
ACCESSORIES	
UXBLY-fillidet Pedestal with Spanison Stores Demos	
uxiny-Gilde ^s Pedestal with Spacieus Storage Drawer- Tilonium - PNE EPWD157517 Island While PNE EPWD1575IW	Optional
Island White PN II EPWD157SIW	Optional
ryer Stacking Kit PN# STACKIT7x	Optional
rying Rack - PN# A04840701	Optional
PECHICATIONS	
olour -	
Titanium	Π
Island White	ſŴ
aximum Exhaust Duct Length** (Ft.)	125
ower Supply Connection Location	Rear
ollege Rating	240V/60Hz/30A
onnected Load (kW Rating) @ 240 Volts	the street of the Contract of
	6.0
nos @ 240 Valls	25
tips @ 240 Volls	
nps @ 240 Volls Pabing Element @ 240 Volls (Watts)	5,400
nps @ 240 Volts sabing Bement @ 240 Volts (Watts) Ipping Wolght (Apprex.)	141 Lbs.
nps @ 240 Volls alung Hemert @ 240 Volls (Watts) lipping Wolght (Apprex) dide by Side was in crafts mouter instruction receive cursors from complete.	141 Lbs
nps @ 240 Volts sabing Bement @ 240 Volts (Watts) Ipping Wolght (Apprex.)	T41 Lbs. endin cappely of rents

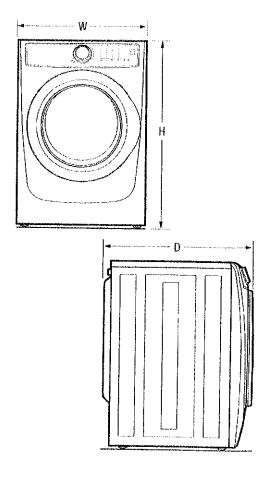


PRODUCT DIMENSIONS		**	
Height (without 15" Pedestal) (with 15" Pedestal)		38" 53-1/4"	
Width		27"	
Depth (to Centre of Arc Not Incl. (with Oner 90° Open)	rðing Hase)	31-5/8" 53-1/2"	

15" Pedestal Drawer Installation

Elevates dryer height to 53 ¼." For detailed pedestal installation, refer to instructions included with pedestal or on web. Pedestal Installation may require modified utility hookup locations. For details, refer to Product Installation Guide on web.









Electrolux Major Appliances, N.A.