

36" GAS RANGE - 6 BURNERS

GR366

FEATURES

- 6 dual-stacked, sealed burners
- Dual-stacked, sealed burners for higher highs, lower lows
- Convection oven for faster, more consistent cooking
- Infrared broiler inside oven sears quickly and evenly
- Heavy-gauge stainless steel
- Enhanced views into oven
- Rigorously tested in our U.S. manufacturing facilities for decades of use
- Exceptional 24/7 support from our Customer Care team in Madison
- Signature red infinite control knobs
- Continuous cast-iron grates for easy movement of pots and pans
- Spark ignition system re-ignites if flame goes out
- Adjustable legs for stability, plus rear casters


ACCESSORIES

- Stainless Steel Kickplate
- Bake stone kit (stone, rack and peel)
- Stainless steel, brass or chrome bezels
- High altitude conversion kit
- Full-extension easy glide oven rack
- Cast iron S-grates and wok grate
- Stainless steel kickplate
- Signature red, black or stainless steel control knobs
- Front leg covers
- 5" and 10" stainless steel risers, and 20" riser with shelf

Accessories available through an authorized Sub-Zero dealer.
For local dealer information, visit subzero-wolf.com/locator.




*Ally
Qian
Nub
Lot 30*

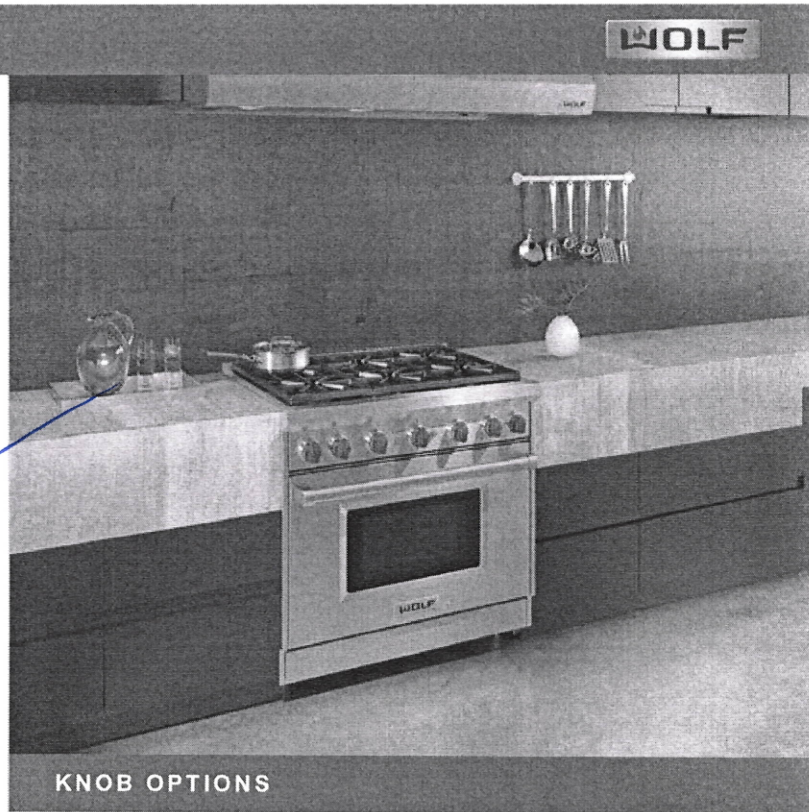

KNOB OPTIONS



TOP CONFIGURATION



RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 5 - 15,000 Btu Burners


*Nub
Lot 30*

*check
cavity
side by
side*

PRODUCT SPECIFICATIONS


Model	GR366
Dimensions	35 7/8"W x 37"H x 28 3/8"D
Oven 1 Interior Dimensions	30"W x 18 5/8"H x 17"D
Oven 1 Usable Capacity	3.7 cu. ft.
Oven 1 Overall Capacity	5.5 cu. ft.
Door Clearance	19 1/2"
Weight	470 lbs
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female
Receptacle	3-prong grounding-type

DIMENSIONS

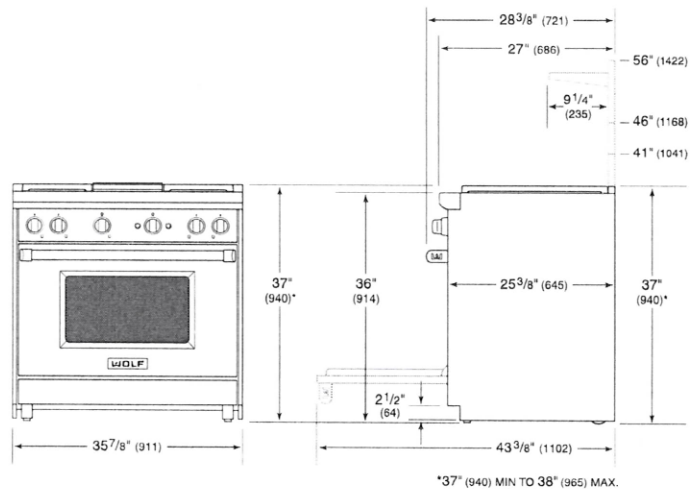


STANDARD INSTALLATION

ELECTRICAL




GAS



NOTE:

Dimensions in parenthesis are in millimeters unless otherwise specified

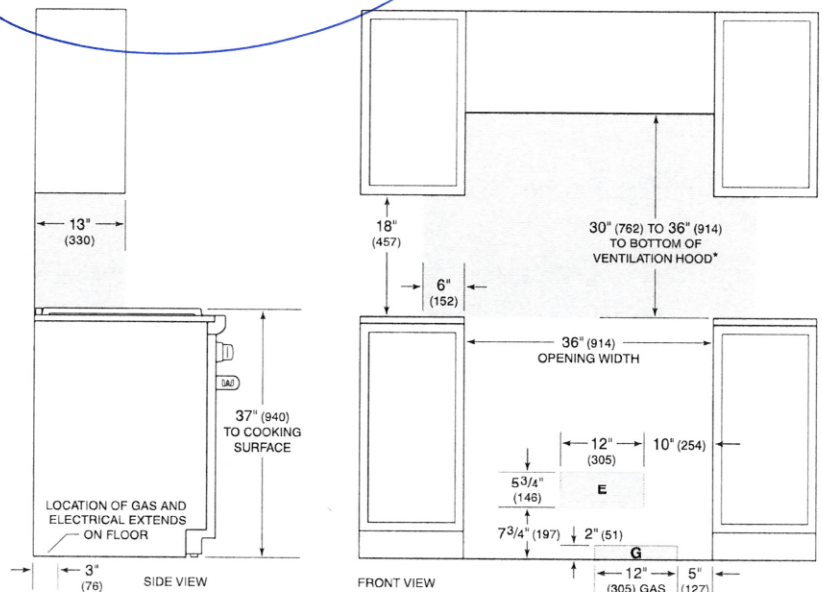

*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler requires non-combustible materials.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.

LG REFRIGERATION

LFXC24796_

24 cu.ft. InstaView™ Door-in-Door® Refrigerator

23.5 cu.ft.

InstaView™ Door-in-Door® with ColdSaver™ Panel

Slim SpacePlus® Ice System

3 SpillProtector™ Tempered Glass Shelves / 1 Folding Shelf

2 Crispers/1 Bonus Drawer

7 Door Bins (including Door-in-Door®)

DuraBase™ Solid Freezer Drawer Base

Glide N' Serve® Drawer

Smart Cooling Plus System

10 Year Limited Manufacturer's Warranty on Linear Compressor



Fresh Air Filter, Dual Evaporators, Multi-Air Flow

SmartDiagnosis™ System

Wi-Fi Enabled (Smart Grid Available)

ENERGY STAR® Qualified

Available in Black Stainless Steel & Stainless Steel

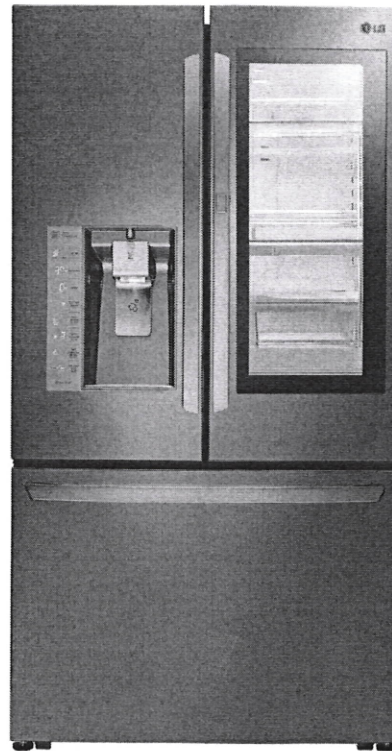

CAPACITY

Refrigerator	15.60 cu. ft.
Freezer	7.90 cu. ft.
Total	23.5 cu. ft.

FEATURES

InstaView™ Door-in-Door® w/ ColdSaver™ Panel	• (w/ Glass Panel)
ENERGY STAR® Qualified	• (716 kWh/Year)
Ice & Water Dispenser	•
Dispenser Type	Integrated Tall Ice & Water Dispenser®
Ice System	Slim SpacePlus®
Daily Ice Production	4.5 lbs
Ice Storage Capacity	3.0 lbs + 2.5 lbs
Water Filtration System	Compact Filter LT1000P
Smart Cooling Plus® System	•
Multi Air Flow Cooling	•
Temperature Sensors	8
Linear Compressor	•
Fresh Air Filter	•
Dual Evaporator	•
Display Type	Smooth Touch Control (White LED)

CONVENIENCE

Temperature Controls	Electronic/Digital
Door Alarm	•
Child Lock	•
LoDecibel™ Quiet Operation	•
SmartDiagnosis™	•
Auto Closing Door Hinge	•

REFRIGERATOR

No. of Shelves	4 Split (3 Fixed/1 Folding)
Folding Shelf	•
Cantilevered Shelves	•
Shelf Construction	SpillProtector™ Tempered Glass
Crisper Bins	2 Humidity Crispers/1 Bonus Drawer
Glide N' Serve® Drawer	•
Refrigerator Light	Premium LED (Ceiling and Side)

REFRIGERATOR DOOR

No. of Shelves/Bin	7 Total (Including Door-in-Door®)
Door Bin Construction	3 Piece (Clear+Opaque+Spray Deco)
Dairy Corner/Bin	•

FREEZER

Door Type	Pull Drawer
Handle	SmartPull® Freezer Handle
DuraBase™ Solid Drawer Base	•
Drawer Divider	•
Ice Bin	1 Extra Ice Bin
Freezer Light	Premium LED

MATERIALS AND FINISHES

Contour Door	•
Hidden Hinges	•
Surface	Coated Metal
Back	Flush & Metal Cover Over Mechanical Parts
Available Colors	Black Stainless Steel (D), Stainless Steel (S)
Handles	Matching Commercial Handles

DIMENSIONS/CLEARANCES/WEIGHTS

Depth with Handles	30 7/8"
Depth without Handles	28 3/8"
Depth without Door	24 1/8"
Depth (Total with Door Open)	42 3/4"
Height to Top of Case	68 7/8"
Height to Top of Door Hinge	70 1/4"
Width	35 3/4"
Width (Door Open 90° with Handle)	44 1/4"
Width (Door Open 90° without Handle)	40"
Door Edge Clearance with Handle	4 1/4"
Door Edge Clearance without Handle	2 1/8"
Installation Clearance	Sides 1/8", Top 1", Back 2"
Weight (Unit/ Carton)	333 lbs / 383 lbs.
Carton Dimensions (WxHxD)	38" x 73" x 33"

LIMITED WARRANTY

1 Year Parts and Labor, 7 Years on the Sealed System, 10 Years on Linear Compressor

UPC CODES

LFXC24796D Black Stainless Steel	048231 787680
LFXC24796S Stainless Steel	048231 788847

ESSENTIALS


CYCLONE

UNDER-CABINET


Modern, clean lines provide a perfect complement to any interior, while centrifugal blowers liquefy cooking residue without complex filters to make clean up a snap. Available in black, white, stainless steel and black stainless finishes.

ZEPHYR


ZEPHYRONLINE.COM

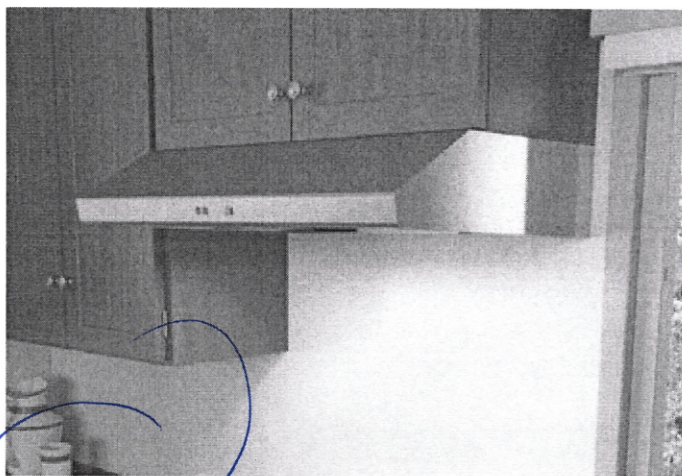


Stainless Steel

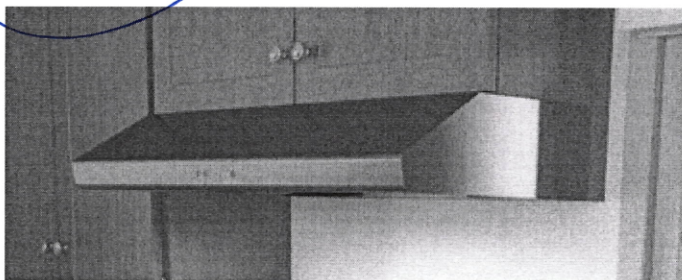



Black Stainless

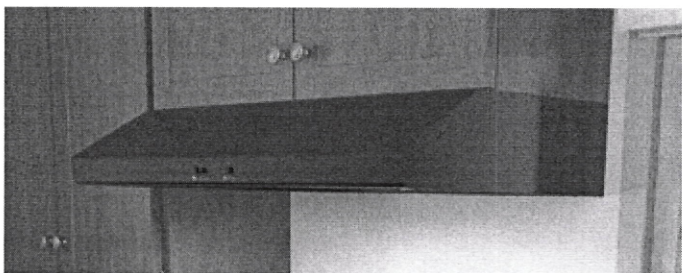


Black

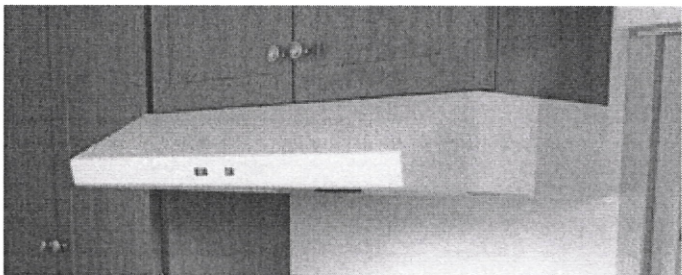

White

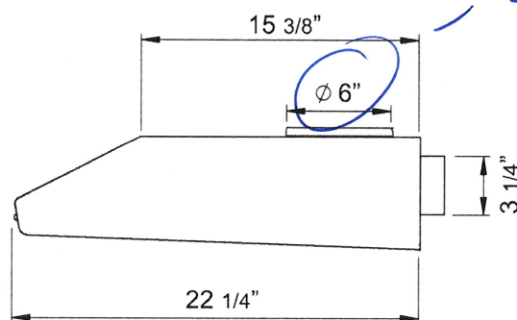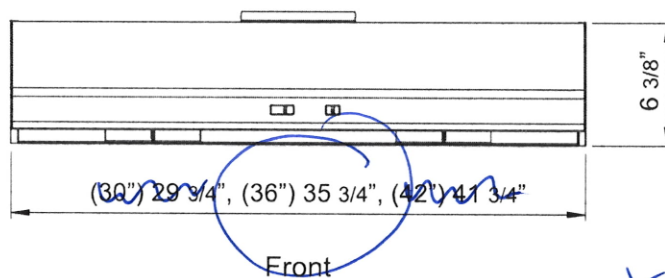

Side

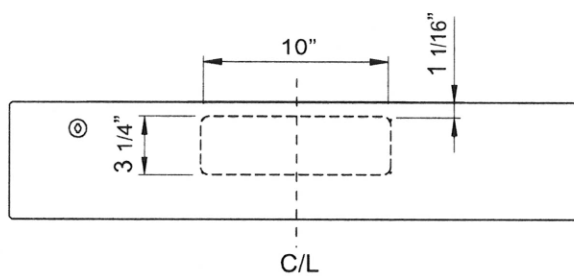


Back

MODEL			
Black	AK6500BB	AK6536BB	
White	AK6500BW	AK6536BW	
Black Stainless	AK6500BBS	AK6536BBS	
Stainless Steel	AK6500BS	AK6536BS	AK6542BS
Size	30" (29-3/4")	36" (35-3/4")	42" (41-3/4")
Blower CFM (Min. - Max.)	290 - 600	290 - 600	290 - 600
Sones (Min. - Max.)	1.5 - 5	1.5 - 5	1.5 - 5
FEATURES			
Controls	Mechanical Slide	Mechanical Slide	Mechanical Slide
Speed Levels	3	3	3
Auto Delay-Off	No	No	No
Lighting	Halogen, 35W x2	Halogen, 35W x2	Halogen, 35W x2
Dual-Level Lighting	Yes	Yes	Yes
Removable Safety Grilles	2	2	2
Recirculating Option	No	No	No
Self Cleaning	Yes	Yes	Yes
DUCT SPECIFICATIONS			
Vertical Internal Blower	6" Round or 3-1/4" x 10"	6" Round or 3-1/4" x 10"	6" Round or 3-1/4" x 10"
Horizontal Internal Blower	3-1/4" x 10"	3-1/4" x 10"	3-1/4" x 10"
AC POWER	120V, 60Hz at Max. 2.4A	120V, 60Hz at Max. 2.4A	120V, 60Hz at Max. 2.4A
OPTIONAL ACCESSORIES			
Bloom™ GU10 LED	Z0B0040	Z0B0040	Z0B0040
Make-Up Air Kit	MUA006A	MUA006A	MUA006A
Damper, 6" Round	AK00066	AK00066	AK00066
MOUNTING HEIGHT RANGE*	24" - 32"	24" - 32"	24" - 32"
WARRANTY	10 years parts, 1 year labor		

*Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

KitchenAid®

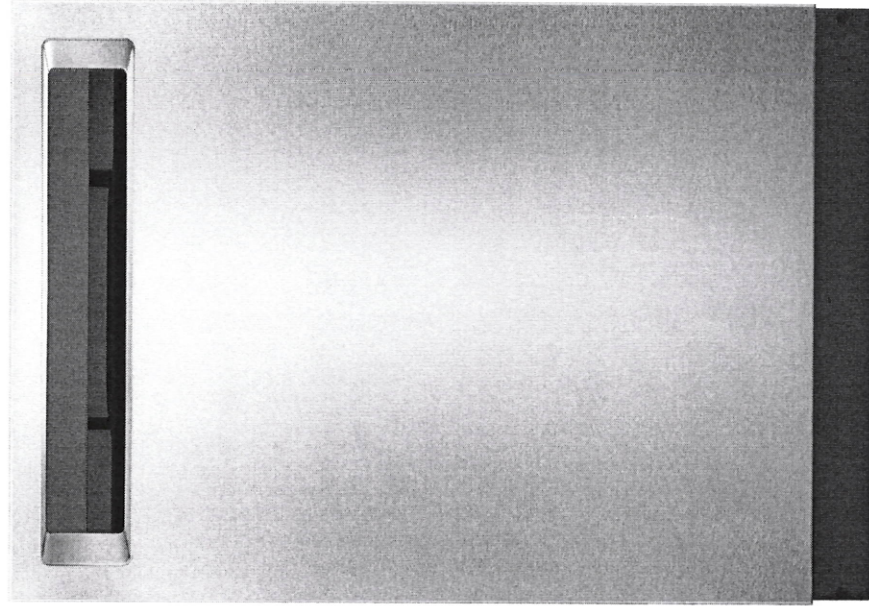

46 DBA Dishwasher with Third Level Rack and PrintShield™ Finish, Pocket Handle

★★★★★ 4.7 (49)

[Write a review](#)

Open the pocket handle of this beautiful dishwasher and discover features that take clean to new heights, like a Third Level Rack that makes it easy to clean hard-to-place items. The ProWash™ Cycle delivers exceptional results by making real-time cycle adjustments. PrintShield™ Finish resists fingerprints outside while the stainless steel interior and Heat Dry help improve drying performance.

AVAILABLE COLOR OPTIONS



PrintShield Stainless - KDPE234GPS

FEATURES

Third Level Rack

Adds 35% more space¹ and makes it easier to clean long and flat cooking tools like spatulas and serving utensils, as well as items like food processor blades and mixer beaters, while freeing up space in the lower two racks.


PrintShield™ Finish

Resists smudges and fingerprints. The specialized coating for stainless steel is easy to clean with just water and a soft cloth, so you can spend more time cooking and less time cleaning up the kitchen.


ProWash™ Cycle

Determines the ideal cycle for washing dishes based on soil level and then makes real-time adjustments to achieve the best cleaning performance.

Product and Cabinet Opening Dimensions

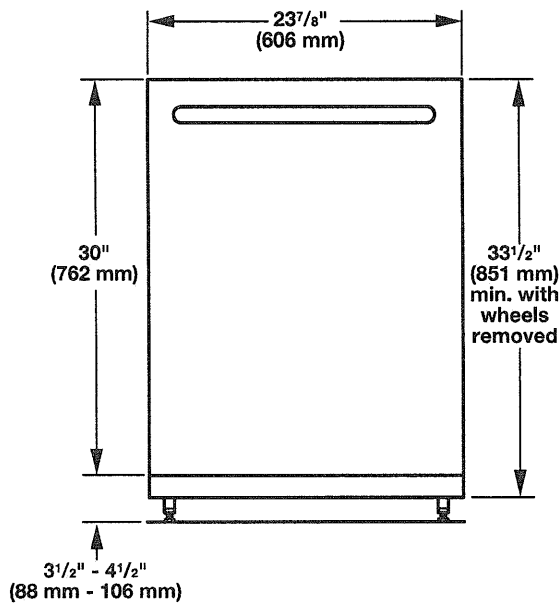

For 4" (100 mm) toe kick, height of cabinet opening is $34\frac{1}{2}$ " (863 mm).

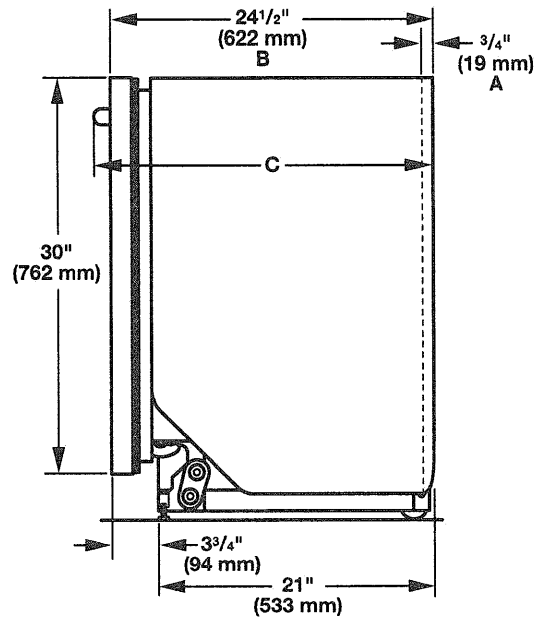


A. Insulation may be compressed (not used on all models).

B. For panel-ready models, dishwasher depth is 24" (610 mm), not including the $\frac{3}{4}$ " (19 mm) custom door panel.

C. Door handles may protrude forward of the face of the dishwasher, varies by model.

Check that all surfaces have no protrusions that would prohibit dishwasher installation.

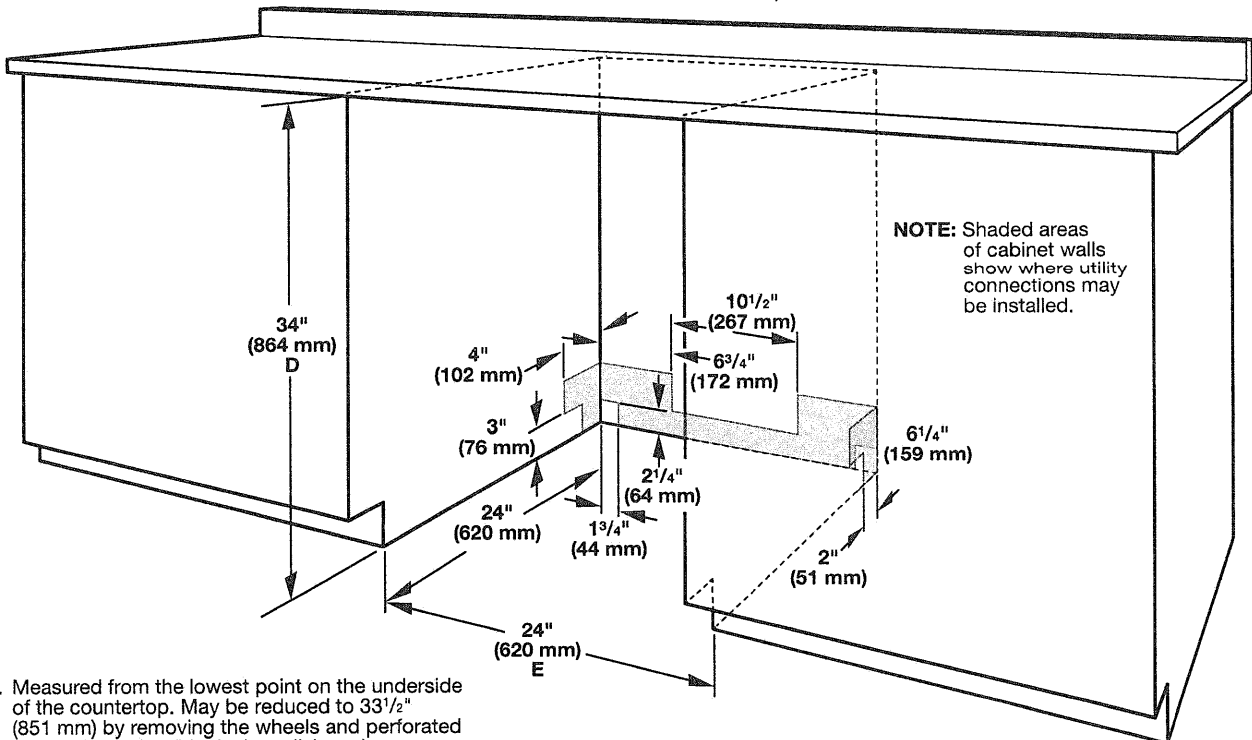

D. Measured from the lowest point on the underside of the countertop. May be reduced to $33\frac{1}{2}$ " (851 mm) by removing the wheels and perforated area of insulation (blanket) on dishwasher.


E. Minimum, measured from narrowest point of opening

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/IAPMO test standards, is resistant to heat and detergent, and fits the 1" (25 mm) drain connector of the dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: Do not connect multiple drain hoses together.

- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (508 mm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (508 mm) above subfloor or floor.

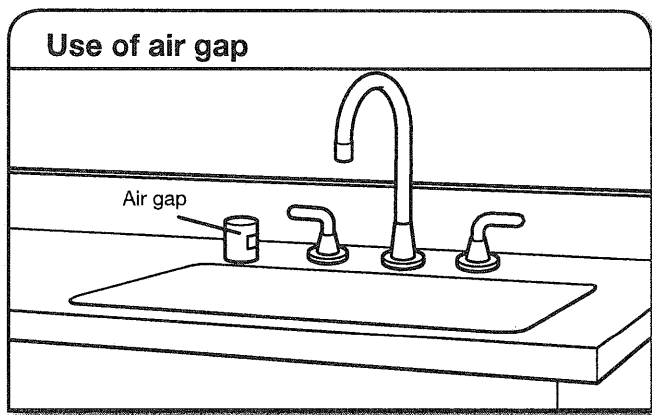

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
- A hot water line with 20 to 120 psi (138 to 862 kPa) water pressure can be verified by a licensed plumber.
- 120°F (49°C) water at dishwasher
- 3/8" O.D. copper tubing with compression fitting or flexible braided water supply line. See the "Tools and Parts" section at the front of the guide for part details and orders.

NOTE: 1/2" minimum plastic tubing is not recommended.

- A 90° elbow with 3/4" hose connection with rubber washer. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Do not solder within 6" (152 mm) of the water inlet valve.
- If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line (see the "Tools and Parts" section at the front of the guide for part details) and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471

You Must Have:


- 120-volt, 60 Hz, AC-only, 15- or 20-amp, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker
- A separate circuit

If Connecting Dishwasher with a Power Cord:

- Use UL Listed power cord kit marked for use with dishwasher. See the "Tools and Parts" section at the front of the guide for part details and orders.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.




If Connecting Dishwasher with Direct Wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief. See the "Tools and Parts" section at the front of the guide for part details and orders.



GE 5.8CU. FT. STAINLESS STEEL CAPACITY WASHER
Model #: GTW750CSLWS



19

\$1,299

Approximate dimensions: 48 H x 27 W x 27 D (in.)

Weight: 170 lbs

FEATURES

Wifi Connect Built-In

Wirelessly control laundry functions from your smart device

APPEARANCE

Colour Appearance Code WS

CAPACITY

Cubic Feet (IEC) 5.8

CYCLES

Whites Cycle	Yes	Heavy Duty	Yes
Colour Cycle	Yes	Casuals	Normal Soil
Delicates	Yes	Number of Cycles	1-4
Speed Wash	Yes	Drain & Spin	Yes
Basket Clean	Yes	Towels	Yes
Active Wear	Yes	Cold Wash	Yes
Denims	Yes	Bulky Items	Yes

ECONOMICAL / QUIET

Energy Star Qualified

Yes

FEATURES

Wash Basket Type

Stainless Steel

Precise Fill

Yes

Spin Speed Selections

5

Sanitize w/Oxy

Yes

Dispenser Drawer

Bleach, Fabric Softener

Chiruclean™

Yes

Dispenser

Detergent (Liquid/Powder), Softener and Beach

Control Type

Rotary-Electronic

Cycle Status Lights

LED

Soft Close Lid

Yes

Spin Speed

800 RPM

Influser

Yes

Installation Hose

No

Cycles

Water Station

Wash System

Rain Shower System

Load Access

Top Load

Wash/Rinse Temperatures

6

OPTIONS

Delay Wash

Yes

Optional Soil Levels

Extra Heavy, Heavy, Normal, Light

My Cycle

Yes

Signal Adjust

Yes

Auto Soak

Yes

Deep Rinse

Yes

Extra Rinse

Yes

Deep Fill

Yes

Warm Rinse

Yes

POWER & RATINGS

Motor Speeds

Variable

Volts / Hertz

120V; 60 Hz

Circuit Breaker or Time Delay Fuse

15 or 20 Amp

WARRANTY

2-Year Limited

Yes

WEIGHTS & DIMENSIONS

Overall Height (in.)

48

Overall Width (in.)

27

Approximate Shipping Weight (lbs.)

170

Net Weight (lbs)

162

Overall Depth (in.)

27

Net Weight (lbs)

145

Approximate Shipping Weight (lbs.)

155

Overall Height (in.)

43-1/2



Overall Width (in.)

26-7/8

Overall Depth (in.)

26-5/8

GE® 7.4 CU. FT. CAPACITY ALUMINIZED ALLOY DRUM ELECTRIC DRYER WITH HE SENSOR DRY
 Model #: GTD75ECMLWS

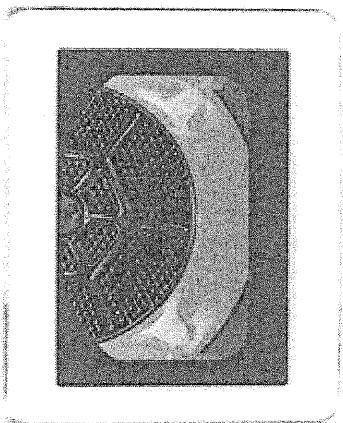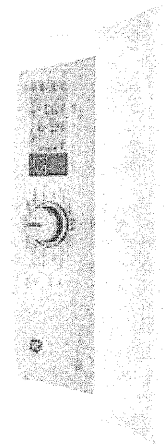

\$1,299

Approximate dimensions: 48 H x 27 W x 30 1/2 D (in.)

Weight: 125 lbs

FEATURES

Wifi Connect Built-In
 Wirelessly control laundry functions from your smart device

CAPACITY

Capacity 7.4 cu ft

CYCLES

- Delicates Yes
- Sanitize Yes
- Denims Yes
- Antibacterial cycle Yes
- Mixed Load Yes

- SteamRefresh Yes
- Bulky Items Yes
- Quick Fluff Yes
- Towels Yes
- Damp Dry Yes

More Dry, Less Dry, Cool Down, Extended Tumble

Casuals

Yes

Steam Dearthle

Yes

ECONOMICAL / QUIET

Energy Star Qualified

Yes

FEATURES

Speed Dry

Yes

Dual Thermistors

Yes

Control Type

Electronic

Extended Spin

Yes

Additional Dryer Features

Interior Light, Removable Up-Front Lint Filter, Front Serviceable

Heat Selections

5

Cycles

14

Reverse-a-Door

Yes

WARRANTY

Full 1-Year

Parts & Labour, In-Home

WEIGHTS & DIMENSIONS

Approximate Shipping Weight (lbs.)

125

Net Weight (lbs)

111

Overall Width (in.)

27

Lint Filter

Yes

Energy Saving Option

Yes-eDry

Moisture Sensor

Sensor Dry

Damp Alert

Yes

Exhaust Options

4-Way (Rear; Right; Left & Bottom)

Fuel Type

Electric

Aluminized Alloy Drum

Yes

Overall Depth (in.)

30 1/2

Overall Height (in.)

48