


KitchenAid®

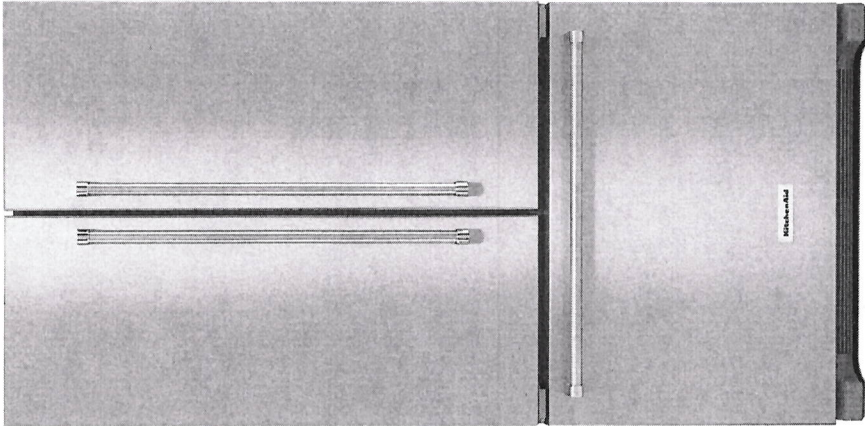

NEW

22 cu. ft. 36-Inch Width Counter Depth French Door Refrigerator with Interior Dispense

★★★★★ 4.1 (438)
Write a review

This 72-inch refrigerator is three inches taller than a standard counter-depth refrigerator. It fills the gap that can be left above many refrigerators, adding to its integrated appeal. A pull-out freezer drawer allows you to organize frozen items on three levels. And with the ExtendFresh™ Temperature Management System all of your ingredients will be held at the optimum temperature to maximize their flavor and texture.

AVAILABLE COLOR OPTIONS

☒ Stainless Steel - KRFC302ESS

Nido Lot 31
Natalie Becker

FEATURES

ExtendFresh™ Plus Temperature Management System

Ensures ingredients remain fresh for maximum taste and texture using a sensor-controlled system with a variable-capacity compressor. There is one thermistor in the freezer and one thermistor in the refrigerator.

Interior Water Dispenser

Provides easy access to filtered water and is conveniently located for one-hand operation.

Produce Preserver

Absorbs ethylene gas emitted by many fruits and vegetables, causing them to over ripen. By removing ethylene, the produce preserver helps extend freshness.

PRODUCT MODEL NUMBERS

KRFC302E


Electrical: A 115 volt, 60 Hz, AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator and approved accessories be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: A cold water supply with water pressure of between 35 and 120 psi (241 and 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

Reverse Osmosis Water Supply:
IMPORTANT: The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 35 and 120 psi (241 and 827 kPa).


Bottom Mount Refrigerator

PRODUCT DIMENSIONS

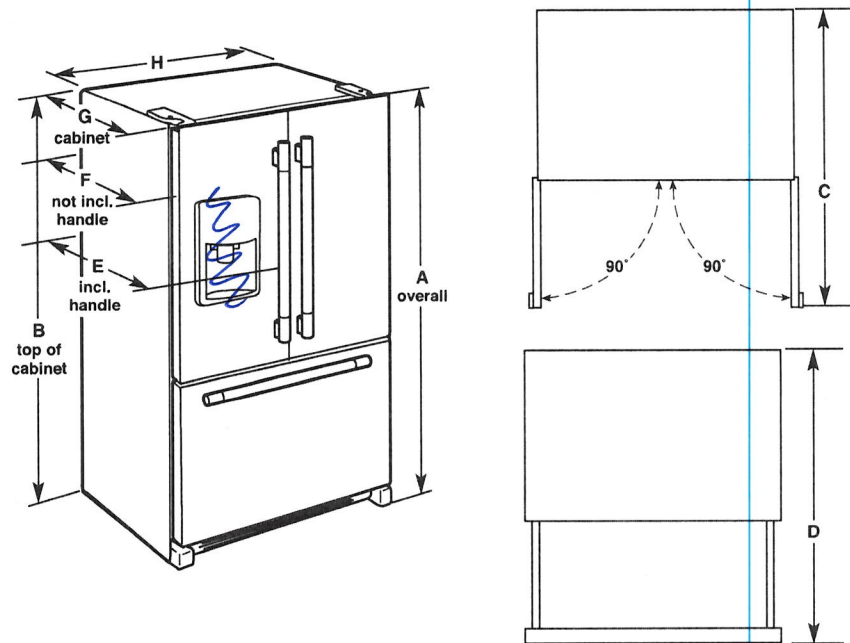

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - Doors Open 90° "C"	Depth - Drawer Open "D"	Depth - With Handles "E"	Depth - Without Handles "F"	Depth - Cabinet Only "G"	Width - Cabinet "H"
21.9	72" (182.9 cm)	71⅞" (181.3 cm)	44⅞" (112.1 cm)	45¼" (114.9 cm)	30¼" (76.8 cm)	27¾" (70.5 cm)	24⅝" (62.5 cm)	35¾" (90.8 cm)

LOCATION REQUIREMENTS

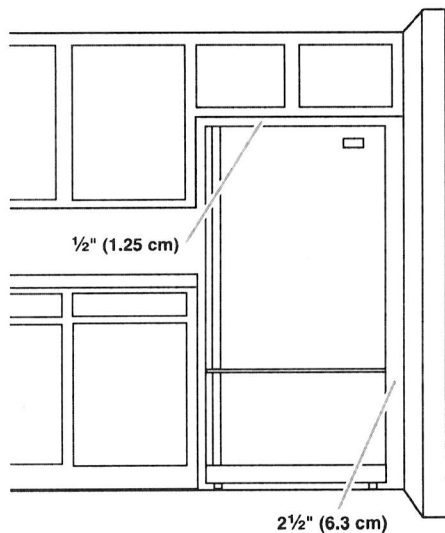

IMPORTANT: This refrigerator is designed for indoor, household use only.

To ensure proper ventilation for your refrigerator, allow for 1/2" (1.25 cm) of space on each side and at the top. Allow for 1" (2.54 cm) of space behind the refrigerator. If your refrigerator has an ice maker, allow extra space at the back for the water line connections. When installing your refrigerator next to a fixed wall, leave 2 1/2" (6.3 cm) minimum on the hinge side (some models require more) to allow for the door to swing open.


NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

FEC90B
36" Electric Freestanding Range

Porter & Charles

FEC90B

36" Electric Freestanding Range

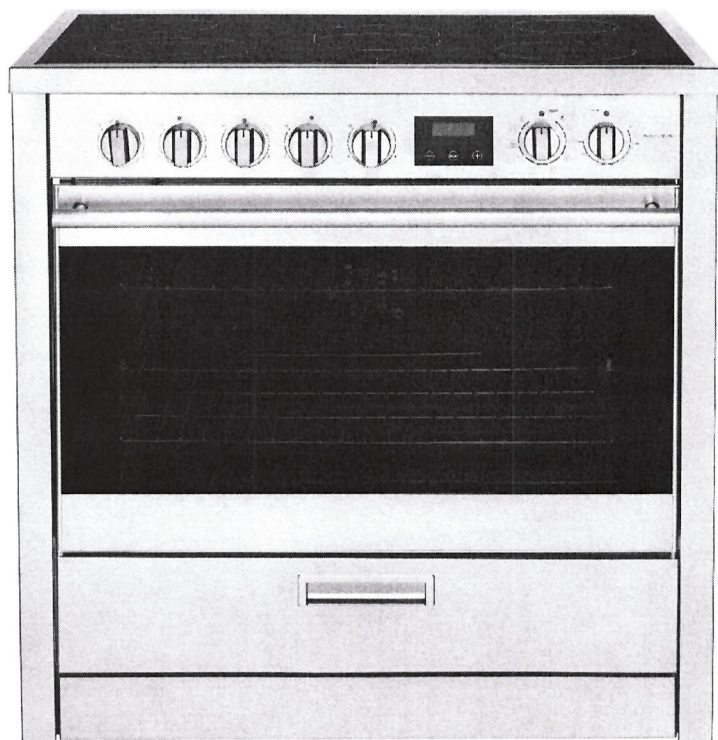

RANGE FEATURES

- 36" (90cm) stainless steel electric range
- 120L(4.3cu.ft)oven capacity
- 8 cooking functions including True Fan convection
- True Fan cooking technology for perfect cooking
- Double glazed door
- 5 electric burners, 2 expandable
- Residual heat indicator
- Diamond glazed interior
- Catalytic low temperature continuous clean lining
- Metric and imperial baking chart on inside of door
- Full extension telescopic rails
- Fully programmable clock/timer with delay start and finish
- Warming drawer

COOK TOP FEATURES

- 2 x 145mm Hi-lite Element – 1,200 Watts
- 1 x 180mm Hi-lite Element – 1,800 Watts
- 1 x Double Ring Hi-lite element
 - 1 x 120mm Element – 750 Watts
 - 1 x 210mm Element – 2,200 Watts
- 1 x Expandable Hi-lite element
 - 1 x 120mm Element – 1,400 Watts
 - 1 x 210mm Element – 2,200 Watts

OVEN FEATURES

- 120L(3.8cu.ft)oven capacity
- Defrost
- Pizza mode
- Conventional baking
- Fan assist baking
- Classic bake
- High bake
- True Fan convection cooking
- Fan grill
- Full grill
- Half grill

Specifications

FEC90B

RANGE DIMENSIONS


- D: $25\frac{3}{16}"$ x W: $35\frac{7}{16}"$ x H: $36\frac{1}{4}"$
- D: 640 mm x W: 900 mm x H: 920 mm

CUT-OUT DIMENSIONS

- H: min. $33\frac{7}{8}"$ x W: $35\frac{1}{2}"$
- H: min. 860 mm x W: 903 mm

ELECTRICAL REQUIREMENTS

- 208 / 240 Volt 60Hz, 40AMP
- PORTER&CHARLES ovens are supplied with a 4' long electrical cable and plug, located from the bottom right in the rear of the range.

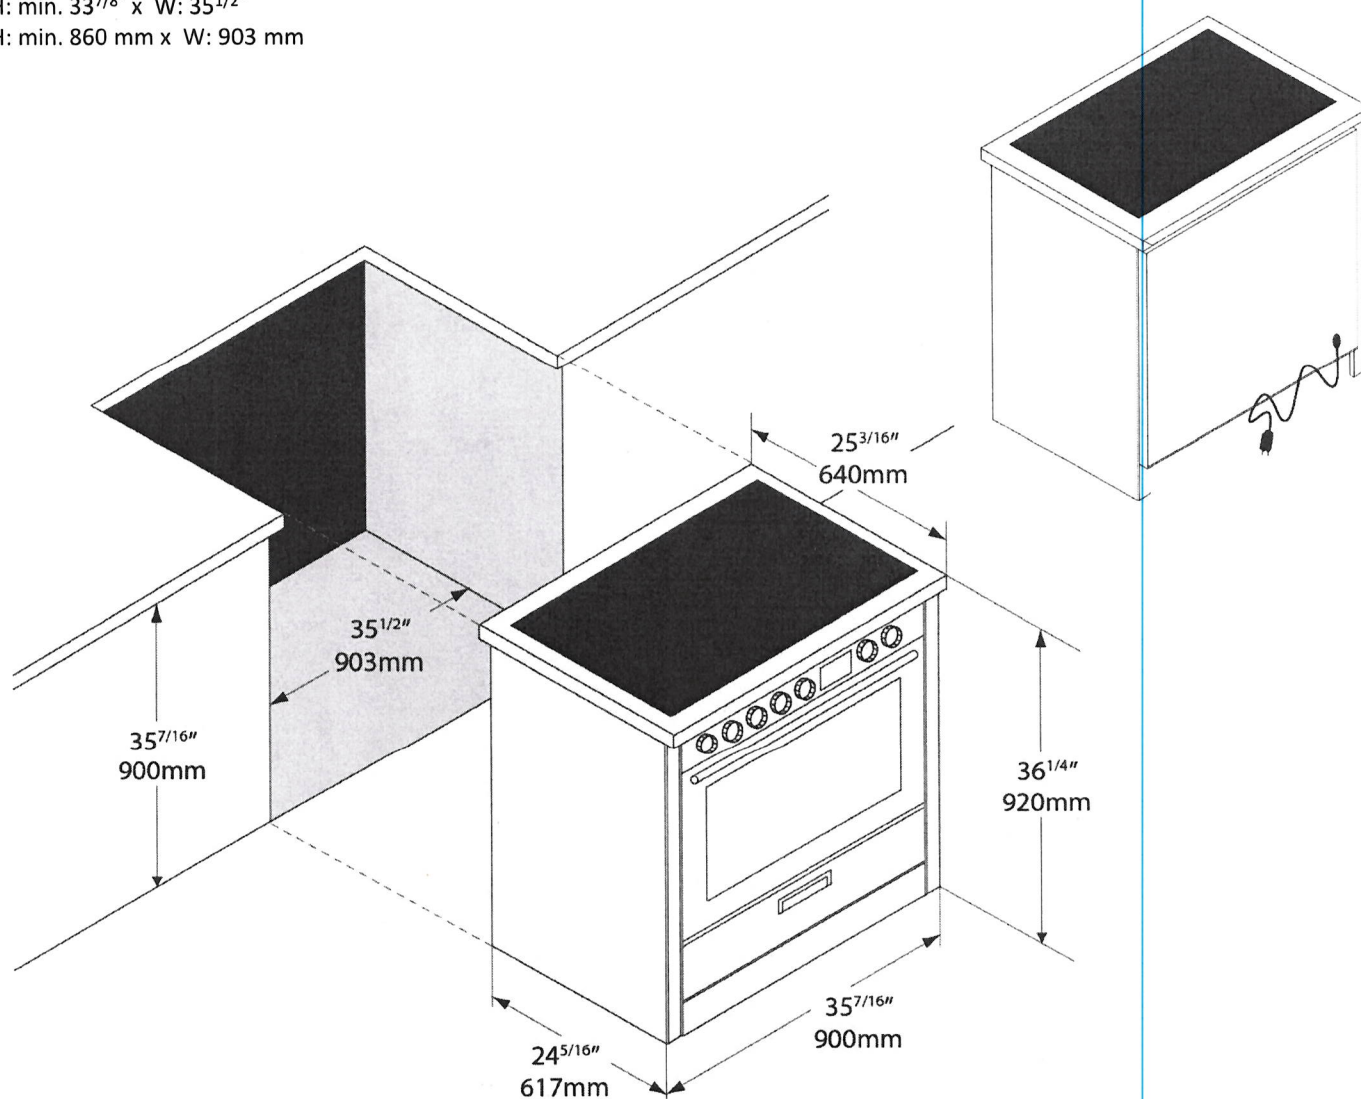

Specifications are subject to change without notice.

Detailed Specification Available at www.porterandcharles.ca

LUGANO

WALL-MOUNT
ASPIRE SERIES


Dimensions

30"W x 19 11/16"D x 5"H
36"W x 19 11/16"D x 5"H


Models

ELG630S2 Lugano 30" Stainless
ELG636S2 Lugano 36" Stainless


Special features




halogen lamps



multi-function electronic controls
with LCD display



stainless steel micro hole filters

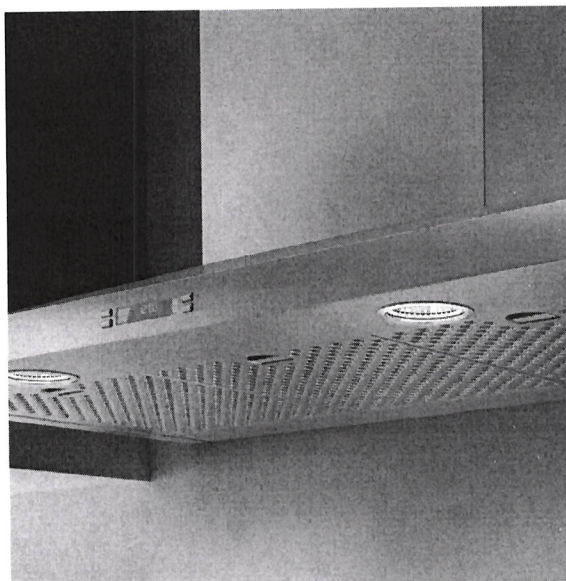

With Lugano, a gently tapered stainless steel canopy that measures only 5" high, conveys understated elegance. Available in 30" or 36" widths, Lugano features include a powerful 600 CFM blower, halogen lighting with 2 light intensities, stainless steel microhole filters and a multi-function electronic control with LCD display that delivers convenience and safety.


Designed for standard ducted installation, Lugano can also be installed as a recirculating system using the Recirculating Kit, available as an accessory.

elica

FEATURES

Size (in) & Type Finish	30" or 36" Wide Wall-Mount Chimney Stainless Steel
Controls	Multi-function electronic with LCD display
Illumination	2, 40 Watt Halogen Lamps, 2 Light Intensities (bulbs included)
Installation Type	Ducted or Recirculating Installation Recirculating Kit Sold Separately
Blower Type	600 CFM, 4-Speed Internal
Blower Performance	Speed 1, 160 CFM, 1.4 Sones Speed 2, 280 CFM, 3.2 Sones Speed 3, 470 CFM, 6.0 Sones Speed 4, 600 CFM, 8.2 Sones
Filter Type	Dishwasher-Safe, Stainless Steel Micro Hole (2 w/ 30", 3 w/ 36")
Telescopic Chimney Extension	For heights 7'1" - 8'11" (ducted) For heights 7'5" - 9'4" (recirculating)
Duct Transition	6" Round with Back Draft Damper (top)
Electrical	120V-60Hz 530 Watts at 4.4 Amps
Warranty	2 Year Parts & Labor, In-Home Service

ACCESSORIES



Optional Recirculating Kit for 30" and 36"

CODE: KIT02721
MODEL: KIT02721



Optional Long Chimney Extension Kit

Reaches 8'5" - 12'0" (ducted)
Reaches 8'9" - 12'4" (recirculating)

CODE: KIT02785
MODEL: EXXCEK07

CONSUMABLE PARTS

Replacement Grease Filter (1)

CODE: GF04YB

Replacement Carbon Filter (1)


CODE: KIT02667

Replacement Light Bulb (1)

CODE: 2006DX

Consumable parts are sold in units of one (1). Order accordingly.

LINE DRAWING

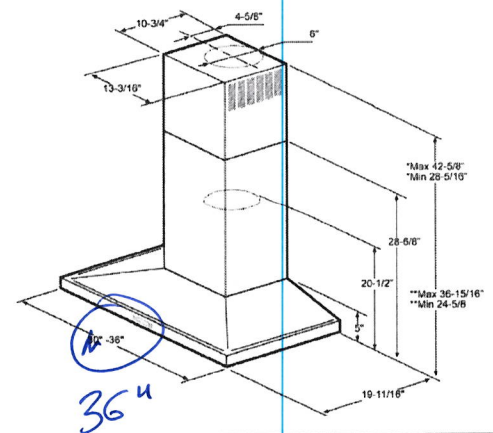

SPECIAL FEATURES



Elica CRS:

CFM Reduction System (CRS), is an exclusive feature to Elica hoods, which enables the installer to reduce the maximum blower CFM, to meet local code requirements.





Elica Heat Guard:

A safety feature that protects the hood and cabinetry from excessive heat, by sensing extreme temperatures (>158 degrees) and will automatically adjust the blower speed to HIGH. Blower speed will automatically adjust back once temperatures drop to a safe level.

Dishwashers

24" Flush Handle Dishwasher 500 Series- Stainless steel SHP865WD5N

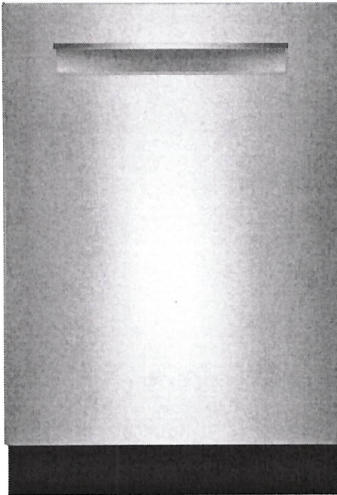

The flexible 3rd rack allows you to accommodate deeper items, while adjustable tines let you customize the rack's loading space.

- **44 dBA:** Quietest dishwasher brand.
- A flexible 3rd rack with fold down sides adds 30% more loading capacity.
- The pocket handle seamlessly integrates into your kitchen & installs flush.
- The EasyGlide™ rack system provides a smooth glide for easier loading & unloading on the upper rack.
- FlexSpace™ Tines fold back to fit your larger pots & pans.

Technical Data

Upper Rack :	500
Adjustable upper rack :	Rackmatic 3-stage
Upper rack cup shelf :	2
Lower Rack :	500
3rd Rack :	3rd Rack 2.0
Silverware Basket :	Standard
Accessories Parts :	no
Optional accessories :	SGZ1010UC, SMZ5000, SMZPC002UC
UPC code :	825225921905
Variant color :	Stainless steel
Panel ready :	No
Alternative colors available :	SHP865WD2N, SHP865WD6N
Silence level (dBA) :	44
Watts (W) :	1300
Current (A) :	12
Volts (V) :	120
Frequency (Hz) :	60
Energy Consumption (kWh/yr) :	269
Energy Star® qualified :	Yes
Plug type :	fixed connection
Required cutout size (HxWxD) (in) :	x 33 7/8 " x 23 9/16 "
Required cutout size (HxWxD) (mm) :	860-890 x 610 x 610
Overall appliance dimensions (HxWxD) (in) :	33 7/8 " x 23 9/16 " x 23 3/4 "
Power cord length (in) :	43 1/2"
Power cord length (cm) :	110
Length outlet hose (in) :	67 "
Length outlet hose (cm) :	175
Product packaging dimensions (HxWxD) (in) :	35 3/4" x 26" x 29 5/16"
Tub material :	Stainless steel
Tub type :	TallTub
ADA Compliant :	No
Number of place settings :	15

Optional accessories

- SGZ1010UC : Drain hose extension kit
- SMZ5000 : Dishwashing aid set
- SMZPC002UC : Powercord with cold plug

Dishwashers

24" Flush Handle Dishwasher 500 Series- Stainless steel SHP865WD5N

The flexible 3rd rack allows you to accommodate deeper items, while adjustable tines let you customize the rack's loading space.

Key Features

- 44 dB - Quietest Dishwasher Brand.
- A flexible 3rd rack with fold down sides adds 30% more loading area.
- InfoLight® Beams on Floor to Indicate Dishwasher is Running
- RackMatic® on Upper Rack - 3 Height Adjustments and Up to 9 Possible Rack Positions
- AquaStop® Leak Protection Works 24/7

Design

- Full Size Stainless Steel Tall Tub Installs Perfectly Flush
- A flexible 3rd rack with fold down sides adds 30% more loading area.
- 16 Place Setting Capacity
- LED Remaining Time Display
- RackMatic® on Upper Rack - 3 Height Adjustments and Up to 9 Possible Rack Positions
- Flexible Silverware Basket Can be Split into Two Pieces and Placed Anywhere for Added Flexibility

Performance

- 44 dB - Quietest Dishwasher Brand.
- 5 Wash Cycles and 5 Options
- Detergent Tray Optimizes Detergent Dissolving
- Speed60® gets your dishes from dirty to dry in about an hour.
- Extra Dry Option for Better Drying Results
- Load Size Sensor Automates Wash Temperature
- Sanitize Option Eliminates Bacteria and Enhances Drying Results
- ExtraScrub option increases pressure and temperature in the entire lower rack for hard to remove food stains.

Efficiency


- 269 kwh/yr - Energy Star®

Convenience


- Electronic delay timer: 1-24 hours Delay Start Timer
- AquaStop® Leak Protection Works 24/7
- Self-Latching Door

Dishwashers

24" Flush Handle Dishwasher 500 Series- Stainless steel SHP865WD5N

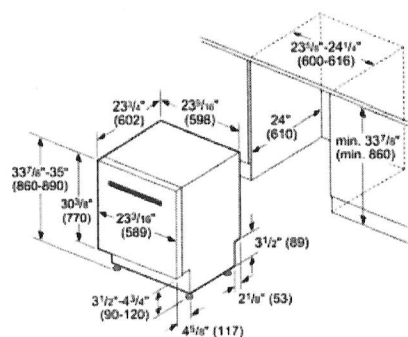


measurements in inches (mm)

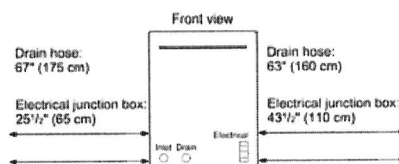

All connections are at the rear of the appliance.
Extension for drain hose available as accessory.
Power cord for connection to electrical outlet (3-prong plug) available as accessory.

WM3770H_A

4.5 cu.ft. Front Load Washer w/ TurboWash®

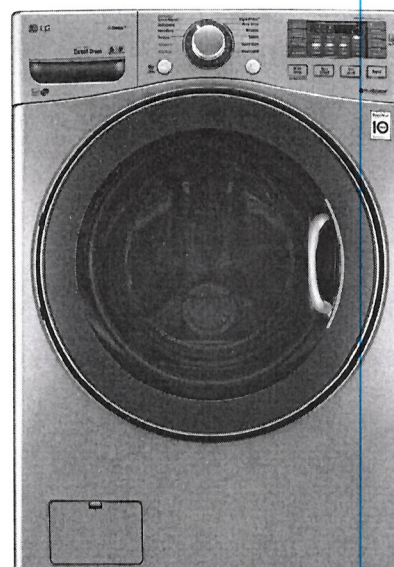

4.5 cu.ft. Ultra Large Capacity

TurboWash®

Steam

Allergiene™ Cycle

12 Wash Programs

ENERGY STAR® Qualified

CAPACITY

Capacity 4.5 cu. ft.

APPEARANCE

Design Look Front Control

On-Door Electronic Control Panel with LED Display *

Hard Buttons *

Dial-A-Cycle™ *

ENERGY

ENERGY STAR® Qualified *

CEE Tier 1

WASH PROGRAMS

No. of Programs 12

Wash Programs Cotton/Normal, Perm. Press, Delicates, Speed Wash, TubClean™, Bulky/Large Sanitary, Allergiene™, Heavy Duty, BrightWhites™, Towels, Download

No. of Options 10

Options Prewash, Delay Wash, Extra Rinse, Rinse+Spin, Child Lock, ColdWash™, Steam, FreshCare™, TurboWash®, Add Garment

No. of Wash/Rinse Temps 5

Spin Speeds Extra Hot, Hot, Warm, Cold, Tap Cold (All Cold Rinses)

No. of Water Levels Automatically adjusts to the size of load

No. of Soil Levels 5

FABRIC CARE FEATURES

TurboWash® *

Steam Technology *

Allergiene™ Cycle *

Sanitary Cycle *

ColdWash™ Option *

CONVENIENCE FEATURES

TrueBalance™ Anti-Vibration System *

4 Tray Dispenser Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener *

LoDecibel™ Quiet Operation *

End of Cycle Signal *

LoadSense *

Child Lock *

Auto Suds Removal *

Forced Drain System *

Leveling Legs 4 Adjustable Legs *

Easy Loading TilTub™ *

SMART THINQ™ TECHNOLOGY

SmartDiagnosis™ • (v 3.0)

NFC Tag On Technology *

MOTOR AND AGITATOR

Motor Type Inverter Direct Drive Motor

Motor Speed Variable

Max RPM 1,300

Axis Horizontal

MATERIALS AND FINISHES

NeveRust™ Stainless Steel Drum *

Cabinet PCM

Control Panel Plastic

Top Plate Painted

Door Rim Glass/Chrome

Door Cover Dark Blue Tinted

Available Colors White (W), Graphite Steel (V)

POWER SOURCE

Ratings UL Listed

Electrical Requirements 120V, 10 Amps

Type Electric, 60 Hz

OPTIONS/ACCESSORIES

Pedestal WDP4W, WDP4V

Pedestal (WxHxD) 27" x 14 1/8" x 28 2/5"

Sidekick™ Pedestal Washer WD100CW, WD100CV

Sidekick™ Pedestal Washer (WxHxD) 27" x 14 1/8" x 30 3/4" (50 1/2 with drawer open)

Stacking Kit KSTK1

Hose Included No

DIMENSIONS

* Product (WxHxD) 27" x 38 11/16" x 29 3/4"

(51" D with door open)

Carton (WxHxD) 29 1/2" x 43 5/16" x 31 5/16"

Weight (Product/Carton) 202.8 lbs / 224.8 lbs

LIMITED WARRANTY

1 Year Parts and Labor, 10 Years Motor, Lifetime on Drum

UPC CODES

WM3770HWA Washer (White) 048231 017473

WM3770HVA Washer (Graphite Steel) 048231 017480

DLEX3570W Electric Dryer (White) 048231 014199

DLGX3571W Gas Dryer (White) 048231 014205

DLEX3570V Electric Dryer (Graphite Steel) 048231 014229

DLGX3571V Gas Dryer (Graphite Steel) 048231 014236

WDP4V Pedestal (Graphite Steel) 048231 012904

WDP4W Pedestal (White) 048231 012898

WD100CV Sidekick™ Pedestal Washer (Graphite Steel) 048231 015165

WD100CW Sidekick™ Pedestal Washer (White) 048231 015172

KSTK1 Stacking Kit (Chrome) 048231 011204

Ultra Large Capacity SteamDryer™ w/ NFC Tag On

DLEX3570_/DLGX3571_



ALWAYS STAY EFFICIENT.

Efficiency can mean a lot nowadays, and this dryer knows it. Its ultra large capacity will handle extra-large loads, so you finish your laundry faster. The Intelligent Electronic Controls with Dual LED Display make it easier to get the settings right, so you can just "set it and go." Plus, the Sensor Dry System will detect the level of moisture in the fabric and automatically adjust drying time and temperature. If you appreciate efficiency, so does this dryer.

SPECIFICATIONS


- 7.4 cu. ft. Ultra Capacity with Alcosta Steel Drum
- 12 Drying Programs
- 5 Temperature Settings

STYLISH DESIGN

- Upfront Electronic Control Panel with Dual LED Display and Dial-A-Cycle™
- Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover
- Reversible Door
- Stackable with Matching Washer (Stacking Kit sold separately)
- Optional Matching Drawer Pedestal

INNOVATIONS

- TrueSteam™ Technology
- SteamFresh™ Cycle
- SteamSanitary™ Cycle
- ReduceStatic™ Option
- EasyIron™ Option
- Sensor Dry System
- Precise Temperature Control with Variable Heat Source
- LoDecibel™ Quiet Operation
- NFC Tag On
- SmartDiagnosis™
- 3 Minute Installation Check
- FlowSense™ Duct Clogging Indicator
- Wrinkle Care Option
- Anti-Bacterial Cycle
- Damp Dry Signal

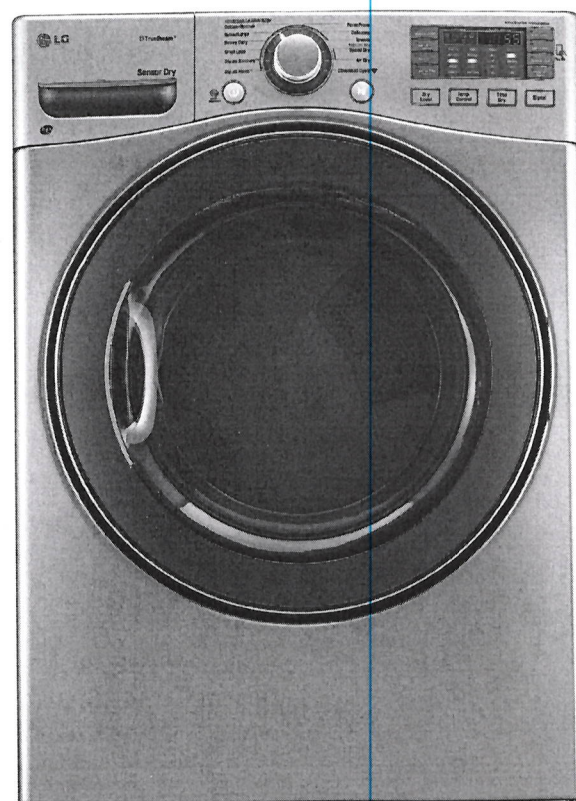

7.4 cu.ft. Ultra Large Capacity

Do laundry a little less often. With **7.4 cubic feet of capacity**, this dryer handles really large loads, saving you time and energy.

SteamSanitary™ Cycle

You probably wish you could clean your throw pillows or children's toys. With the **SteamSanitary™ Cycle**, you can. It uses steam to safely sanitize delicate items right in the dryer.

NFC Tag On

Easily change and customize cycles with a simple tap of a smart phone app. Can't find a cycle you need? There's an app for that. Your laundry just got a little bit smarter.

DLEX3570_/DLGX3571_



CAPACITY

Capacity 7.4 cu. ft.

APPEARANCE

Design Look Front Control

Intelligent Electronic Controls with Dual LED Display •

Dial-A-Cycle™ •

DRYING PROGRAMS

No. of Programs 12

Programs (Sensor Dry) Cotton/Normal, Perm. Press, Towels, Delicates, Small Load, Heavy Duty, Bulky/Large, SteamFresh™, SteamSanitary™, Download

Programs (Manual Dry) Speed Dry, Air Dry

No. of Options 10

Options More Time, Less Time, Custom Program, Damp Dry Signal, Wrinkle Care, Child Lock, ReduceStatic™, EasyIron™, Rack Dry, End of Cycle Signal

Temperature Settings High, Medium High, Medium, Low, Ultra Low

Drying Levels Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry

Manual Dry Times 60 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time

FABRIC CARE FEATURES

SteamFresh™ Cycle •

SteamSanitary™ Cycle •

ReduceStatic™ Option •

EasyIron™ Option •

Sensor Dry •

Precise Temperature Control and Variable Heater •

CONVENIENCE FEATURES

NFC Tag On •

LoDecibel™ Quiet Operation •

SmartDiagnosis™ •

FlowSense™ Duct Clogging Indicator •

Wrinkle Care Option •

Remaining Time Display/Status Indicator(s) •

End of Cycle Signal •

Child Lock •

Drying Rack •

Drum Light •

Reversible Door •

Leveling Legs 4 Adjustable Legs •

Venting Option Electric: 4 Way Venting / Gas: 3 Way Venting •

3 Minute Installation Check •

MATERIALS AND FINISHES

Alcanta Steel Drum •

Cabinet Painted Steel •

Control Panel Plastic •

Top Plate Painted Steel •

Transparent Glass Door •

Door Rim Large Chrome Rimmed Glass Door with Dark Blue Tinted Cover •

Available Colors White (W), Graphite Steel (V)

POWER SOURCE

Ratings CSA Listed

Electrical Requirements 120V, 15 Amps (Gas) / 240V, 30 Amps (Electric)

Type Gas/Electric

OPTIONS

Pedestal WDP4W/WDP4V

Pedestal (WxHxD) 27" x 13 3/5" x 28 2/5"

Stacking Kit KSTK1

LP Conversion Kit 383EEL3002D

Side Venting Kit 3911EZ9131X

DIMENSIONS

Product (WxHxD) 27" x 38 11/16" x 29 3/4"

(51" D with door open)

Carton (WxHxD) 29 1/2" x 42 1/4" x 31 1/4"

Weight (Product/Carton) 136lbs. / 155lbs.

LIMITED WARRANTY

1 Year Parts and Labor

UPC CODES

DLEX3570V Electric Dryer (Graphite Steel) 048231 014229

DLGX3571V Gas Dryer (Graphite Steel) 048231 014236

DLEX3570W Electric Dryer (White) 048231 014199

DLGX3571W Gas Dryer (White) 048231 014205

WM3570HVA Washer (Graphite Steel) 048231 014083


WM3570HWA Washer (White) 048231 014052

WDP4V Pedestal (Graphite Steel) 048231 011198

WDP4W Pedestal (White) 048231 011211

KSTK1 Stacking Kit (Chrome) 048231 013024

Optional washer & pedestals sold separately

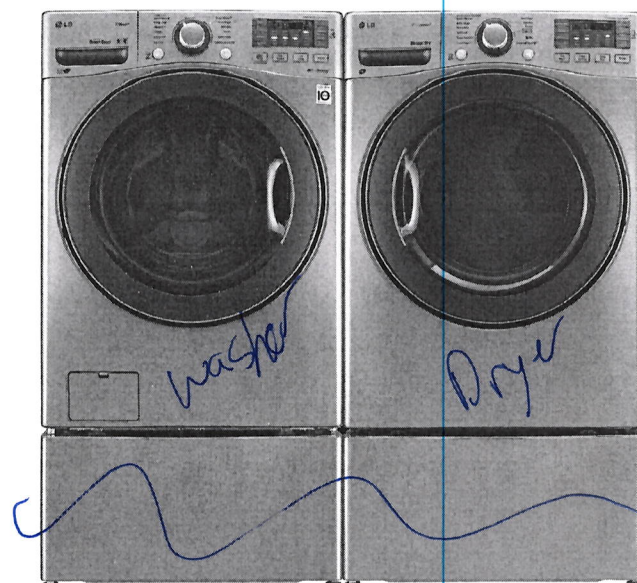

LG Electronics U.S.A., Inc.

1000 Sylvan Avenue Englewood Cliffs, NJ 07632

Customer Service and Technical Support: (800) 243-0000

LG.com

Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate.

© 2014 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective companies. 4/10/14