

30" (72.6 cm) and 36" (91.4 cm) Wall-Mount Canopy Range Hood

PRODUCT MODEL NUMBERS

KVWB600D

KVWB606D

Electrical: A 120 volt, 60 Hz., AC only, 15-amp, fused electrical circuit is required.

VENTING METHODS

This canopy range hood is factory set for venting through the roof or through the wall.

A 6" (15.2 cm) round vent system is needed for installation (not included). The hood exhaust opening is 6" (15.2 cm) round.

NOTE: Flexible vent is not recommended. Flexible vent creates back pressure and air turbulence that greatly reduce performance.

Vent system can terminate either through the roof or wall. To vent through a wall, a 90° elbow is needed.


Rear Discharge

A 90° elbow may be installed immediately above the hood.

For Non-Vented (Recirculating) Installations

If it is not possible to vent cooking fumes and vapors to the outside, the hood can be used in the non-vented (recirculating) version, using a Recirculation Kit (which includes charcoal filters and a deflector). To order, see the "Assistance or Service" section.

Example Vent System

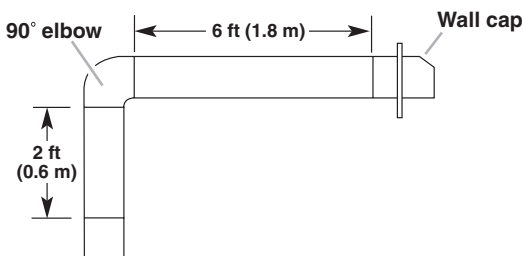

The following example falls within the maximum recommended vent length of 35 ft (10.7 m).


1 - 90° elbow = 5.0 ft (1.5 m)

1 - wall cap = 0.0 ft (0.0 m)

8 ft (2.4 m) straight = 8.0 ft (2.4 m)

Length of system = 13.0 ft (3.9 m)


PRODUCT DIMENSIONS

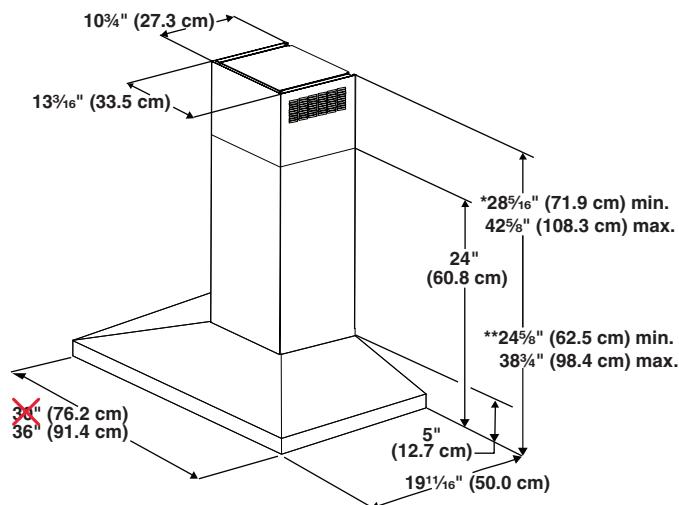

*For non-vented (recirculating) installations

**For vented installations


Roof Venting

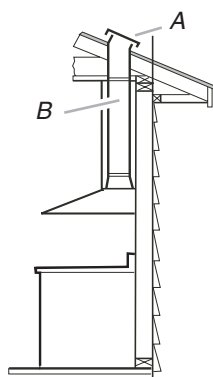

A. Roof cap

B. 6" (15.2 cm) round vent


Wall Venting

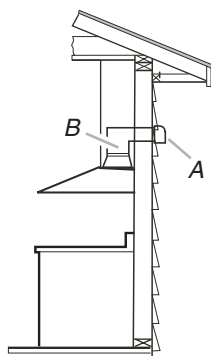

A. Wall cap

B. 6" (15.2 cm) round vent

Non-Vented (Recirculating)

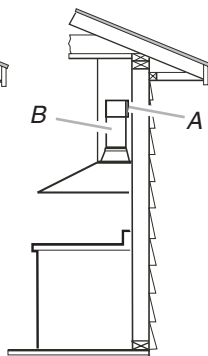

A. Diverter

B. 6" (15.2 cm) round vent

Calculating Vent System Length

To calculate the length of the system you need, add the equivalent feet (meters) for each vent piece used in the system.


Vent System

Vent Piece	6" (15.2 cm) Round
45° elbow	2.5 ft (0.8 m)
90° elbow	5.0 ft (1.5 m)



Maximum equivalent vent length is 35 ft (10.7 m).

CABINET DIMENSIONS

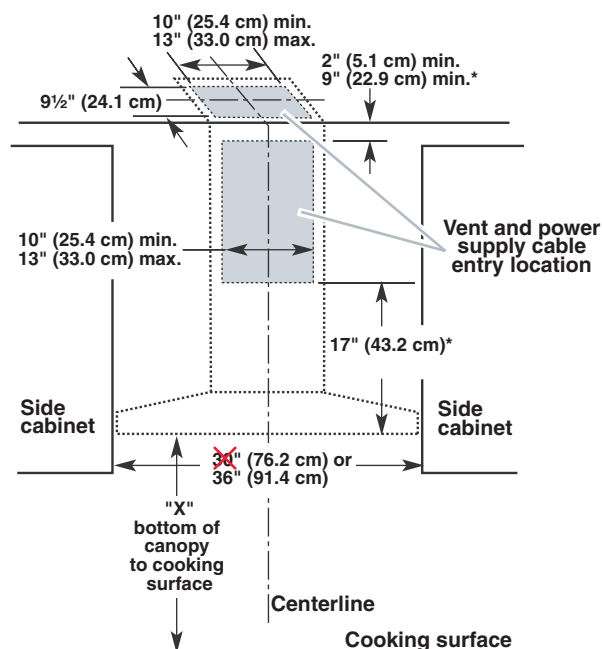

*For non-vented (recirculating) installations

IMPORTANT:

Minimum distance "X": 24" (61.0 cm) from electric cooking surface.

Minimum distance "X": 27" (68.6 cm) from gas cooking surfaces.

Suggested maximum distance "X": 36" (91.4 cm)

The chimneys can be adjusted for different ceiling heights. See the following chart.

Vented Installations		
	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 2" (2.79 m)
Gas cooking surface	7' 4" (2.23 m)	9' 2" (2.79 m)
Non-vented (recirculating) Installations		
	Min. ceiling height	Max. ceiling height
Electric cooking surface	7' 1" (2.16 m)	9' 6" (2.9 m)
Gas cooking surface	7' 4" (2.23 m)	9' 6" (2.9 m)


***NOTE:** The range hood chimneys are adjustable and designed to meet varying ceiling or soffit heights depending on the distance "X" between the bottom of the range hood and the cooking surface. For higher ceilings, a Chimney Extension Kit is available from your dealer or an authorized parts distributor. The chimney extension replaces the chimney shipped with the range hood. To order, see the "Assistance or Service" section.

DIMENSIONS

COMMERCIAL-STYLE RANGETOPS

PRODUCT DIMENSIONS

MODEL #	30" (76.2 cm) Rangetop KCGC500J		36" (91.4 cm) Rangetop KCGC506J		48" (121.9 cm) Rangetop KCGC558J	
Unit of Measurement	in		in	cm	in	
Overall Width (A)	29³/₄		35 ³ / ₄	90.8	47³/₄	
Grate Depth (B)	22		22	55.9	22	
Depth without Control Panel (C)	23¹/₄		23 ¹ / ₄	59.1	23¹/₄	
Depth with Control Panel Overhang (D)	27¹/₈		27 ¹ / ₈	70.8	27¹/₈	
Depth with Knobs (E)	29³/₈		29 ³ / ₈	74.6	29³/₈	

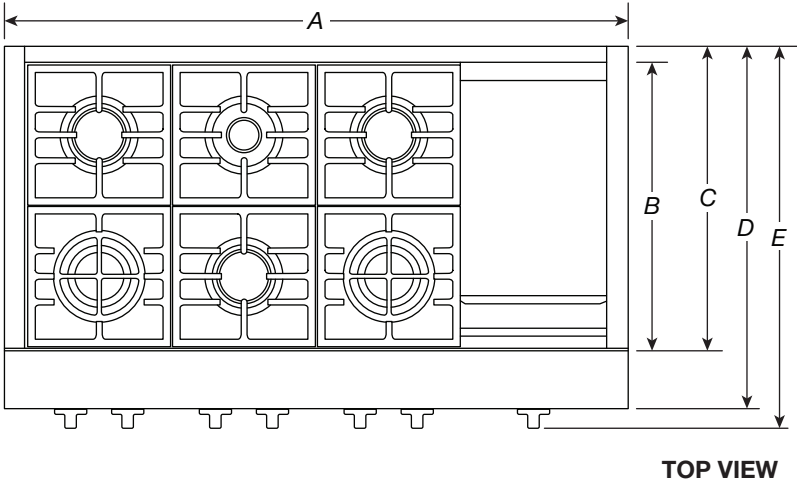

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All KitchenAid® appliances are appropriately UL, CUL or CSA approved.


DIMENSIONS

COMMERCIAL-STYLE RANGETOPS


PRODUCT DIMENSIONS

MODEL #	30" (76.2 cm) Rangetop KCGC505J		36" (91.4 cm) Rangetop KCGC506J		48" (121.9 cm) Rangetop KCGC558J	
Unit of Measurement		cm	in	cm	in	cm
Grate Width (F)*	27 ⁷ / ₈	69.7	33	83.8	44 ³ / ₈	112.7
Gas Inlet to Surface (G)	10 ¹ / ₂	27.3	10 ³ / ₄	27.3	10 ³ / ₄	27.3
Center to Gas Inlet (H)	14 ¹ / ₈	27.9	14 ¹ / ₈	35.9	19 ⁵ / ₈	49.8
Recessed Rangetop Width (I)	29 ¹ / ₈	74	35 ¹ / ₈	89.2	41 ¹ / ₈	119.7

*Includes width of grates and gridline.

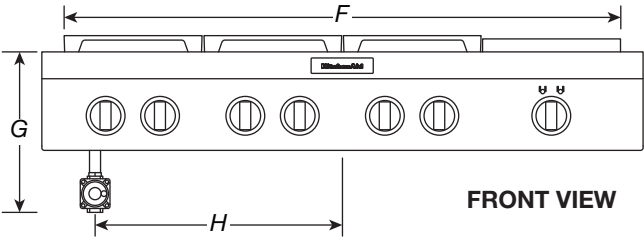

FRONT VIEW

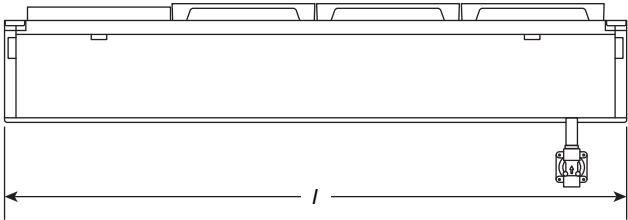

BACK VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All KitchenAid® appliances are appropriately UL, CUL or CSA approved.




DIMENSIONS

COMMERCIAL-STYLE RANGETOPS

PRODUCT DIMENSIONS

MODEL #	30" (76.2 cm) Rangetop KCGC500J		36" (91.4 cm) Rangetop KCGC506J		48" (121.9 cm) Rangetop KCGC558J	
Unit of Measurement	in	cm	in	cm	in	cm
Height with Grates (J)	9	22.9	9	22.9	9	22.9
Control Panel Height (K)	7 ¹³ / ₁₆	19.8	7 ¹³ / ₁₆	19.8	7 ¹³ / ₁₆	19.8
Recessed Rangetop Height (L)	7	17.8	7	17.8	7	17.8
Cooking Surface Height (M)	7 ¹ / ₁₆	18.0	7 ⁷ / ₁₆	18.9	7 ¹ / ₁₆	18.0
Recessed Rangetop Depth (N)	21 ⁷ / ₈	55.6	21 ⁷ / ₈	55.6	21 ⁷ / ₈	55.6
Depth with Control Panel (O)	25 ¹ / ₂	64.8	25 ¹ / ₂	64.8	25 ¹ / ₂	64.8

IMPORTANT: Supplied regulator does not come preattached and is pictured for reference purposes only.

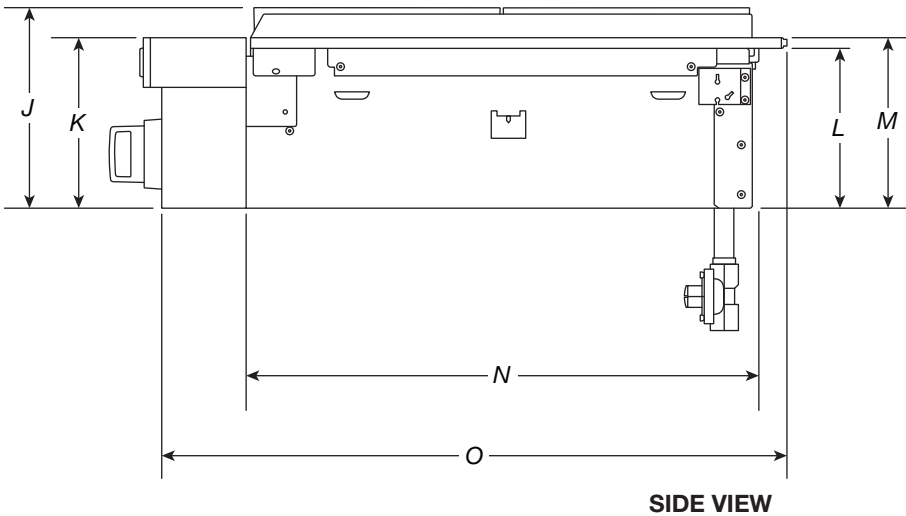

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All KitchenAid® appliances are appropriately UL, CUL or CSA approved.




DIMENSIONS

COMMERCIAL-STYLE RANGETOPS

OPENING/CLEARANCE DIMENSIONS

MODEL #	30" (76.2 cm) Rangetop KCGC500J		36" (91.4 cm) Rangetop KCGC506J		48" (121.9 cm) Rangetop KCGC558J	
Unit of Measurement			in	cm		
Combustible Area above Cooking Surface Width (min.) (A)	30	76.2	36	91.4	48	121.9
Bottom of Cabinet Height above Cooking Surface (min.) (B)*	42	106.7	58	147.3	58	147.3
Bottom of Cabinet Height above Countertop (min.) (C)	18	45.7	18	45.7	18	45.7
Distance to Fixed Wall or Combustible Material (D)	12	30.5	12	30.5	12	30.5

*If installing a hood above the rangetop, follow the hood instructions for dimensional clearances above the cooking surface.

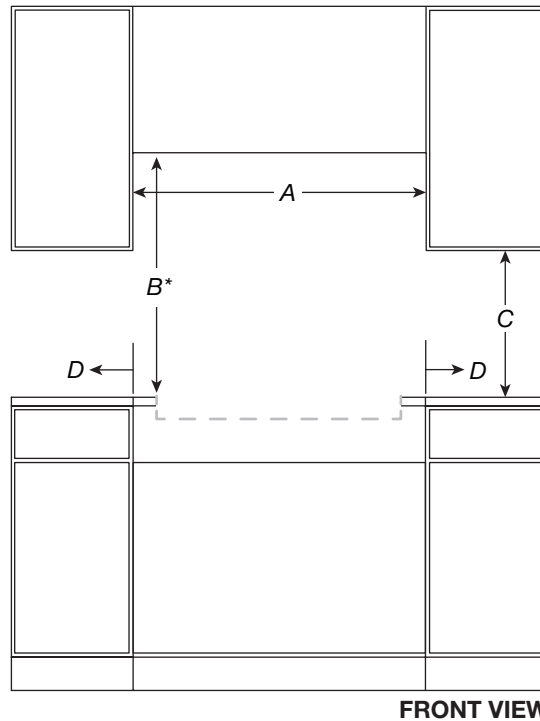

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
 All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

KitchenAid®

DIMENSIONS


COMMERCIAL-STYLE RANGETOPS

OPENING/CLEARANCE DIMENSIONS

MODEL #	30" (76.2 cm) Rangetop KCGC500J		36" (91.4 cm) Rangetop KCGC506J		42" (106.7 cm) Rangetop KCGC558J	
Unit of Measurement	in	cm	in	cm	in	cm
Recommended Upper Cabinet Depth (E)	13	33	13	33	13	33
Cutout to Wall Depth (if backwall is constructed of non-combustible material) (F)*	1 1/4	4.4	1 3/4	4.4	1 3/4	4.4
Cutout to Wall Depth (if backwall is constructed of combustible material) (F)*	7 3/4	19.7	7 3/4	19.7	7 3/4	19.7
Cabinet to Countertop Height (G)**	7 1/4	18.4	7 1/4	18.4	7 1/4	18.4
Cabinet Depth (H)	24	61	24	61	24	61

*If the back wall is constructed of a combustible material and a backsplash is not installed, a 7 3/4" (19.7 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the rangetop.

**The bottom of the cutout supports the product. Unlike many cooktops, these models do not hang from the side flanges, but rather sit on the floor of the cutout.

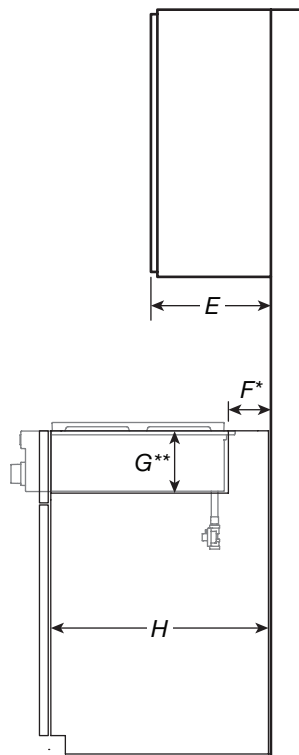

SIDE VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
 All KitchenAid® appliances are appropriately UL, CUL or CSA approved.


KitchenAid®

COMMERCIAL-STYLE RANGETOPS

OPENING/CLEARANCE DIMENSIONS

MODEL #	30" (76.2 cm) Rangetop KCGC500J		36" (91.4 cm) Rangetop KCGC506J		48" (121.9 cm) Rangetop KCGC558J	
Unit of Measurement			in	cm	in	cm
Countertop and Cabinet Cutout Width (I)	29 3/4"	74.3	35 3/4"	89.5	47 1/4"	119.0
Countertop and Cutout Depth (J)	22 1/4"	56.5	22 1/4"	56.5	22 1/4"	56.5
Notch Width (K)	1/4"	0.6	1/4"	0.6	1/4"	0.6
Cutout Width (L)	29 3/4"	75.3	35 3/4"	90.8	47 1/4"	121.2

NOTE: Due to manufacturing factory tolerances, these are nominal dimensions. You may need to readjust to meet your clearance.

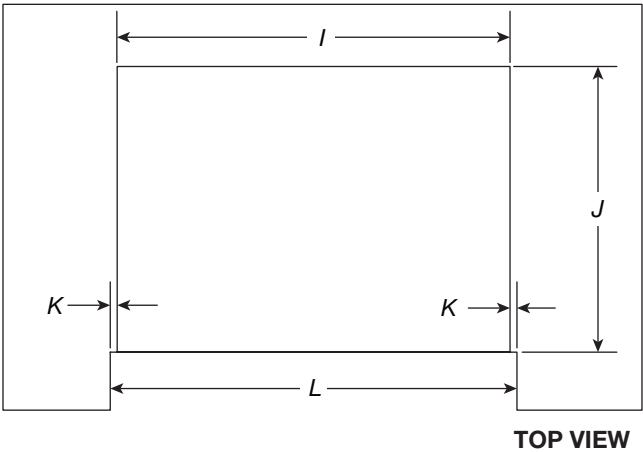

TOP VIEW

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
All KitchenAid® appliances are appropriately UL, CUL or CSA approved.



DIMENSIONS


COMMERCIAL-STYLE RANGETOPS

ELECTRICAL REQUIREMENTS

ELECTRIC REQUIREMENTS CHECKLIST

- ☐ A 120 V, 60 Hz, AC only, 15 A fused, electrical circuit is required.
- ☐ A dedicated circuit is recommended.

RECOMMENDED ELECTRICAL OUTLET ZONE

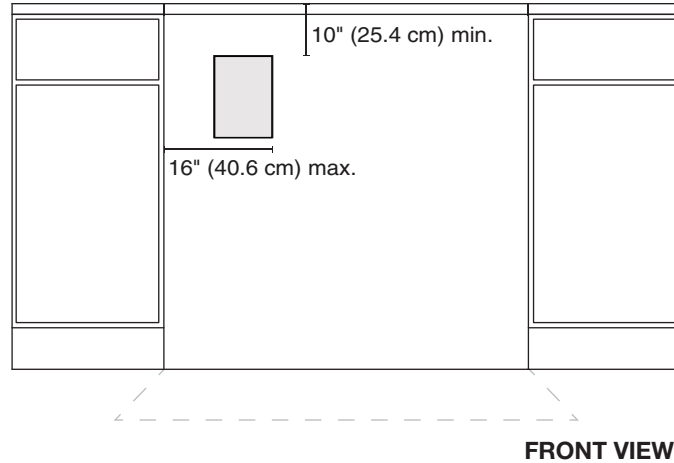

NOTE: If you have questions about your electrical supply, call a licensed, qualified electrician.


IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
 All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

KitchenAid®

COMMERCIAL-STYLE RANGETOPS


GAS REQUIREMENTS

RECOMMENDED GAS SUPPLY LOCATION

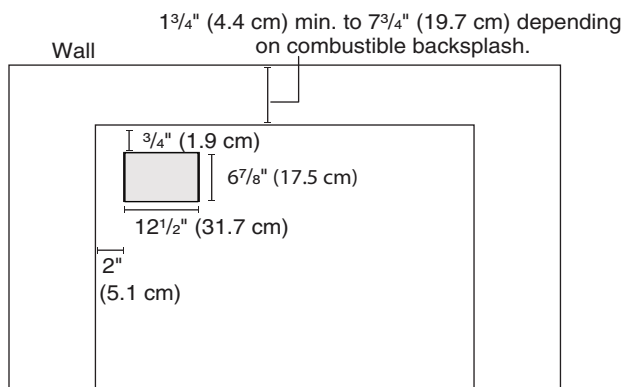

TOP VIEW

GAS SUPPLY ZONE

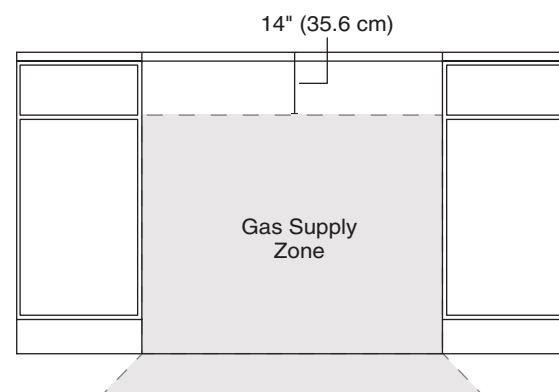

FRONT VIEW

*If the back wall is constructed of a combustible material and a backsplash is not installed, a 7 1/2" (19.1 cm) minimum clearance is required from the cutout or 6" (15.2 cm) minimum clearance from the back edge of the rangetop.

**Unlike many cooktops, these models do not hang from the side flanges, but rather sit on the floor of the cutout. The grey box pictured in the image above on the left is a hole in the cutout for the gas and electric lines to pass through.

NOTE: If you have questions about your gas supply, call a licensed, qualified service technician.

IMPORTANT: Dimensional specifications are provided for planning purposes only.
Do not make any cutouts based on this information. Refer to the Installation Guide before selecting cabinetry, verifying electrical/gas connections, making cutouts or beginning installation.
 All KitchenAid® appliances are appropriately UL, CUL or CSA approved.

KitchenAid®

W11255638C

KitchenAid®


24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

Applies to all model numbers starting with;

KDFE104K, KDTE104K, KDFE204K, KDTE204K, KDTE304LPA,
KDFM404K, KDTM404K, KDPM604K, KDTM604K, KDPM704K,
KDTM704K, KDTM704LPA, KDPM804K, KDTM804K

PRODUCT DIMENSIONS

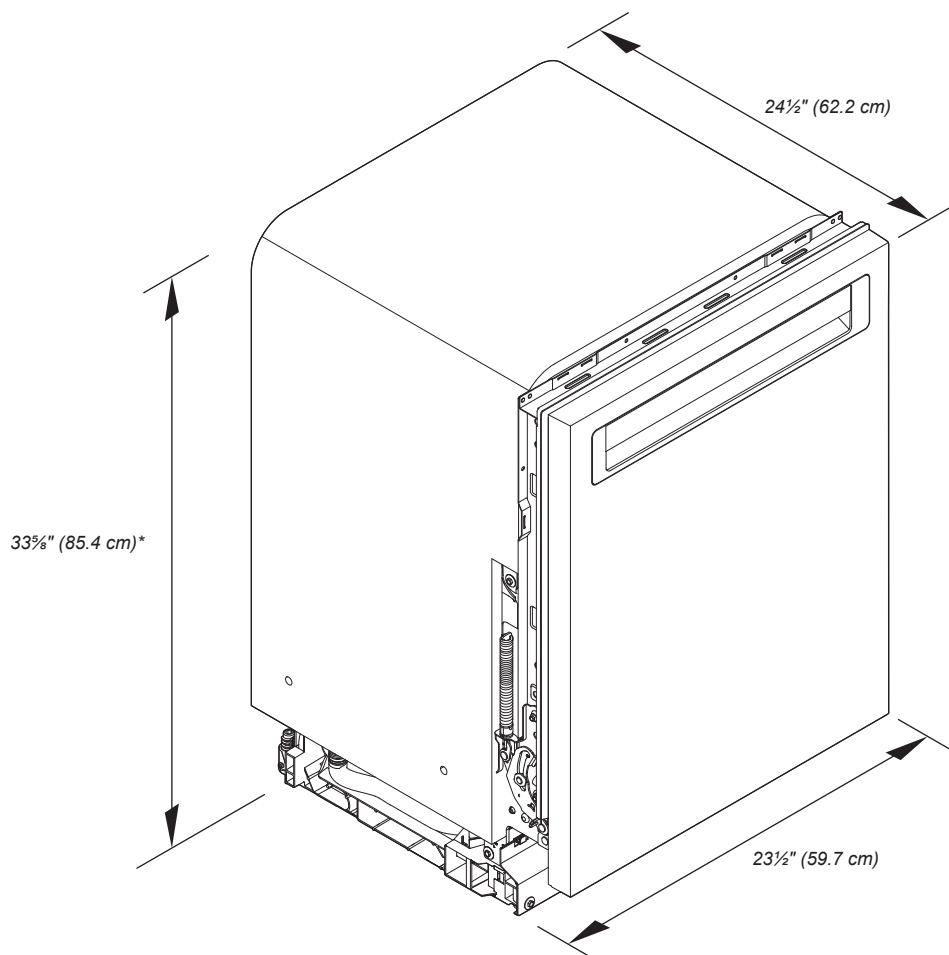

*Dishwasher can be raised 1 7/16" (3.7 cm) with feet fully extended.


Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.

Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

KitchenAid® 24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

PRODUCT DIMENSIONS (CONTD.)

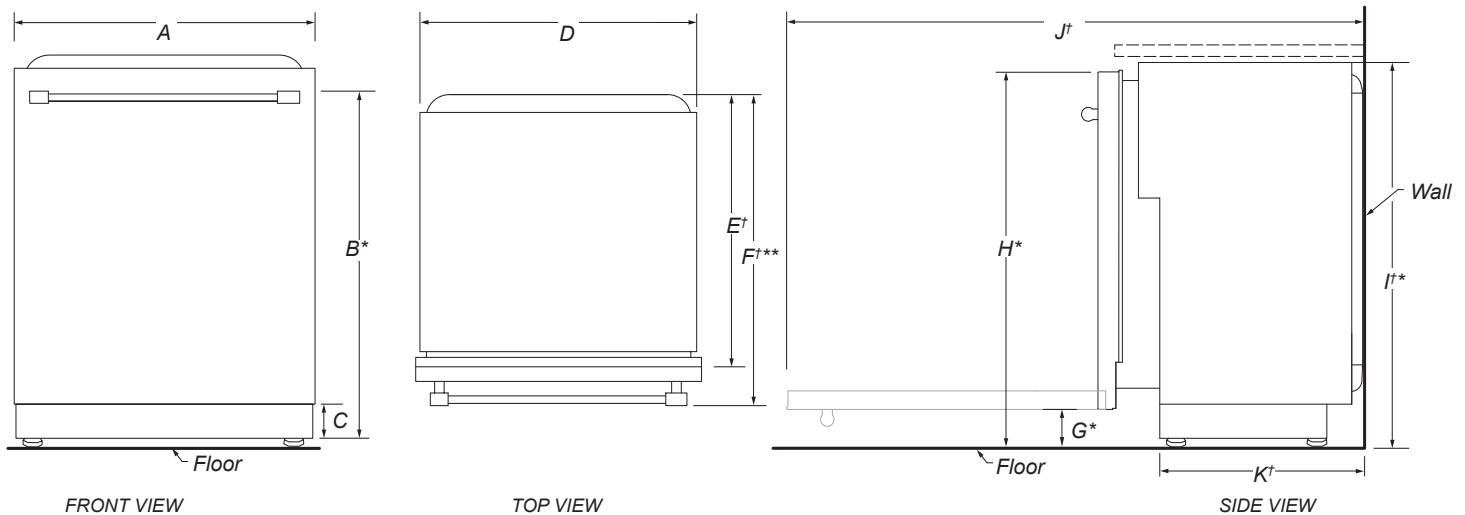

	DESCRIPTION	DIMENSIONS
A	Width of door	23½" (59.7 cm)
B*	Height to top of handle	30⅓" (78.3 cm)
C	Height of adjustable toe kick	3⅝" (8.4 cm) - min. 4⅛" (11.8 cm) - max.
D	Width of recessed dishwasher	22⅝" (57.4 cm)
E†	Depth without door	22⅝" (57.5 cm)
F†**	Depth with Towel Bar Handle	26⅞" (68.3 cm)
	Depth with Pocket Handle	24½" (62.6 cm)
	Depth of Panel-Ready Models	24" (61.0 cm)
G*	Height to bottom of door (min.)	3⅝" (8.4 cm)
H*	Height to top of door (min.)	33⅞" (84.9 cm)
I*	Height of recessed dishwasher (min.)	33⅝" (85.4 cm)
J†	Depth with door fully open (min.)	50⅜" (127.4 cm)
K†	Depth with toe kick (min.)	20⅓" (52.9 cm)

†Insulation blanket thickness not included, can be crushed up to 1/8" (0.3 cm), or removed along the top perforate section for additional clearance.

*Dishwasher can be raised 1⅞" (3.7 cm) with feet fully extended.

**For panel-ready models, dishwasher depth is 24" (61.0 cm), not including the 3/4" (1.9 cm) custom door panel.

Because Whirlpool Corporation policy includes a continuous commitment to improve our products, we reserve the right to change materials and specifications without notice.


Dimensions are for planning purposes only. For complete details, see Installation Instructions packed with product. Specifications subject to change without notice.

KitchenAid® 24" Dishwasher

DETAILED PLANNING DIMENSIONS GUIDE

OPENING/CLEARANCE DIMENSIONS

IMPORTANT: Check that all surfaces have no protrusions that would prohibit dishwasher installation.

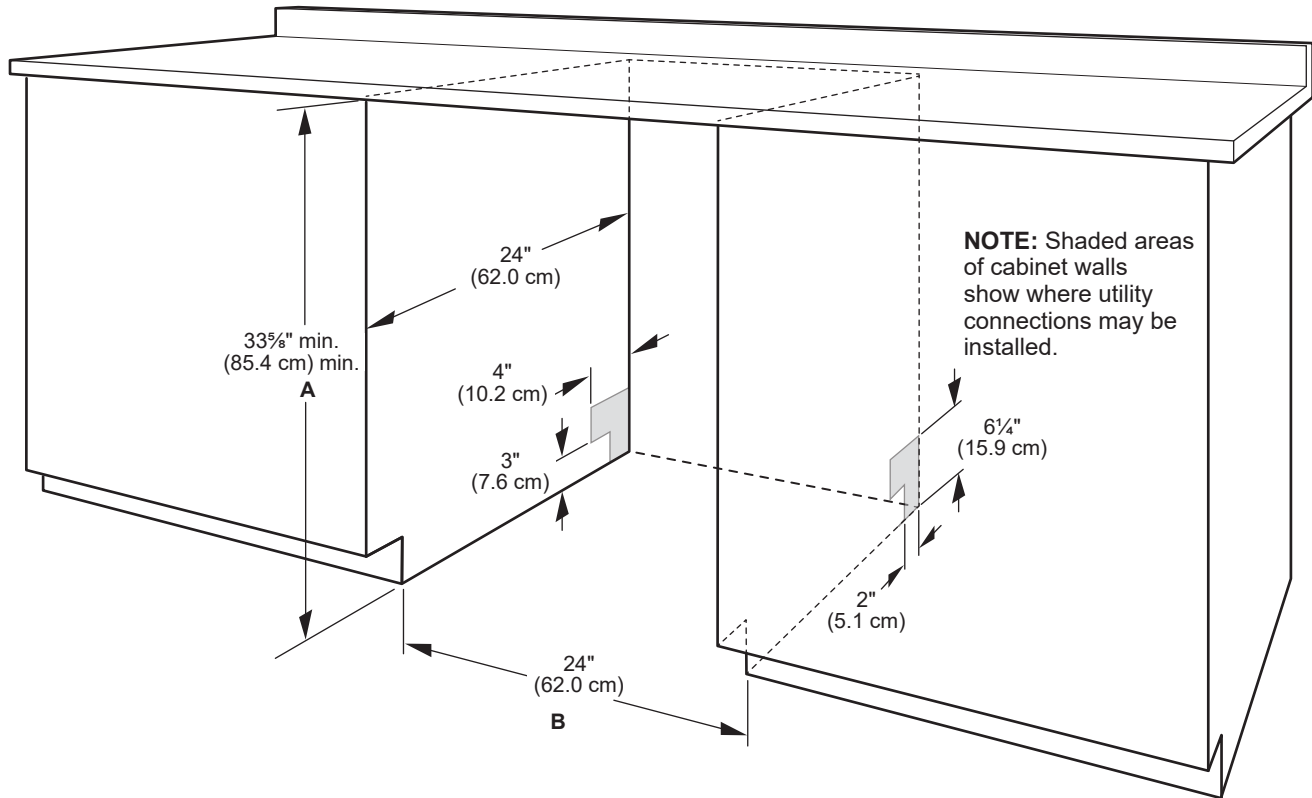

A. Measured from the lowest point on the underside of the countertop. May be reduced to 33 5/8" min. (85.4 cm) min. by removing the feet and perforated area of insulation (blanket) on dishwasher.

B. Minimum, measured from narrowest point of opening.


NOTE: Corner locations require a 2" (5.1 cm) minimum clearance between the side of the dishwasher door and the wall or cabinet.

DRAIN REQUIREMENTS

- A new drain hose is supplied with your dishwasher. If drain hose is not long enough, use a new drain hose with a maximum length of 12 ft (3.7 m) that meets all current AHAM/ IAPMO test standards, is resistant to heat and detergent, and fits the 1" (2.5 cm) drain connector of the dishwasher.

NOTE: Do not connect multiple drain hoses together.

- Make sure to connect drain hose to waste tee or disposer inlet above drain trap in house plumbing and 20" (50.8 cm) minimum above the floor. It is recommended that the drain hose either be looped up and securely fastened to the underside of the counter or be connected to an air gap.
- Make sure to use an air gap if the drain hose is connected to house plumbing lower than 20" (50.8 cm) above subfloor or floor.

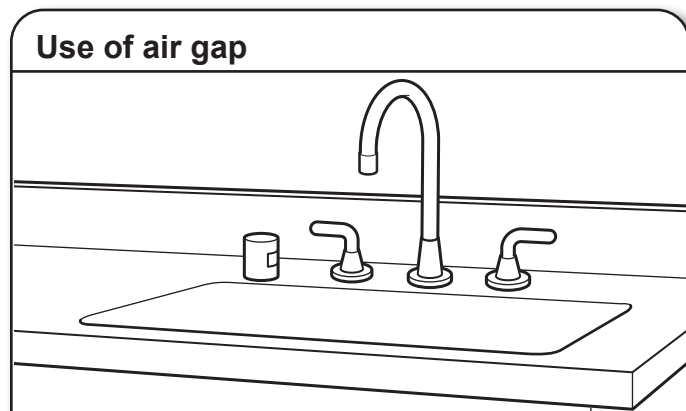

- If required, the air gap should be installed in accordance with the air gap installation instructions. When you are connecting the air gap, a rubber hose (not provided) will be needed to connect to the waste tee or disposer inlet.
- Use 1/2" (1.3 cm) minimum I.D. drain line fittings.

WATER SUPPLY REQUIREMENTS

- This dishwasher has a water heating feature and also requires a connection to a hot water supply line.
 - A hot water line with 20 psi to 120 psi (138 kPa to 862 kPa) water pressure can be verified by a licensed plumber.
 - 120°F (49°C) water at dishwasher.
 - 3/8" (0.95 cm) O.D. copper tubing with compression fitting or flexible braided water supply line.
- NOTE:** 1/2" (1.3 cm) minimum plastic tubing is not recommended.
- A 90° elbow with 3/4" (0.95 cm) hose connection with rubber washer.
 - Do not solder within 6" (15.2 cm) of the water inlet valve.
 - If installed in new construction, make sure the house water supply lines have been flushed prior to connecting the dishwasher to remove any debris that may exist in the supply line.

NOTE: If replacing an existing dishwasher, it is recommended to install a new water line and drain hose (supplied) with the new dishwasher.

ELECTRICAL REQUIREMENTS

⚠ WARNING



Electrical Shock Hazard

Plug into a grounded 3 prong outlet.

Do not remove ground prong.

Do not use an adapter.

Do not use an extension cord.

Failure to follow these instructions can result in death, fire, or electrical shock.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70 - latest edition, and all local codes and ordinances.

A copy of the above code standards can be obtained from:

National Fire Protection Association
1 Batterymarch Park
Quincy, MA 02169-7471

You Must Have:

- 120 V, 60 Hz, AC only, 15 A or 20 A, fused electrical supply
- Copper wire only
- A maximum of 2 field wiring supply conductors (12 AWG largest size) plus 1 grounding conductor are permitted in the terminal box.

We Recommend:

- A time-delay fuse or circuit breaker.

Circuit Requirements:

- The dishwasher may be installed on the same circuit as a garbage disposal providing that the branch circuit cannot exceed rated circuit load and must comply with all governing codes and regulations such as but not limited to National Electrical Code, ANSI/NFPA 70 - latest edition.
- No electrical connections other than the dishwasher power and ground connections can be made inside of the dishwasher terminal box.


If connecting dishwasher with a power supply cord:

- Use UL Listed power cord kit marked for use with dishwasher.
- Plug into a grounded 3 prong outlet. Outlet must meet all local codes and ordinances.



If connecting dishwasher with direct wiring:

- Use flexible, armored, or nonmetallic sheathed copper wire with grounding wire that meets the wiring requirements for your home and local codes and ordinances.
- Use a UL Listed/CSA Approved metallic strain relief.






PRODUCT DIMENSIONS

KRMF706E

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 to 414 kPa).

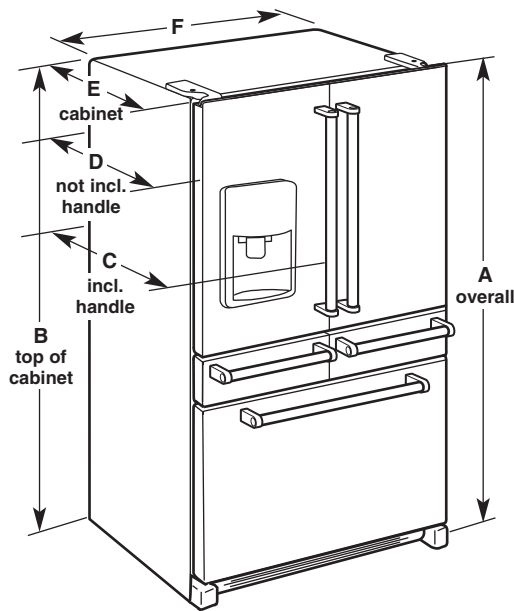

Model Size	Height - Overall "A"	Height - Top of Cabinet "B"	Depth - With Handles "C"	Depth - Without Handles "D"	Depth - Cabinet Only "E"	Width - Cabinet "F"
25.8	70 $\frac{7}{8}$ " (178.1 cm)	68 $\frac{5}{8}$ " (173.7 cm)	36 $\frac{1}{4}$ " (92.1 cm)	34 $\frac{1}{2}$ " (87.7 cm)	29" (73.7 cm)	36" (91.4 cm)

$\frac{1}{2}$ " (1.25 cm)

$3\frac{3}{4}$ " (9.5 cm)

NOTE: This refrigerator is intended for use in a location where the temperature ranges from a minimum of 55°F (13°C) to a maximum of 110°F (43°C). The preferred room temperature range for optimum performance, which reduces electricity usage and provides superior cooling, is between 60°F (15°C) and 90°F (32°C). It is recommended that you do not install the refrigerator near a heat source, such as an oven or radiator.

KitchenAid® ~~27"~~ (68.6 cm) and 30" (76.2 cm) Electric Built-In Microwave/Oven Combination

PRODUCT MODEL NUMBERS

KEMS309E KOCE500E KOCE507E

ELECTRICAL CONNECTION


If codes permit and a separate ground wire is used, it is recommended that a qualified electrical installer determine that the ground path and the wire gauge are in accordance with local codes. Check with a qualified electrical installer if you are not sure the oven is properly grounded.

This oven must be connected to a grounded metal, permanent wiring system.

Be sure that the electrical connection and wire size are adequate and in conformance with the National Electrical Code, ANSI/NFPA 70-latest edition or CSA Standards C22.1-94, Canadian Electrical Code, Part 1 and C22.2 No. O-M91-latest edition, and all local codes and ordinances.

To properly install your oven, you must determine the type of electrical connection you will be using and follow the instructions provided for it here.

- Oven must be connected to the proper electrical voltage and frequency as specified on the model/serial/rating plate. See the following illustration.



A. Model/serial/rating plate

- Models rated from 7.3 to 9.6 kW at 240 volts (5.4 to 7.4 kW at 208 volts) require a separate 40-amp circuit. Models rated at 4.8 kW and below at 240 volts (3.6 kW and below at 208 volts) require a separate 30-amp circuit.
- A circuit breaker is recommended.
- Connect directly to the fused disconnect (or circuit breaker box) through flexible, armored or nonmetallic sheathed, copper cable (with grounding wire). See "Make Electrical Connection" section.
- Flexible conduit from the oven should be connected directly to the junction box.
- Do not cut the conduit. The length of conduit provided is for serviceability of the oven.
- A UL listed or CSA approved conduit connector must be provided.
- If the house has aluminum wiring, follow the procedure below:
 - Connect a section of solid copper wire to the pigtail leads.
 - Connect the aluminum wiring to the added section of copper wire using special connectors and/or tools designed and UL listed for joining copper to aluminum.


Follow the electrical connector manufacturer's recommended procedure. Aluminum/copper connection must conform with local codes and industry accepted wiring practices.

For power requirements, refer to the following table.


Model	Voltage	Amperage (L1)*	Amperage (L2)*	Rating (W)
KOCE507E/KOCE500E	120/240	32	30	8000
KOCE507E/KOCE500E	120/208	30	28	6600

*Amperage values noted above are for information purposes only: the units are rated in watts.

PRODUCT DIMENSIONS

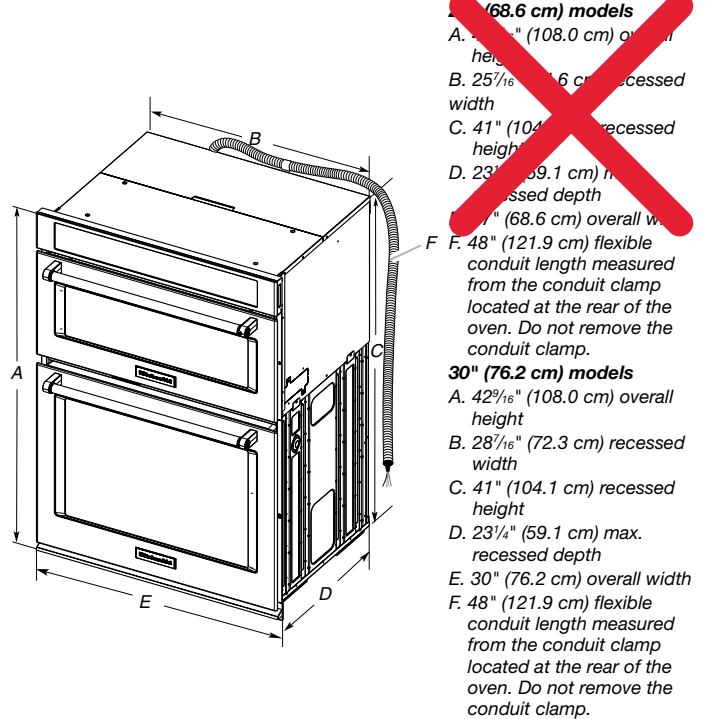

Cabinet Dimensions

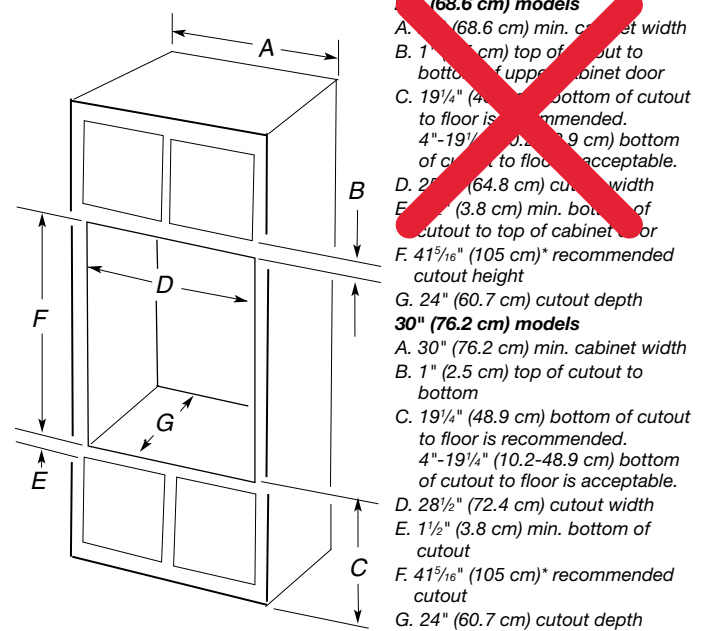

* NOTE: The cabinet height can be between 41" (104.1 cm) and 41 1/2" (105.6 cm) for microwave/oven combination.

In stock & Express Shipping | [CLICK HERE](#)

LOT 2-66, INVISIFIL
HOOD FAN



[Home](#) > KitchenAid 36 inch 600 CFM Wall Mount Range Hood with 3-Speed in Stainless Steel KVWB606DSS

KitchenAid 36 inch 600 CFM Wall Mount Range Hood with 3-Speed in Stainless Steel KVWB606DSS

SKU 092640 Available
★★★★ 3.9 (320) [Write a review](#)

Cooking is great, but grease collecting on your cabinets is not. This KitchenAid 36-inch canopy vent hood does a great job venting away strong odours, steam, and grease so you can protect your kitchen surfaces. It features auto speed sensing, touch controls, and a powerful 600 CFM motor with 65K BTU threshold

\$1,698.00 ~~\$2,049.99~~
(Free Shipping Included)

Old Appliance Removal

-- Please Select --

Add to Cart

♥ [Add to Wish List](#) | [Add to Compare](#)

[Free Shipping On Order Over \\$448](#)
[100% Price Match Guarantee](#)

Share: [Email to a friend](#)

Sale

GET 5% OFF



By closing this message, you consent to our cookies on this device in accordance with our Privacy Notice unless you have disabled them.

CLOSE

KitchenAid®


KitchenAid® 36" 6-Burner Commercial-Style Gas Rangetop

MSRP: \$4,599.99

☐

COMPARE

ADD TO CART

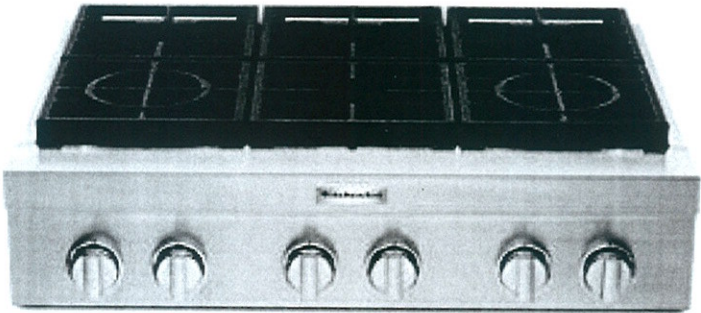

KitchenAid® 36" 6-Burner Commercial-Style Gas Rangetop

KCGC506JSS

★★★★☆

4.5 (101)

Write a review

Key Features

- Two 20,000 BTU Ultra Power™ Dual-Flame Burners
- Three-Level Convertible Grates
- 5,000 BTU Simmer & Melt Burner
- Three 15,000 BTU Burners

Color

Stainless Steel



MSRP: \$4,599.99

ADD TO CART

WHERE TO BUY

Estimated Arrival for L6A: Friday, May 27

Change this location?




- Height: 45"
- Depth: 30.81"
- Weight: 220 lb.


LOT 2-66, INNISFIL
Wellon 5599
WALL OVEN
30"
094324

Recently Viewed Items


KOCE500ESS

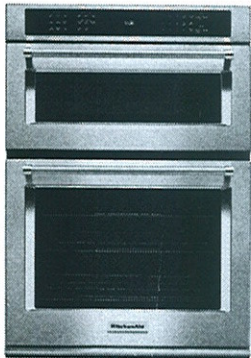


KitchenAid 30" Combination Wall Oven with Even-Heat™ True Convection - KOCE500ESS

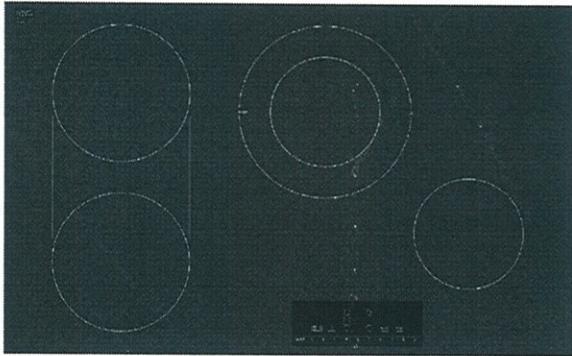


Bosch 800 Series 30" Electric Cooktop - NET8068UC (/products/bosch-800-series-30-



KitchenAid 47 dB Front-Control Dishwasher with ProWash™ Cycle - KDFE104KPS

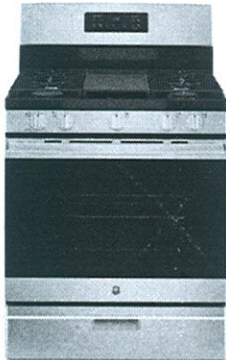

Hi there. Have a question? 
GE 5.0 Cu. Ft. Freestanding Steam-Clean Gas Range - JGBS66SESS (/products/ge-5-0-cu-
You are in the right place. Chat with us now!

LOT 2-66, INNSFILL
WALL OVEN

• Professionally-Inspired Design

Separate Microwave and Oven Compartments

With 5.0 cu. ft. of space in the conventional oven and 1.4 cu. ft. in the microwave, you'll have more than enough room to cook a wide variety of dishes at the same time.

Temperature Probe

You'll always know what temperature your food is cooking at with a simple glance, thanks to this amazingly accurate internal temperature probe. Never worry about serving raw or overcooked food again.

EasyConvect Conversion System

Always produce perfectly cooked food with this EasyConvect conversion system. This feature takes the guesswork out of convection cuisine, allowing you to focus on creating culinary delights.

Even-Heat True Convection

Every nook and cranny in your conventional oven will warm up to and stay at the perfect temperature thanks to this Even-Heat true convection system. Consistent warmth within the cavity ensures your meals are just right to serve your family and friends.

SatinGlide Roll-Out Extension Rack

Use the SatinGlide roll-out extension rack to easily remove large turkey dinners and trays of freshly baked goods. With an easy-grip handle and smooth loading and unloading, never worry about dropping your dishes again.

Microwave Convection Cooking

By combining 900W of microwave energy with 1,600W of convection cooking, your fantastic foods will be ready to consume in a snap. Plus, the microwave provides a second convection cooking option.

Crispwave Microwave Technology with Crisper Pan

Use your microwave for much more than just reheating leftovers. KitchenAid's Crispwave technology allows you to grill, fry and bake your dishes with precision and finesse not found in other microwaves.

Professionally-Inspired Design

Let this wall oven help define your kitchen style. With sleek touches such as the satin textured handles and clean design, you'll feel like you're cooking in a five-star restaurant.

Hi there. Have a question?



You are in the right place. Chat with us now!

Detailed Specifications:

General Overview:

- Fuel Type: Electric
- Size: 30"

Oven Features

LOT 2-66, INMSFIL
WALL OVEN

- Number of Oven Lights: Two
- Broiler Location: Top of Oven
- Door Broil Position: Closed
- Interior Coating: Porcelain
- Interior Colour: Blue
- Number of Oven Rack: Three
- Oven Rack Types: Standard, Gliding Roll-Out
- Number of Rack Glides: Six
- Adjustable Self-Cleaning
- Hidden Bake Element
- Bake Element Power: 2,800W/2,427W
- Broiler Element Power: 4,000W/3,467W
- Convection Element Type: True
- Convection Element Power: 3,200W
- Display Type: Digital
- Features: Clock, Control Lock, Delay Start, Proofing, Sabbath Mode, Star K, Temperature Probe, Time Bake, Timer

Microwave Features

- Cooking Power: 900W
- Turntable
- Turntable Diameter Size: 14.13"
- Convection
- Convection Power: 1,600W
- Interior Light: Incandescent
- Sensor Cooking
- Quick Touch Controls: Add a Minute, Cook Power, Cook Time, Crisp, Defrost, EasyConvect, Popcorn, Reheat, Soften/Melt, Steam Cook

Dimensions

Wall Oven:

- Width: 30"
- Height: 42.5"
- Depth: 26.88"



Shipping:

- Width: 34.81"

Hi there. Have a question?

X

You are in the right place. Chat with us now!

By closing this message, you consent to our cookies on this device in accordance with our Privacy Notice unless you have disabled them.

CLOSE


30" Combination Wall Oven with Even-Heat™ True Convection (Lower Oven)

MSRP: \$6,804.99

WALL OVEN

ADD TO CART

☐ COMPARE

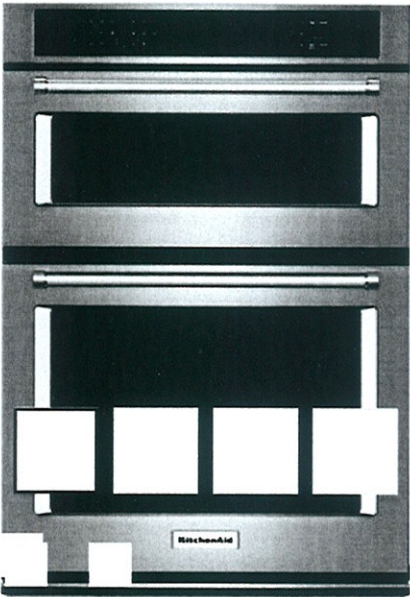

30" Combination Wall Oven With Even-Heat™

KOCE500ESS

★★★★☆ 4.3 (2101) [Write a review](#)

Key Features

- Even-Heat™ True Convection Oven (lower oven)
- Microwave Convection Cooking (upper oven)
- Temperature Probe
- EasyConvect™ Conversion System
- 5.0 Cu. Ft. Capacity (lower oven)

Color

Stainless Steel



MSRP: \$6,804.99

ADD TO CART

WHERE TO BUY

Estimated Arrival for L6A: Tuesday, Aug. 16

[Change this location?](#)

In stock & Express Shipping | [CLICK HERE](#)



LOT 2-66
INMISIL

DISHWASHER
Do us8

[Home](#) > KitchenAid 24 inch 39 dBA Built-In Dishwasher in Stainless Steel KDFE204KPS

KitchenAid 24 inch 39 dBA Built-In Dishwasher in Stainless Steel KDFE204KPS

SKU 129915 Available
★★★★★ 4.6 (1834) [Write a review](#)

KDFE204KPS Built-In Undercounter Dishwasher, Stainless Steel Tub, 39 dB Decibel Level, 24 inch Exterior Width, 5 Wash Cycles, Full Console, 13 Capacity (Place Settings), 3 Loading Racks

\$1,198.00 ~~MSRP: \$1,499.99~~
(Free Shipping Included)
 Or as low as **\$99.83 per month** over 12 months. [Learn More](#)

Old Appliance Removal

-- Please Select --


Add to Cart

 [Add to Wish List](#) |  [Add to Compare](#)


[Free Shipping On Order Over \\$448](#)
[100% Price Match Guarantee](#)

Share:  [Email to a friend](#)

Sale

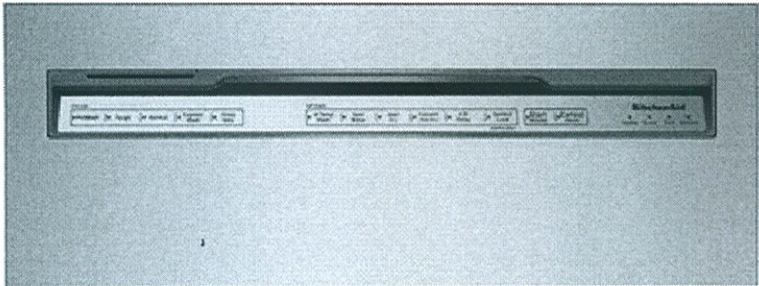


LOT 2-66
DISHWASHER

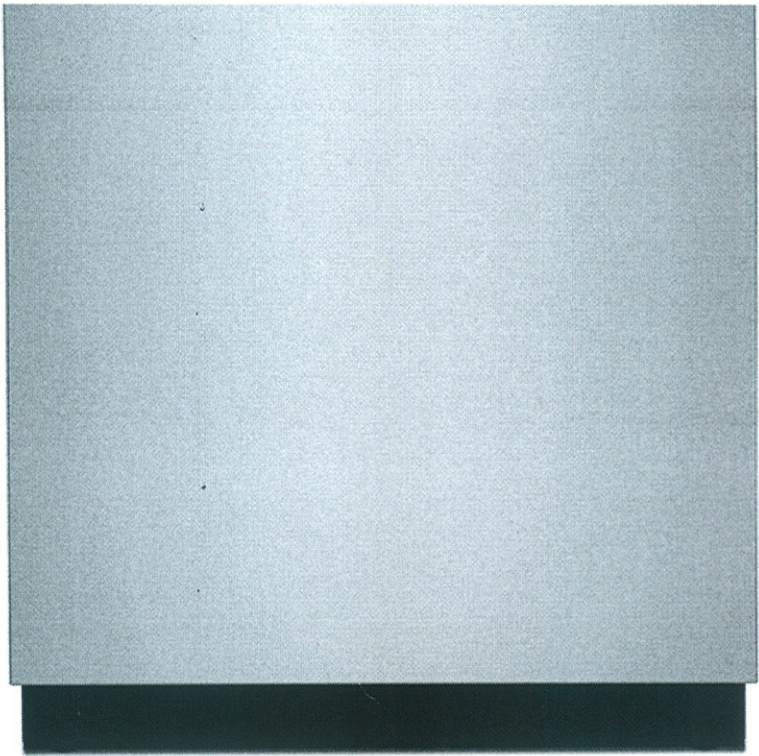

◦ ◦ ◦ ◦ ◦ ◦ ◦ ◦

Similar Products Available to Order


Sale

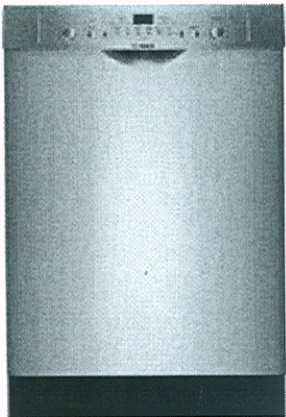

Bosch Ascenta 24 inch 50 dB Tall Tub Built-In Dishwasher in Stainless Steel

★★★★★ (849)
\$1,099.00 MSRP: ~~\$1,299.00~~

Sale

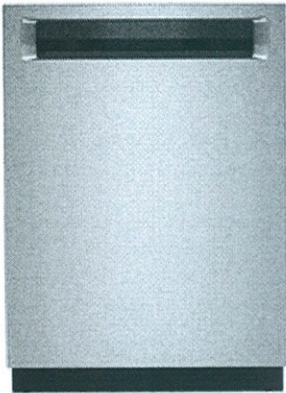

KitchenAid 24 inch Tall Tub Dishwasher in Stainless Steel KDPM804KPS

★★★★★ (754)
\$1,898.00 MSRP: ~~\$2,199.99~~



Bosch 23-inch Control Dishwasher

★★★★★
MS

◦ ◦ ◦ ◦ ◦

-25.8 Cu. Ft. 36" Multi-Door Freestanding Refrigerator with Platinum Interior Design

Lot 2-66, INNSFIL

SAVE \$900.00 (15%)


Sale: \$5,099.99 MSRP: \$5,999.99

ADD TO CART

☐ COMPARE



FRIDGE

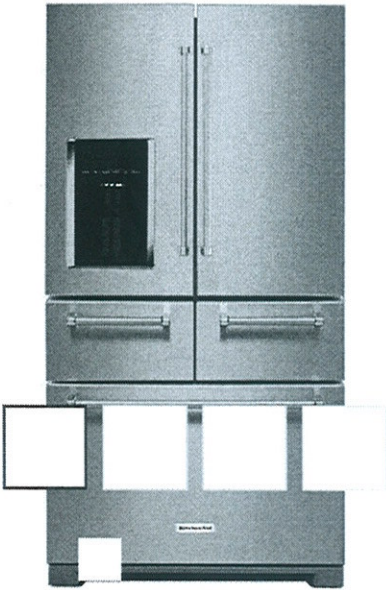

25.8 Cu. Ft. 36" Multi-Door Freestanding Refrig

KRMF706ESS


★★★★★ 4.1 (4934) Write a review

Key Features

- 5-Door Configuration
- Preserva® Food Care System
- 2 Soft-Close Drawers
- Professionally-Inspired Design
- 3-Tier Freezer Drawer with Storage Divider

Color

Stainless Steel



Sale: \$5,099.99

MSRP: \$5,999.99 SAVE \$900.00 (15%)



25.8 Cu. Ft. 36" Multi-Door Freestanding Refrigerator with Platinum Interior Design

SAVE \$900.00 (15%)

ADD TO CART

Lot 2-66, INMISAL

SALE: \$5,099.99 MSRP: \$5,999.99

FRIDGE

Estimated Arrival for M4B 1B3: Tuesday, Apr. 12

Change this location?

Extended Service Plans ⓘ

No Selection
1 Year — \$204.99
2 Year — \$374.99
4 Year — \$499.99

Shop with Confidence

PROFESSIONAL HOME DELIVERY

Enjoy our professional in-home delivery service. Haul away service also available. Terms apply.

LEARN MORE

HASSLE FREE & EASY RETURNS ON MAJOR APPLIANCES

Not satisfied for any reason? Request a return within 5 business days of delivery for a product refund. See our return policy for details. Terms apply.

LEARN MORE

NEED HELP CHOOSING THE RIGHT APPLIANCE?

We've Got You Covered! Our Virtual Shopping Team has the answers to all your appliance-buying questions.

CONTACT US

Overview

25.8 Cu. Ft. 36" Multi-Door Freestanding Refrigerator with Platinum Interior Design

LOT 2-46, INMSFL

SAVE \$900.00 (15%)

ADD TO CART

SALE: \$5,099.99 MSRP: \$5,999.99


REFRIGERATOR WITH PLATINUM INTERIOR DESIGN

This uniquely versatile, platinum interior refrigerator offers 5 doors, including 2 soft-close drawers, to deliver optimized storage. A convenient undershelf storage pan saves space and goes instantly from refrigerator to countertop. This refrigerator also features the Preserva® Food Care System which uses two independent cooling systems to help keep food fresh longer.



5-Door Configuration

Is a KitchenAid® innovation and industry first. This revolutionary configuration is a breakthrough in organization that puts all your food in ready sight and easy reach. It features soft close pantry doors to provide an additional level of convenience.

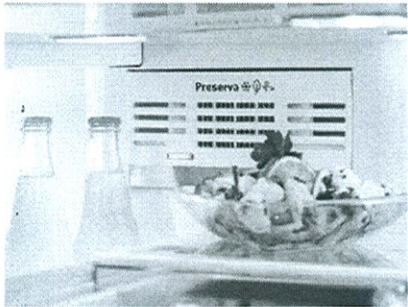

Preserva® Food Care System

Two independent cooling systems provide a dedicated refrigeration unit to help keep food fresh longer, and a separate system for frozen food. The FreshFlow™ Air Filter helps minimize odours while the two Produce Preservers help delay over-ripening.

Additional Features

2 SOFT-CLOSE DRAWERS

Offer optimized storage and are a first for freestanding refrigeration. The left drawer features 5 preset temperatures; meat/fish, drinks, greens/herbs, deli/cheese, thaw/marinate. The right drawer includes a Produce Preserver and is ideal for produce.

PROFESSIONALLY-INSPIRED DESIGN

Combines a bold blend of professionally-inspired styling with sleek touches for the home. This beautiful 5-door refrigeration unit features Satin Textured Handles and the KitchenAid® Badge, a symbol of uncompromised quality.

VIEW MORE

Specifications

25.8 Cu. Ft. 36" Multi-Door Freestanding Refrigerator with Platinum Interior Design

Lot 2-66, INMSFL

SAVE \$900.00 (15%)

ADD TO CART

SALE: \$5,099.99 MSRP: \$5,999.99

Width:

9144.00, 36.0"

Centimeters, Inches


FRIDGE

Depth:

9207.50, 36-1/4"

Centimeters, Inches

Certifications

ADA Compliant	No
CEE Tier	Not Rated
Energy Star® Qualified	No
Prop 65	<div><div></div><div>CALIFORNIA RESIDENTS ONLY - WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.</div></div>
UL	Yes
ULe Environmentally Preferred Certified	Passed 60 point AHAM (Association of Home Appliance Manufacturers) Sustainability Standards

Dimensions

Capacity	25-19/25
Depth	9207.50 cm, 36-1/4 in
Freezer Volume	2153.63 l, 7.61 cu. ft.
Height	17811.75 cm, 70-1/8 in
Refrigerator Volume	5136.45 l, 18.15 cu. ft.
Width	9144.00 cm, 36.0 in

VIEW MORE SPECS