


LOT 2-30

INNISFIL

AVG



AVW-308CS

30" Wall mounted hood - MSRP: \$789.00

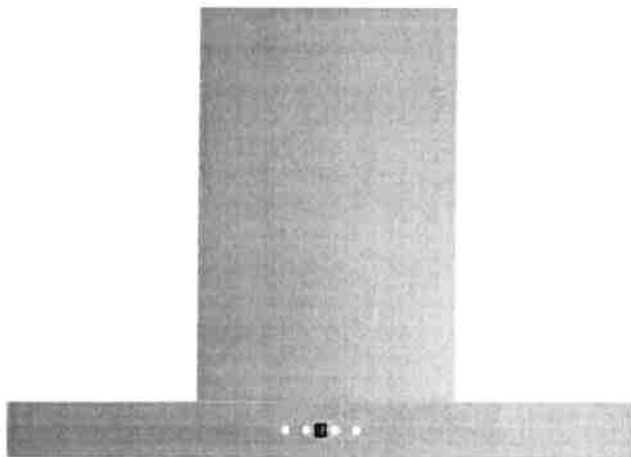


Model	
AVW-308CS	
Features	
Control	Soft touch with LED display
Lighting	2 bulbs, 3W LED (bulbs included)
Blower type	860 CFM, 6-Speed
Blower performance	Speed 1, 2.4 sones
	Speed 6, 6.2 sones
Filter type	2 aluminium micro hole filters (included)
	2 Stainless steel baffle filters (included)
Duct transition	6" Round (Top)
Ducting	Ducted
Chimney (ducted out)	For ceiling heights up to 9'0"
Exterior Appearance	
Stainless steel grade	201
Electrical Requirements	
Electrical requirements	120V / 60Hz / 2.7 Amps
Dimensions	
Dimensions	29 1/2" (W) x 19 3/4" (D) x 2 3/4" (H)
Warranty	
1-year Warranty	Parts and labour, in-home service

Dimensions

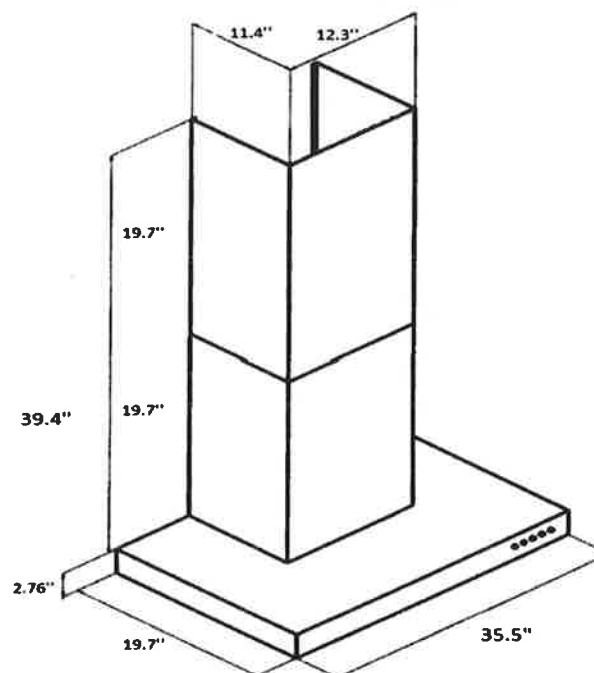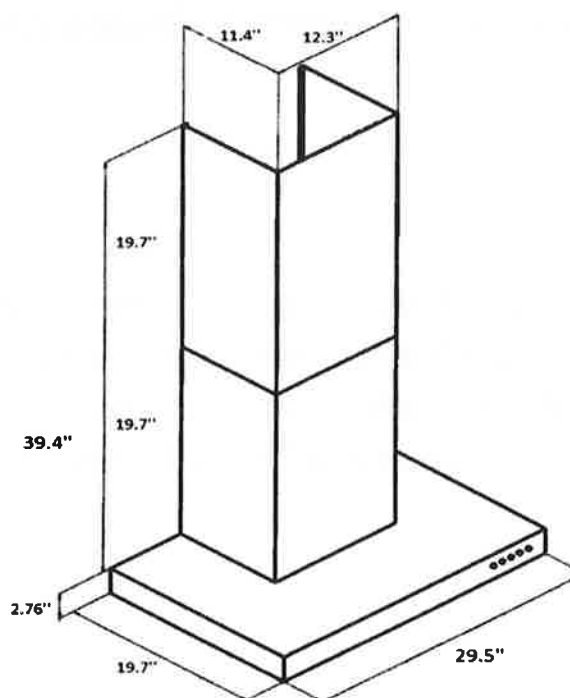

Installation

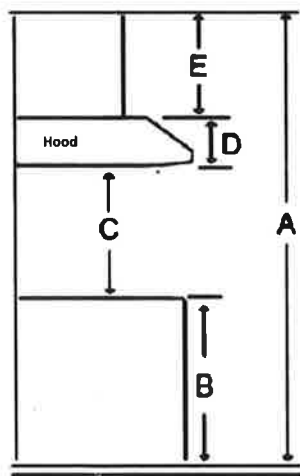

A	Floor to ceiling height	Variable
B	Floor to counter top height (standard)	36"
C	Recommended height between cooking surface and bottom of the hood	28" to 30"
D	Hood height	2.76"
E	Chimney height	Max 39.4"

Duct transition

6" round top

The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.



LG LSGL6335F

DIMENSIONS & WEIGHT

- Cabinet Width (in.)
30"
Overall Depth (in.) - including handle
29.3"
- Overall Height (in.)
37.2"
Overall Width (in.)
29.9"
- Product Weight (lb)
157.7
Shipping Weight (lb)
200.3

BRAND

- Cooktop Type
Sealed

LOT 2-30, INNISFIL

Number of Cooktop Burners

5

- **Oven Type**

Single Oven

Oven Cooking System

ProBake Convection®

- **Oven Capacity (cu.ft.)**

6.3

Oven Cleaning Type

EasyClean® + Self Clean

- **Drawer Type**

Storage

Size in Width (in)

30"

APPEARANCE

- **Colours**

Smudge Resistant Stainless Steel, Smudge Resistant Black Stainless Steel

Control Type

SmoothTouch™ Glass

- **Knobs**

Stainless Steel Appearance, Weighted

Oven Door Feature

InstaView & WideView™ Window

- **Cooktop Finish**

Porcelain Enamel

COOKTOP

- **Cooktop Type**

Sealed

Number of Cooktop Burners

5

- **Element/Burner - Left Front**

18,000 BTU

Element/Burner - Left Rear

9,100 BTU

- **Element/Burner - Right Front**

20,000 BTU UltraHeat™

LOT 2-30

INNISFIL

Element/Burner - Right Rear

5,000 BTU

- Element/Burner - Center
10,000 BTU Oval
Cooktop Burner Grate Features
Edge-to-Edge Continuous Grates
- Cooktop Burner Grate Material
Cast Iron

OVEN

- Oven Type
Single Oven
Oven Cooking System
ProBake Convection®
- Convection Conversion Auto-Adjust
Yes
Oven Cleaning Type
EasyClean® + Self Clean
- Self-Clean Oven Door Lock
Automatic
Oven Capacity (cu. ft.)
6.3
- Broiler Element Power
13,500 BTU
Bake Element Power
19,000 BTU
- Number of Rack Positions
7
Number of Oven Racks
2
- Oven Rack Type
1 Standard, 1 Heavy Duty
Drawer Type
Storage
- Oven Modes
Bake, Conv. Bake, Conv. Roast, Broil High, Broil Low, Warm, Proof,
EasyClean®, SelfClean, Frozen Meal, Air Fry, Slow Cook

LOT 2-30, INNISFIL

Oven Light Type

Halogen

CONTROL FEATURES

- Kitchen Timer
Yes
Timed Cook
Yes
- Oven Control Lock
Yes
Door Lock
Yes
- Sabbath Mode
Yes

SMART FEATURES

- Wi-Fi Connect
Yes
Smart Diagnosis™
Yes
- ThinQ® Technology
Yes
Works with
LG ThinQ®
Amazon Alexa
Google Assistant
SIDECHEF

POWER/RATINGS

- Volts/Hertz/Amps
120V/60Hz/4.2A

LOT 2-30

INNISFIL

Smudge Resistant Top Control Dishwasher with TrueSteam®, QuadWash® and 3rd Rack
LDP6810SS



DIMENSIONS/CLEARANCES/WEIGHT

- Product Dimensions (in) (W x H x D)
23 3/4" x 33 3/5" x 24 3/5"
Product Weight (lbs)
84.7 lbs
- Depth with Door Closed with Handle (in)
24 3/5"
Depth with Door Open (in)
50 1/2"
- Carton Dimensions (in) (W x H x D)
28" x 34 7/10" x 29 3/5"
Shipping Weight with Carton (lbs)
96.8

CAPACITY

- Total Place Settings
15
Upper Rack Dish Height Limit
7.1"
- Lower Rack Dish Height Limit

LOT 2-30, INNISFIL

12.5"

RACKS AND BASKETS

- Cutlery Baskets
Yes
Cup Rack
Yes
- Stemware Holders
Yes
Fold Down Tines
Yes (Half Fold on Upper & Half(Smart), Half(Normal) Fold on Lower)
- BPA-Free Nylon Coated Racks and Tines
Yes
Rack Handle
Yes (Upper)
- Glide Rail (Upper Rack)
Yes
EasyRack™ Plus System
Yes
- Height Adjustable Upper Rack
Yes
3rd Rack (adjustable)
Yes

STYLE AND DESIGN

- Control Panel Location
Top Control
Electronic Controls
Fully Integrated Control Panel
- Time Remaining Indicator
Yes (LED)
Tub Material NeveRust™
Stainless Steel
- Handle
Pocket Handle
All Available Colours
Smudge Resistant Stainless Steel
- Fingerprint Resistant

LOT 2-30

INNISFIL

Yes

FEATURES

- TrueSteam®
Yes
QuadWash®
Yes
- Inverter Direct Drive Motor
Yes
LoDecibel™ Quiet Operation
44 dBA
- Number of Wash Cycles
10 (Auto, Heavy, Delicate, Refresh, Normal, Turbo, Download Cycle, Machine Clean, Rinse, Express)
Number of Options
9 (Dual Zone, Half Load, Energy Saver, Steam, High Temp, Extra Dry, Delay Start, Control Lock, Night Dry)
- No. of Spray Arms
3 (Top, Upper, Lower)
SenseClean™ Wash System
Yes
- Vario Wash
Yes
Detergent and Rinse-Aid Dispenser
Yes
- Dynamic Dry™ (Hybrid Condensing Drying System)
Yes
NSF® Certified
Yes
- End of Cycle Indicator
Yes (Beeper + END indication on display)
Hidden Water Heater
Yes
- Leak Protection
Yes
Soil (Turbidity) Sensor
Yes

LOT 2-30, INNISFIL

- Tub Insulation (Damping Sheet, Sound Absorbing Material (felt), Base)
Yes
BPA-Free Nylon Coated Racks and Tines
Yes
- Anti-Bacterial Treatment (Sump, Inner / Outer filter, Drain pump case, Drain hose)
Yes
Balanced Door
Yes
- 3-Stage Filtration System
Yes

SMART FEATURES

- wi-fi Enabled
Yes
ThinQ®
Yes
- Works with
Google Assistant, Amazon Alexa
SmartDiagnosis™
Yes

POWER RATINGS

- ENERGY STAR® Qualified
Yes
CEE Tier
1
- Energy Use (kWh/Year)
258 kWh/Year
Water Factor (WF)
2.8


Installation Overview

Preparing Cabinet Opening
 Preparing Electrical Wiring
 Preparing Water Supply Connection
 Preparing the Dishwasher
 Removing Lower Cover
 Sliding the Dishwasher into Cabinet


Leveling the Dishwasher
 Securing the Dishwasher to Countertop
 Connecting the Drain Hose
 Connecting Water Supply
 Connecting Power
 Final Check

Product Dimensions

Back view

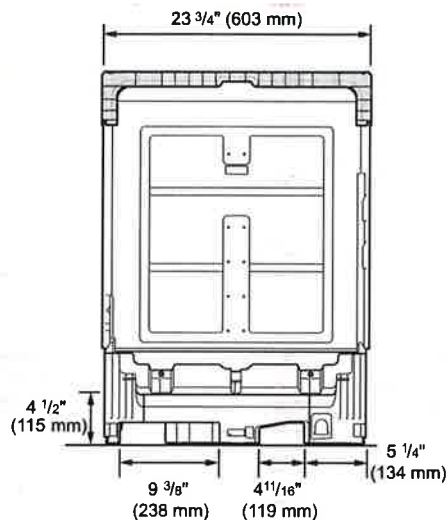

Side view

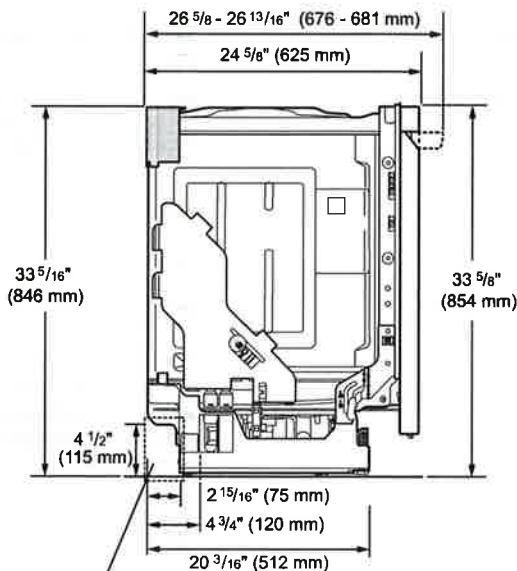

Water supply hose, drain hose and electric cable should be passed through this area.

NOTE

- For easiest installation, see marked areas above for water and electrical clearances in base of dishwasher.

Product Specifications


The appearance and specifications listed in this manual may vary due to constant product improvements.

Electrical requirement	120 V, 60 Hz AC only, minimum 15 A circuit breaker
Water pressure	20 - 80 psi (140 - 550 kPa)
Dimensions	$23 \frac{3}{4}"$ (W) X $24 \frac{5}{8}"$ (D) X $33 \frac{5}{8}"$ (H) 603 mm(W) X 625 mm(D) X 854 mm(H)
Inlet water temperature	120 °F (49 °C) minimum, 149 °F (65 °C) maximum
Net weight	72 - 89 lbs. (33 - 40 kg)


Preparing Cabinet Opening

This dishwasher is designed to fit a standard dishwasher opening. An opening may be needed on both sides to route plumbing and electrical connections.


- To ensure proper drainage, install the dishwasher no more than 12 ft. (3.65 m) from the sink.
- The location must have sufficient space for the dishwasher door to open easily and provide at least 0.1" (2 mm) between the dishwasher and the cabinet sides.
- If installing the dishwasher in a corner, leave a minimum of 2" (50 mm) between the dishwasher and the adjacent wall.
- The adjacent wall must be free of obstructions.
- For flush installations only, you may remove the cabinet brace ① inside the cabinet.

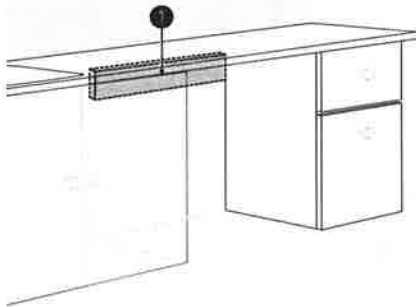

- 1 Select a location as close to the sink as possible for easy connections to water supply line, drain hose and electrical connection.

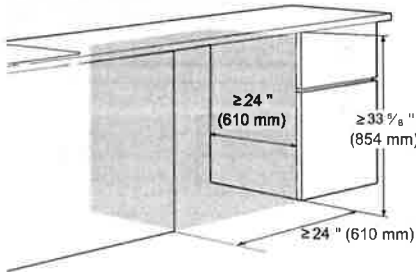


- 2 To allow for proper clearance of plumbing and electrical, use the template included with the literature to determine the clearance on the side of the cabinet where the cabinet meets the back wall. Using a 2 1/2" diameter hole saw, drill a hole in the target area as shown on the template.



⚠ WARNING

- Installation damage is not covered by the warranty, and leaks caused by improper installation may result in property damage.
- Do not use existing holes unless they are in the target area.
- Failure to properly locate the hole for the water and drain lines may prevent the dishwasher from installing flush with the cabinets and could result in kinked, pinched, crushed, stressed or damaged lines.



LOT 2-30

INNISFIL

LG LRMVS3006S



CAS

DIMENSIONS/CLEARANCES/WEIGHTS

- Depth with Handles
39 1/8"
Depth without Handles
36 5/8"
- Depth without Door
31 3/4"
Depth (Total with Door Open)
51"
- Height to Top of Case
68 7/8"
Height to Top of Door Hinge
70 1/4"
- Width
35 3/4"
Width (Door Open 90° with Handle)
45"
- Width (Door Open 90° without Handle)
40"
Door Edge Clearance with Handle

LOT 2-30, INNISFIL

4 5/8"

- Door Edge Clearance without Handle

2 1/4"

Installation Clearance

Sides 1/8", Top 1", Back 2"

- Weight (Unit/Carton)

404 lbs./437 lbs.

Carton Dimensions (WxHxD)

38" x 73" x 33"

SUMMARY

- Series

LG

Type

French Door

- Door Type

4-Door

InstaView™ Door-in-Door®

Yes

- Total Capacity (cu.ft.)

29.50

Colour

Smudge Resistant Stainless Steel

CAPACITY

- Refrigerator (cu.ft.)

17.00

Full-Convert™ Drawer

3.60

- Freezer (cu.ft.)

8.90

Total Capacity (cu.ft.)

29.50

- Energy Consumption (kWh/Year)

799



ENERGY STAR® Qualified

Yes

Dimensions and Clearances

- Check the dimensions of the appliance and the installation path to ensure there is sufficient room to move the refrigerator through doors or narrow openings.
- If an opening is too narrow to fit the refrigerator through, remove the refrigerator doors. See Removing/Assembling the Doors and Drawers in this manual.
- The installation location chosen for the refrigerator should allow space behind the unit for connections and airflow and space in front to open the doors and drawers.
- Too small of a distance from adjacent items may result in lowered freezing capability and increased electricity consumption charges. Allow at least 24 inches (610 mm) in front of the refrigerator to open the doors, and at least 2 inches (50.8 mm) between the back of the refrigerator and the wall.

ENGLISH



-	Dimension/Clearance	LRMDS3006*	LRMDC2306*
		LRMVS3006*	LRMVC2306*
A	Depth without Handle	35 2/3" (906 mm)	28 7/9" (731 mm)
B	Width	35 3/4" (908 mm)	35 3/4" (908 mm)
C	Height to Top of Case	69" (1753 mm)	69" (1753 mm)
D	Height to Top of Hinge	70 1/4" (1785 mm)	70 1/4" (1785 mm)
E	Back Clearance	2" (50 mm)	2" (50 mm)
F	Depth without Door	31" (785 mm)	24" (610 mm)
G	Depth with Handle	38 1/9" (968 mm)	31 2/9" (793 mm)
H	Depth (Total with Freezer Drawer Open)	59 3/8" (1508 mm)	47 3/4" (1213 mm)
I	Depth (Total with Door Open 90°)	50" (1270 mm)	43 1/9" (1095 mm)

LOT 2-30

INNISFIL

HOME APPLIANCES



LG LAUNDRY

DLEX4200_ / DLGX4201_

7.4 cu.ft. Front Load Dryer with TurboSteam™ and Built-In Intelligence

KEY FEATURES

7.4 cu. ft. Ultra Large Capacity
 TurboSteam™ Technology
 AI Fabric Sensor/ Smart Pairing™
 LG ThinQ® Technology / Proactive Customer Care
 Tempered Glass Door
 FlowSense™ Duct Clogging and Lint Filter Indicators
 ENERGY STAR® Certified
 Closet Depth
 LoDecibel™ Quiet Operation
 Reversible Door
 Wrinkle Care Option

AVAILABLE COLORS




SMART APPLIANCE

LG ThinQ®

Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle



PRODUCT FEATURES

SUMMARY		FABRIC CARE FEATURES		POWER SOURCE	
Type	Front Load Dryer	AI Dry	Yes	Ratings	CSA Listed
Capacity	7.4 cu. ft.	Sensor Dry	Yes	Electrical Requirements	120V, 15 Amps (Gas) / 240V 30 Amps (Electric)
Matching Washer	WM4200HWA, WM4200HBA	Precise Temperature Control with Variable Heater	Yes	Type	Electric, Gas
Sensor Dry	Yes	Steam	TurboSteam™	BTU Rating	20,000 Feet
Steam	Yes	CONVENIENCE FEATURES		OPTIONS	
Color	White (W), Black Steel (B)	3 Minute Installation Check	Yes	LP Conversion Kit	383EEL3002D
APPEARANCE		LoDecibel™ Quiet Operation	Yes	Side Venting Kit	3911EZ9131X
Intelligent Electronic Controls with LED Display	Yes	End of Cycle Signal	Yes	Pedestal	WDP4W, WDP4B
Dial-A-Cycle™	Yes	Drum Light	Yes	Pedestal (WxHxD)	27 x 14 1/8 x 30 3/4 (50 1/2 D with door open)
Touch Buttons	Yes	Reversible Door	Yes	DIMENSIONS (ELECTRIC)	
DRYER PROGRAMS		FlowSense™ Duct Clogging Indicator	Yes	Product (WxHxD)	27" x 39" x 30 1/8"
No. of Programs	14	Wrinkle Care Option	Yes	Depth with Door Open	51 3/8"
Programs (Sensor Dry)	Normal, Heavy Duty, Bedding, Small Load, Anti Bacterial, Steam-Sanitary™, SteamFresh™, Perm Press, Delicates, Sportswear, Towels, Speed Dry (Manual Dry), Air Dry (Manual Dry), Downloaded	Child Lock	Yes	Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
		Venting Option	Electric: 4 Way Venting / Gas: 3 Way Venting	Weight (Product)	125.3 lbs.
No. of Options	12	4 Adjustable Legs	Yes	Weight (Carton)	142.6 lbs.
Options	More Time, Less Time, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, TurboSteam™, Reduce Static, Remote Start, Drum Light, Signal	Remaining Time Display/Status Indicator(s)	Yes	DIMENSIONS (GAS)	
		ThinQ® TECHNOLOGY		Product (WxHxD)	27" x 39" x 30 1/8"
Temperature Settings	High, Med.High, Medium, Low, Ultra Low	SmartDiagnosis™ (v3.0)	Yes	Depth with Door Open	51 3/8"
		Wi-Fi	Yes	Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry	Remote Start and Cycle Monitor	Yes	Weight (Product)	139.34 lbs.
		Energy Monitoring	Yes (Wi-Fi)	Weight (Carton)	155.0 lbs.
Manual Dry Times	60 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time	ENERGY		LIMITED WARRANTY	
		ENERGY STAR® Certified	Yes	Parts & Labor	1 Year
		CEF	Electric: 3.94 / Gas: 3.49	Drum	3 Years
MATERIALS AND FINISHES		UPC CODES			
Aluminized Alloy Steel Drum	Yes	DLEX4200W (White)	048231028417		
Tub Rear	Painted	DLGX4201W (White)	048231028424		
Cabinet	Painted Steel	WM4200HWA (White)	048231028301		
Door	Tempered Glass Door	DLEX4200B (Black Steel)	048231028394		
All Available Colors	White (W), Black Steel (B)	DLGX4201B (Black Steel)	048231028400		
		WM4200HBA (Black Steel)	048231028295		

LOT 2-30

INNISFIL

HOME APPLIANCES

LG LAUNDRY

WM4100HBA

5.2 cu. ft. Capacity Front Load Washer



TurboWash™ 360 Technology

AI DD™

Steam Technology

ENERGY STAR® Qualified

SmartDiagnosis™

Touch Control Panel

ThinQ™ Technology (Wi-Fi Enabled)

Enjoy new ways to control your home with LG smart appliances

- Start the laundry while you're out shopping
- Get alerts when the cycle is finished
- Works with the LG ThinQ® app



works with the Google Assistant



works with alexa



CAPACITY	
Capacity (cu.ft.)	5.2
APPEARANCE	
Design Look	Front Control
Intelligent Electronic Controls with LED Display	*
Touch Buttons	*
Dial-A-Cycle™	*
ENERGY	
ENERGY STAR® Qualified	*
CEE Tier	2
DRYING PROGRAMS	
No. of Programs - 14	Normal, Perm. Press, Heavy Duty, Delicates, Towels, Speed Wash, Drain+Spin, Bedding, Tub Clean, Bright Whites™, Sanitary, Allergiene™, Sportswear, Downloaded
No. of Options - 14	TurboWash™, Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Wi-Fi, Add Item, Cold Wash, Extra Rinse, Rinse+Spin, Control Lock, Spin Only, Signal
Temperature Settings	5 Extra Hot, Hot, Warm, Cold, Tap Cold
Spin Speeds	5 Extra High, High, Medium, Low, No Spin
Water Levels	Load Sensing
Soil Levels	5
FABRIC CARE FEATURES	
AI DD™	*
TurboWash™ 360 Technology	*
Steam Technology	*
Allergiene™ Cycle	*
Sanitary Cycle	*
ColdWash™ Option	*
CONVENIENCE FEATURES	
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener
TrueBalance™ Anti-Vibration System	*
Load Sense	*
Control Lock	*
Auto Suds Removal	*
Leveling Legs	4 Adjustable Legs
ThinQ® TECHNOLOGY	
SmartDiagnosis™ (v3.0)	*
Wi-Fi	*
Remote Start and Cycle Monitor	*
Energy Monitoring	*

Tub Clean Coach	*
MOTOR	
Motor Type	Inverter Direct Drive Motor
Motor Speed	Variable
Max RPM	1,300
Axis	Horizontal
MATERIALS AND FINISHES	
NeverRust™ Stainless Steel Drum	*
Cabinet	PCM
Control Panel	Plastic
Top Plate	Painted
Door Cover	Tempered Glass Door
Door / Rim	Glass/Chrome
All Available Colours	Black Steel (B)
POWER SOURCE	
Ratings	UL Listed
Electrical Requirements	120V, 10 Amps
Type	Electric
OPTIONS	
Pedestal	WDP4B 27" x 14 1/8" x 30 3/4"
SideKick™ Pedestal Washer	WD100CB 27" x 14 1/8" x 30 3/4"
Stacking Kit	KSTK1
DIMENSIONS	
Product (WxHxD)	27" x 39" x 30 1/4" 55" (With door open)
Carton (WxHxD)	29 23/32" x 42 27/32" x 31 17/32"
Weight (Product/Carton)	198.4 lbs / 212.1 lbs
LIMITED WARRANTY	
1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor	
UPC CODES	
WM4100HBA	772454073250
DLEX4200B	772454073267
DLGX4201B	772454073366
WD100CB	772454071805
WDP4B	048231026451
KSTK1	772454059896