



RS36A72U1_N

Integrated French Door Refrigerator 16.8cu ft, Ice & Water

Integrated

This 72" Fisher & Paykel French Door Refrigerator is designed to fit flush with your kitchen cabinetry for a seamless look. ActiveSmart™ FoodCare technology helps keep food fresher for longer.

Stainless Steel

Dimensions

Depth	23 3/4"
Height	71 13/16"
Width	35 21/32"

Features & Benefits

Clever energy

Your fridge adapts to daily use by cooling and defrosting only when needed. This means your fridge uses the energy it needs without compromising on food care.

Water on tap

The slimline dispenser makes it easy to fill almost any sized jug or vessel with cool filtered water and doesn't take up any storage space in your fridge.

Easy installation

Our integrated products are easy to install, whether you are renovating your kitchen or designing a new one. Our fridges are designed for minimal gaps with adjustable front and rear feet to allow for uneven floors alongside adjustable door panels that can be customized to match your kitchen.

Ice maker

Fresh ice is always available for you in a dedicated freezer bin. Simply turn it off to free up freezer space or during busy times, you can boost ice production by up to 30%.

Design quality

Our fridges are designed and built using quality materials. We use real stainless steel on our fridges and solid glass for shelving.

Humidity control

Your fruit and veges need different environments. The humidity control slides in each storage bin create a microclimate that helps keep food fresher for longer.

Specifications

Accessories

EZKleen stainless steel door panel & handle kit with water dispenser	RD3672U
Replacement water filter	81099
Stainless Steel Door Panel Set 72	RD3672U
Water filter	Part number 842802

Capacity

Freezer	5.1 cu ft
Refrigerator	11.7 cu ft
Total	16.8 cu ft

Consumption

Energy Star Certified	Yes
Energy usage	561 kWh/year

Details

UPC Code	822843243389
----------	--------------



A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W fisherpaykel.com

Freezer	
Bottle chill	•
Built-in ice maker	•
Door alarm	•
Fast freeze	•
LED lighting	•
Large plastic bin	•
Slide Out Pastry Tray	•
Small plastic bins	1
Performance	
Sabbath mode	•
Refrigerator	
Adjustable door shelves	6
Adjustable glass shelves	3
Cantilevered Shelves	•
Covered door shelves	2
Deli storage	•
Deli storage bins	1
Door alarm	•
Fruit and vegetable bins	2
LED lighting	•
SmartTouch control panel	•
Soft-close doors	•
Stackable bottle holders	4
Ultra slim water dispenser	•

Style And Series	
Configuration	French Door
Product Style	Integrated
Type	Fridge/Freezer
Warranty	
Parts & Labor	2 years
Sealed system parts	5 years
SKU	
25076	

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2018

Other product downloads available at fisherpaykel.com

fisherpaykel.com



Stainless Steel Built-In Refrigerator - RS36A72U1 - Data Sheet

A.A
A.A


NH
NH

CAVITY PREPARATION

36" ACTIVSMART™ BUILT-IN REFRIGERATOR


Model no:

RS36A72U1 (with Stainless Steel Door panels PART NO. RD3672U)

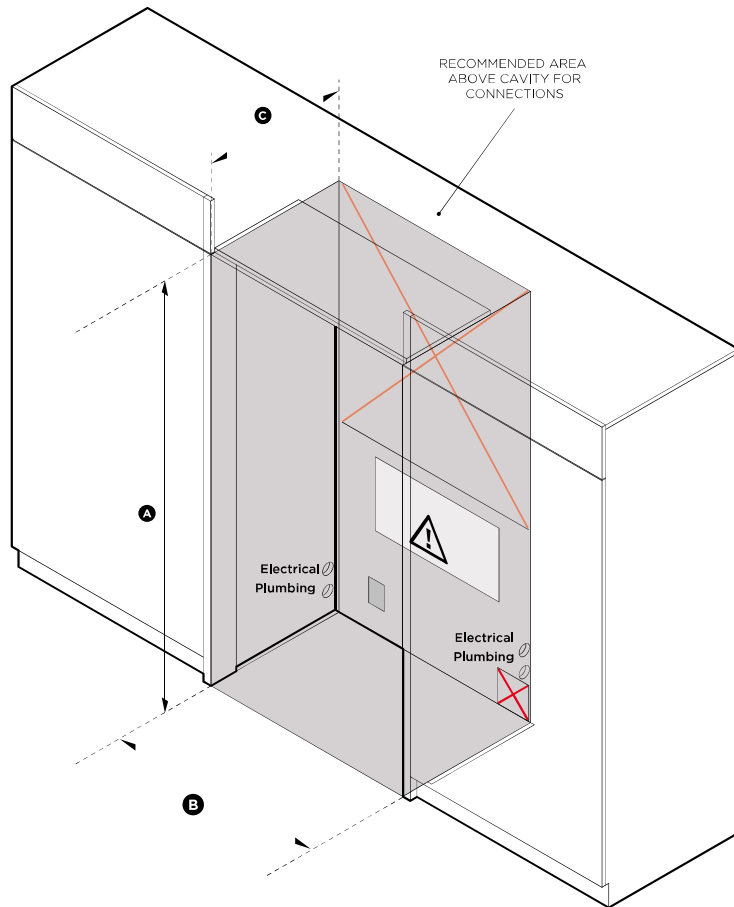


ISO VIEW OF CAVITY

Framed: Finished return, sides and top



LEFT SIDE OF CAVITY

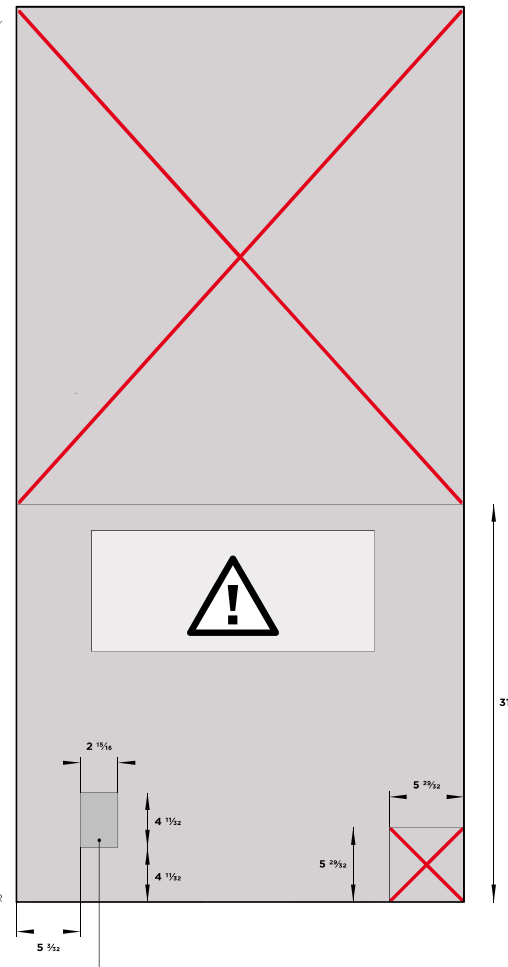

REAR OF CAVITY

Cavity Dimensions

	in
Ⓐ Overall height of cavity	72"
Ⓑ Overall width of cavity	36"
when adjoining cabinetry cannot share 5/32" door gap	
Ⓒ Overall depth of cavity	25"

Specifications

Electrical

Supply	115 VAC, 60 Hz
Service	10 amp circuit

Plumbing

Supply	1/4" (6mm) PEX hose or copper tubing (to suit local regulations)*
Pressure	min 22 psi (150 kPa) max 120 psi (827 kPa) @ 68°F (20°C)

NOTE: Recommended that the electrical & water connection be located above the fridge cavity. Optional to locate in an adjacent cabinet to either side of the fridge.

✗ Do not locate water or electricity in this area, keep clear of connections.

⚠ CAUTION: Central area can only fit electrical plug if it is placed within a recessed cavity.

* Customer to supply.

IMPORTANT NOTE: The product dimensions and specifications apply at the date of issue. Under our policy of continuous product improvement, these dimensions and specifications may change at any time. Dimensions may vary by $\pm 3/32$ ". Please read the installation manual for detailed information on installing the product or visit fisherpaykel.com.

A.A
A.A

NH
NH

Fisher & Paykel

Oven, 30", 17 Function, Self-cleaning

Series 9 | Contemporary


Stainless Steel



- With contemporary styling, advanced cook functions and touchscreen, this large capacity oven is a highlight of our collection
- Guided cooking using your touchscreen makes it simple to cook by food, function or recipe.
 - 4.1 cu ft total capacity, with 17 oven functions including Aero™ Pastry and Roast, Air Fry and Dehydrate
 - Non-tip, full extension sliding shelves for safe removal of hot dishes
 - Accessories include food probe, smokeless grill tray, and more

DIMENSIONS

Height	27 1/16"
Width	29 29/32"
Depth	23 29/32"

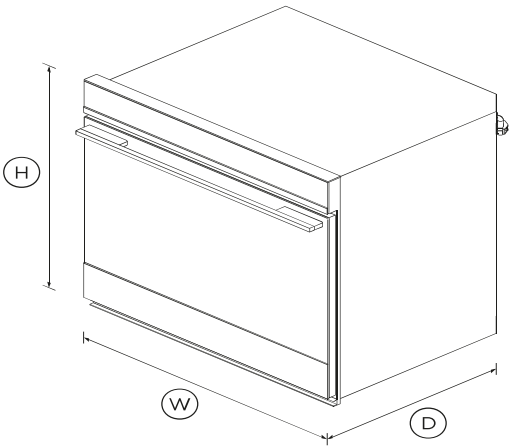

FEATURES & BENEFITS

- Cook with confidence**
Our touchscreen interface provides an intuitive guided cooking experience that helps deliver perfect results, whether you've been cooking all your life or just starting out. Cook with a favorite method, a hero ingredient, or a go-to cooking function or recipe.
- Generous capacity**
With its 4.1 cu ft total capacity, you can create several perfectly

- cooked dishes at once using multiple shelves.
- Multi-function flexibility**
The cooking functions have each been tailored, tested, tweaked and perfected to ensure that no matter what you're cooking, you've got the right heat to match. A food probe precisely monitors cooking in real time, giving you complete control.
- Exceptional performance**
AeroTech circulates heat evenly for a consistent temperature throughout the cavity, helping you ensure perfect results even when cooking on multiple shelves.
- Self-cleaning**
Our self-clean technology breaks down food residue at a very high temperature, leaving a light ash that's easily removed with a damp cloth. The enamel coated side racks don't need to be removed when using this function.
- Design freedom**
Available in an elegant black or a stylish black with stainless steel, this oven is designed to fit seamlessly into your kitchen. Premium materials and detailing to support a cohesive, considered kitchen design.

SPECIFICATIONS

Accessories	
Food probe	•
Full Extension Telescopic	3 sets
Full extension sliding shelves	3 sets
Grill rack	1
Roasting dish	1
Self cleaning side runners	1 set
Smokeless grill tray	1

Capacity

A.A
A.A

NH
NH

Shelf positions	8
Total	41. cu ft
Usable capacity	3.6 cu ft

Cleaning

Acid resistant graphite enamel	•
Removable oven door	•
Removable shelf runners	•
Self-clean	Standard and light cycles

Controls

Adjustable audio and display	•
Automatic cooking/minute	•
Automatic pre-set	•
Automatic rapid pre-heat	•
Celsius/Fahrenheit	•
Connected Fisher and Paykel	•
Electronic clock	•
Electronic oven control	•
Food probe	•
Guided cooking by food type	•
Interior light	3 x 20W halogen
Intuitive touchscreen display	•
Precise electronic temperature	•

Functions

AeroTech™ technology	•
Aero™ Bake	•
Bake	•
Broil	•

Classic bake	•
Maxi Broil	•
Number of functions	17
Pastry Bake	•
Pizza bake	•
Rapid proof	•
Roast	•
Self-clean function	•
Slow cook	•
Vent bake	•
Warm	•

Performance

AeroTech™ technology	•
Automatic rapid pre-heat	•
Broil power	4400W
Broil width	20"
CoolTouch door	•
Number of passes on broil	10

Power requirements

Amperage	16.6 - 19.4A
Supply voltage	208 - 240V

Product dimensions

Depth	23 ²⁹ / ₃₂ "
Height	27 ¹ / ₁₆ "
Width	29 ²⁹ / ₃₂ "

Safety

Advanced cooling system	•
Balanced oven door	•
Catalytic venting system	•
Control panel key lock	•
CoolTouch door	•
Full extension sliding shelves	•
Non-tip shelves	•

SKU	81861
-----	-------

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. Â© Fisher & Paykel Appliances Ltd 2019.

A.A
A.A

NH
NH

Other product downloads available at fisherpaykel.com



User Guide



Service & Warranty Booklet



Installation Guide




A PEACE OF MIND SALE


24 Hours 7 Days a Week Customer Support

T 1300 650 590 W www.fisherpaykel.com


LOT 5-76, INNISFIL, APPLIANCES

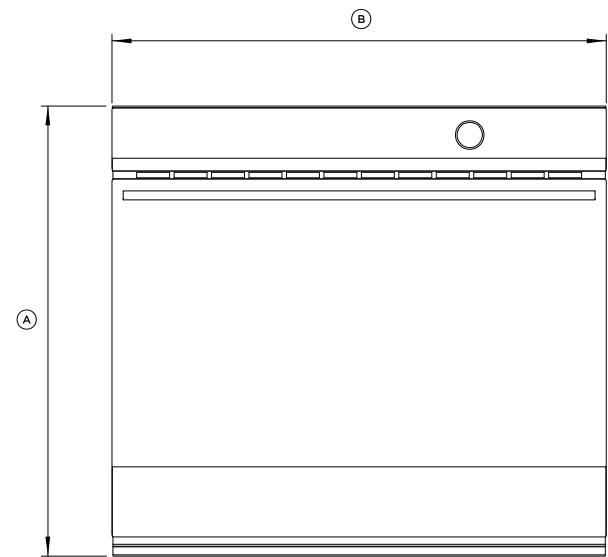

FRONT

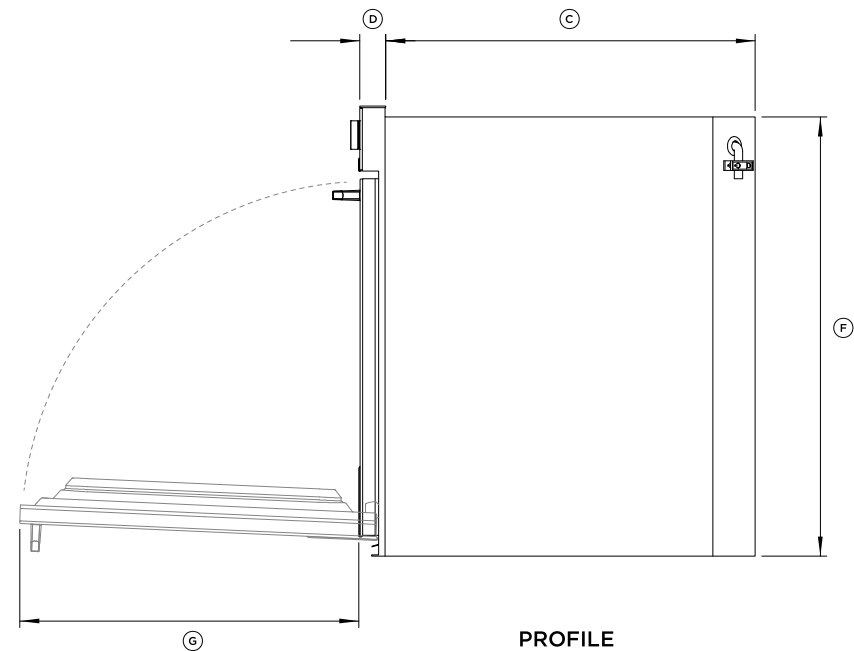

PROFILE

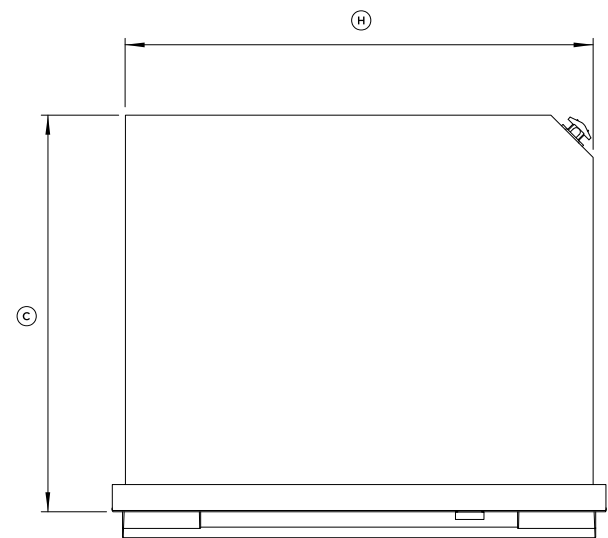


PLAN

A.A
A.A


NH
NH

PRODUCT DIMENSIONS	OB30S	
	INCHES	MM
A Overall height of product	27 1/8	690
B Overall width of product	29 15/16	760
C Overall depth of product (excl. handle and dials)	23 15/16	610
D Depth of oven front and control panel (excl. handle and dials)	1 1/2	40
E Depth of chassis (does not include oven front)	22 3/8	569
F Height of chassis	26 9/16	675
G Depth of door (open) (measured from front of door)	21 5/8	550
H Overall width of chassis	28 5/16	720

Note: If flush installing, you need to replace the lower trim with the supplied long trim at the base of the oven, and the depth of the control panel G with the fitted spacer is larger than conventional ovens. Ensure you have created a 1 5/8" (42mm) recess in cabinetry.

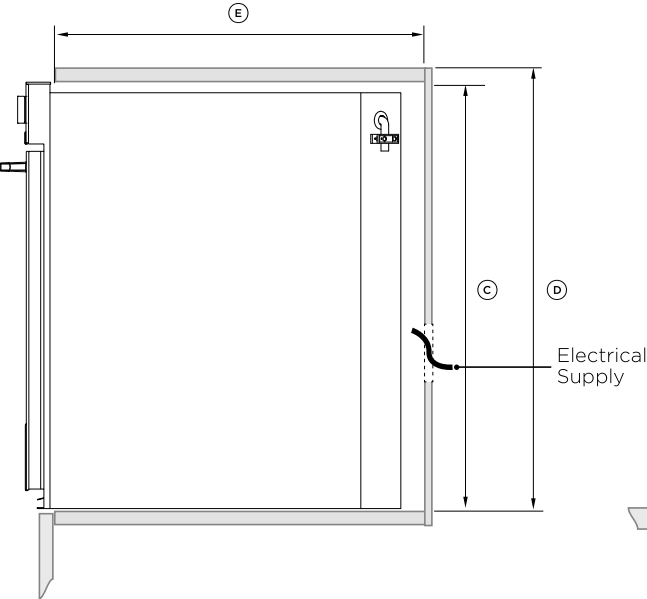

PROFILE

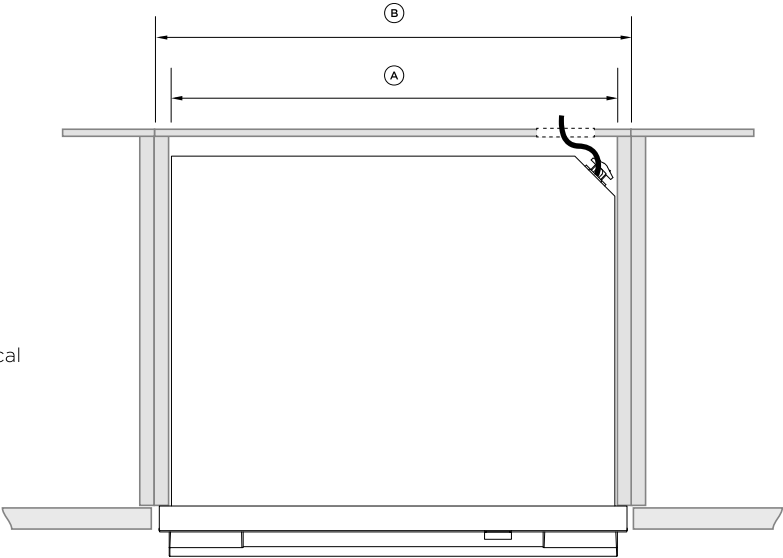

PLAN


CABINETRY DIMENSIONS	OB30S	
	INCHES	MM
Ⓐ Minimum inside width of cavity	28 1/2	724
Ⓑ Overall width of cabinetry	30 1/8	764
Ⓒ Minimum inside height of cavity	26 13/16	681
Ⓓ Overall height of cabinetry	27 3/8	693
Ⓔ Minimum inside depth of cavity		
• Proud install	22 5/8	575
• Flush install	24 3/16	614

Notes:


If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

Ensure the cavity is completely sealed with no gaps. This is to ensure the oven cooling system functions correctly.

PROUD INSTALL

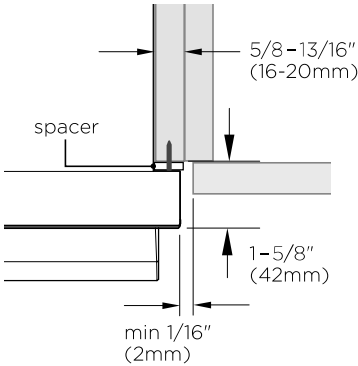

FLUSH INSTALL

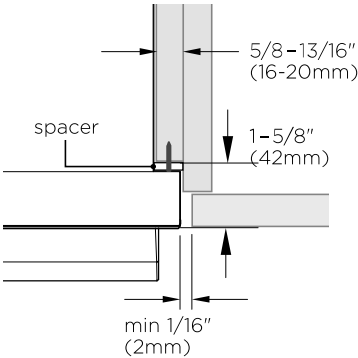

A.A
A.A

NH
NH



CG365DNGRX2_N

Gas on Steel Cooktop 36" 5 Burner, Flush Fit

Contemporary

This Fisher & Paykel 36" gas on steel cooktop with five burners is designed to integrate perfectly with your kitchen.

Stainless Steel



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 1.888.936.7872 W fisherpaykel.com

Dimensions

Depth	20 7/8"
Height	3 1/16"
Width	35 1/2"

Features & Benefits

Fits flush
This Gas Cooktop's burners are recessed into the work surface leaving the trivets flush and providing an integrated kitchen bench with a seamless look.

Clever cooking results
The consistent flame and heat distribution of the dual flame wok burner combined with the highly responsive dials offer precise heat adjustment that can perfect a slow simmer for sauces or an intense heat for searing steaks.

Designed to match
The brushed stainless steel has been designed for durability but also provides a modern, stylish finish, matching the Fisher & Paykel family of kitchen appliances.

Safe and sound
Intuitive dials glow red for on and white for off, showing from a distance which burners are lit. The Auto-reignite system means you don't have to hold down a dial while burners ignite – if a burner goes out it is automatically relit at the original flame setting.

Easy cleaning
The stainless steel component is easily accessible and quick to clean. Cast iron trivets provide a durable and stable cooking platform. Their rubber feet prevent them from scratching the cooktop.

Handy accessories
This cooktop comes with a small pan support and wok stand to complement different cooking styles.

Specifications

Accessories	
Small pot trivet	•
Wok stand	•

Burner ratings	
Auxiliary burner	700 - 3800 BTU
Rapid burner	2000 - 9500 BTU
Semi-rapid burner	900 - 8500 BTU
Wok burner max	18500 BTU
Wok burner min (simmer)	600 BTU

Burners	5 including 1 dual wok burner
Burners	

Cleaning	
Easy clean cooktop design	•
Quick component removal	•

Controls	
Burner indicator lights	•
Ergonomic control dials	•
Laser etched graphics	•
Turned dials	•

A.A
A.A

NH
NH

Details	
UPC Code	822843809110
Performance	
Cast iron trivets	•
Electronic ignition	•
Innovalve™ technology	•
LPG/Natural gas models	•
Natural gas compatible	•
Quick connect gas valves	•
Power requirement	
AMP draw	2 A
Supply frequency	60 Hz
Supply voltage	110 - 120
Safety	
Auto re-ignition system	•
Spill containment	•
Style And Series	
Product Style	Contemporary
Warranty	
Warranty	2 years
SKU	81379

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2018

Other product downloads available at fisherpaykel.com
fisherpaykel.com

LOT 5-76, INNISFIL, APPLIANCES

Convection Speed Oven 24"

Series 9 | Contemporary

Stainless Steel




The perfect addition to the kitchen, this Convection Speed Oven provides a variety of fast cooking options including True Convection and Broil.

- 1.3 cu ft total capacity
- Intuitive display with nine oven functions
- Full width grill function
- Easy clean interior

DIMENSIONS

Height	18 1/16 "
Width	23 1/2 "
Depth	22 1/8 "

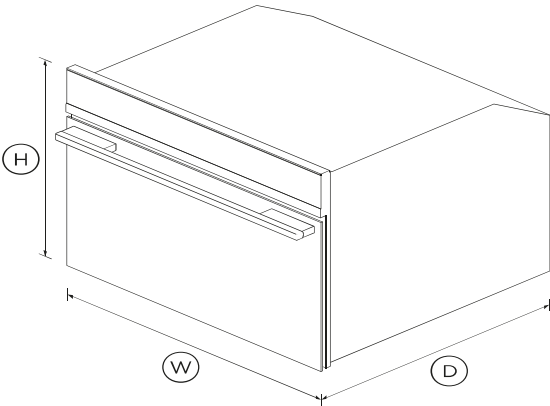

FEATURES & BENEFITS

Sized to suit

This compact 24" Convection Speed Oven can be placed almost anywhere, Companion products share the same dimensions and can be installed in multiple configurations to suit your kitchen design and preference.

Cooking flexibility

Choose from nine cooking modes including True Convection and Broil. With both microwave and convection oven technology in the same oven, you have more flexibility for your culinary creations.

Easy to use

The intuitive touch display shows you all the information you

need, allowing you to easily program in your desired cooking mode and duration.

LOT 5-76, INNISFIL, APPLIANCES

Beauty of choice

With the choice of a stylish stainless steel or elegant black trim, our Companion products help you achieve a coherent kitchen aesthetic that suits your design style.

Easy cleaning

This Convection Speed Oven has formed side racks and a stainless steel interior that are easy to clean.

Safe and sound

The CoolTouch door is safe to touch from the outside, protecting your hands and the surrounding cabinetry.

SPECIFICATIONS

Accessories

Baking pan	•
Contemporary round handle	Part 81671
Glass turntable	•
Optional 30" trim kit	Part 81226
Optional lower trim kit	Part 81662
Turntable wire stand	•
Wire shelf	•

Capacity

Shelf positions	3
Total capacity	1.3 cu ft
Usable capacity	1.2 cu ft

Cleaning

Easy clean stainless steel	•
Easy to clean formed side	•

LOT 5-76, INNISFIL, APPLIANCES

Consumption

Microwave energy 1.65kWh

Controls

Audio feedback •

Automatic cooking/minute •

Celsius/Fahrenheit •

Electronic capacitive touch •

High resolution touch display •

Interior light 25W halogen •

Intuitive information display •

Multi-language interface •

Precise electronic temperature •

Recipe and food based •

Functions

Broil •

Convection Broil •

Defrost by time •

Defrost by weight •

Microwave + broil •

Microwave + ring •

Microwave cooking •

Number of functions 9

Ring + broil •

True convection •

Performance

Broil power 1500W

Fan Element Power 1500W

Microwave power 900W

Microwave power levels 6

Power requirements

Amperage 15A

Supply frequency 60Hz

Supply voltage 208 - 240V

Product dimensions

Depth 22 1/8 "

Height 18 1/16 "

Width 23 1/2 "

Safety

Control panel key lock •

CoolTouch door •

SKU 81231

TEST The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. ? Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

User Guide



Service & Warranty Booklet



Installation Guide

**A PEACE OF MIND SALE****24 Hours 7 Days a Week Customer Support****T 1.888.936.7872 W www.fisherpaykel.com**



A.A




NH

4 PRODUCT DIMENSIONS


LOT 5-76, INNISFIL, APPLIANCES

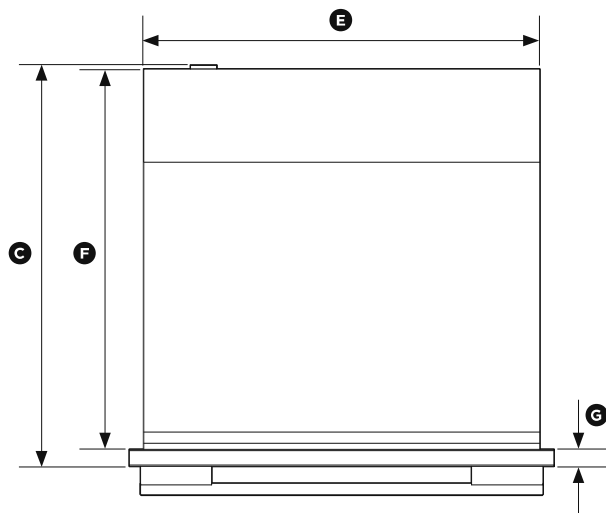

TOP

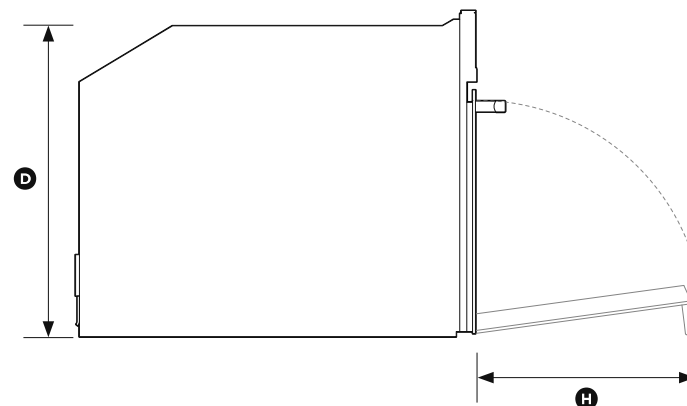

SIDE

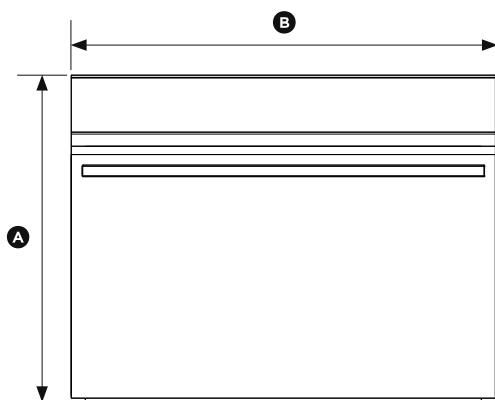

FRONT

A.A
A.A





NH
NH

PRODUCT DIMENSIONS	OM24N MODELS
	inches (mm)
(A) Overall height of product	18" (458)
(B) Overall width of product	23 7/16" (596)
(C) Overall depth of product (excluding handle and dials)	22 1/8" (562)
(D) Height of chassis	17 1/2" (445)
(E) Width of chassis	21 7/8" (556)
(F) Depth of chassis	21 1/4" (540)
(G) Depth of oven frame and control panel (=distance between front of chassis and front of oven door, excl. knobs)	7/8" (22)
(H) Depth of oven door when fully open (measured from front of control panel)	12 5/8" (320)

5 A CABINETY DIMENSIONS (18 1/8" (460mm) HIGH CAVITY)

- The oven can be installed under a cooktop, in a column, or combined with the companion warmer drawer.
- The cabinet material must be able to withstand heat.
- The oven must be centered within the walls of the cabinet and fixed with the screws and bushings that are provided.

LOT 5-76, INNISFIL, APPLIANCES

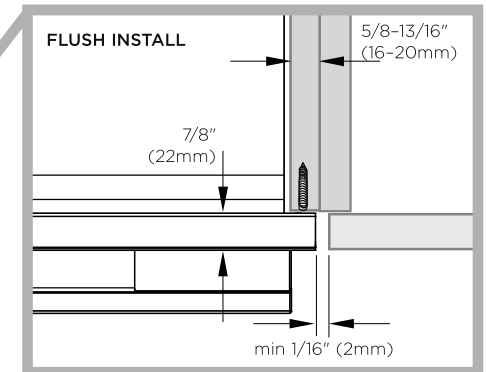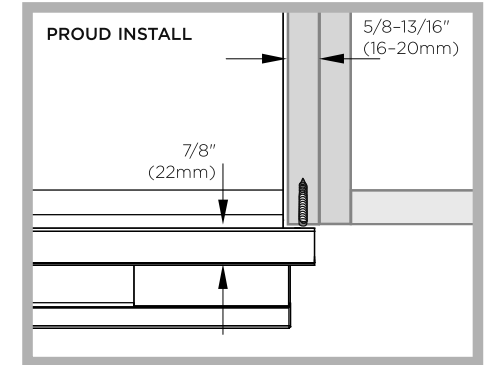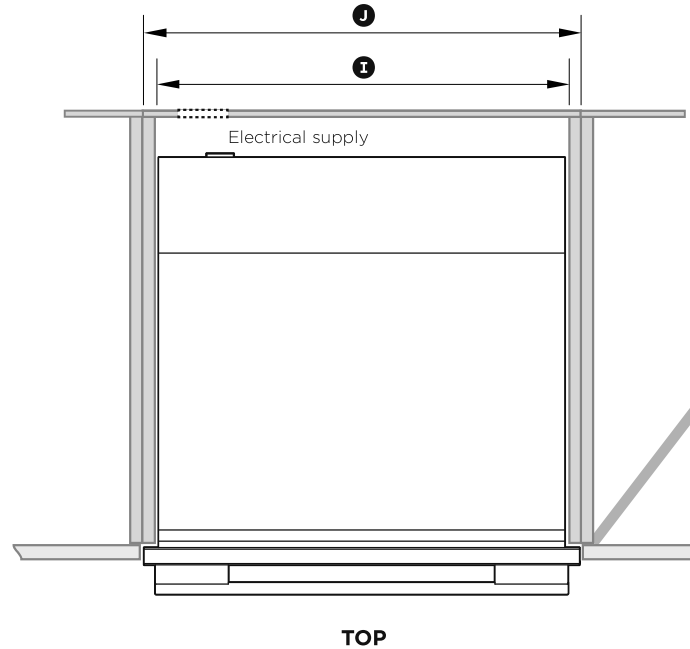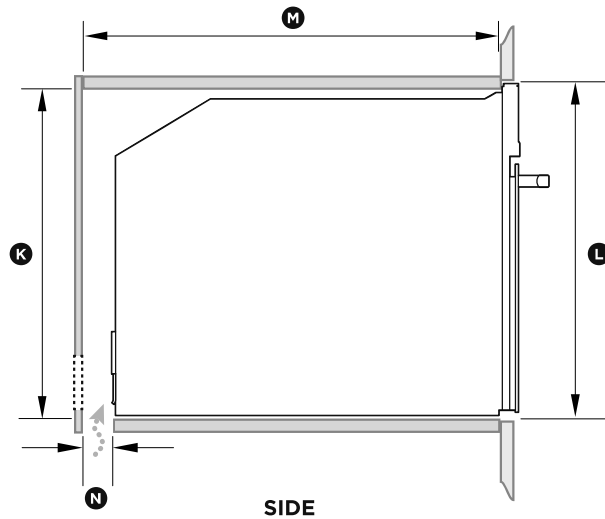

CABINETY DIMENSIONS

OM24N MODELS	
	inches (mm)
I Minimum inside width of cavity	22 1/16" (560)
J Overall width of cabinetry	23 5/8" (600)
K Minimum inside height of cavity	17 3/4" (450)
L Overall height of cabinetry	18 1/8" (460)
M Minimum inside depth of cavity	22 1/16" (560)
N Ventilation air vent	2" (50)

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

A.A
A.A




NH
NH

5 B CABINETRY DIMENSIONS (18 7/8" (480mm) CAVITY TRIM KIT)

- The oven must be installed under a cook top, in a column, or combined with the companion warmer drawer.
- The cabinet material must be able to withstand heat.
- The oven must be centred within the walls of the cabinet and fixed with the screws and bushings that are provided.

Lower Trim Kit

The Lower Trim kit shown is available to order separately from fisherpaykel.com. To install the trim kit, refer to the instructions which accompany it.

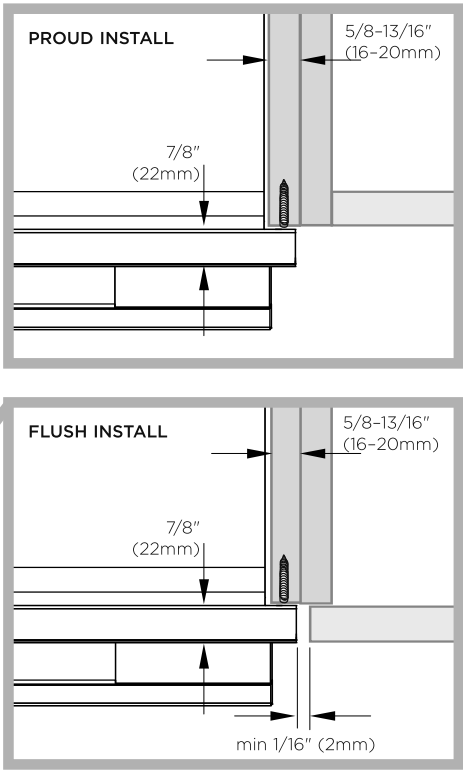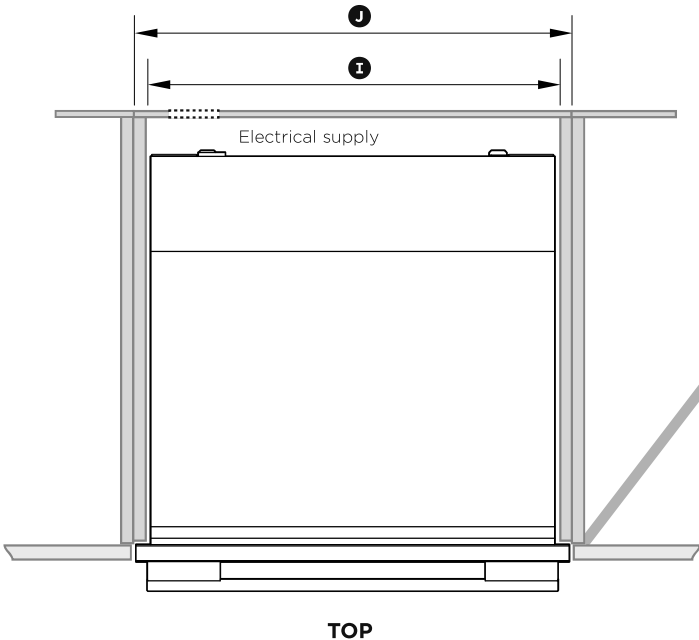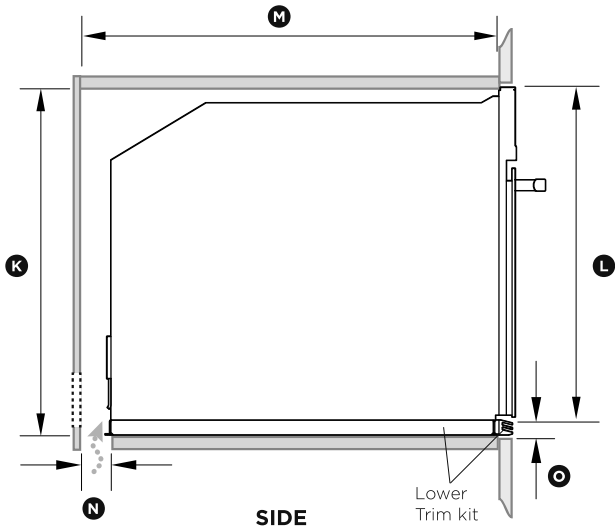

CABINETRY DIMENSIONS	OM24N MODELS	
	inches (mm)	
ⓐ Minimum inside width of cavity	22 1/16" (560)	
ⓑ Overall width of cabinetry	23 5/8" (600)	
ⓒ Minimum inside height of cavity	18 1/2" (470)	
ⓓ Overall height of cabinetry	18 7/8" (480)	
ⓔ Minimum inside depth of cavity	22 1/16" (560)	
ⓕ Ventilation air vent	2" (50)	
ⓖ Height of trim kit	13/16" (20)	

Note: If installing a cooktop above the oven, ensure adequate clearance is provided for the cooktop as per the cooktop manufacturer's instructions.

- Before connecting to the electricity, make sure that the:
 - specifications of the electrical system match with what is detailed on this section. (Fig. 1)
 - system has an effective ground connection compliant with current standards and laws.

The ground connection is required by law. The cable must not, at any point, reach a temperature greater than 122°F (50°C) above room temperature.

This oven must be connected to the electricity through a power supply cable and plug that is compatible with the outlet of the electrical system that powers this oven. If a fixed appliance does not have a power cord and plug, or another device that ensures disconnection from the mains, with an opening distance of the contacts that allows complete disconnection, such disconnection devices must be provided in the power supply mains conforming to the installation rules. The omnipolar socket or switch must be easy to reach when the appliance is installed.

NOTE: The manufacturer declines all liability if the usual accident prevention standards and the above instructions are not followed.

MAX POWER (W)	HZ	VOLTAGE (V)	AMPS (A)
3400	60 Hz	120/240	14
2700	60 Hz	120/208	13

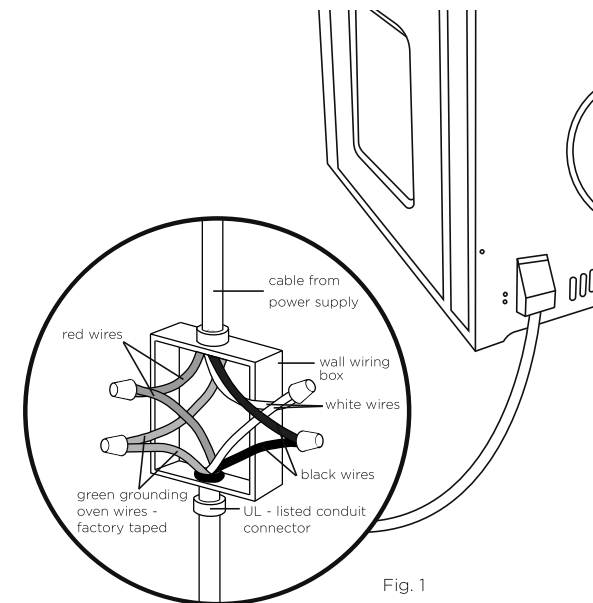


Fig. 1

7 SECURE THE OVEN TO THE CABINETRY

- Position the oven in the prepared cavity.


IMPORTANT!

Do not lift the oven by the door handle.

- Use the supplied screws and spacers to secure the oven to the cabinetry.

IMPORTANT!

- Do not over-tighten the screws.
- Take care not to damage the lower trim of the oven.
- Do not seal the oven into the cabinetry with silicone or glue. This makes future servicing difficult. Fisher & Paykel will not cover the costs of removing the oven, or of damage caused by this removal.

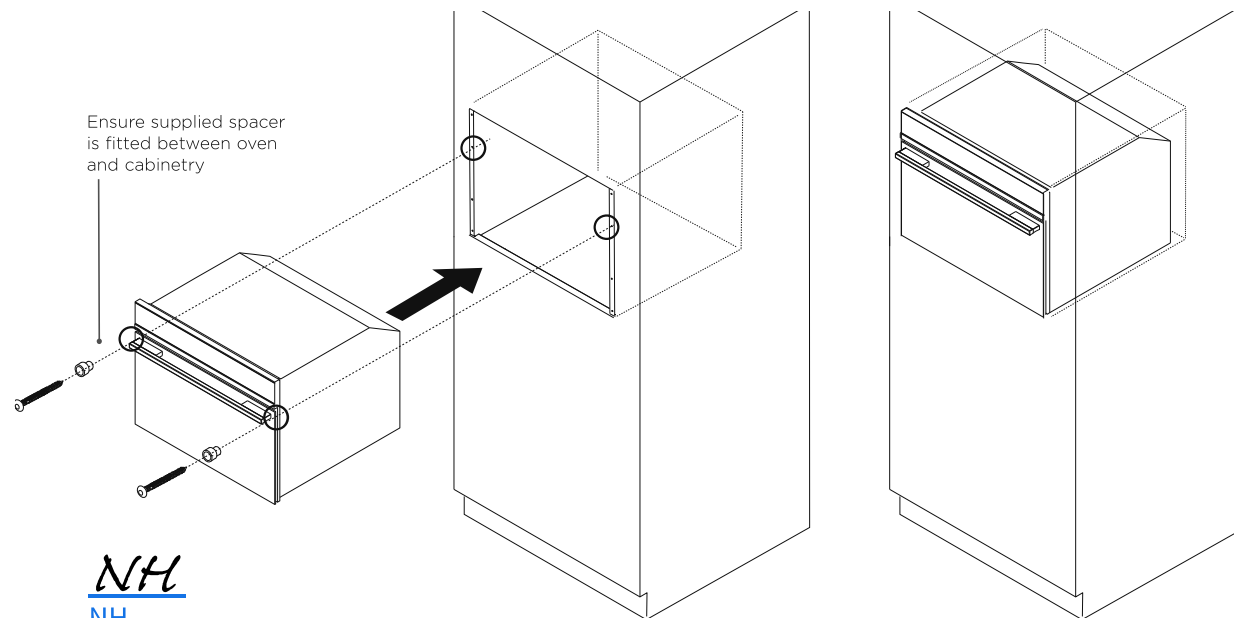

A.A
A.A

NH
NH



TK30NDB1

30" Companion Trim Kit

Contemporary

The 30" Companion Trim Kit seamlessly blends the coffee maker (EB24DSXB1) or combination steam oven (OS24NDB1) with your cabinetry.

Stainless Steel

Dimensions

Depth	
Height	18.8125mm
Width	29.7638mm

Specifications

Style And Series

Product Style	Contemporary
---------------	--------------

SKU	81226
-----	-------

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2018

Other product downloads available at fisherpaykel.com

fisherpaykel.com

**A PEACE OF MIND SALE**

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W fisherpaykel.com

COMPANION OVENS
ACCESSORY 30"/76CM TRIM KIT

US CA NZ AU




Keep this document handy for easy reference.

- This Trim Kit is designed to complement your companion product if installing into 30" (760mm) wide cabinetry.
- For contact information or if you require service, assistance or replacement parts, see your 'Service & warranty' booklet.


This Trim Kit is designed to be installed ONLY with the following FISHER & PAYKEL products:

- Companion Ovens
- or in combination with OB30/OB76 Ovens

1 CABINETRY SPECIFICATION

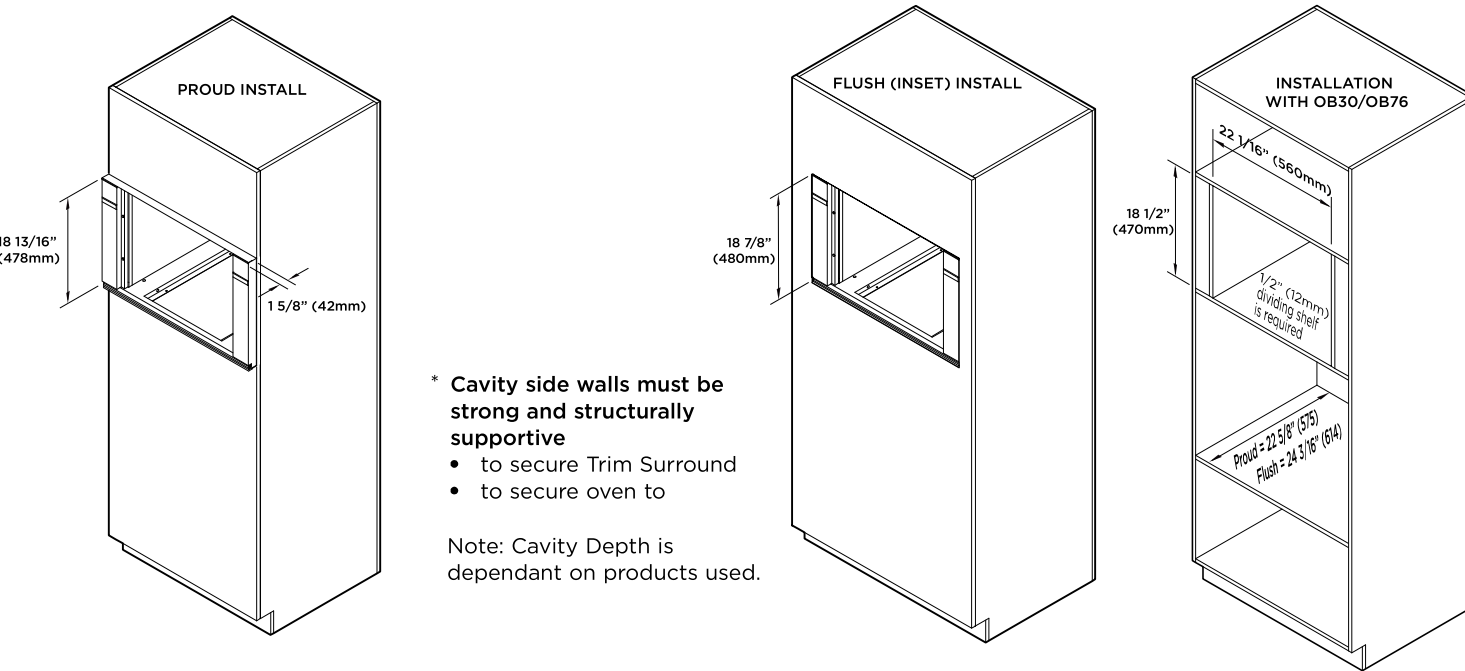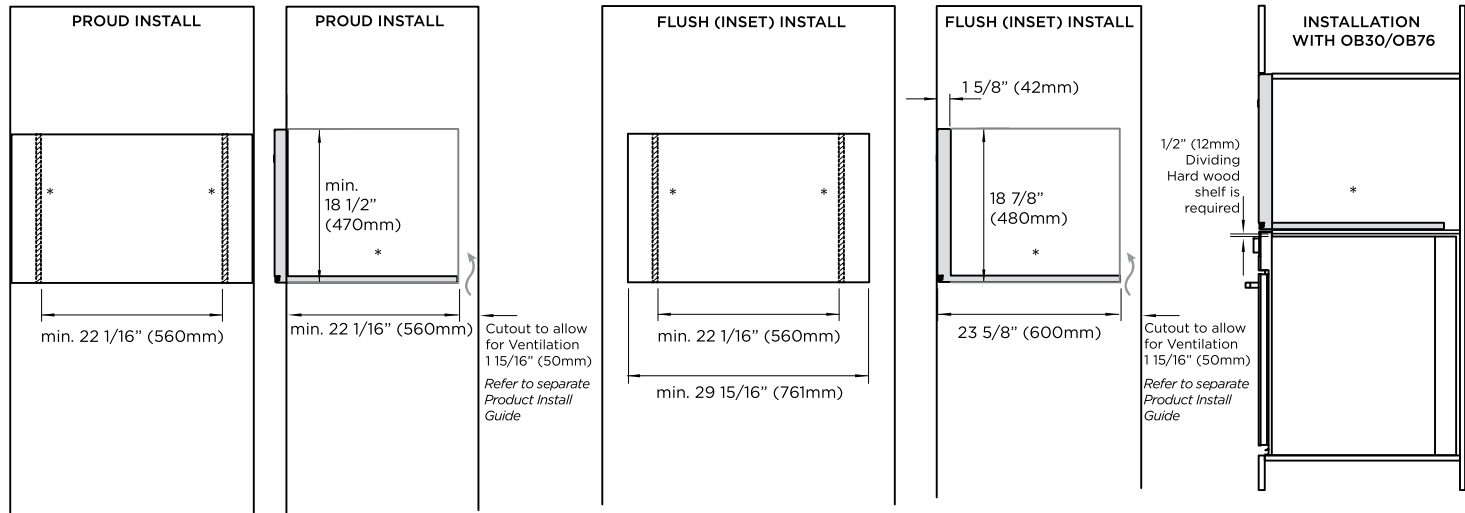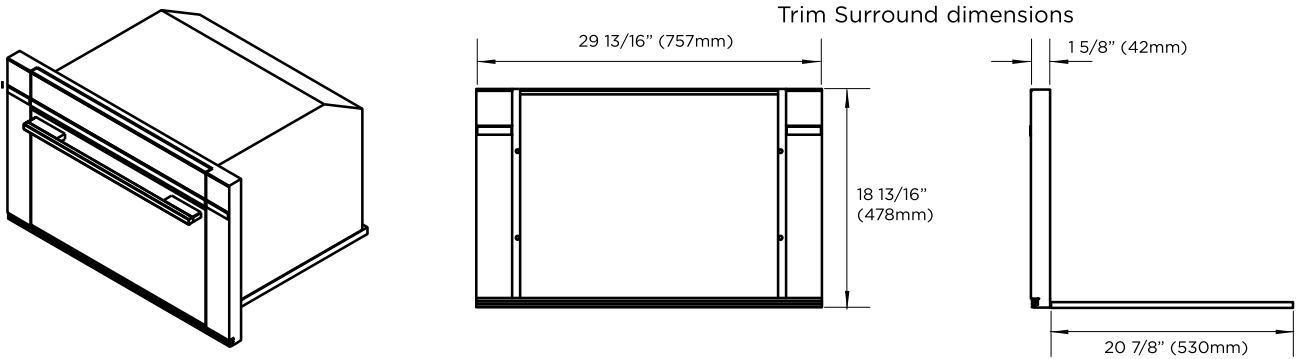

2 PARTS SUPPLIED

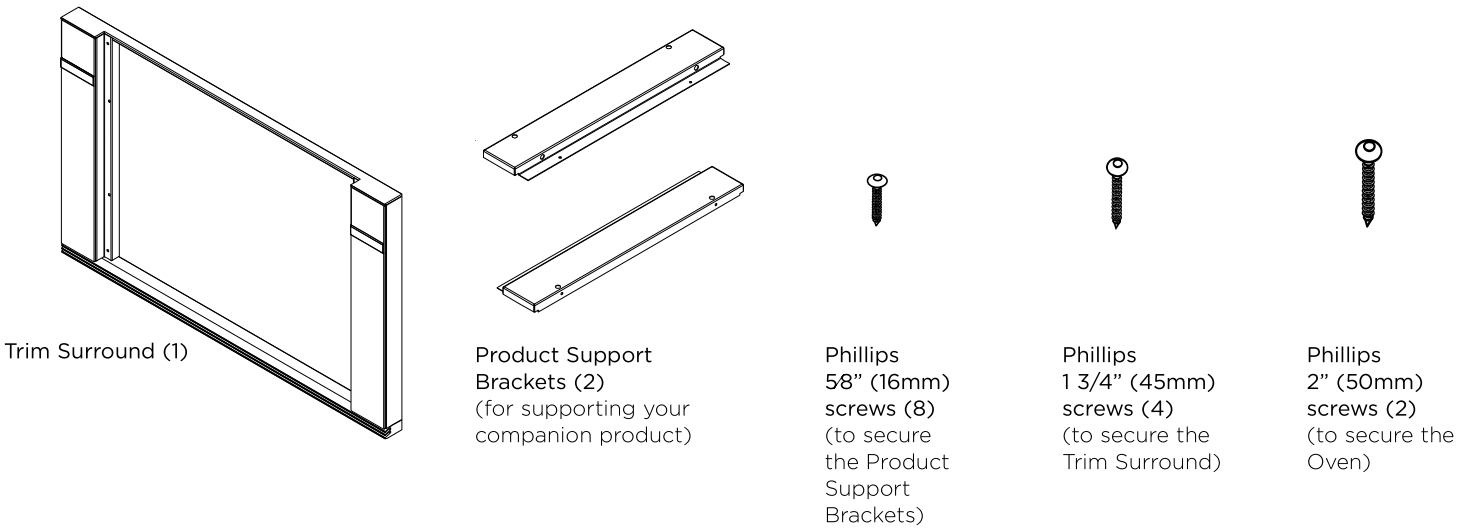


3 POSITION TRIM SURROUND ON CABINETRY


IMPORTANT!

- Ensure all packaging and protective film is removed from the Trim Surround before installing.

- ① Mark the center of your cavity at the front.
- ② Mount the Trim Surround with the small lip resting flat on the front edge of the cabinetry shelf.
- ③ Center the Trim Surround by lining up the small cut "V" in the lip with your center mark from Step 1.

Note: If installing above an Oven, ensure both products are centered and aligned in the cabinetry.

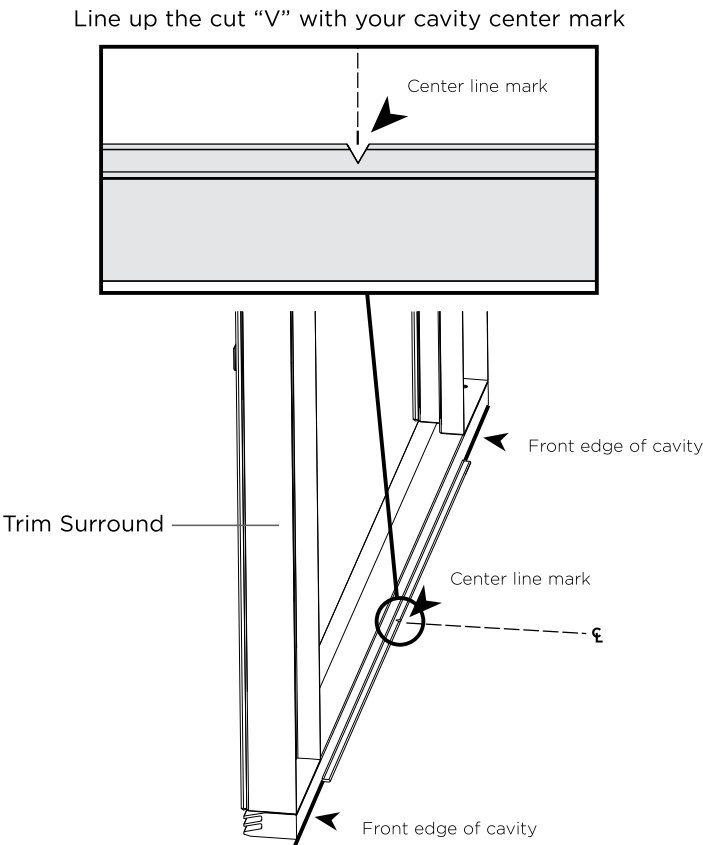



HC36DTXB2

36" Wall Chimney Box Range Hood

Choose a Fisher & Paykel Designer Chimney Range Hood to effectively eliminate steam, smoke and odors.

Featuring sleek styling and energy efficient LED lighting, this powerful range is an asset to any kitchen.

Brushed Stainless Steel with black glass

Dimensions

Depth	19 11/16"
Height	23 3/4 - 41 1/16"
Width	35 3/8"

Features & Benefits

Easy Cleaning

The black glass and stainless steel finish is easily wiped clean. Multi-layered filters trap grease effectively. Designed for simple removal, the filter is easy to clean and dishwasher safe.

Powerful yet Effective

With its 600CFM airflow, this range hood keeps the noise down to 48DBA on its usual operating speed while efficiently removing unwanted steam, smoke and any lingering odors.

Designed to Match

Featuring a slim, contemporary design, the Designer Chimney Range Hood is timeless and seamlessly aligns with the Fisher & Paykel family of appliances.

Bright LED Lighting

This range hood's LED lights provide bright, warm, energy efficient lighting ensuring the entire cooktop surface is illuminated.

Ventilation Options

Depending on your preferences, this range hood can be recirculated internally or ducted externally. Visit fisherpaykel.com for the correct recirculation kit.

Specifications

Cleaning

Dishwasher safe filters	3
Stainless steel filter cover	•

Controls

Control type	Soft-touch
Light type	LED 2 x 6W
Timer function	•

Details

UPC Code	822843500840
----------	--------------

Fan ratings

Maximum air movement	600 CFM
Maximum decibel rating	67 dBA
Speed 1 airflow	316 CFM
Speed 1 sound rating	48 dBA
Speed 2 airflow	432 CFM
Speed 2 sound rating	58 dBA
Speed 3 airflow	542 CFM
Speed 3 sound rating	63 dBA
Speed 4 airflow	600 CFM
Speed 4 sound rating	67 dBA

Installation

Air outlet	6"
Ducted	Top extraction
Internal Blower Included	•
Recirculation	Optional - top extraction
Two-Piece Height Adjustable Flue	•



A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W fisherpaykel.com

Optional accessories

Chimney extension	791774
Light bulb	792579
Recirculation carbon filter(s)	791772
Recirculation diverter	792580

Performance

Extraction type	Surface
Filter type	Mesh
Number of filters	3
Speeds	4

Power requirement

Rated current	5.2 A
Supply Frequency	60 Hz
Supply voltage	120 V
Total Power	542

Warranty

Warranty	2 years parts & labor
----------	-----------------------

SKU	50084
-----	-------

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © © Fisher & Paykel Appliances Ltd 2017

Other product downloads available at fisherpaykel.com

fisherpaykel.com

Double DishDrawer™

Dishwasher, Tall, Sanitize

Series 7 | contemporary

Stainless Steel




Doing the dishes got easier. Load one drawer while the other washes – with the top drawer fitting your large dinner plates easily.

- Six wash programs, as well as additional Quick wash, Sanitize and Extra Dry options
- Flexible racking can be folded down to fit bigger dishes

DIMENSIONS

Height	34 - 36 ³ / ₈ "
Width	23 ⁹ / ₁₆ "
Depth	22 ⁹ / ₁₆ "

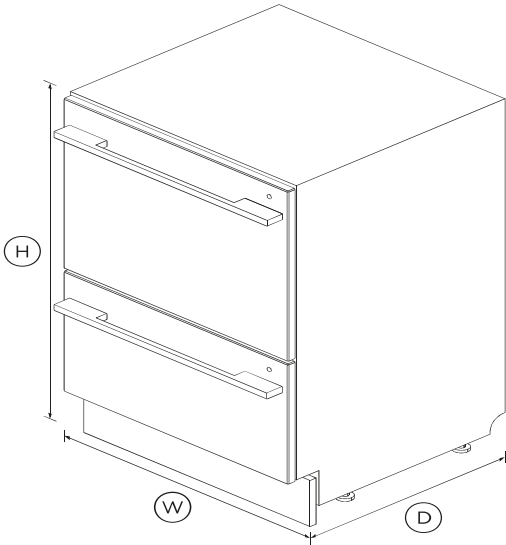

FEATURES & BENEFITS

- Ease of use**
DishDrawer™ Dishwashers are as easy to open and close as kitchen drawers and can be conveniently positioned at bench height for ease of loading and minimal bending. Flexible racking allows you to make adjustments to fit in a variety of dishes.
- Independent wash**
With the ability to use both drawers independently and select different wash programs the DishDrawer™ Dishwasher can wash everything from fine glass and crystal to heavily soiled pots and

- pans.
- True half load**
Each drawer holds a true half load for guilt-free small washes and fast turnaround of your dishes. Both drawers operate independently so different wash cycles can operate simultaneously to accommodate a variety of loads.

Complementary Design
DishDrawer™ Dishwashers are designed to match the Fisher & Paykel family of kitchen appliances, with matching handles, premium styling and quality materials for a stylish finish in your kitchen.

Quick, Sanitize and Extra Dry options
The Quick wash modifier delivers a faster wash while maintaining performance. The Sanitize option provides extra protection killing 99.9% of bacteria in the final rinse. The Extra Dry setting is perfect for plastic dishes.

Quiet performer
Running at a very low decibel rating, these DishDrawer™ Dishwashers do their job without making a fuss. The combination of intelligent technology and simple mechanics means greater reliability and excellent wash performance.

SPECIFICATIONS

Accessories	
Contemporary round handle	Part number 81674
Cutlery basket	2
Kickstrip	•

Capacity and Loading	
Accommodates round plates	12.25" (top) - 11" (bottom)
Fixed height, foldable cupracks	•
Fold down tines	•

Pitch adjustable tines	•
Place settings	14

Consumption

Energy star rating	•
Energy usage	263kWh/year
Water usage	3.28 gal running both tubs

Controls

Child lock	•
Electronic fault/Diagnostic	•
End of cycle beeps	•
Energy saving delay start	•
Internal wash selector	•
Rinse aid indicator light	•

Features

Fan assisted drying	•
Flow through detergent	•
Quiet operation	•
SmartDrive™ technology	•

Performance

Noise on gentle cycle top	44
---------------------------	----

Power requirements

Amperage	9.6A
Electric circuit	3
Rated current	15A
Supply frequency	60Hz

Supply voltage	120V
----------------	------

Product dimensions

Depth	22 9/16 "
Height	34 - 36 3/8 "
Width	23 9/16 "

Warranty

Parts and labor	Limited 2 Year Parts & Labor
-----------------	------------------------------

Wash Programs

Delicate	•
Eco	•
Extra Dry	•
Fast	•
Heavy	•
Medium	•
Number of wash programs	15
Quick	•
Rinse	•
Sanitize	•
Wash modifiers	3

Water connection

Inlet water temperature	Max 140°F
Supplied hose to suit 3/8"	•
Water pressure	0.03 Mpa - 1 Mpa (4.3-145 psi)

SKU	81222
-----	-------

TEST The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. ? Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com



Quick Start Guide



User Guide



Service & Warranty Booklet



Installation Guide



Resources (zip)






A PEACE OF MIND SALE

24 Hours 7 Days a Week Customer Support

T 1.888.936.7872 W www.fisherpaykel.com

4 PRODUCT DIMENSIONS



Handles may vary

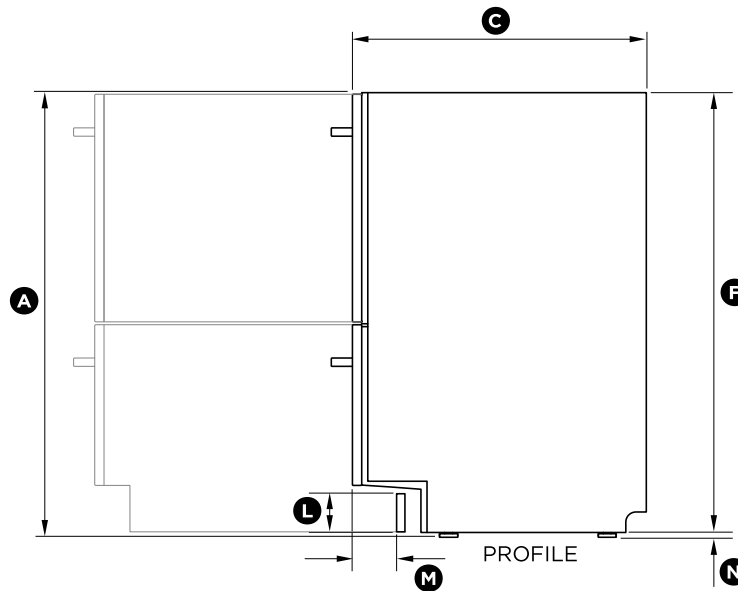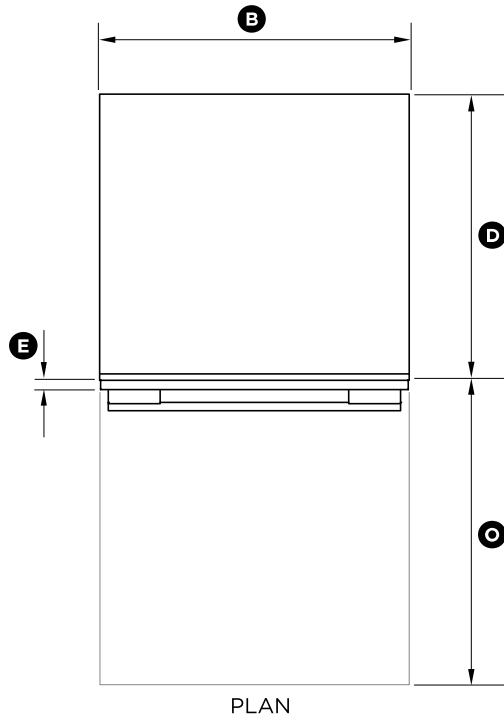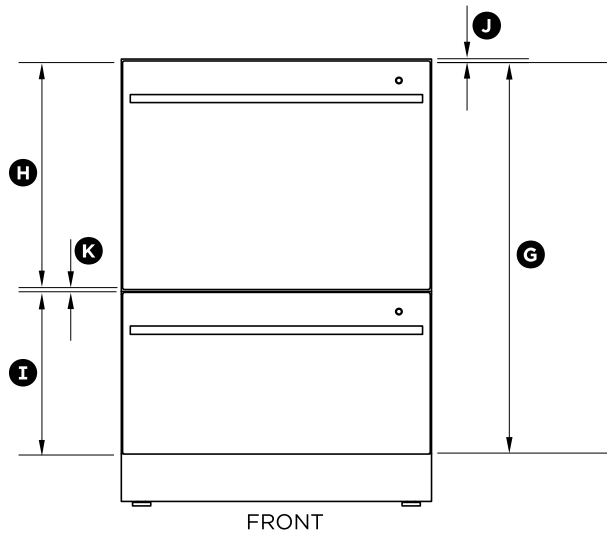

LOT 5-76, INNISFIL, APPLIANCES

PRODUCT DIMENSIONS	DD24DDFT	DD24DV2T
	INCHES (MM)	INCHES (MM)
(A) Overall height of product ¹	34 - 36 3/8" (864-924) ²	34 - 36 3/8" (864-924) ²
(B) Overall width of product	23 9/16" (599)	23 13/16" (605)
(C) Overall depth of product (excl. handle)	22 9/16" (573)	22 3/4" (578)
(D) Depth of chassis (to back of front drawer panel)	21 3/4" (553)	21 3/4" (553)
(E) Depth of drawer front panel (excl. handle)	13/16" (20)	13/16" (20)
(F) Height of chassis ¹	33 11/16" (855)	33 11/16" (855)
(G) Height of drawer front panels	30" (762)	30" (762)
(H) Height of upper drawer front panel	17 3/8" (442)	17 3/8" (442)
(I) Height of lower drawer front panel	12 1/4" (312)	12 1/4" (312)
(J) Height from top of drawer front panel to top of chassis	1/16" (2)	1/16" (2)
(K) Ventilation gap between drawer front panels	5/16" (8)	5/16" (8)
(L) Height of toekick (customisable)	2 13/16 - 5" (72-127)	2 13/16 - 5" (72-127)
(M) Depth from front of drawer panel to front of toekick (adjustable) ³	1 1/2 - 4" (38-102)	1 11/16 - 4 3/16" (43-107)
(N) Height of leveling feet (adjustable)	3/8 - 2 3/4" (9-69) ²	3/8 - 2 3/4" (9-69) ²
(O) Maximum extension of drawer	21 9/16" (547)	21 9/16" (547)


¹ includes 1/16" (2mm) high bracket slots ² depending on adjustment of leveling feet
³ adjustable to match toekick recess on adjoining cabinetry

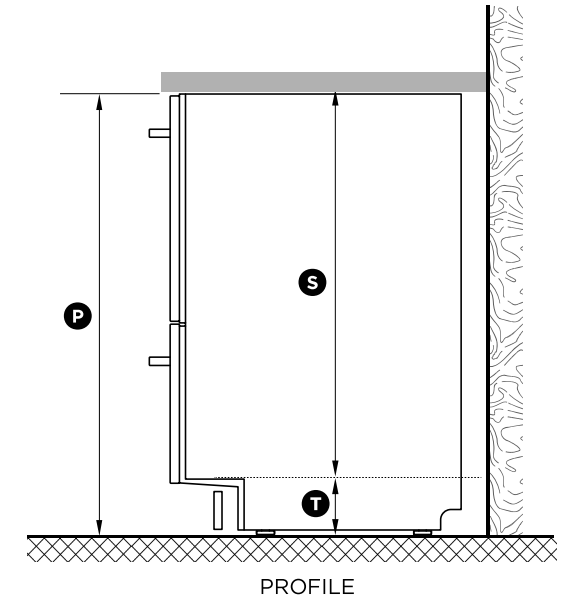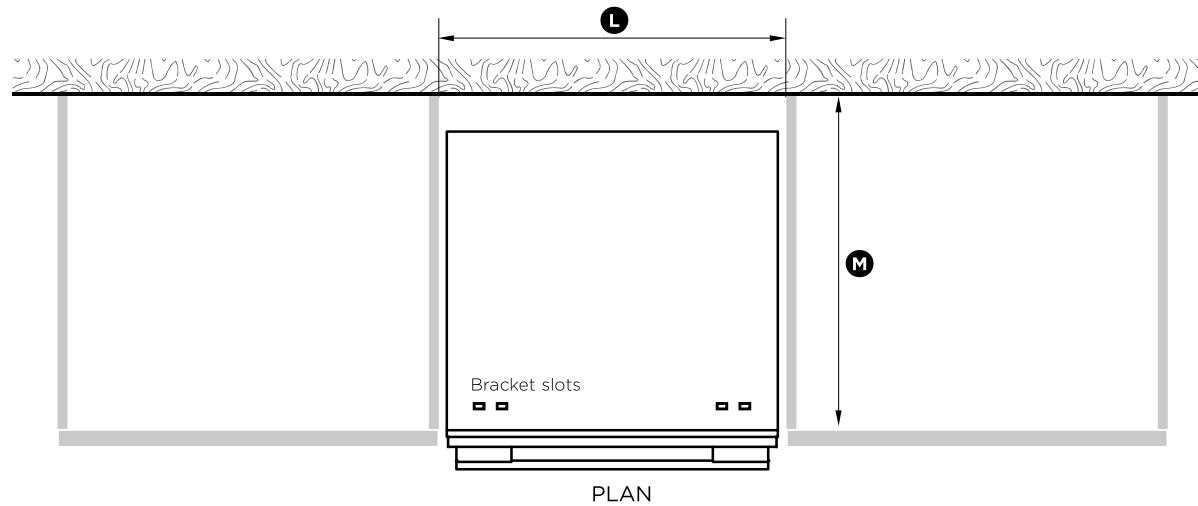


CABINETY DIMENSIONS	DD24DDFT	DD24DV2T
	INCHES (MM)	INCHES (MM)
(P) Inside height of cavity*	min. 34" (864)	min. 34" (864)
(Q) Inside width of cavity	23 5/8" (600)	24" (610)
(R) Inside depth of cavity	min. 22 1/16" (560)	min. 22 1/16" (560)
(S) Recommended height of adjacent cabinet space	30" (762)	30" (762)
(T) Height of toekick space*	3 15/16" - 6 5/16" (100-160)	3 15/16" - 6 5/16" (100-160)

* depending on adjustment of leveling feet

Minimum clearances from adjacent cabinetry

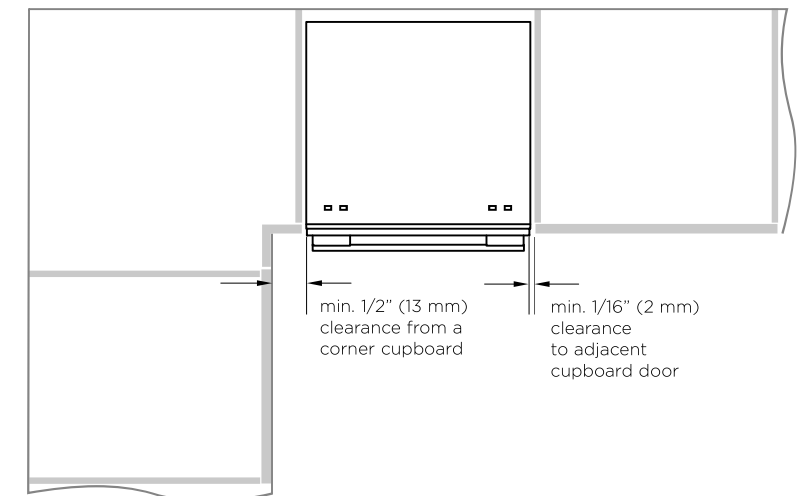




These marks indicate formed bracket screw locations, if securing by drawer removal.

If there is no side partition, you can construct timber bracing as something to secure into.

WARNING!


Incorrect placement of the hole will result in damage to hoses.

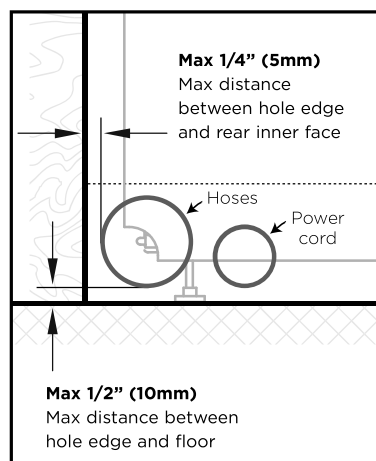

Service Holes

Can be located either side of dishwasher, close to the rear face and the floor, as illustrated, for access to the water supply, drain and power outlet. The small hole is for the power cord only.

- If the hole is through wood, make sure its edges are smooth and rounded.
- If the hole is through metal, ensure you fit the supplied Edge Protector to prevent damage to the power cord.

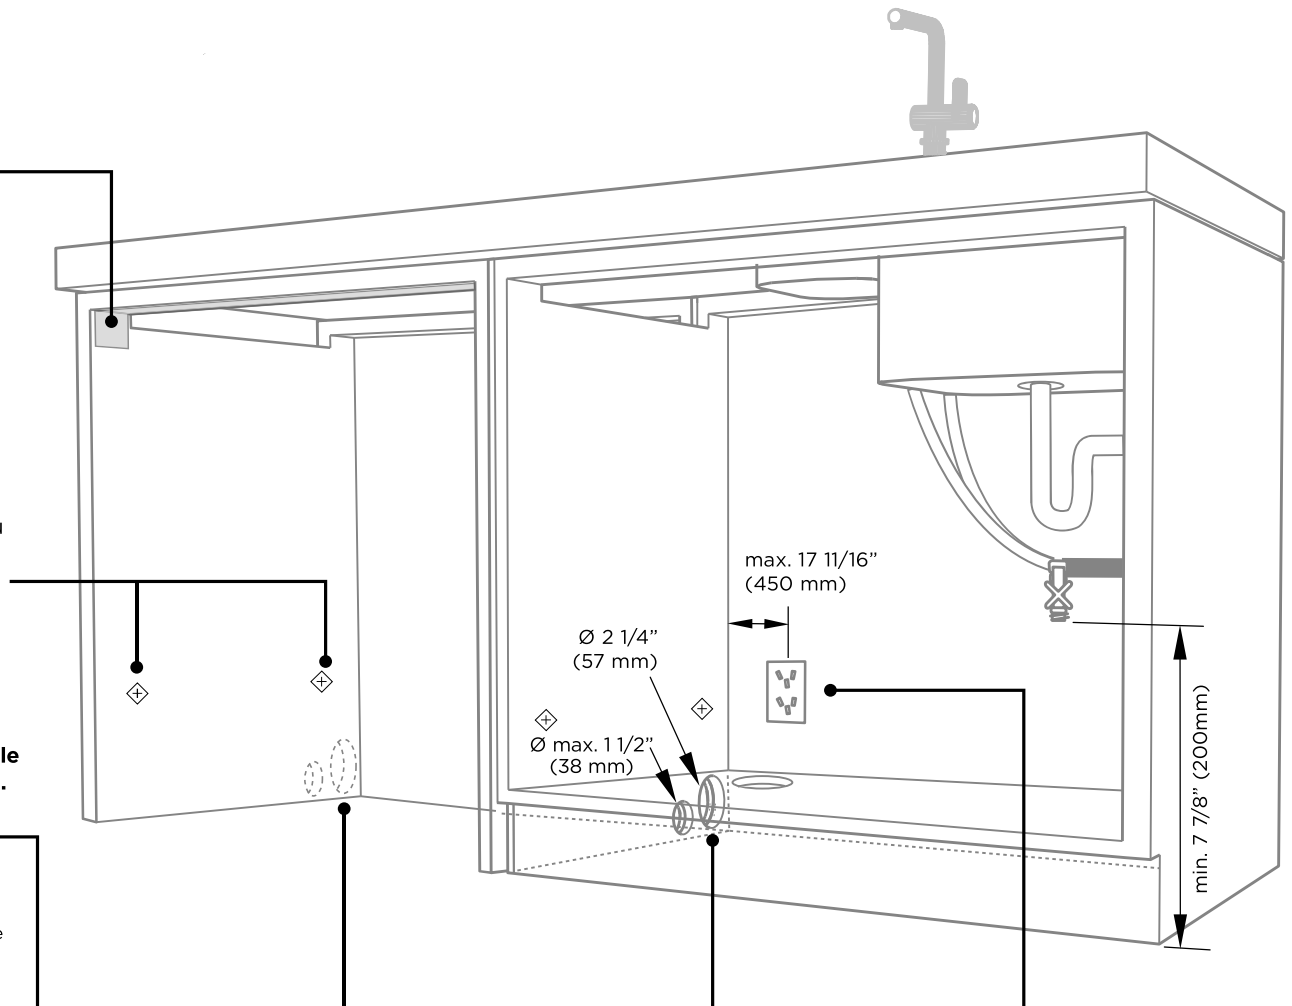

Water Connection

Recommended **HOT**
(Maximum 140°F/60°C).

Supplied hose to suit 3/8" (9 mm) male compression fitting.

Water Pressure

Water softener models

Max. 1 MPa (145 psi)
Min. 0.1 MPa (14.5 psi)

Models without water softener

Max. 1 MPa (145 psi)
Min. 0.03 MPa (4.3 psi)

Kosher requirements


Drains will need to be separated to satisfy kosher requirements. We suggest you confirm acceptability with your local rabbi in respect to kosher installations.

IMPORTANT!

The power outlet must be located in a cabinet adjacent to the dishwasher cavity.
110-120 VAC max. 15 A

⑦ **MAXIMUM DISTANCE OF HOSES & CORD FROM CHASSIS EDGE**

LOT 5-76, INNISFIL, APPLIANCES

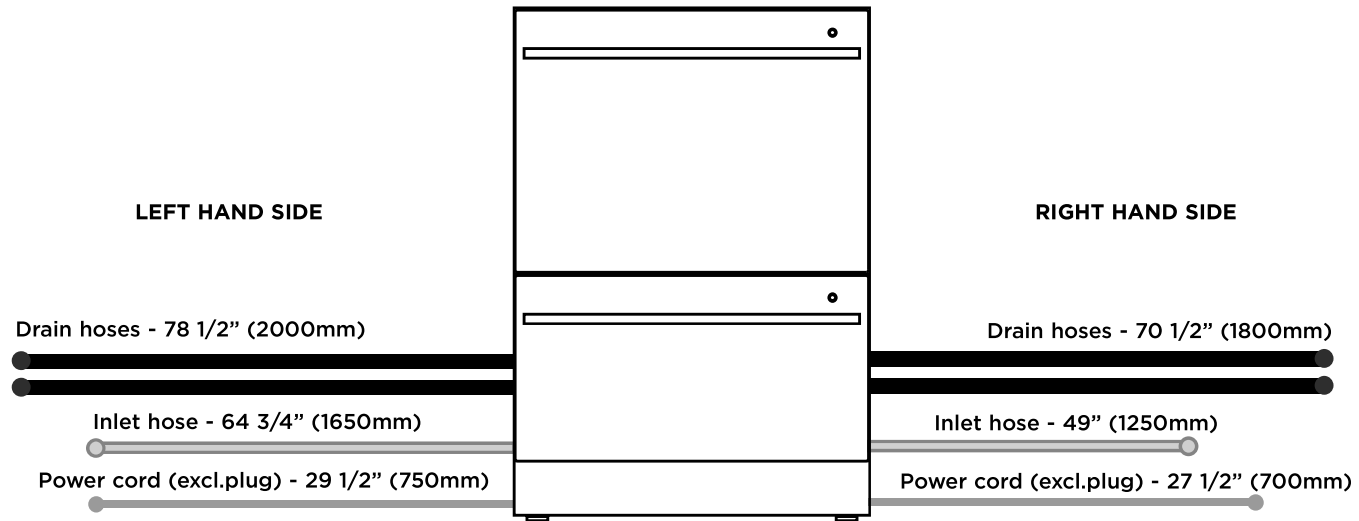

LG LAUNDRY

WM4100HBA

5.2 cu. ft. Capacity Front Load Washer

TurboWash™ 360 Technology

AI DD™

Steam Technology

ENERGY STAR® Qualified

SmartDiagnosis™

Touch Control Panel

ThinQ™ Technology (Wi-Fi Enabled)

Enjoy new ways to control your home with LG smart appliances

LG ThinQ™

- Start the laundry while you're out shopping
- Get alerts when the cycle is finished
- Works with the LG ThinQ® app

works with the
Google AssistantWORKS WITH
alexa


CAPACITY	
Capacity (cu.ft.)	5.2
APPEARANCE	
Design Look	Front Control
Intelligent Electronic Controls with LED Display	•
Touch Buttons	•
Dial-A-Cycle™	•
ENERGY	
ENERGY STAR® Qualified	•
CEE Tier	2
DRYING PROGRAMS	
No. of Programs - 14	Normal, Perm. Press, Heavy Duty, Delicates, Towels, Speed Wash, Drain+Spin, Bedding, Tub Clean, Bright Whites™, Sanitary, Allergiene™ Sportswear, Downloaded
No. of Options - 14	TurboWash™, Steam, Fresh Care, Pre-wash, Remote Start, Delay Wash, Wi-Fi, Add Item, Cold Wash, Extra Rinse, Rinse+Spin, Control Lock, Spin Only, Signal
Temperature Settings	5 Extra Hot, Hot, Warm, Cold, Tap Cold
Spin Speeds	5 Extra High, High, Medium, Low, No Spin
Water Levels	Load Sensing
Soil Levels	5
FABRIC CARE FEATURES	
AI DD™	•
TurboWash™ 360 Technology	•
Steam Technology	•
Allergiene™ Cycle	•
Sanitary Cycle	•
ColdWash™ Option	•
CONVENIENCE FEATURES	
4 Tray Dispenser	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener
TrueBalance™ Anti-Vibration System	•
Load Sense	•
Control Lock	•
Auto Suds Removal	•
Leveling Legs	4 Adjustable Legs
ThinQ® TECHNOLOGY	
SmartDiagnosis™ (v3.0)	•
Wi-Fi	•
Remote Start and Cycle Monitor	•
Energy Monitoring	•



Tub Clean Coach	•
MOTOR	
Motor Type	Inverter Direct Drive Motor
Motor Speed	Variable
Max RPM	1,300
Axis	Horizontal
MATERIALS AND FINISHES	
NeveRust™ Stainless Steel Drum	•
Cabinet	PCM
Control Panel	Plastic
Top Plate	Painted
Door Cover	Tempered Glass Door
Door / Rim	Glass/Chrome
All Available Colours	Black Steel (B)
POWER SOURCE	
Ratings	UL Listed
Electrical Requirements	120V, 10 Amps
Type	Electric
OPTIONS	
Pedestal	WDP4B 27" x 14 1/8" x 30 3/4"
SideKick™ Pedestal Washer	WD100CB 27" x 14 1/8" x 30 3/4"
Stacking Kit	KSTK1
DIMENSIONS	
Product (WxHxD)	27" x 39" x 30 1/4" 55" (With door open)
Carton (WxHxD)	29 23/32" x 42 27/32" x 31 17/32"
Weight (Product/Carton)	198.4 lbs / 212.1 lbs
LIMITED WARRANTY	
1 Year Parts and Labour, 3 Years on Drum, 10 Years on Direct Drive Motor	
UPC CODES	
WM4100HBA	772454073250
DLEX4200B	772454073267
DLGX4201B	772454073366
WD100CB	772454071805
WDP4B	048231026451
KSTK1	772454059896

⚠ WARNING

- Certain internal parts are intentionally not grounded and may present a risk of electric shock only during servicing. Service personnel- Do not contact the following parts while the appliance is energized: pump, valve, motor, control board.

Tools Needed

- ❶ Pliers
- ❷ Flat-Blade Screwdriver
- ❸ Level

Choosing the Proper Location

Check the following requirements for the install location before installing the washer.

- Allow for sufficient space between the walls and the washer for installation.
- Make sure that the floor is clean, dry and free of dust, dirt, water and oil so the leveling feet cannot slide easily. Leveling feet that can move or slide on the floor can contribute to excess vibration and noise.
- If the floor has too much flex, reinforce it to make it more rigid. If the floor is not solid, it may cause severe vibration and noise.
- If a drain pan must be used, take extra care to follow the instructions provided with the drain pan and make sure the leveling feet are adjusted for firm and even contact with the pan. Use of drain pans and failure to properly level the washer may result in increased vibration and noise during operation.

Power Outlet

- The power outlet must be within **60 inches (1.5 m)** of either side of the washer.
- Position the washer so that the outlet and plug are easily accessible.
- Do not overload the outlet with more than one appliance.
- The outlet must be grounded in accordance with current electrical wiring codes and regulations.
- Use a time-delay fuse or circuit breaker.


- It is the personal responsibility and obligation of the washer owner to have a proper outlet installed by a qualified electrician.

Flooring

- To minimize noise and vibration, install the washer on a level, solidly constructed floor capable of supporting the washer without flexing or bouncing.
- The washer must be installed on firm flooring to minimize vibration during the spin cycle. Concrete flooring is best, but a wood floor is sufficient, provided it is built to FHA standards.
- The floor under the washer must not slope more than 1 inch (2.5 cm) from front to back or side to side.
- Installing on carpeting and soft tile surfaces is not recommended.
- Never install the washer on a platform or weakly supported structure.

Floor Installation

To ensure sufficient clearance for water inlet hoses, drain hose and airflow, allow minimum clearances of at least **1 inch (2.5 cm)** at the sides and **4 inches (10 cm)** behind the washer. Be sure to allow for wall, door, or floor moldings that may increase the required clearances.

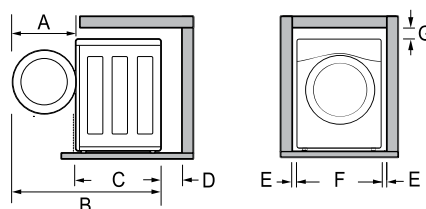


Dimensions and Clearances	
A	24 3/4" (62.6 cm)
B	55" (139.6 cm)
C	30 1/4" (77 cm)
D	4" (10 cm)
E	1" (2.5 cm)

Dimensions and Clearances	
F	27" (70 cm)
G	1/4" (0.5 cm)

Stacking or Pedestal Installation

The washer can be stacked under a dryer or on top of a pedestal or pedestal washer.

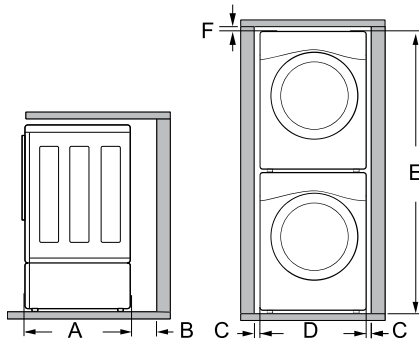

Dimensions and Clearances	
A	30 1/4" (77 cm)
B	4" (10 cm)
C	1" (0.5 cm)
D	27" (70 cm)
E	77 1/2" (196.8 cm)
F	1/4" (0.5 cm)

NOTE

- Refer to the instructions packaged with the optional pedestal kit before stacking appliance on pedestal.
- Do not use a drain pan with a pedestal or pedestal washer installation as it can block the drawer. Using a drain pan may result in increased vibration and noise during operation.

Unpacking and Removing Shipping Material

Remove all shipping materials from the washer for proper operation and inspect it for shipping damage.

CAUTION


- Failure to remove shipping materials can cause excessive noise and vibration.

Unpacking Shipping Material

* This feature is only available on some models.


Lift the washer off the foam base.

- After removing the carton and shipping material, lift the washer off the foam base.
- Make sure the plastic drum support ①* comes off with the base and is not stuck to the bottom of the washer.
- If you must lay the washer down to remove the carton base ②, always protect the side of the washer and lay it carefully on its side. Do not lay the washer on its front or back.

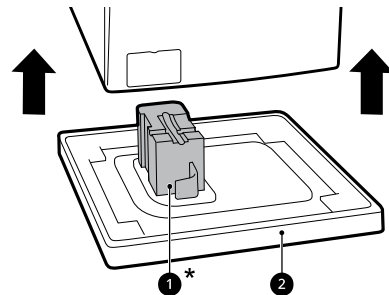

Removing Shipping Material

- Remove the bolt assemblies.
 - Starting with the bottom two shipping bolts ③, use the included wrench to fully loosen all 4 shipping bolts by turning them counterclockwise.
 - Remove the bolt assemblies (bolts and retainers) by wiggling them slightly while pulling them out.

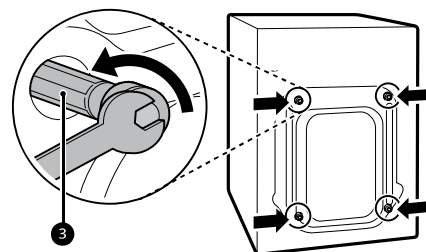

- Install the hole caps.
 - Locate the hole caps ④ included in the accessory pack or attached to the back of


- Let the water drain into a bucket, and check the water temperature to make sure you've connected the hoses to the correct faucets.




- Never create an airtight seal between the hose and the drain with tape or other means. If no air gap is present, water can be siphoned out of the drum resulting in poor wash/rinse performance or clothing damage.

Using a Standpipe to Drain


- 1 Clip the end of the hose into the elbow bracket.
 - Connect the elbow bracket ① within **4 inches (10 cm)** of the end of the drain hose. If the drain hose is extended more than **4 inches (10 cm)** beyond the end of the elbow bracket, mold or microorganisms could spread to the inside of the washer.



- 2 Insert the end of the drain hose into the standpipe.




- 3 Use the provided tie strap ② to secure the drain hose in place.



- 4 If the water valves and drain are built into the wall, fasten the drain hose to one of the water hoses with the provided tie strap ③ (ribbed side on inside).

- 4 Attach the inlet hoses to the back of the washer.
 - Attach the hot water inlet hose to the hot water inlet on the back of the washer. Attach the cold water inlet hose to the cold water inlet on the back of the washer.
 - Tighten the fittings securely. Turn on both faucets all the way and check for leaks at both ends of the hoses.

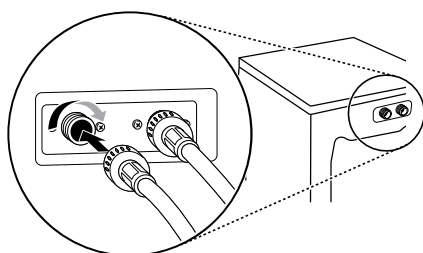

Connecting the Drain Hose


Connect the drain hose to either a standpipe or laundry tub.

⚠ WARNING

- The drain hose should always be properly secured. Failure to properly secure the drain hose can result in flooding and property damage.


NOTE

- The drain must be installed in accordance with any applicable local codes and regulations.
- Make sure that the drain hose is not stretched, pinched, crushed, or kinked.
- Do not install the drain hose with the end lower than **29.5 inches (75 cm)** or higher than **96 inches (244 cm)** above the bottom of the washer or more than **60 inches (152 cm)** away from the washer.

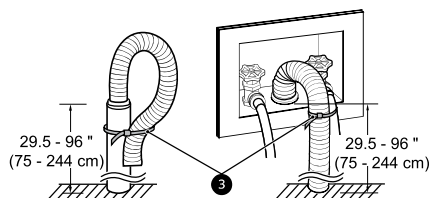


Using the Laundry Tub to Drain


- 1** Clip the end of the hose into the elbow bracket.
 - Connect the elbow bracket **1** within **4 inches (10 cm)** of the end of the drain hose. If the drain hose is extended more than **4 inches (10 cm)** beyond the end of the elbow bracket, mold or microorganisms could spread to the inside of the washer.



- 2** Hang the end of the drain hose over the side of the laundry tub.



- 3** Use the provided tie strap to secure the drain hose in place.



Leveling the Washer

The drum of the washer spins at very high speeds. To minimize vibration, noise, and unwanted movement, the floor must be a solid, level surface.

CAUTION


- Using the washer without leveling it may cause excess vibration and noise, leading to a washer malfunction.
- Adjust the leveling feet only as far as necessary to level the washer. Extending the leveling feet more than necessary can cause the washer to vibrate.

NOTE

- Before installing the washer, make sure that the floor is clean, dry and free of dust, dirt, water and oil so the washer feet cannot slide easily. Feet that move or slide on the floor can contribute to excessive vibration and noise.

How to Level the Washer

- 1** Position the washer in its final location.
 - Take special care not to pinch, strain, or crush the water and drain hoses. If you have a carpenter's level **1**, you can use it to check that the washer is level. The slope beneath the washer should not exceed **1 inch**, and all 4 leveling feet must rest firmly on the floor.

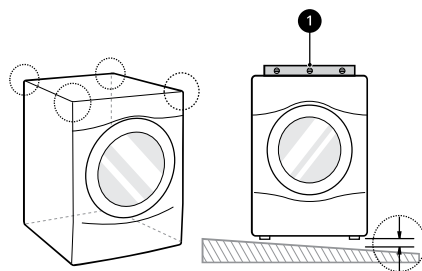

LG LAUNDRY

DLEX4200_ / DLGX4201_

7.4 cu.ft. Front Load Dryer with TurboSteam™ and Built-In Intelligence

7.4 cu. ft. Ultra Large Capacity
 TurboSteam™ Technology
 AI Fabric Sensor/ Smart Pairing™
 LG ThinQ® Technology / Proactive Customer Care
 Tempered Glass Door
 FlowSense™ Duct Clogging and Lint Filter Indicators
 ENERGY STAR® Certified
 Closet Depth
 LoDecibel™ Quiet Operation
 Reversible Door
 Wrinkle Care Option

AVAILABLE COLORS


LG ThinQ®

Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle




LOT 5-76, INNISFIL, APPLIANCES



SUMMARY		FABRIC CARE FEATURES		POWER SOURCE	
Type	Front Load Dryer	A.I Dry	Yes	Ratings	CSA Listed
Capacity	7.4 cu. ft.	Sensor Dry	Yes	Electrical Requirements	120V, 15 Amps (Gas) / 240V 30 Amps (Electric)
Matching Washer	WM4200HWA, WM4200HBA	Precise Temperature Control with Variable Heater	Yes	Type	Electric, Gas
Sensor Dry	Yes	Steam	TurboSteam™	BTU Rating	10,000 Feet
Steam	Yes	CONVENIENCE FEATURES		OPTIONS	
Color	White (W), Black Steel (B)	3 Minute Installation Check	Yes	LP Conversion Kit	383EEL3002D
APPEARANCE		LoDecibel™ Quiet Operation	Yes	Side Venting Kit	383EEL9001B
Intelligent Electronic Controls with LED Display	Yes	End of Cycle Signal	Yes	Pedestal	WDP4W, WDP4B
Dial-A-Cycle™	Yes	Drum Light	Yes	Pedestal (WxHxD)	27" x 14 1/8" x 30 3/4" (50 1/2" D with door open)
Touch Buttons	Yes	Reversible Door	Yes	DIMENSIONS (ELECTRIC)	
DRYER PROGRAMS		FlowSense™ Duct Clogging Indicator	Yes	Product (WxHxD)	27" x 39" x 30 1/8"
No. of Programs	14	Wrinkle Care Option	Yes	Depth with Door Open	51 3/8"
Programs (Sensor Dry)	Normal, Heavy Duty, Bedding, Small Load, Anti Bacterial, Steam-Sanitary™, SteamFresh™, Perm Press, Delicates, Sportswear, Towels, Speed Dry (Manual Dry), Air Dry (Manual Dry), Downloaded	Child Lock	Yes	Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
No. of Options	12	Venting Option	Electric: 4 Way Venting / Gas: 3 Way Venting	Weight (Product)	125.3 lbs.
Options	More Time, Less Time, Damp Dry Signal, Wrinkle Care, Control Lock, Wi-Fi, Energy Saver, TurboSteam™, Reduce Static, Remote Start, Drum Light, Signal	4 Adjustable Legs	Yes	Weight (Carton)	142.6 lbs.
Temperature Settings	High, Med.High, Medium, Low, Ultra Low	Remaining Time Display/Status Indicator(s)	Yes	DIMENSIONS (GAS)	
Drying Levels	Very Dry, More Dry, Normal Dry, Less Dry, Damp Dry	ThinQ® TECHNOLOGY		Product (WxHxD)	27" x 39" x 30 1/8"
Manual Dry Times	60 min., 50 min., 40 min., 30 min., 20 min., More Time/Less Time	SmartDiagnosis™ (v3.0)	Yes	Depth with Door Open	51 3/8"
		Wi-Fi	Yes	Carton (WxHxD)	29 1/2" x 42 1/4" x 31 1/4"
		Remote Start and Cycle Monitor	Yes	Weight (Product)	139.34 lbs.
		Energy Monitoring	Yes (Wi-Fi)	Weight (Carton)	155.0 lbs.
		ENERGY		LIMITED WARRANTY	
		ENERGY STAR® Certified	Yes	Parts & Labor	1 Year
		CEF	Electric: 3.94 / Gas: 3.49	Drum	10 Years
		MATERIALS AND FINISHES		UPC CODES	
		Aluminized Alloy Steel Drum	Yes	DLEX4200W (White)	048231028417
		Tub Rear	Painted	DLGX4201W (White)	048231028424
		Cabinet	Painted Steel	WM4200HWA (White)	048231028301
		Door	Glass Door w/ Chrome trim	DLEX4200B (Black Steel)	048231028394
		All Available Colors	White (W), Black Steel (B)	DLGX4201B (Black Steel)	048231028400
				WM4200HBA (Black Steel)	048231028295

12 INSTALLATION

Clearances

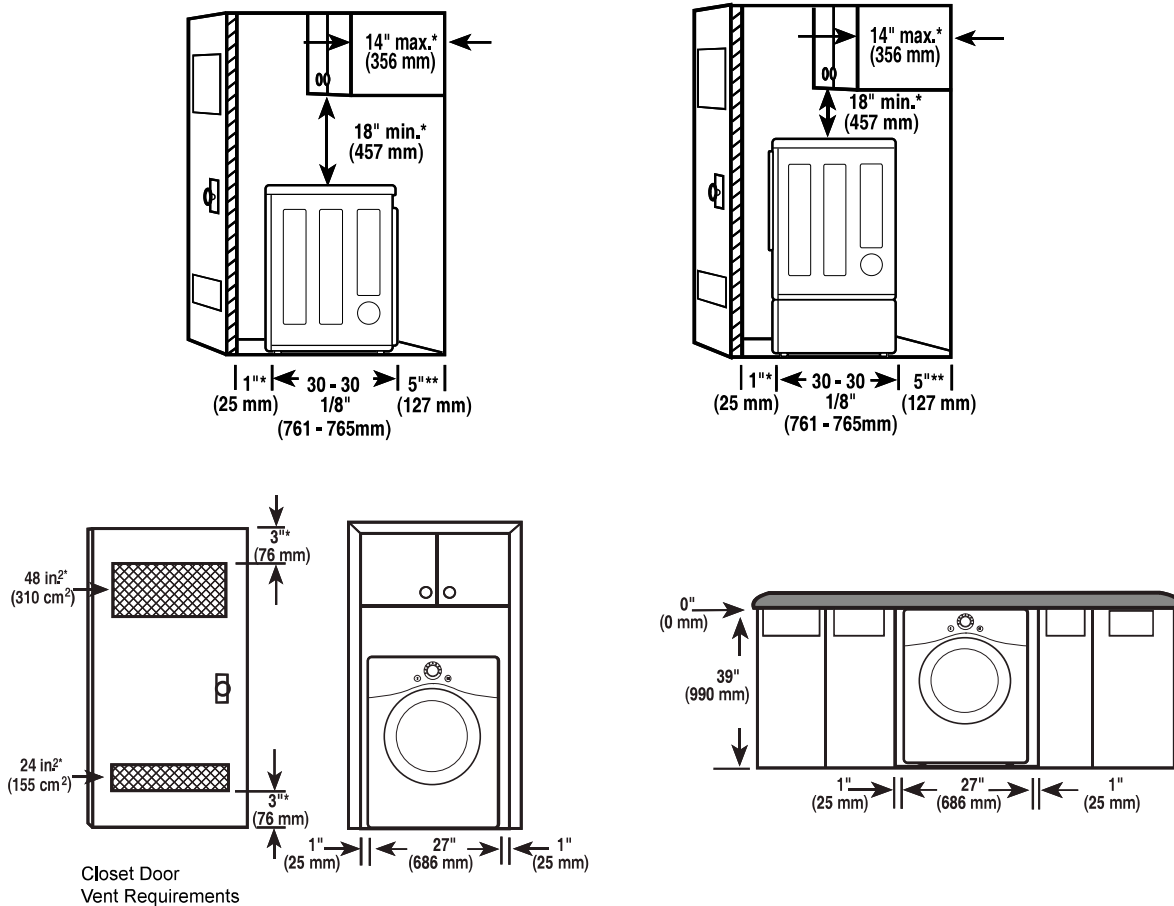

Installation Spacing for Recessed Area or Closet Installation

The following clearances are recommended for this dryer. This dryer has been tested for clearances of 1 inch (2.5 cm) on the sides and rear. Recommended clearances should be considered for the following reasons:

- Additional clearances should be considered for ease of installation and servicing.
- Additional clearances should be considered on all sides of the dryer to reduce noise transfer. For closet installation, with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent ventilation openings are acceptable.


Closet Ventilation Requirements

Closets with doors must have both an upper and lower vent to prevent heat and moisture buildup in the closet. One upper vent opening with a minimum opening of 48 sq. in. (310 cm²) must be installed no lower than 6 feet above the floor. One lower vent opening with a minimum opening of 24 sq. in. (155 cm²) must be installed no more than one foot above the floor. Install vent grilles in the door or cut down the door at the top and bottom to form openings. Louvered doors with equivalent ventilation openings are also acceptable.

NOTE

- There should be at least a little space around the dryer (or any other appliance) to eliminate the transfer of vibration from one appliance to another. If there is enough vibration, it could cause appliances to make noise or come into contact, causing paint damage and further increasing noise.

Installation Spacing for Recessed Area or Closet, with Stacked Washer and Dryer

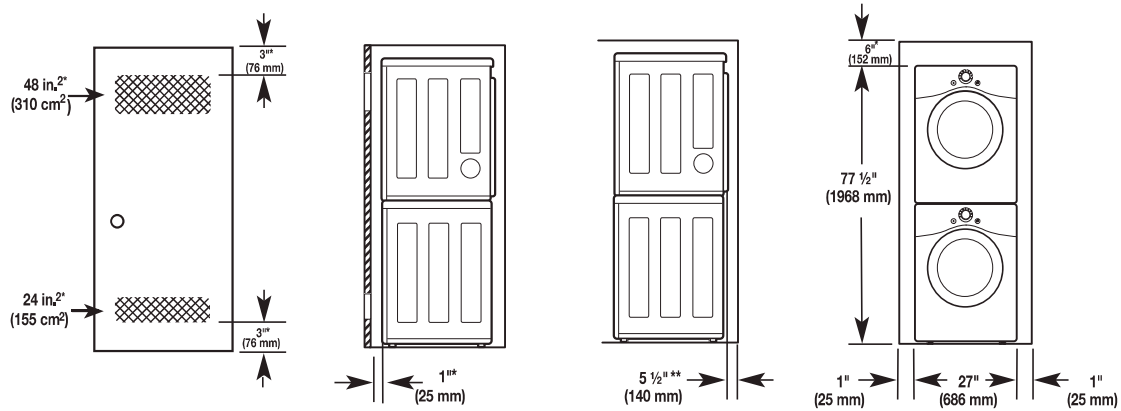


* Required spacing

** For side or bottom venting, 2-inch (5.1 cm) of spacing is allowed.

Installation Spacing for Cabinet

For cabinet installation with a door, minimum ventilation openings in the top of the cabinet are required.

* Required spacing

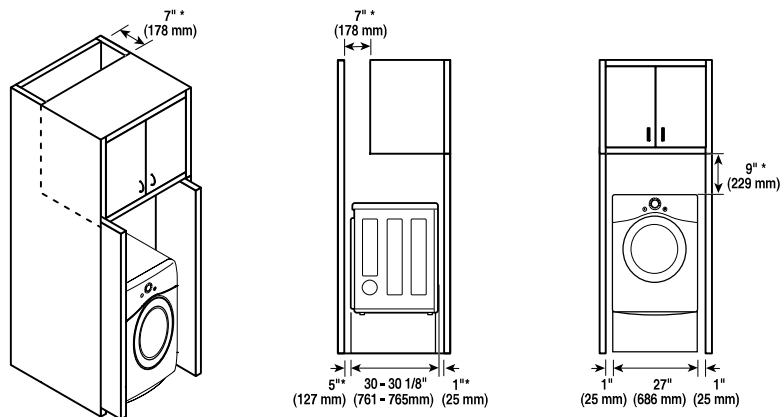

Venting the Dryer

WARNING




To reduce the risk of fire or explosion, electric shock, property damage, injury to persons or death when using this appliance, follow basic safety precautions, including the following:

- Do not crush or collapse ductwork.
- Do not allow ductwork to rest on or contact sharp objects.
- If connecting to existing ductwork, make sure it is suitable and clean before installing the dryer.
- Venting must conform to local building codes.
- Gas dryers **MUST** exhaust to the outdoors.
- Use only 4-inch (10.2 cm) rigid, semi-rigid or flexible metal ductwork inside the dryer cabinet and for venting outside.
- To reduce the risk of fire, combustion, or accumulation of combustible gases, DO NOT exhaust dryer air into an enclosed and unventilated area, such as an attic, wall, ceiling, crawl space, chimney, gas vent, or concealed space of a building.
- To reduce the risk of fire, DO NOT exhaust the dryer with plastic or thin foil ducting.
- The exhaust duct must be 4-inch (10.2 cm) in diameter with no obstructions. The exhaust duct should be kept as short as possible. Make sure to clean any old ducts before installing your new dryer.
- Rigid, semi-rigid or flexible metal ducting is recommended for use between the dryer and the wall. All non-rigid metal transition duct must be UL-listed. Use of other materials for transition duct could affect drying time.
- DO NOT use sheet metal screws or other fasteners which extend into the duct that could catch lint and reduce the efficiency of the exhaust system. Secure all joints with duct tape.
- Do not exceed the recommended duct length limitations noted in the chart. Failure to follow these instructions may result in extended drying times, fire or death.

WARNING

- Ductwork is not provided with the dryer. You should obtain the necessary ductwork locally. The vent hood should have hinged dampers to prevent backdraft when the dryer is not in use.
- The total length of flexible metal duct must not exceed 8 ft. (2.4 m).

Ductwork

Wall Cap Type	Number of 90° Elbows	Maximum length of 4-inch diameter rigid metal duct
  a: 4" (10.2 cm)	0	65 ft.(19.8 m)
	1	55 ft.(16.8 m)
	2	47 ft.(14.3 m)
	3	36 ft.(11.0 m)
	4	28 ft.(8.5 m)
 b: 2.5" (6.35 cm)	0	55 ft.(16.8 m)
	1	47 ft.(14.3 m)
	2	41 ft.(12.5 m)
	3	30 ft.(9.1 m)
	4	22 ft.(6.7 m)

NOTE

- Deduct 6 ft. (1.8 m) for each additional elbow. Do not use more than four 90° elbows.
- In Canada, only those foil-type flexible ducts, if any, specifically identified for use with the appliance by the manufacturer should be used. In the United States, only those foil-type flexible ducts, if any, specifically identified for use with the appliance by the manufacturer and that comply with the Outline for Clothes Dryer Transition Duct, Subject 2158A, should be used.


Routing and Connecting Ductwork

NOTE


Follow the guidelines below to maximize drying performance and reduce lint buildup and condensation in the ductwork. Ductwork and fittings are NOT included and must be purchased separately.

- Use 4-inch (10.2 cm) diameter rigid, semi-rigid or flexible metal ductwork.
- The exhaust duct run should be as short as possible.
- Use as few elbow joints as possible.
- The male end of each section of exhaust duct must point away from the dryer.
- Use duct tape on all duct joints.
- Insulate ductwork that runs through unheated areas in order to reduce condensation and lint buildup on duct surfaces.
- Incorrect or inadequate exhaust systems are not covered by the dryer warranty. Dryer failures or service required because of such exhaust systems will not be covered by the dryer warranty.

Correct Venting



Incorrect Venting



Connecting Electric Dryers

WARNING

To reduce the risk of fire or explosion, electric shock, property damage, injury to persons, or death when using this appliance, follow requirements including the following:

Electrical Requirements for Electric Models Only

- The wiring and grounding must conform to the latest edition of the National Electrical Code, ANSI/NFPA 70 and all applicable local regulations. Please contact a qualified electrician to check your home's wiring and fuses to ensure that your home has adequate electrical power to operate the dryer.
- This dryer must be connected to a grounded metal, permanent wiring system, or an equipment-grounding conductor must be run with the circuit conductors and connected to the equipment-grounding terminal or lead on the dryer.
- The dryer has its own terminal block that must be connected to a separate 240 VAC, 60-Hertz, single-phase circuit, fused at 30 amperes (the circuit must be fused on both sides of the line). ELECTRICAL SERVICE FOR THE DRYER SHOULD BE OF THE MAXIMUM RATE VOLTAGE LISTED ON THE NAMEPLATE. DO NOT CONNECT THE DRYER TO 110-, 115-, OR 120-VOLT CIRCUIT.
- If the branch circuit to dryer is 15 ft. (4.5 m) or less in length, use UL (Underwriters Laboratories) listed No.-10 AWG wire (copper wire only), or as required by local codes. If over 15 ft. (4.5 m), use UL-listed No.-8 AWG wire (copper wire only), or as required by local codes. Allow sufficient slack in wiring so the dryer can be moved from its normal location when necessary.
- The power cord (pigtail) connection between the wall receptacle and the dryer terminal block IS NOT supplied with the dryer. Type of pigtail and gauge of wire must conform to local codes and with instructions on the following pages.

WARNING

- A 4-wire connection is required for all mobile and manufactured home installations, as well as all new construction after January 1, 1996. A 4-wire connection must be used where local codes do not permit grounding through the neutral wire.
- Do not modify the plug and internal wire provided with the dryer.
- The dryer should be connected to a 4-hole outlet.
- If the plug does not fit the outlet, a proper outlet will need to be installed by a qualified electrician.
- Connect the power cord to the terminal block. Each colored wire should be connected to the same color screw. Wire color indicated on manual is connected to the same color screw in the block.
- Grounding through the neutral conductor is prohibited for: (1) new branch-circuit installations, (2) mobile homes, (3) recreational vehicles, and (4) areas where local codes prohibit grounding through the neutral conductor.
- This dryer is supplied with the neutral wire grounded. This white ground wire MUST BE MOVED to the neutral terminal when a 4-wire cord is to be used, or where grounding through the neutral conductor is prohibited.

NOTE

- For electrical requirements for mobile or manufactured homes, see **Special Electrical Requirements**.