


AVH-368CS 36" Wall mounted hood - MSRP: \$879.00




Model	AVH-368CS		
Features			
Control	Soft touch with LED display		
Lighting	2 bulbs, 3W LED (bulbs included)		
Blower type	860 CFM, 6-Speed		
Blower performance	Speed 1, 2.4 sones		
	Speed 6, 6.2 sones		
Filter type	3 aluminium superior micro hole filters and		
	stainless steel baffle filters included		
Duct transition	6" Round (Top)		
Ducting	Ducted		
Chimney (ducted out)	For ceiling heights up to 9'0"		
Exterior Appearence			
Stainless steel grade	201		
Elec	ctrical Requirements		
Electrical requirements	120V / 60Hz / 2.7 Amps		
Dimensions			
Dimensions	35 1/2" (W) x 19 3/4" (D) x 3 1/4" (H)		
	Warranty		
1-year Warranty	Parts and labour, in-home service		

Dimensions

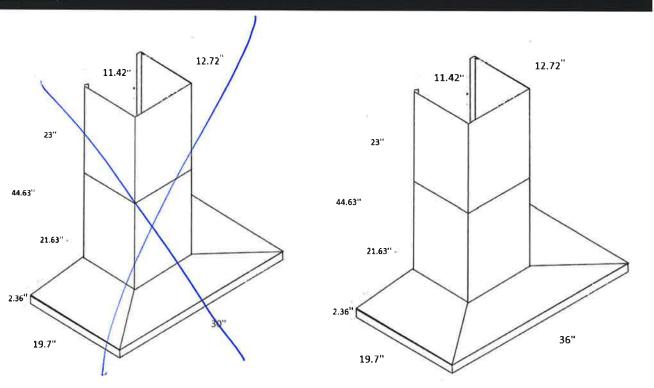

Installation



Α	Floor to ceiling height	variable	
В	Floor to counter top height (standard)	36"	
С	Recommended height between		
D	Hood height	2.36"	
Ε	Chimney height	Max 44.63"	



The information contained herein is based on sources that we believe to be reliable, but is not guaranteed by us, may be incomplete and/or may change without notice.

Solid surface or laminate countertops often require special installations. For example, heat-reflective tape and rounded corners may be necessary. Contact the countertop manufacturer for instructions specific to your countertop.

2.6 Gas requirements

Ensure that the requirements for the gas supply are met. The cooktop is shipped from the factory for use with natural gas. For use with LP conversion, a certified technician or installer must do the conversion. Supply pressure:

Natural Gas: 7 inches water column (17.4 Millibars)

Propane Gas: 11 inches water column (27.4 Millibars)

The propane gas tank must be equipped with its own high pressure regulator in addition to the pressure regulator supplied with this unit.

2.7 Electrical requirements

Ensure that the following electrical requirements are met.

CAUTION

Do not use an extension cord with this appliance.

- This appliance requires a 60 Hz, 15 Amp, 120 V/AC connection.
- The appliance is equipped with a 40" (1000 mm) power cord.

The power connection must remain accessible from the front of the cabinet after the installation is complete.

3 Prepare installation space

Create the cutout in the countertop according to the instructions.

General countertop requirements:


- The angle of the cut surface to the countertop surface must be 90°.
- With multi-layered countertops, secure strips laterally in the cutout if necessary.
- After creating the cutout, remove all debris.
- Follow the countertop manufacturer's recommendations for protecting the cut edges, e.g. apply heat resistant foil
- If the cooktop will be installed in combination with an oven, refer to the Approved Combination Matrix included with the product for cutout and clearance dimensions.


MARNING

The bottom of the cooktop can become hot.

► If the cooktop is not installed in combination with an oven, install a horizontal panel below the cooktop to prevent accidental contact. Refer to the section on installing a horizontal panel. → Page 9

3.1 Installation dimensions

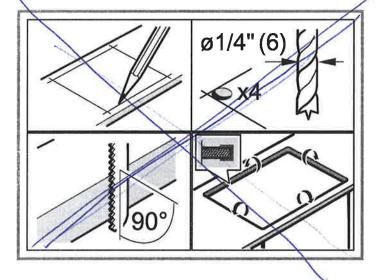

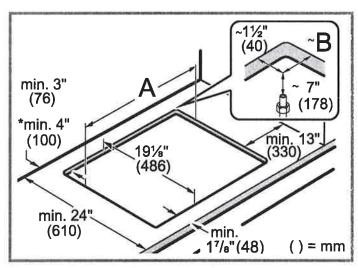


*For installation in a kitchen island.

11	NGM8058UC	NGM8658UC
Α	28 ¹⁵ / ₁₆ " (735 mm)	34 ¹⁵ / ₁₆ " (887 mm)
В	7¼" (184 mm)	101/4" (260 mm)



Installation over oven

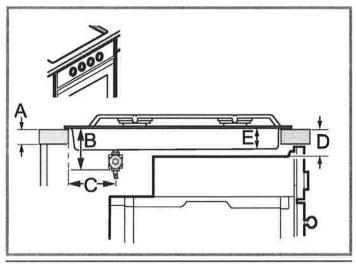


Α	min. ¾" (19 mm) max. 2" (50 mm)	
В	5%" (150 mm)	
С	2¾" (70 mm)	
D	Refer to Approved Combination Matrix	
Ε	2%" (60)	

Installation with horizontal panel

If there is no oven beneath the cooktop, install a horizontal panel. To allow access to the power supply connection and regulator maintain a minimum clearance of 3/4" (10 mm) from the edges of the panel (F). IMPORTANT: Complete the installation of the cooktop before installing the horizontal panel.


installation above a drawer

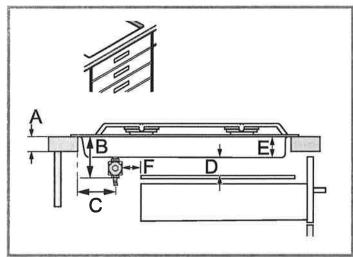

Α	min. ³ / ₄ " (19 mm) max. 2" (50 mm)	
В	5%" (150 mm)	
С	23/4" (70 mm)	
D	min. 0" (0 mm)	
E	2%" (60)	
F	min. ¾" (10 mm)	

LOT 5-22 1A+5 COOKTOP Installation procedure en-us

Installation above a cabinet door



Α	min. ¾" (19 mm) max. 2" (50 mm)
В	5%" (150 mm)
С	2¾" (70 mm)
D	min. 0" (0 mm)
E	2%" (60)
F	min. %" (10 mm)
G	min. 1" (25)

4 Installation procedure

Follow these instructions to install the cooktop into the countertop.



A CAUTION

Sharp edges.

Use protective gloves when installing the appliance.




CAUTION

The appliance is heavy.

▶ It is recommended that two people install this appliance.

4.1 Preparing the cooktop

1. Place the cooktop face down on a soft and stable surface. Use the foam sheet from the packaging to protect surfaces from scratching.



Double Oven

30" Microwave Combination Oven 500 Series - Stainless Steel HBL57M52UC



The Bosch Microwave Combination Oven Features Heavy Metal Stainless Steel Knobs.

- · Genuine European Convection for Even Baking Results on Mutliple Levels.
- · Heavy-duty Metal Knobs for a Premium Look and Feel.
- · The Wall Oven is Designed to be Installed Flush with your Cabinetry.

Technical Data

Cooking mode:

Microwave

Cooking method second cavity:

3rd element convection, Convection Bake, Convection Broil, Convection Roast, Dough proving setting, Pizza

setting, Small area grill, Top/bottom heating, Top heating,

1/3 bottom heat., Variable small-area grill, Warming Integrated Cleaning system:

Number of interior lights:

No

Included accessories:

2 x oven racks /lower

Bake Element Wattages cavity 1 (W):

Microwave Wattages (W):

950

UPC code:

825225928690

Product color: Energy source: Stainless steel

Watts (W):

Electric

Current (A):

7975

Volts (V):

40

Frequency (Hz):

208-240 60

Approval certificates:

CSA

Power cord length (in):

50"

Power cord length (cm):

Appliance Dimensions (h x w x d) (cm):

127

124.4 x 75.5 x 62.2

Required cutout size (HxWxD) (in): 45 5/8" x 28 1/2" x 23 1/2" Overall appliance dimensions (HxWxD) (in):

49" x 29 3/4" x 24 1/2" Overall appliance dimensions (HxWxD) (mm):

1244 x 755 x 622

Product packaging dimensions (HxWxD) (in):

55 3/4" x 34" x 31 1/2"

Net weight (lbs):

296

Net weight (kg):

134.0

Gross weight (lbs): Gross weight (kg):

328 149.0

Included accessories

2 x oven racks /lower


Optional accessories

HEZTR301: Telescopic Oven Rack 30"




Double Oven


30" Microwave Combination Oven 500 Series - Stainless Steel HBL57M52UC





Power conduit 50* (1270 mm) from the lower even.



Elusts Installation
Oven Over Storage or Warming Drawer








The overs will oversity the subus resulting at a "O" (12) spacing between the products

A STANT FOR COMMENT OF THE PROPERTY OF THE PRO

Seaso, revealed to bechar (rest)

Standard Installation Combination Oven over Storage or Warming Drawer



- 'Wall oven junction box may be located above or right or left of the unit within reach of the power conduit.
- **Electrical hook up may be located below (depending on space) or next to the drawer within the reach of the power cord.

3/3

24" Pocket Handle Dishwasher

500 Series - Stainless Steel SHPM65Z55N





SHPM65Z55N Stainless Steel

Also available in:

White

SHPM65Z52N

Black

SHPM65Z56N

All-new AutoAir™ option automatically releases the door at the end of the cycle to let moisture escape and fresh air in for drier dishes.


Features & Benefits

44 dBA: dishwasher runs quietly so your kitchen conversations aren't interrupted.

The Flexible 3rd Rack with fold down sides adds 30% more* loading area, perfect for utensils and ramekins.


The AquaStop® leak protection system contains leaks through a precisely engineered system. If a leak occurs, the system contains it by shutting down operation and pumping out water. So you have the ultimate peace of mind whether you are away or at home.

General Properties	
Number of wash cycles	5
Number of options	5
dBA	44
Third rack	Flexible 3rd Rack
Rack adjustability	Rackmatic®
Tub material	Stainless Steel
Control type	Buttons
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop®
Water softener	No
Five-level wash	Yes
ChildLock	No
Special features	InfoLight®, AutoAir™ Option
Efficiency	
Water usage per cycle	3.5
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption (kWh)	269
Total annual water consumption (g)	623.5
Capacity	
Number of place settings	16





Technical Details	
Watts (W)	1440 W
Current (A)	12 Amps
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length	67"
- Install length from corner of unit	45"
Minimum water pressure (lb/sin)	14
Length outlet hose (in)	79"
Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/10 x 23 3/4"
Required cutout size (HxWxD) (in)	33 7/8" x 23 5/8" x 24"
Adjustable feet	Yes
Net weight (lbs)	91 lbs
Accessories-Optional	
Junction Box	SMZPCJB1UC
Bosch Dishwasher Water Supply Hose	SMZSH002UC
Drain Hose Extension Kit	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Anti-Tarnish Silverware Cassette	SMZ5002UC
Edge Protector	SMZEP001UC



Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches, BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904


^{*}Compared to a Bosch dishwasher with 2 racks.


24" Pocket Handle Dishwasher


500 Series - Stainless Steel SHPM65Z55N





Installation Details

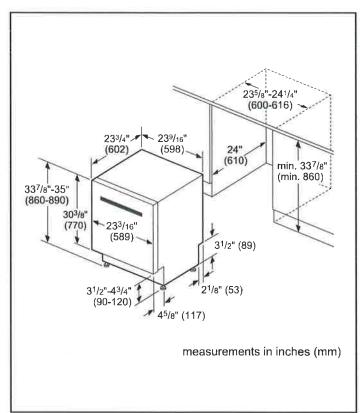

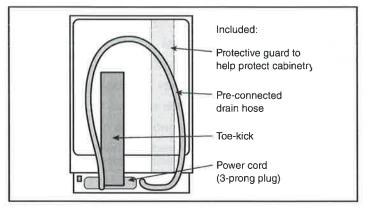

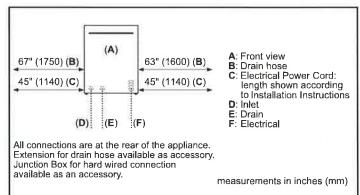

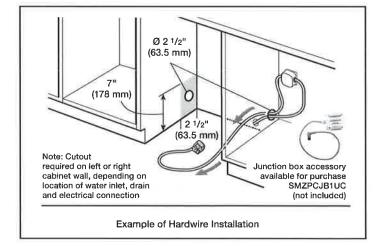

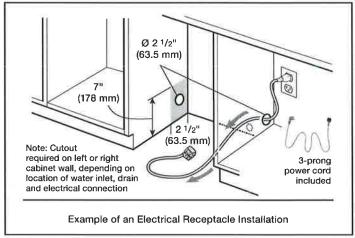

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


24" Pocket Handle Dishwasher


500 Series - Stainless Steel SHPM65Z55N

LOT 5-22, PHS, APPLIANCES

BOSCH Invented for life

Installation Details





Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.

FRIGIDAIRE

GALLERY

28.8 Cu. Ft. French Door Refrigerator

APPLIANCES

French Door Refrigerator

Available Products: GRFN2853AF

Available Colors: Stainless Steel

Version: 08/22



Product Specifications

Refrigerator		Freezer	
Adjustable Temperature Drawer	Yes	Auto Close Drawer	Yes
Air Filter	Yes	Automatic Defrost	Yes
Crisper Color	Clear	Basket Divider	Yes
Dairy Bin	No	Baskets / Bins Color	White
Door Bin Color	Clear	Interior Lighting	LED
Humidity Controls	Automatic	Shelf Material	Glass
Interior Lighting	LED	Number of Baskets / Bins	1
Shelf Material	Glass	Number of Pull Out Shelves	1
Water Filter	Yes	Total Number of Shelves	1
Number of Adjustable Gallon Plus Door Bins	3		
Number of Fixed Condiment Door Bins	2	Controls	
Number of Fixed Gallon Plus Door Bins	3	Air Filter Indicator	Yes
Total Number of Door Bins	8	Digital Display	Yes
Number of Adjustable Shelves	2	Door Ajar Alarm	Yes
Number of Fixed Shelves	1	Ice Maker On/Off	Yes
Number of Crispers	2	Internal Control Lock	Yes
Produce Keeper Ready	Yes	Mute Sound Control	Yes
Produce Keeper Included	Yes	On/Off Display	Yes
* ' ' ' '		Power Failure Alarm	Yes
Ice Maker		Power On/Off	Yes
ce Maker	Yes	Sabbath Mode	Yes
Ice Maker Location	Frozen Section	Water Filter Indicator	Yes
ice Shape	Square	Control Location	Side of Door
Second Ice Maker	No	Control Escentisti	Bide of Boot
		Exterior	
Dispenser		Counter-Depth	No
Water	Yes	Door Stops	Yes
vyate)	ies	Front Rollers	Yes
Dimensions and Walsons		Rear Rollers	Yes
Dimensions and Volume	70.0	Door Finish	
Height With Hinge	70"	LAOU CHIISH	Smooth
Height Without Hinge	68 3/10"		
Width	36"	Electrical Specifications	
Width of Cabinet	35 6/10"	Amps @ 120 Volts	3.3 Amps
Depth of Cabinet	28 1/2"	Minimum Circuit Required	15 Amps
Depth With Door	33 3/10"		
Depth With Door 90° Open	48 1/2"	Performance Certifications and Approvals	
Depth With Door and Handle	35 7/10"	ENERGY STAR Certified	Yes
Fresh Food Capacity	19.8 Cu. Ft.		
Freezer Capacity	9 Cu. Ft.		

Total Capacity

28.8 Cu. Ft.

28.8 Cu. Ft. French Door Refrigerator

French Door Refrigerator

Available Products: GRFN2853AF

Available Colors: Stainless Steel

Version: 08/22

LUT 5-22, PHS, APPLIANCE

General Specifications

Annual Energy	652 kWh
Condenser Type	Dynamic
Cooling System	Single Evaporator
Leveling Legs	Yes
Prop 65 Label	Yes
Refrigerant Type	R-600A
Warranty - Labor	1 Year
Warranty - Parts	1 Year

Connectivity

Wi-Fi Enabled No

Safety Certifications and Approvals

CSA Listed Yes

28.8 Cu. Ft. French Door Refrigerator

French Door Refrigerator

Available Products: GRFN2853AF

Available Colors: Stainless Steel

Version: 08/22

LOTS-22, PHS. APPLIANCES.

Installation Diagram

