# **MAAX SUBMITTAL SPECIFICATIONS**

# **HALO SLIDING DOOR 44**

### **MODEL NUMBER 138996**

DIMENSIONS: 47" x 78 3/4" Glass Water Capacity: n/a



Project :	
Contractor :	
MAAX Representative :	Tel:
Date :	

Vivez l'expérience MAAX Enjoy the experience

# STANDARD FEATURES

 78 3/4" high luxury clear glass panel 8mm (5/16") tempered glass with chrome handle & hardware Ball bearing roller technology for smooth and quiet opening 48" & 60" reversible door for left or right opening Also available in a corner configuration

#### **OPTIONS**

• n/a

#### **UNIQUE FEATURES**

- Reversible Header
- Ball Bearing Roller

### SYSTEMS

**CERTIFICATIONS**Maax products adhere to one or more of the following certifications:











www.maax.com

— DS · H H (-

# **MAAX SUBMITTAL SPECIFICATIONS**

# Vivez l'expérience MAAX\* Enjoy the experience

# HALO SLIDING DOOR 44 1/2

**MODEL NUMBER 138996** 

# **TECHNICAL DRAWINGS**

## **CILA** ONE PIECE TOILET 3.5LPF / 0.92GPF

□ 4710BOXU **Unlined Tank** 

#### PRODUCT SPECS

- Ultra high efficiency toilet
- 3.5Lpf/0.92Gpf
- Elongated bowl with concealed skirted trapway
- Vitreous china
- 17" bowl height
- Soft white tank lever
- 12" (305mm) Rough-in
- 2" Fully glazed ball pass trapway
- 3" Flapper
- Siphone jet flush action
- Water surface: 7%" x 5%" (198mm x 143mm)
- Floor bolts and decorative soft while side caps included
- Smooth close toilet seat included

#### **DIMENSIONS**

391mm W x 725mm D x 765mm H 153/8" W x 281/2" D x 301/8" H

#### **COMPLIANCE CERTIFICATIONS**

Meets or exceeds the following:

- IAPMO cUPC
- US EPA WaterSense
- ASME A 112.19.2 / CSA B45.1
- ANSI A117.1 ADA Guideline
- MaP Premium tested 800g
- IAPMO Green, Calgreen and LEED Compliant

#### SHIPPING

Cube 9.39 GW 92.5 lbs






NOTES: This toilet is designed to rough-in at a minimum dimension of 305mm (12") from finished wall to C/L of outlet. Supply line not included with fixture and must be ordered separately.

Important: Dimensions of fixtures are nominal and may vary within the range of tolerances establishedby ASME standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

Products are designed to comply ADA/ANSI A117.1 Standard. It shall be the responsibility of the installer to comply with the local disability codes and standards prior to installing the product.

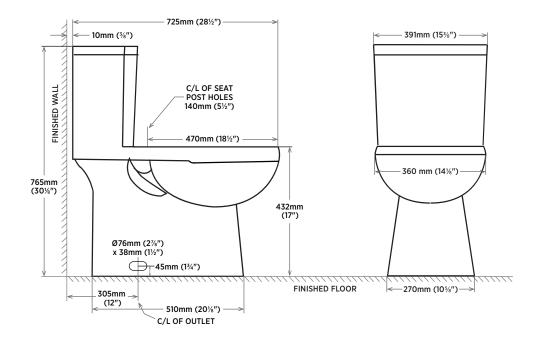

REVISED OCTOBER 2019



#### **Bristol Sinks**

http://bristolsinks.com/

PRODUCT NAME: B926 Undermount Sink w/ 15mm Radius Corners


MODEL: B926 PRICE: \$980.00 SKU: B926 WEIGHT: 35lbs.

#### **DESCRIPTION**

Single Bowl Undermount Sink with 15mm radius corners Outside dimensions: 32 x 19 x 10"
Minimum Cabinet Size: 33"
Stainless Steel Single Bowl Sink
16 Gauge Type 304 Stainless Steel
Stone Guard undercoating over rubber pad
3 1/2" drain opening
Supplied with installation clip, template and strainer cUPC certified



#### ADDITIONAL IMAGES









PERIODOUSSS Eros Wat 30" 600 CFM

Vulcano xl Well 36" 600 CFM

PPULKSBARSS Vulcano xl V/sl 30\* 600 CFM





If you are looking for more performance and don't want the heaste of modifying your kitchen, the Eros oriers a powerful motor in the convience of an under cabinet licod.

# Eros

Wall 30" - 76 cm / 36" - 90 cm

Wall 24" - 60 cm Motos and connol

Ughting Hologen Duct specification


Vulcano xi


The Vulcano is a twist on the conventional pyramid shape with softer angles, resulting in a classic alogant finish.

- VULCANO 280 600 😂

Mail 30° - 76 om Mains and cortrol 4 spd Machanisa Hara 9ahr 2010001 Spring: Numerom 2400 W
--







2 A	/	100
$\langle \rangle$	$\sum$	1
3/	162 - 211	<b>V</b> 36
	861-16/100	

	m/3
*/>	
1	13/
	142 - 21 12 000 1 4 5 5 5 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6 6

250 CFM 3 spd Electronio controls "Metalic"

Wall 30" - 76 cm / 36" - 90 cm

Monors and control


Wileano INSI 24* 280 CHM	Welcano Wal 30" 280 CFM	Wileano Well 36" 290 CFM
Wass	rwsss.	Wass

0	M	3.6
$\langle \rangle$	$\rightarrow$	
1	182 - 21 22	
9.31	BL1 N/1 DF #	nui.

280 CHM	AND DEM	380 OFM
24	-06	36
Vulcano INSI	Wuleano Wal	Wuleano Wel
<b>FPVULZ4W3SS</b>	FPVUI 307/3SS	FPVUL36V3SS





76

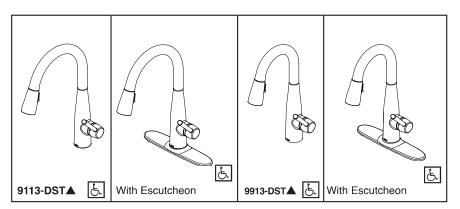

#### Submitted Model No.:

#### Specific Features:

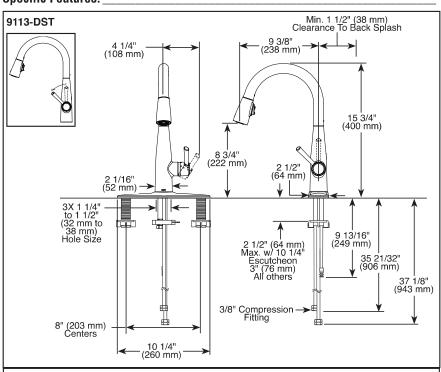

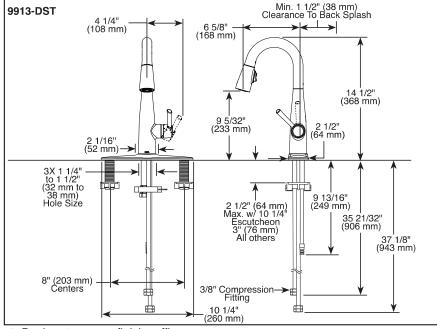

# ▲ Designate proper finish suffix

Designate proper limits sum.

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-K-9113-DST Rev. B



see what Delta can do

# KITCHEN FAUCETS

- Essa<sup>™</sup> Collection
- Single Handle Pull-Down

#### **FEATURES:**

- DIAMOND Seal® Technology
- MagnaTite® Magnetic Docking
- Touch-Clean® Sprayhead

#### **STANDARD SPECIFICATIONS:**

- Maximum 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
- One or three hole mount (Escutcheon included with kitchen models. For prep models, order separately)
- Diamond coated ceramic cartridge
- 3/8" O.D. straight, staggered PEX supply lines
- Spout rotates 360°
- Red/Blue indicator markings
- Two-function wand; Aerated stream or spray
- Dual integral check valves in sprayer

#### WARRANTY

- Parts and Finish Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

#### **COMPLIES WITH:**

- ASME A112.18.1 / CSA B125.1ASME A112.18.6
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with .25% weighted average Pb content regulations.

**Delta Faucet Company** 55 E. 111th Street, Indianapolis, IN 46280 350 South Edgeware Road, St. Thomas, ON NSF © 2019 Delta Faucet Company

