

MAAX SUBMITTAL SPECIFICATIONS

HALO SLIDING DOOR 44 1/2

MODEL NUMBER 138996

DIMENSIONS: 47" x 78 3/4" Glass
Water Capacity: n/a



Project : _____
Contractor : _____
MAAX Representative : _____ Tel : _____
Date : _____

www.maax.com

Vivez l'expérience
MAAX
Enjoy the experience

STANDARD FEATURES

- 78 3/4" high luxury clear glass panel 8mm (5/16") tempered glass with chrome handle & hardware Ball bearing roller technology for smooth and quiet opening 48" & 60" reversible door for left or right opening Also available in a corner configuration

OPTIONS

- n/a

UNIQUE FEATURES

- Reversible Header
- Ball Bearing Roller

SYSTEMS

CERTIFICATIONS

Maax products adhere to one or more of the following certifications:



2012-05-05

DS
KKH
DS
MAAX

MAAX SUBMITTAL SPECIFICATIONS

HALO SLIDING DOOR 44
1/2

MODEL NUMBER 138996



TECHNICAL DRAWINGS

CORE

OMBRA

WALL

ZEPHYR
ZEPHYRONLINE.COM

ACT™

	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
Min. - Max. CFM	200 - 600	200 - 390	200 - 290
Min. - Max. Sones	1 - 6	1 - 4	1 - 3


*AIRFLOW CONTROL TECHNOLOGY™ (ACT™)
is an exclusive feature built into specific Zephyr hoods which can
limit the maximum blower CFM to meet local code requirements.




Stainless Steel




Black Stainless Steel

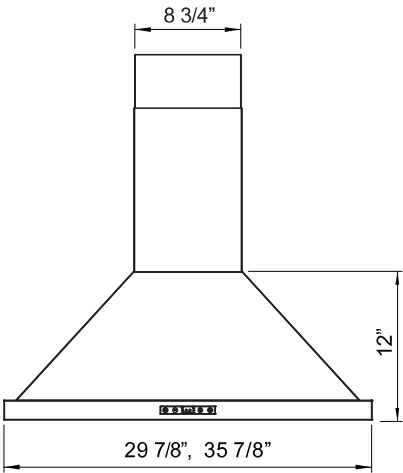

FRONT

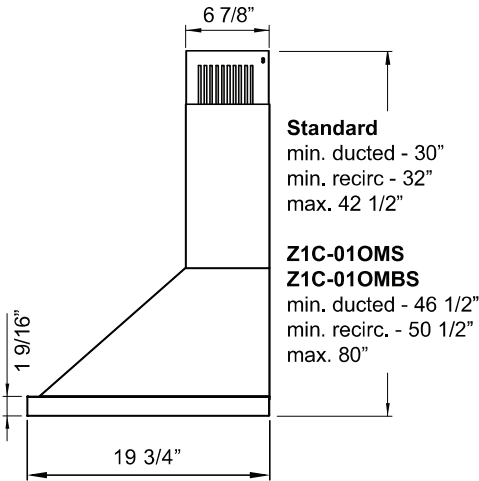

SIDE

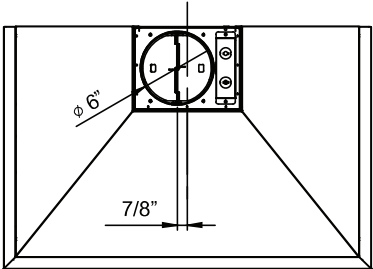

TOP

DS
KKH
DS
MCA

CORE

OMBRA

WALL

ZEPHYR
ZEPHYRONLINE.COM

MODEL		
Stainless Steel	ZOM-E30BS	ZOM-E36BS
Black Stainless Steel	ZOM-E30BBS	ZOM-E36BBS
Size	30"	36"
Blower CFM (Min. - Max.)	200 - 600	200 - 600
Sones (Min. - Max.)	1 - 6	1 - 6
ACT 390 CFM (Min. - Max.)	200 - 390	200 - 390
ACT 390 Sones (Min. - Max.)	1 - 4	1 - 4
ACT 290 CFM (Min. - Max.)	200 - 290	200 - 290
ACT 290 Sones (Min. - Max.)	1 - 3	1 - 3
FEATURES		
ACT™ Technology	Yes	Yes
Controls	Capacitive Touch	Capacitive Touch
Speed Levels	4*	4*
Auto Delay-Off	Yes	Yes
Lighting	LumiLight LED, 6W x2	LumiLight LED, 6W x2
Dual-Level Lighting	Yes	Yes
Filters	Aluminum Mesh x2	Aluminum Mesh x2
Recirculating Option	Yes	Yes
Duct Cover Extension Option	Yes, Up to 12' Ceiling	Yes, Up to 12' Ceiling
DUCT SPECIFICATIONS		
Vertical Internal Blower	6" Round	6" Round
Horizontal Internal Blower	NA	NA
AC POWER	120V, 60Hz at Max. 4A	120V, 60Hz at Max. 4A
OPTIONAL ACCESSORIES		
Recirculating Kit	ZRC-01OM	ZRC-01OM
Duct Cover Extension	Z1C-01OMS (ss) Z1C-01OMBS (black ss)	Z1C-01OMS (ss) Z1C-01OMBS (black ss)
Hybrid Baffle Filter Kit	Z0F-B002	Z0F-B002
Make-Up Air Kit	MUA006A	MUA006A
MOUNTING HEIGHT RANGE**		
	24" - 34"	24" - 34"
WARRANTY		
	3 years parts, 1 year labor	3 years parts, 1 year labor

CEILING HEIGHT		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
STANDARD DUCT COVER	Ducted Mounting Height**	26" - 30"	26" - 34"	29.5" - 34"	NA	NA	NA	NA	NA
	Recirc Mounting Height**	26" - 28"	26" - 34"	29.5" - 34"	NA	NA	NA	NA	NA
DUCT COVER EXTENSION	Ducted Mounting Height**	NA	NA	NA	26" - 31.5"	26" - 34"	26" - 34"	26" - 34"	28" - 34"
	Recirc Mounting Height**	NA	NA	NA	NA	NA	26" - 29.5"	26" - 34"	28" - 34"

*When ACT™ is enabled the maximum speed levels will change. ACT 390 CFM = 3 speeds and ACT 290 CFM = 2 speeds.
**Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.

ACT™ - AIRFLOW CONTROL TECHNOLOGY™ (ACT™)
is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.

Specifications subject to change, check zephyronline.com for up-to-date information.
Zephyr Ventilation | 2277 Harbor Bay Parkway, Alameda, CA 94502 | 888.880.VENT

FEB21.0101



DS
KKA
DS
MCA

Exhibit 7242

Model number:

106185

Dimensions:

72" x 42" x 18"

Installation:

Drop-in

Material:

Acrylic



Standard Features:

- Rectangular shape bathtub
- Drop-in or alcove installation with tiling flange
- Minimalist look with discreet armrests and textured floor
- End drain

Product characteristics:

- Made in North America
- Integrated Armrest
- Therapy System Available

Systems:

Whirlpool

Combined Whirlpool/Aeroeffect

Aeroeffect

Warranty:

25 Years

Standard colors:

White (001)

Bone (004)

Biscuit (007)

Certifications

MAAX products adhere to one or more of the following certifications:

Options (Visit our website for a complete list of our options)

No	Description
☐ OPT 10053	Chromatherapy
☐ OPT 10095	Water heater assembly
☐ OPT 10106	Metal trim kit for whirlpool and combined systems
☐ OPT 20029	Metal trim kit for Air Push Control
☐ OPT 20137	Cable-operated waste and overflow



DS

DS

Exhibit 7242




Model number:

106185

Dimensions: 72" x 42" x 18"

Installation: Drop-in


Material: Acrylic

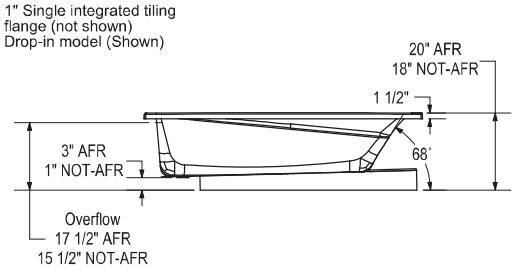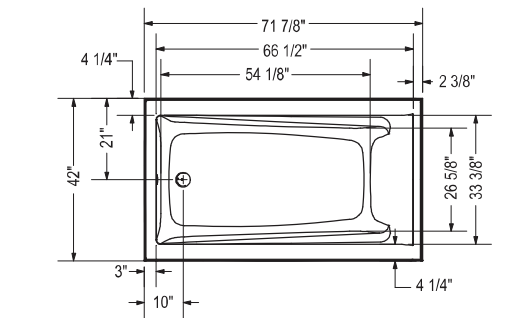

Technical drawing is universal for all Exhibit 7242 configurations.

Wood support design may vary.
Single Integrated tiling flange: 1" height x 1/4" thickness (not shown)

All dimensions are approximate.
Structure measurement must be verified against the unit to ensure proper fit.

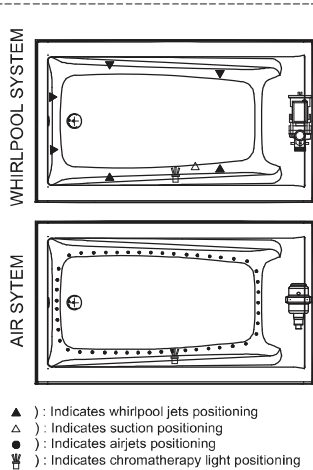

- (▲) : Indicates whirlpool jets positioning
- (△) : Indicates suction positioning
- (●) : Indicates airjets positioning
- (☼) : Indicates chromatherapy light positioning

Dimensions:

71 7/8 x 42 x 18 in.
(1826 x 1067 x 457 mm)

Water capacity:

78 gallons - 295 liters

Weight:

86 lbs - 39 kg

Bathing well:

66 1/2 X 33 3/8 in.
(1689 X 848 mm)

Deep sump height:

16 1/2 in. - 419 mm

Deck width:

4 1/4 in. - 108 mm

Drain location:

End

Project:

Contractor:

Representative:

Date:

Tel:

Notes:

DS
KKA

DS
MCA



Novatech Louisbourg 3/4 lite 1 panel door.

Louisbourg

| ECLECTIC |

There’s something about the Louisbourg glass style that draws the eye and invites the imagination to play. Featuring an innovative silkscreen design, this decorative door insert makes an attractive addition to any modern entranceway.

GLASS STYLE



Silkscreen Ink Finish

FRAME AVAILABLE

- White
- Contemporary

GLASS PRIVACY RATING



PRICE POINT



AVAILABLE GLASS SHAPES



Full Lite



3/4 Lite



1/2 Lite