

Café™ 36" Commercial Hood

CVW93612MSS / CVW93613MDS

CAFÉ



ALSO
AVAILABLE IN



CVW93613MDS
Matte Black



FEATURES & BENEFITS

Make sure everyone is focused only on your food with a **590-CFM venting system** that removes smoke, grease, odors and moisture from the air.

Adjust your vents to match your cooking techniques with **four-speed fan control** that removes grease, odors and moisture.

Enjoy a fresh-smelling kitchen all the time with a **vertical exhaust** that takes smoke, grease, odors and moisture away from the cooktop.

Clearly watch the progress of preparing your favorite meals with **dual halogen cooktop lighting** that brightly illuminates the cooking surface.

See your way through midnight snacking with a **night light** that softly illuminates the cooktop and surrounding areas.

Keep your clean-up to a minimum with a **removable grease filter** that helps eliminate hand scrubbing.

FEATURES

Control Location	Hidden
Cooktop Lighting	Halogen
Ducting	Vertical Only
Exhaust Options	7" Round Duct
Fan Speed Control	4-Speed
Filter Cleaning	Dishwasher Safe
Removable Grease Filter(s)	Yes
CFM/ Sones Rating	590/ 7.5 (High Speed) 160/ 0.4 (Working Speed)
Light Controls	Off/High/Night

TECHNICAL DETAILS

Amp Rating at 120V	3.9
--------------------	-----

WEIGHTS & DIMENSIONS

Approximate Shipping Weight	77 lb
Net Weight	60 lb
Cabinet Width	36 in
Overall Depth	21 in
Overall Height	18 in
Overall Width	36 in

GE Café CVW93014MWM

***30" w Hood fan did not have Spec Sheet**

FEATURES

Ducting: Vertical Only

Cooktop Lighting: Halogen

Exhaust Options: 7" Round Duct

CFM/ Sones Rating: 590/ 7.5 (High Speed)

160/ 0.4 (Working Speed)

Product Type: Designer Hood

Removable Grease Filter(s): Yes

Fan Speed Control: 4-Speed

Light Controls: Off/High/Night

Filter Cleaning: Dishwasher Safe

Control Location: Hidden

APPEARANCE

Color Appearance: Matte White

Blower / Light Switch Color: Stainless

POWER / RATINGS

Amp Rating at 120V: 3.9

WARRANTY

Warranty Notes: See written warranty for full details

Parts Warranty: Limited 1-year entire appliance

Labor Warranty: Limited 1-year entire appliance

WEIGHTS & DIMENSIONS

Overall Width: 30.0 in

Overall Depth: 21.0 in

Cabinet Width: 30.0 in

Overall Height: 18.0 in

Net Weight: 54.0 lb

Café™ 36" Commercial Hood

CVW93612MSS / CVW93613MDS



WARRANTY

Parts warranty	Limited 1-year entire appliance
Labor warranty	Limited 1-year entire appliance
Warranty notes	See written warranty for full details


DIMENSIONS AND INSTALLATION INFORMATION

Installation Information:
Before installing, consult Use & Care/installation instructions packed with product for current dimensional data.


Optional Kits for 30" Commercial hoods
UXCHSS—Stainless chimney kit
UXCHDS—Black Slate chimney kit

AMP RATING	
120V	3.9

Installed above a cooktop
(shown with optional chimney kit)

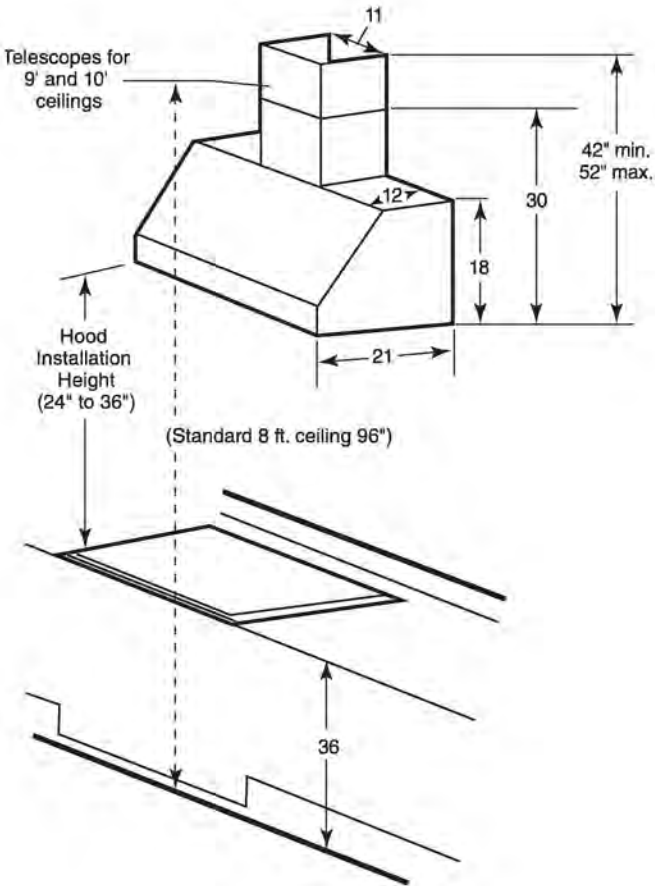

Installed above a range
(shown with optional chimney kit)

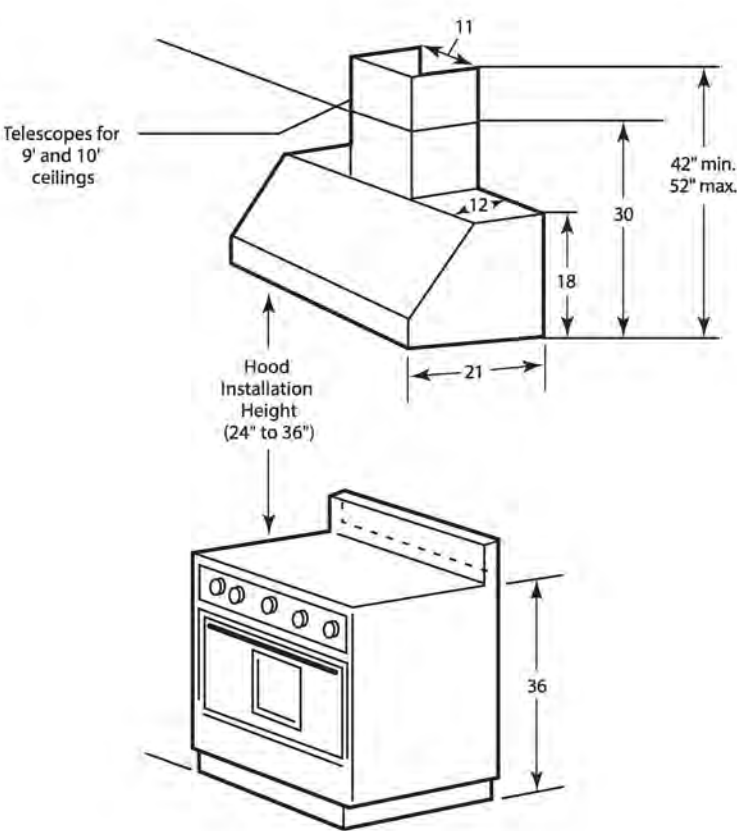

Café™ Energy Star® 18.6 Cu. Ft. Counter-Depth French-Door Refrigerator

CWE19SP3ND1 / CWE19SP2NS1

CAFÉ

DISTINCT BY DESIGN™



CWE19SP3ND1
Matte Black with
Brushed Stainless handles



GE Café CWE19SP4NW2

ALSO
AVAILABLE IN



CWE19SP2NS1
Stainless Steel
with Brushed
Stainless handles.

FEATURES & BENEFITS

Enjoy the aesthetic and amenities of a French-door refrigerator that fits in a **33-inch opening**

Create a built-in look with **counter-depth design** that fits flush with surrounding cabinetry

Enjoy a cleaner appliance appearance with **internal water dispenser**

Display groceries like a gallery with **showcase LED lighting** positioned throughout the interior to spotlight your favorite foods and containers

Easily store your farmer's market veggies and fresh fruits in **two humidity-controlled drawers**, and place large items like party platters and sheet cakes in a **full-width, adjustable-temperature drawer**

Open the door as often as you need to while cooking or attending to guests and trust the **Turbo Cool setting** to make adjustments that will properly maintain the refrigerator's interior temperature

Spend less time looking for your favorite frozen foods thanks to **multi-level freezer baskets** that make organization easy

Choose your refrigerator's exact temperature using easily adjustable controls with a **digital actual temperature display**, stored in-the-door for a subtle, hidden appearance

Make room for tall items like milk and fruit juice with a **Quick Space shelf** that slides away usefully

Enjoy water and ice from the refrigerator with total peace of mind, thanks to an **advanced water filtration system** that uses RPWFE replacement filters to remove 98% of pharmaceuticals*

*Removes 98% of ibuprofen, atenolol, fluoxetine, progesterone and trimethoprim. These pharmaceuticals are not necessarily in all users' water.

APPEARANCE

Counter-depth design	Yes
Exterior design	Contoured crown doors
Handle design	Café™
Hidden door hinges	Yes

FEATURES

Configuration	French door
WiFi connect	ConnectPlus
Temperature management features	Turbo Cool setting; Multiflow air system with electronic sensors
Defrost type	Frost Guard
Control type	Upfront electronic temperature controls; Digital temperature display
Dispenser	Internal water
Icemaker	Factory-installed
Water filtration	GE water filtration 6 month; XWF; water filter indicator light
Filter location	Upper right corner
Door alarm	Yes
Fresh food cabinet drawers	Multi-level drawers; 2 humidity controlled drawers; 1 full-width, adjustable temperature drawer
Fresh food cabinet shelves	5 total; glass; 4 split adjustable; 1 Quick Space shelf
Fresh food door bins	8 Clear Look; 6 adjustable with gallon storage; 2 fixed
Fresh food features	Interior lighting - dual level LED
Freezer storage baskets	2 total; 1 full-width, full-extension plastic
Freezer cabinet drawer features	Freezer drawer
Freezer features	Interior lighting - LED; ice bucket
Exterior style	Counter-depth
Leveling system	2 point front adjustable
Performance features	Easily removable door gaskets

CAPACITY

Total capacity (cubic feet)	18.6 cu. ft.
Fresh food capacity	13.57 cu. ft.
Freezer capacity	5.01 cu. ft.

WEIGHTS & DIMENSIONS

Overall depth	31 in.
Overall height	69-7/8 in.
Overall width	32-3/4 in.
Case depth without door	24-1/8 in.
Depth with door open 90°	42 in.
Depth without handle	29 in.
Height to top of case	68-5/8 in.
Height to top of hinge	69-3/4 in.
Width w/door open 90° incl. handle	40-1/2 in.
Approximate shipping weight	252 lb.
Net weight	232 lb.



Café™ Energy Star® 18.6 Cu. Ft. Counter-Depth French-Door Refrigerator

CWE19SP3ND1 / CWE19SP2NS1




WARRANTY

Parts warranty	Limited 1-year entire appliance
Labor warranty	Limited 1-year entire appliance
Warranty notes	See written warranty for full details



DIMENSIONS

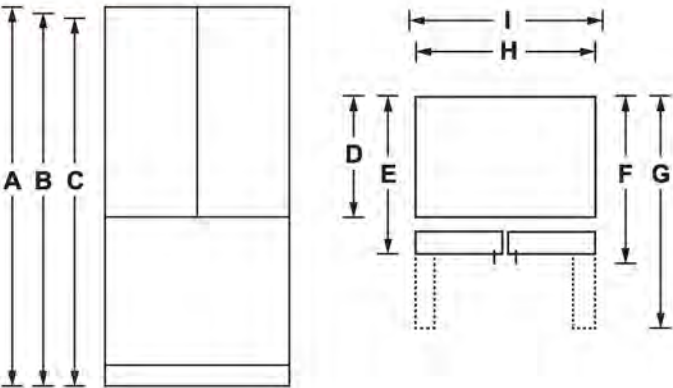

OVERALL DIMENSIONS	Height to top of door (in.) A	69-7/8
	Height to top of hinge (in.) B	69-3/4
	Height to top of case (in.) C	68-5/8
	Case depth without door (in.) D	24-1/8
	Case depth less door handle (in.) E	29
	Case depth with door handle (in.) F	31
	Depth with fresh food door open 90° (in.) G	42
	Width (in.) H	32-3/4
AIR CLEARANCES	Width with door open 90° with door handle (in.) I	40-1/2
	Each side (in.)	1/8
	Top (in.)	1
	Back (in.)	2

ADDITIONAL ACCESSORIES



CXMA3H3PNBZ
Brushed Bronze
3 handles



CXMA3H3PNSS
Brushed Stainless
3 handles
(Standard on Matte Black
and Stainless Steel)



CXMA3H3PNBT
Brushed Black
3 handles



CXMA3H3PNCU
Brushed Copper
3 handles

For answers to your Café™ product questions, visit our website at cafeappliances.com.

Café™ Stainless Interior Built-In Dishwasher with Hidden Controls

CDT875P4NW2 / CDT875P3ND1 / CDT875P2NS1

CAFÉ

DISTINCT BY DESIGN™



CDT875P4NW2
Matte White with Brushed
Bronze handles



ALSO
AVAILABLE IN



CDT875P3ND1
Matte Black with
Brushed Stainless
handles



CDT875P2NS1
Stainless Steel with
Stainless handles

FEATURES & BENEFITS

Ultra Wash & Dry Plus – Expect precision cleaning and superior dryness on fine china, dinnerware and even dishwasher-safe plastics, with exceptional features like Variable-Pressure Jets and Dual-Convection Ultra Dry

Loading Flexibility – Clean up quickly after hosting any event with a dishwasher that accommodates large items – like charcuterie platters – and dishwasher-safe plastics, like storage containers, conveniently in the lower rack

Status Center – Continue conversations without interruption and easily know when extra dinnerware is available via an LCD screen that displays the dishwasher cycle status

Adjustable Upper Racks – You'll have room for your finest stemware and space for tall bakeware with a rack that can be moved two inches up or down, creating ultimate loading flexibility

WiFi – Always have clean dishes ready for surprise guests with WiFi Connect, which lets you operate your dishwasher from your smartphone. Track and automatically reorder detergent and rinse aid with just the tap of an app

Create a look that matches your personal style – Select any combination of premium finishes and hardware options to create a stunning look customized to any owner's taste

APPEARANCE

Door Style	Long Door with Top Controls
Installation	Side installation or Top installation included; Built-Up Floor Capable; Flush Cabinet Installation
Door Appearance	Full-length flat door

FEATURES

Style	Built-In
Tub and Door Liner	Stainless Steel
Tub Type	Tall Tub
Control Type	Cap Touch Controls; 12 Touchpads
Dishwasher Control Features	Cycle Countdown with LCD Status Center on door; Multi function display; Last Cycle Memory; Audible End-of-Cycle Signal
Wash System	3-Level; 800 Series
Wash System Features	Variable Speed Dual Pumps and Motors; Automatic Temperature Control; Drain Pump; Hard Food Disposer with removable filter; Reversing Quad Blade Lower Wash Arm; Quad Blade Middle Wash Arm; Deep Clean Silverware Jets; Side Jets; 90+ Spray Jet Wash System; Hidden Heater; Automatic HotStart; Bottle Jets (4)
Sensor	Clean Sensor
Wash Arms	3 Wash Levels; Lower- Reversing Quad Blade; Middle - Quad Blade; Bottle Jets; Jets - Variable Pressure; Deep Clean Silverware Jets
Water Filtration System	100% Filtration with Hard Food Disposer and Removable Filter
Dispenser	Rinse Aid with Indicator and Adjustment; Electronic Low Rinse Aid Sensor
Number of Cycles	5
Dishwasher Cycles	Auto; Pots; Normal; China; Express
Number of Options	10
Dishwasher Options	Delay Start 1-12 Hr.; Hi-Temp Wash; Presoak + Sanitize (NSF Certified); Heated Dry Off; Normal Dry; Dual Convection Ultra Dry; Wash Zone Upper Only; Wash Zone Lower Only; Start/Reset; Bottle Wash; Lock Controls
Rack Features	2 Utility Shelves with Stem Safe and Chop-stick slots - Upper Ball-Tipped Tines; Adjustable Upper Rack; 3-Piece Silverware Basket with Cell Covers; Full Extension Slides - Upper
Racking Material	Nylon
Rack Color	Black Pearl
Number of Place Settings	Up to 16
Upper Rack	Premium Height Adjustable; Ball-Tip Tines; 2 Stem Safe Shelves; Chop stick slots; 1/2 fixed tines, 1/2 fold down tines
Lower Rack	Fixed tines with Bottle Jets; 1 Rack handle
Additional Protection	Ball-Tip Tines; 1/2 fixed tines, 1/2 fold down tines
Dishwasher Drying Features	Active Flood Protection
Floor Protection	Dual Convection Ultra Dry; Ultra/Normal/Off; Fan Assist Dry
Leveling System	Leak Pan w/ Sensor; Active Flood Protection
Latch	3 Leveling Legs
Showroom Power Mode	Pull with Handle
WiFi Connect	Yes
Exterior Style	Built-In
Racking System	Traditional
	Full 3rd Rack

ECONOMICAL/QUIET

Quiet Package	39 dBA
Quiet Features	Quiet Water Valve; Sealed Toe Kick; Tub Collar Trim
Motor Type	Variable Speed
Outer Wrap	Full-wrap Blanket; Bitumen
Door Insulation	Insulation; Mastic

WEIGHTS & DIMENSIONS

Cabinet Width	24 in
Approximate Shipping Weight	137 lb
Net Weight	124 lb
Overall Height	34 in
Height w/ Legs Retracted - Minimum Height	33-3/8 in
Height w/Legs Extended - Maximum Height	34-5/8 in
Overall Depth	24 in
Overall Width	23-3/4 in

Café™ Stainless Interior Built-In Dishwasher with Hidden Controls

CDT875P4NW2 / CDT875P3ND1 / CDT875P2NS1




TECHNICAL DETAILS

Calrod Heater Watts	400/1200
Power Connection	Optional cord kit (GPF-CORD - WX09X70910, WX09X70911)
Volts/Hertz/Amps	120 V; 60 Hz; 10.2 A


WARRANTY

Parts warranty	Limited 1-year entire appliance
Labor warranty	Limited 1-year entire appliance
Warranty notes	See written warranty for full details

DIMENSIONS

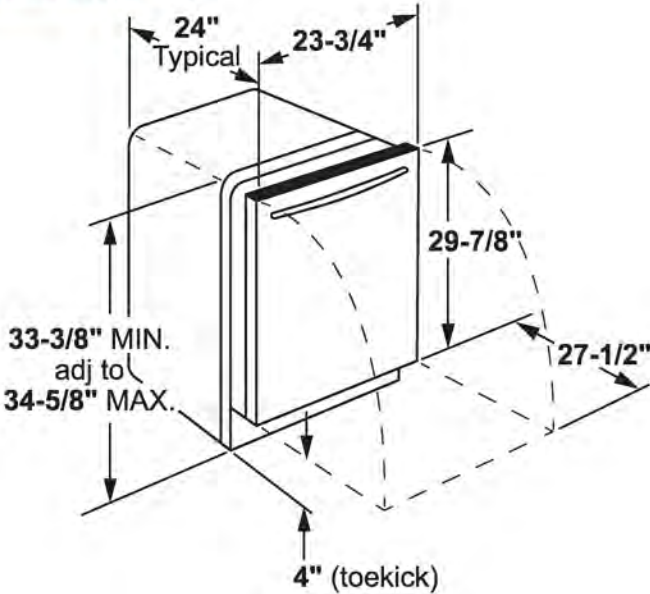

INSTALLATION DIMENSIONS

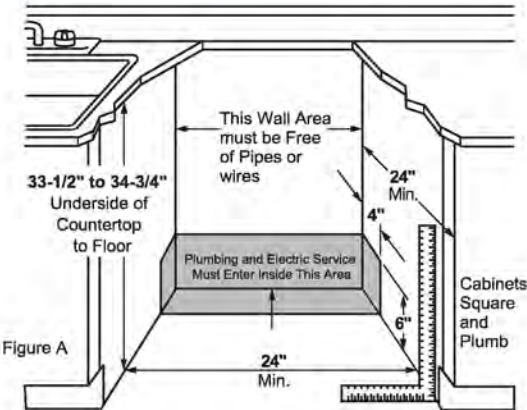

ADDITIONAL ACCESSORIES



Café™ 30" Slide-In Front Control Induction and Convection Range with Warming Drawer

CHS900P4MW2 / CHS900P3MD1 / CHS900P2MS1

CAFÉ

DISTINCT BY DESIGN™

DS



ALSO
AVAILABLE IN



CHS900P2MS1
Stainless Steel with
Brushed Stainless
handles and knobs



CHS900P4MW2
Matte White with
Brushed Bronze
handles and knobs



FEATURES & BENEFITS

Gourmet results without any guesswork - Take culinary skills to the next level with Gourmet Guided Cooking, which combines video-guided recipes from chefs with a system that automatically adjusts the time, temperature and cooking pace for perfect results

Enjoy total control in the kitchen and beyond - Control your oven with your smart device or simply your voice using WiFi Connect

An attractive appearance at all times - Every detail of your kitchen is designed to delight, thanks to a sleek backlit glass touch control panel that visually disappears when not in use and wakes up when prompted

The perfect combination of power & precision - Stun guests by showing off your 11" 3,700-watt induction element, which uses chef-preferred induction cooktop technology to deliver precise heat to cookware only. That means you can do everything from boiling a quart of water in 101 seconds to melting butter at exact temperatures with amazing efficiency.

Precise control for flawless results - Delight guests with the precision of sous vide cooking or perfectly prepared fondues and delicate sauces using a precision cooking probe that is sold separately.

Ensure consistent temperatures across a large area - Evenly heat large griddles or enamel cookware across two 8" synchronized elements

Create a look that matches your personal style - Select any combination of premium finishes and hardware options to create a stunning look customized to any owner's taste

Allow your appliances to interact with one another - Create a chef-like experience with Chef Connect, which can synchronize your appliance clocks and surface lights and vent when a range burner is in use, and even your microwave and range clocks

FEATURES

Configuration	Range with Warming Drawer
Cooking System	True European Convection with Precise Air
Cooking Technology	Convection
Oven Cleaning Type	Self-Clean with Steam Clean Option
Cooktop Burner Type	Induction
Cooktop Surface	Edge-to-Edge; Black Ceramic Glass
Control Location	Front controls
Control Type	Backlit; Glass Touch
Oven Control Features	Audible Preheat Signal; Auto Oven Shut-Off with Override; Auto Recipe Conversion; Auto Self Clean; C* or F* Programmable; Certified Sabbath Mode; Chef Connect; Control Lock Capability; Delay Bake Option (Time Bake); Delay Clean Option; Electronic Clock & Kitchen Timer; Fast Preheat; Hi / Low Broil; Oven "ON" Light; Self-Clean Cool Down Time Display; Steam Clean; Temperature Probe; Warm Mode
Oven Cooking Modes	Convection Bake; Convection Roast
Oven Features	8-Pass Broil Element; Hidden Bake
Self-Clean Oven Door Lock	Automatic
Oven Rack Features	1 Self-Clean Heavy-Duty Roller Rack; 2 Self-Clean Heavy-Duty Oven Racks; 6 Rack Positions
Oven Interior	Black; 1 Incandescent
Connected Capabilities	Amazon Alexa; The Google Assistant; Hestan Cue; iFTTT; Nest; Drop; Innit; DiGiorno
WiFi Connect	Built-In
Element - Left Front	8" 2500W Sync Element
Element - Left Rear	8" 2500W Sync Element
Element - Right Front	11" 3700W Power Boil
Element - Right Rear	6" 1800W
Element - Center	6" 100W Warming Zone
Hot Surface Indicator Lights	1
Heating Element "ON" Indicator Light	5
Warming Drawer Features	(3) levels

CAPACITY

Total Capacity (cubic feet)	5.7 cu ft
-----------------------------	-----------

ACCESSORIES

Trim Kit	Optional; JXFILLR1BB
Cooktop Cleaning	Included; Cream; Sponge
Probe Accessory	Optional; JXPROBE1

WEIGHTS & DIMENSIONS

Depth with Door Open	47-1/2 in
Approximate Shipping Weight	256 lb
Net Weight	236 lb
Height to Top of Rear Vent Trim	37-3/8 in
Overall Height	37-3/8 in
Height to Cooking Surface (in.)	36-1/4 +/- 1/4
Overall Width	29-7/8 in
Cabinet Width	30 in
Overall Depth	29-1/2 in
Depth Without Handle	26-7/8 in
Oven Interior Dimensions (W x H x D) (in.)	24 x 19-7/8 x 20-5/8

APPEARANCE

Installation	Flush Appearance; Free-standing cut-out
Oven Door Features	Big View Oven Window; Full-Wrapped Metal Frame
Handle	Professional Style; Customizable; Consumer Removable

Café™ 30" Slide-In Front Control Induction and Convection Range with Warming Drawer

CHS900P4MW2 / CHS900P3MD1 / CHS900P2MS1



POWER / RATINGS

Amp Rating at 208V	40
Amp Rating at 240V	40
Convection Wattage	2500W
Bake Wattage	2850W
Broiler Wattage	4000W
KW Rating at 208V	11.3
KW Rating at 240V	13.6

WARRANTY


Parts warranty	Limited 1-year entire appliance
Labor warranty	Limited 1-year entire appliance

DIMENSIONS


Receptacle Locations: Locally approved flexible service cord or conduit must be used because terminals are not accessible after range installation. See shaded area in drawing for location of electrical outlet box. Recommended outlet locations allow range to be installed directly against rear wall.

Note: This appliance has been approved for 0" spacing to adjacent surfaces above the cooktop. However, a 6" minimum spacing to surfaces less than 15" above the cooktop and adjacent cabinet is recommended to reduce exposure to steam, grease splatter and heat.

Installation Information: Before installing, consult installation instructions for current dimensional data and additional requirements.

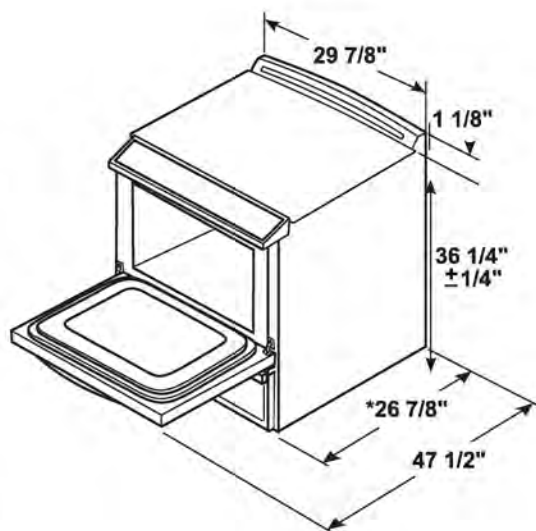

*Depth including door handle is approximately 29 1/2".

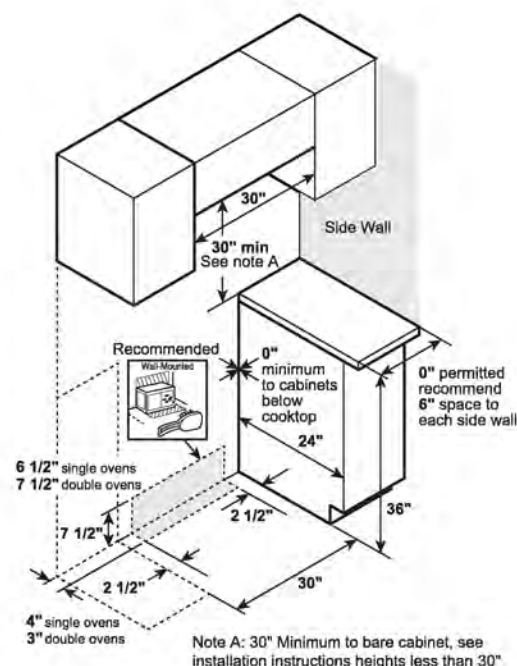

Note A: 30" Minimum to bare cabinet, see installation instructions heights less than 30"

ADDITIONAL ACCESSORIES



CXFCHHKPMBZ
Brushed Bronze
2 handles; 6 knobs



CXFCHHKPMSS
Brushed Stainless
2 handles; 6 knobs



CXFCHHKPMBT
Brushed Black
2 handles; 6 knobs



CXFCHHKPMCU
Brushed Copper
2 handles; 6 knobs



JXPROBE1
Probe Accessory

Café™ 1.5 Cu. Ft. Countertop Convection/Microwave Oven

CEB515P4MWM / CEB515P3MDS



C A F É



ALSO
AVAILABLE IN



CEB515P3MDS
Matte Black

FEATURES & BENEFITS

Achieve crisp, golden brown results with a **convection cooking** setting and a special **rack** that allows air to circulate around foods for even heat distribution.

Take the guesswork out of preparing your favorite foods with an **auto bake/auto roast** feature that uses preprogrammed cooking times and temperatures.

Even late-arriving guests can enjoy delicious results thanks to a **warming oven** that keeps foods ready to serve.

Enjoy consistently delicious results with sensor **cooking controls** that automatically adjust the time and power.

Create more room on the countertop for meal prep with a **built-in capable microwave** and matching trim kit CX152P4MWM/CX153P4MWM or CX152P3MDS/CX153P3MDS.

Prepare large meals with ease thanks to **recessed turntable** that helps maximize space and allows for multiple dishes to cook at the same time.

Entertain with confidence with **1.5 cu. ft. capacity** that can handle more of your favorite foods

APPEARANCE

Installation	Countertop; Built-In
Built-In Capability	Optional 27"; Built-In Kit CX152P4MWM/CX152P3MDS Optional 30"; Built-In Kit CX153P4MWM/CX153P3MDS

FEATURES

Cooking System	Turntable
Cooking Technology	Microwave/Convection
Electronic Digital Display with Clock	Yes (LED)
Express Cook	Instant-On 1-6
Instant On Controls	Yes
Microwave Watts (IEC-705)	1000.0 W
Power Levels	10
Rack Type	2 Removable Oven Racks - Pedestal
Sound Volume Control	On/Off
Timer (On/Off)	Yes
Turntable	Glass Recessed
Turntable Size	13.5 in
Scrolling Display with Help	Yes
Convection Cooking Controls	Bake; Roast
Microwave Sensor Cooking Controls	Popcorn; Beverage; Reheat; Cook
Control Features	Control Lock; Cook Time; Clock; Timer; Add 30 Seconds; Mute; Warm; Convection Bake; Convection Roast; Combination Auto Cook; Auto Bake; Auto Roast; Auto & Time Defrost; Display On/Off; Broil
Microwave Oven Interior	Stainless Steel
Combination Cooking Controls	Combination Cook

CAPACITY

Total Capacity (cubic feet)	1.5 cu ft
Unit Capacity	Family-Size

ECONOMICAL/QUIET

Venting Type	Externally Vented
--------------	-------------------

TECHNICAL DETAILS

Electrical Input - 120V Amperage	13.0
Electrical Input - 120V Watts	1500
Frequency (MHz)	2450
Volts/Hertz	120V; 60Hz

WEIGHTS & DIMENSIONS

Approximate Shipping Weight	44 lb
Cavity (W x H x D)	15-1/2 x 10-7/8 x 15-1/2
Depth with Door Open 90°	36-7/16 in
Net Weight	38 lb
Overall Depth	20 in
Overall Height	13 in
Overall Width	21-3/4 in

WARRANTY



Parts warranty	Limited 1-year entire appliance
Labor warranty	Limited 1-year entire appliance
Warranty notes	See written warranty for full details

Café™ 1.5 Cu. Ft. Countertop
Convection/Microwave Oven

CEB515P4MWM / CEB515P3MDS



DIMENSIONS AND INSTALLATION INFORMATION

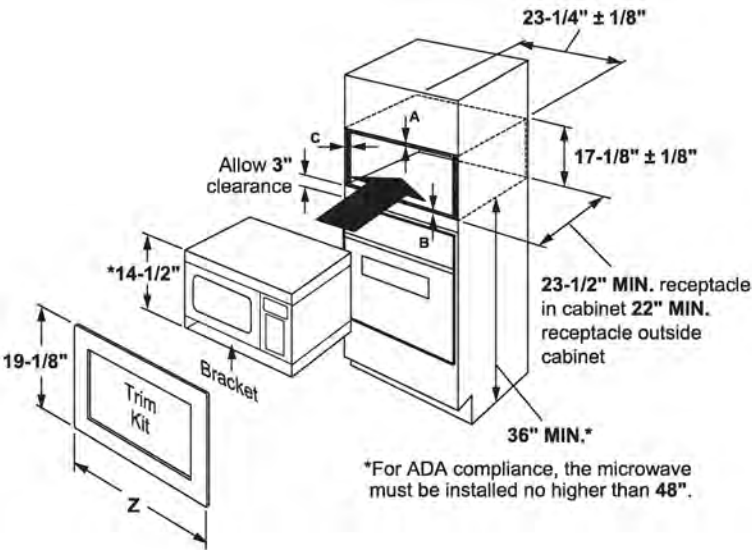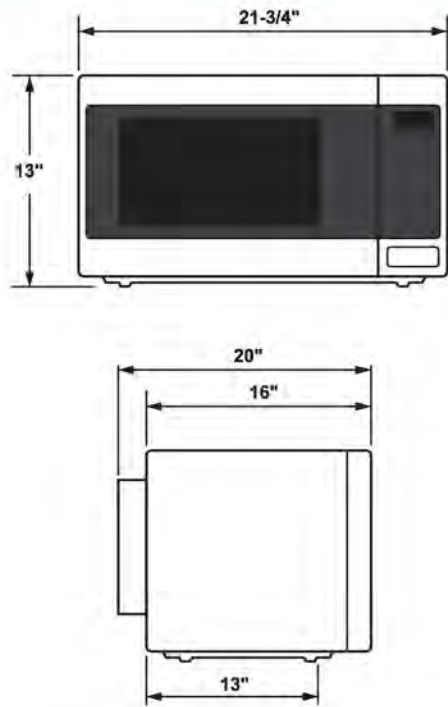

EXTERIOR DIMENSIONS (IN INCHES)

Height	13"
Width	21-3/4"
Depth	16"
Depth including bumpout	20"
Depth from back of case to front legs	13"

CABINET OVERLAP REQUIREMENTS

	30"	27"
A - Overlap of trim kit over top of cabinet	1"	1"
B - Overlap of trim kit over bottom of cabinet	1"	1"
C - Overlap of trim kit over sides of cabinet	3-5/16"	1-7/8"

NOTE: Allow an additional inch of clearance beyond trim kit frame on all sides.

OPTIONAL ACCESSORY TRIM KITS
(AVAILABLE AT ADDITIONAL COST)

For a custom built-in appearance, these kits allow built-in installation of the countertop microwave oven into a wall or cabinet alone and are U.L. approved for installation over a GE single electric wall oven. These kits should not be installed over a gas wall oven.

Note: 120V, 60-cycle, grounded power receptacle location optional on back within cabinet opening.

Installation Information: This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

*Height of product when installed with kit rail and bottom duct: 14-1/2"


ACCESSORY TRIM KITS	"Z"	MAX HEIGHT	TRIM KITS
30" Deluxe	29-3/4"	19-1/8"	CX153P4MWM/CX153P3MDS
27" Deluxe	26-7/8"	19-1/8"	CX152P4MWM/CX152P3MDS



Microwave Optional 30 in. Built-In Trim Kit in Matte White, Fingerprint

by Cafe ★★★★★ (1)  48\$211²⁰[Product Overview](#)[Specifications](#)[Questions & Answers](#)[Customer Reviews](#)[Home](#) / [Appliances](#) / [Appliance Parts](#) / [Microwave Parts](#)

Internet #307386241 Model #CX153P4MWM Store SKU #1003917986 Store SO SKU #1003917986

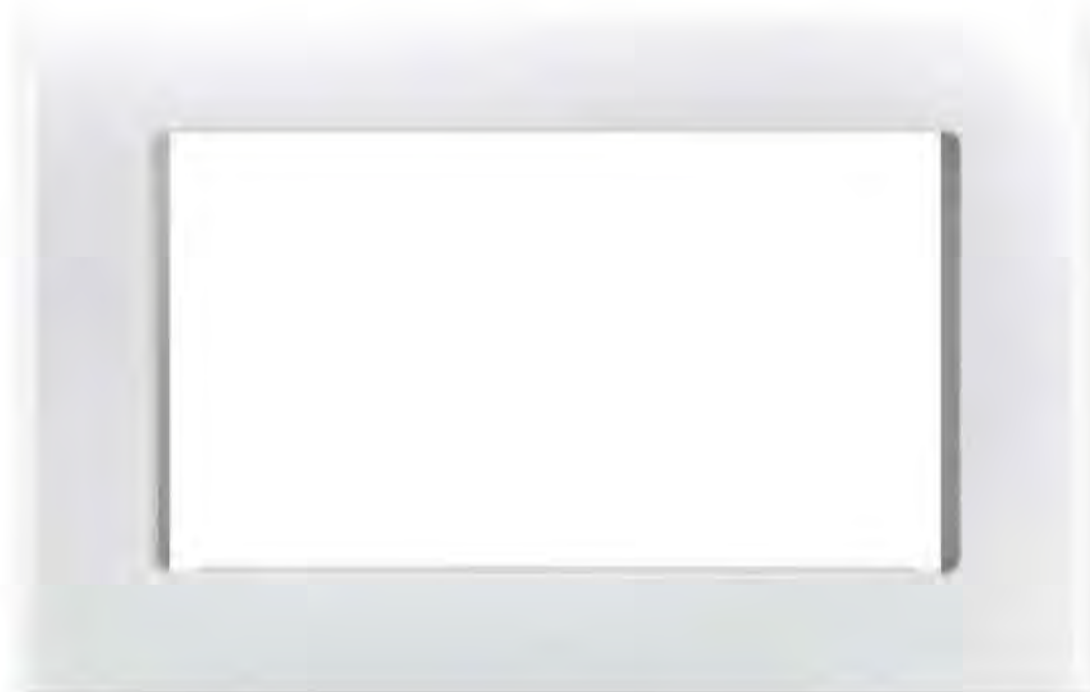[Live Chat](#)[Feedback](#)

Hover Image to Zoom

Microwave Optional 30 in. Built-In Trim Kit in Matte White, Fingerprint Resistant

by Cafe > (Brand Rating: 4.3/5) ★★★★★ (1)  [Write the First Review](#) [Questions & Answers \(7\)](#)



Microwave Optional 30 in. Built-In Trim Kit in Matte White, Fingerprint

by Cafe ★★★★★ (1)  48\$211²⁰

Product Overview

Specifications

Questions & Answers

Customer Reviews



Save up to \$100 on your qualifying purchase.
Apply for a [Home Depot Consumer Card](#)

Color/Finish: **Fingerprint Resistant Matte White**

How to Get It

**Home Delivery**

Check delivery date
below

Free Over \$396**Store Pickup**

Not available for this
item

Check Earliest Delivery Date

Tell us your ZIP Code

Check**Add to Cart** Live Chat FeedbackSimilar Items To Consider



Microwave Optional 30 in. Built-In Trim Kit in Matte White, Fingerprint

by Cafe ★★★★★ (1) 48

\$211²⁰



Product Overview

Specifications

Questions & Answers

Customer Reviews

Add To Cart

Add To Cart

Add To Cart

Add To Cart

Add To Cart

Product Overview

Get a custom appearance for your microwave with the Cafe Built-In 30 in. Microwave Trim Kit in Matte White. With a timeless look, this trim kit is ideal for the home or office to be enjoyed for years and years to come. It is intended for the Cafe 1.5 cu. ft. microwave oven.

Info & Guides

You will need Adobe® Acrobat® Reader to view PDF documents. [Download](#) a free copy from the Adobe Web site.



Specifications



Dimensions

Product Depth (in.)	19.1
Product Height (in.)	1.3
Product Width (in.)	29.8

Details

Appliance Category	Appliance Parts
Appliance Type	Part/Accessory
Brand Compatibility	Cafe
Color/Finish	Fingerprint Resistant Matte White
Compatible Appliance Type	Microwave
Hardware Included	Yes
Microwave Part Type	Trim Kit



ELECTRIC FRONT LOAD DRYER

8.0 Cu. Ft.

EFMC627U TT/IW

Perfect Steam™ Dryer with Instant Refresh™ and IQ-Touch™ Controls



SIGNATURE FEATURES



PREDICTIVE DRY™ MORE ACCURATELY PREDICTS DRY TIMES

Knows after 90 seconds a more accurate time your clothes will be dried to perfection so you don't have to keep checking on your load.



HELP PREVENT OVER- OR UNDER- DRYING WITH LUXCARE® DRY SYSTEM

A more precise sensor for a better dry to protect your clothes from over-drying, but also to help make sure you don't have wet clothes left in the load.



INSTANT REFRESH™ CYCLE REVIVES FABRICS

Remove wrinkles and quickly refresh items with steam in 10 minutes.



15-MINUTE FAST DRY™

Quickly dry the items you need most.

PRODUCT DIMENSIONS

Height	38"
Width	27"
Depth	31-1/2"

MORE EASY-TO-USE FEATURES

ENERGY STAR®-CERTIFIED

Rigorously tested to do more with less. Electrolux dryers meet strict criteria to guarantee high-quality energy efficient performance.

PERFECT STEAM™ WRINKLE RELEASE OPTION

Gently releases wrinkles and reduces static to keep clothes looking their best.

EXTENDED TUMBLE OPTION KEEPS CLOTHES TANGLE-FREE

Gently tumbles your clothes without heat to keep them tangle-free — perfect for when you cannot remove clothes right after the cycle ends.

LUXCARE® LINT SHIELD HELPS AVOID MESSSES

Traps lint so it doesn't make a mess, even if you empty it while there are clothes in the dryer.

ACTIVWEAR CYCLE

Takes care of delicate and expensive activewear garments.

EXTRA-LARGE CAPACITY DRYER

Dry more in each load with our 8.0 cu. ft. dryers.

PLATINUM STAR® LIMITED WARRANTY

Our exclusive limited warranty that includes three-year coverage on parts and one year on labour.²

9 CYCLES TO CARE FOR EVERY FABRIC

Perfectly dry every item with tailored cycles for towels, allergen, delicates, and more.

FITS MORE ROOMS WITH REVERSIBLE DOOR

Enjoy easy loading no matter how your washer and dryer are configured.

OPTIONAL PEDESTALS AND STACKING KIT FOR MORE INSTALLATION OPTIONS

Raise your units with optional pedestal drawers that provide extra storage. Or use the optional stacking kit for convenient placement in small spaces.

Available in:



Titanium
(TT)



Island White
(IW)

¹Fastest time based on smallest load/Fast Dry cycle selected for various load compositions.

²Eligibility based on product registration with Electrolux North America within 60 days of purchase. Products must have been purchased on or after July 1, 2013. See limited warranty for details. Limited time offer.

ELECTRIC FRONT LOAD DRYER

EFMC627U TT /IW

**27" ELECTRIC FRONT LOAD DRYER**

Capacity D.O.E. 8.0 Cu. Ft.

FEATURES

Pull-to-Open Door	Yes
IQ-Touch™ Controls	Yes
Perfect Steam™ Dry System	Yes
Dry System	Predictive Dry™
Sound System	Luxury-Quiet™
Lighting	Luxury-Design® LED
Tumble System	Gentle Tumble™
Moisture Sensor	Yes
Dryer Drum	Stainless Steel
Tumble Speed (RPM)	50
Reversible Door	Yes
Adjustable Leveling Legs	Yes
ENERGY STAR®	Yes

CYCLES

Timed Dry (30, 45, 60, 75), Allergen, Heavy Duty/Towels, Normal, 15-Min. Fast Dry, Activewear, Mixed Load, Delicates, Instant Refresh™ 9

OPTIONS

Temperature Selections	5
Add Steam	Yes
Electronic Auto Dry System	Yes
Manual Timed Dry Selections	4
Delay Start (Hours)	12
End-of-Cycle Chime	On / Off
Extended Tumble	Yes
Anti-Static	Yes
Line Dry	Yes
Dryness Levels	5

INSTALLATION OPTIONS

Freestanding, Under Counter*, Stacked (Above Washer), Pedestal, Hidden (In Closet), Second Floor	Yes
4-Way Dryer Venting	Yes

ACCESSORIES

Luxury-Glide® Pedestal with Spacious Storage Drawer—	
Titanium – PN# EPWD257UTT	Optional
Island White – PN# EPWD257UIW	Optional
Dryer Stacking Kit – PN# STACKIT7X	Optional
Drying Rack – PN# A04840701	Optional
Assembly Hose Kit – PN# 5304495002	Optional



SPECIFICATIONS

Colour –	
Titanium	TT
Island White	IW
Maximum Exhaust Duct Length** (Ft.)	125
Power Supply Connection Location	Rear
Voltage Rating	240V/60Hz/30A
Connected Load (kW Rating) @ 240 Volts	6.0
Amps @ 240 Volts	25
Heating Element @ 240 Volts (Watts)	5,400
Shipping Weight (Approx.)	140 Lbs.

*Side-by-Side units in under-counter installation require custom-built countertop and/or cabinetry.

**Rigid metal duct preferred, semi-rigid optional and allow deductions for elbows and vents. Refer to Installation Guide on web for additional information.

NOTE: Always consult local and national electric and plumbing codes. Refer to Product Installation Guide for detailed installation instructions on the web at electroluxappliances.ca. Specifications subject to change.

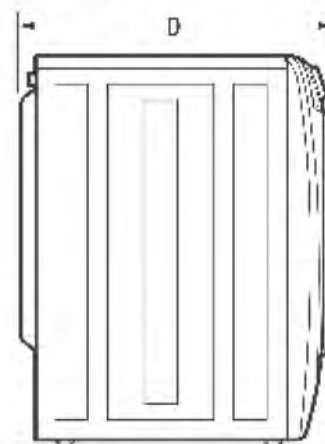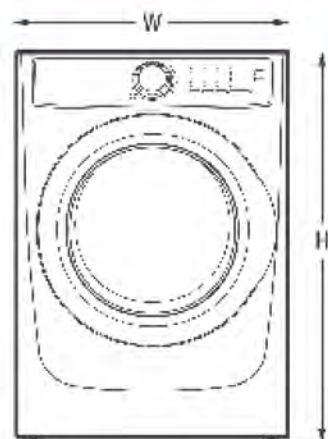**PRODUCT DIMENSIONS**

Height (without 15" Pedestal)	38"
(with 15" Pedestal)	53-1/4"
Width	27"
Depth (to Centre of Arc Not Including Hose)	31-1/2"
(with Door 90° Open)	50-5/8"

Electrolux Major Appliances, N.A.CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca

EFMC627U 05/18

© 2018 Electrolux Major Appliances N.A.




High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.




Printed in Canada

ELECTRIC FRONT LOAD DRYER

EFMC627U TT/IW

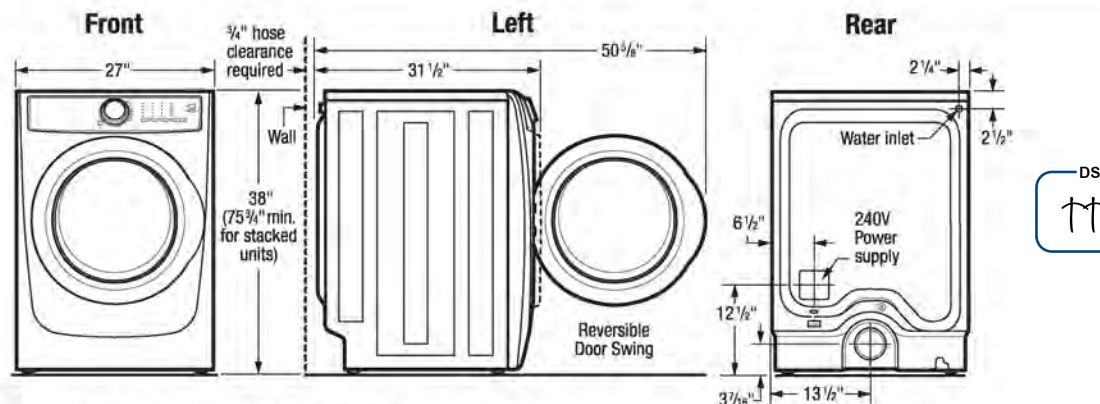**15" Pedestal Drawer Installation**

Elevates dryer height to 53 1/4". For detailed pedestal installation, refer to instructions included with pedestal or on web. Pedestal installation may require modified utility hookup locations. For details, refer to Product Installation Guide on web.

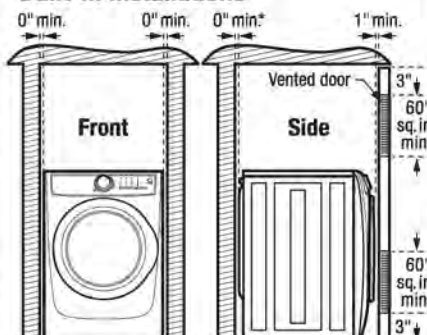**Built-In Installations**

*Steam dryer requires additional 3/4" hose clearance.

Closet Installation:

If washer and dryer are installed in same closet, door(s) MUST be vented with 120 sq. in. minimum louvered opening, equally divided, located 3" from top and bottom of door. Louvered door(s) with equivalent air openings for full-length of door is acceptable. Air openings MUST remain unobstructed with door(s) installed.

Installation Clearances:

Dryer can be built in alone or with washer (side by side or stacked) in closet, recess or under counter installation with 0" minimum clearance required around sides and back of unit(s). To achieve 0" minimum rear clearance, dryer MUST be vented straight back or with quick-turn 90° elbow. Steam dryer requires additional 3/4" steam hose clearance at back of unit(s). Installation of closet door(s) requires additional 1" minimum clearance between front of unit(s) and door(s). Location of plumbing, exhaust and utility hookups MUST be considered when planning any built-in installation. For additional installation details, refer to Product Installation Guides on web.

Under Counter Installation:

Installation of dryer alone or side by side with washer under counter, requires custom-built countertop and/or cabinetry to accommodate unit(s) height.

Stacking Units:

Stacking dryer above washer requires use of optional Stacking Kit (PN# STACKIT7X) with modified utility hookup locations for dryer. For complete installation details, refer to instructions included with Stacking Kit or on web.

Electric Dryer Specifications

- Product Weight – 130 Lbs. / Shipping Weight – 140 Lbs.
- Voltage Rating – 240/60Hz/30A
- Single phase 3- or 4-wire cable, 240 Volt, 60 Hertz AC only electrical supply with ground required on separate circuit fused on both sides of line. (Do not use same circuit as washer.)
- Connected Load (kW Rating) @ 240 Volts = 6.0 kW
- Amps @ 240V = 25A
- Dryer MUST employ a 3-conductor NEMA 10-30 type SRDT or 4-conductor NEMA 14-30 type SRDT or ST (as required), rated at 240 volt AC minimum, 30 amp power supply cord marked for use with clothes dryers (not supplied).
- Grounding through neutral link prohibited in specific applications and certain locales, requiring use of 4-wire system. (For detailed electrical requirements, refer to Product Installation Guide on web.)
- Always consult local and national electric & plumbing codes.
- Can be installed alone, with or without optional 15" pedestal drawer, or stacked above matching Electrolux Washer, which requires installation of optional dryer stacking kit. (For installation details, refer to instructions included with optional pedestal or stacking kit or on web.)
- Can be built in alone or with matching Electrolux Washer (side by side or stacked) in closet, recess or under counter installation with 0" minimum clearance required around sides and back of unit(s). To achieve 0" minimum rear clearance, dryer MUST be vented straight back or with quick-turn 90° elbow. Steam dryer requires additional 3/4" steam hose clearance at back of unit(s). Installation of closet door(s) requires additional 1" minimum clearance between front of unit(s) and door(s). Location of plumbing, exhaust and utility hookups MUST be considered when planning any built-in installation.
- Under-counter installation requires custom-built countertop and/or cabinetry to accommodate unit(s) height.

- Do NOT install in area exposed to dripping water or outdoor weather conditions, or where gasoline or other flammables, including automobiles, are kept or stored.
- For garage installation, dryer MUST be located minimum 18" above floor.
- Floor MUST be solid with 1" maximum slope. To ensure vibration or movement does not occur, reinforcement of floor may be necessary. Do NOT install on carpeted surface.
- Dryer MUST exhaust to outside of building, NOT into any concealed space.
- Dryer equipped for 4-way venting and approved for up to 125-foot-equivalent of duct length, determined by length of run and number of elbows needed.
- Exhaust installation requires minimum 4"-diameter rigid or semi-rigid metal duct with approved, unobstructed vent hood having swing-out damper(s). If installing rigid metal duct (preferred), do not exceed MAXIMUM venting run length of 125 ft., allow deductions for elbows and vents. If installing semi-rigid metal duct, do not exceed MAXIMUM venting run length of 8 ft., always allow deductions for elbows and vents (Refer to Product Installation Guide on web for additional information). Do NOT use flexible plastic or metal foil duct and use shortest run possible.
- Leveling legs supplied to level dryer properly and reduce excessive noise and vibration.
- Water inlet hose for steam setting connects to cold water supply with "Y" connector and requires 3/4" clearance between back of unit and wall.

Note: For planning purposes only. Refer to Product Installation Guide on the web at electroluxappliances.ca for detailed instructions.

Optional Accessories

- Pedestal Drawers – Titanium (PN# EPWD257UTT), Island White (PN# EPWD257UIW).
- Dryer Stacking Kit – (PN# STACKIT7X).
- Drying Rack – (PN# A04840701).
- Assembly Hose Kit – (PN# 5304495002).

**Electrolux Major Appliances, N.A.**

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4 • 1-800-265-8352 • electroluxappliances.ca

EFMC627U 05/18

© 2018 Electrolux Major Appliances N.A.

High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

Printed in Canada



Washer



MSRP Price

24% off

MAP Price [Info](#)

\$2,998.00 CAD

-\$707.20 CAD

\$2,290.80 CAD

[Add to Cart](#)

[Visit a Showroom](#)
(Showrooms)
Sales: 1-877-374-3439
(tel:18773743439)

Showing prices and available rebates for Ontario



Package Products



Washer
EFLS627UTT

(https://www.canadianappliance.ca/product/Electrolux_EFLS627UTT)

\$1,195.40 CAD

[Add to Cart](#)



Dryer
EFMC627UTT

(https://www.canadianappliance.ca/product/Electrolux_EFMC627UTT)

\$1,095.40 CAD

[Add to Cart](#)

[Description & Features \(/Packages/Electrolux-EFLS627UTT-Electrolux-EFMC627UTT-2357.html#tab-features\)](#)

[Specs \(/Packages/Electrolux-EFLS627UTT-Electrolux-EFMC627UTT-2357.html#tab-specs\)](#)

[Manuals \(/Packages/Electrolux-EFLS627UTT-Electrolux-EFMC627UTT-2357.html#tab-manuals\)](#)

[Rebates \(/Packages/Electrolux-EFLS627UTT-Electrolux-EFMC627UTT-2357.html#tab-rebates\)](#)

[Warranty \(/Packages/Electrolux-EFLS627UTT-Electrolux-EFMC627UTT-2357.html#tab-warranty\)](#)

[Financing \(/Packages/Electrolux-EFLS627UTT-Electrolux-EFMC627UTT-2357.html#tab-financing\)](#)

[Install \(/Packages/Electrolux-EFLS627UTT-Electrolux-EFMC627UTT-2357.html#tab-installation\)](#)

[FAQ \(/Packages/Electrolux-EFLS627UTT-Electrolux-EFMC627UTT-2357.html#tab-faq\)](#)

Washer EFLS627UTT

Dimensions and Volume

Height 38"
Height With Pedestal 53"
Width 27"

[Description & Features](#)

[Specs](#)

[Manuals](#)

[Rebates](#)

[Warranty](#)

[Financing](#)


[Install](#)

[FAQ](#)

Depth	32"
Depth (to Arc Exclude Hose)	31 1/2"
Depth With Door 90° Open	53 1/2"
Washer Drum Capacity	5.1 Cu. Ft.
Installation	
Optional Pedestal	Yes
Power Cord Included	Yes
Stacked (Above Dryer)	Yes
Washer Cycles	
Active Wear	Yes
Clean Washer	Yes
Colors	Yes
Cycle Count	9
Delicates	Yes
Fast Wash	Yes
Heavy	Yes
Normal	Yes
Rinse & Spin	Yes
Whitest Whites	Yes
Exterior	
Door Latch	Yes
Reversible Door	Yes
Water Inlet Location	Left Top Rear
Soil Levels	
Soil Level Selections	Yes
Light	Yes
Washer	
Balance System	Yes
Drum Light	Yes
Drum Material	Stainless Steel
Maximum Spin Speed	1,300 RPM
Water Heater	Yes
Water Level Adjustment	Yes
Accessories	
Drain Hose Extension Kit	No
Dryer Stacking Kit Included	No
General Specifications	
Chime On / Chime Off	Yes
Leveling Legs	Yes
Product Weight	223.25 lbs
Prop 65 Label	No
Warranty - Labor	1 Year
Warranty - Parts	1 Year
Dispenser	
Bleach Dispenser	Yes
Detergent Dispenser	Yes
Dispenser Drawer	Yes
Fabric Softener Dispenser	Yes
Prewash Detergent Dispenser	Yes
Energy Data	
Integrated Water Factor	3.2
kWh/year	85 kWh
Modified Energy Factor	2.92
Water Usage/Year	4,154 Gallons
Controls	
Child Lock	Yes
Delay Start	Yes
Delay Start Time	720 Minutes
Electrical Specifications	
Connection Location	Left Center
Minimum Circuit Required	15 Amps
Voltage Rating	120 V
Safety Certifications & Approvals	
CSA Listed	Yes
UL Listed	Yes
NSF Certified	Yes
CEE Tier	Tier 2
ENERGY STAR Certified	Yes
Temperature Settings	
Auto Temperature Control	Yes
Cold	Yes
Warm	Yes
Hot	Yes
Sanitize	Yes
Washer Options	
Freshwater Rinse	Yes
Spin Speed Selections	5
Steam	Yes


DS


[Description & Features Specifications](#)
[Specs](#)
[Manuals](#)
[Rebates](#)
[Warranty](#)
[Financing](#)
[Install](#)
[FAQ](#)

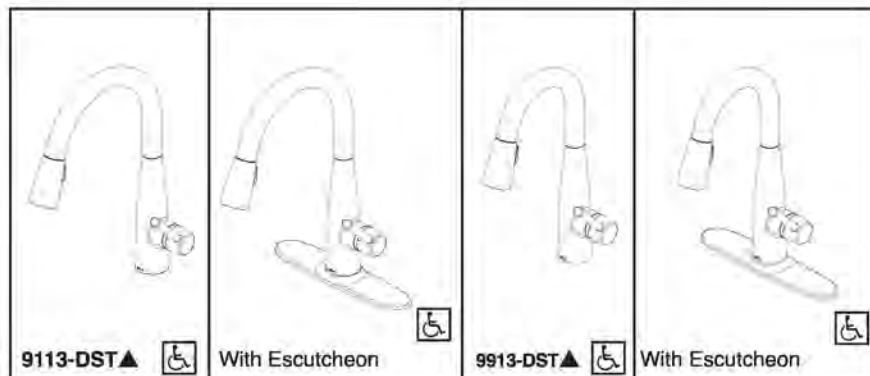

Submitted Model No.:

Specific Features:

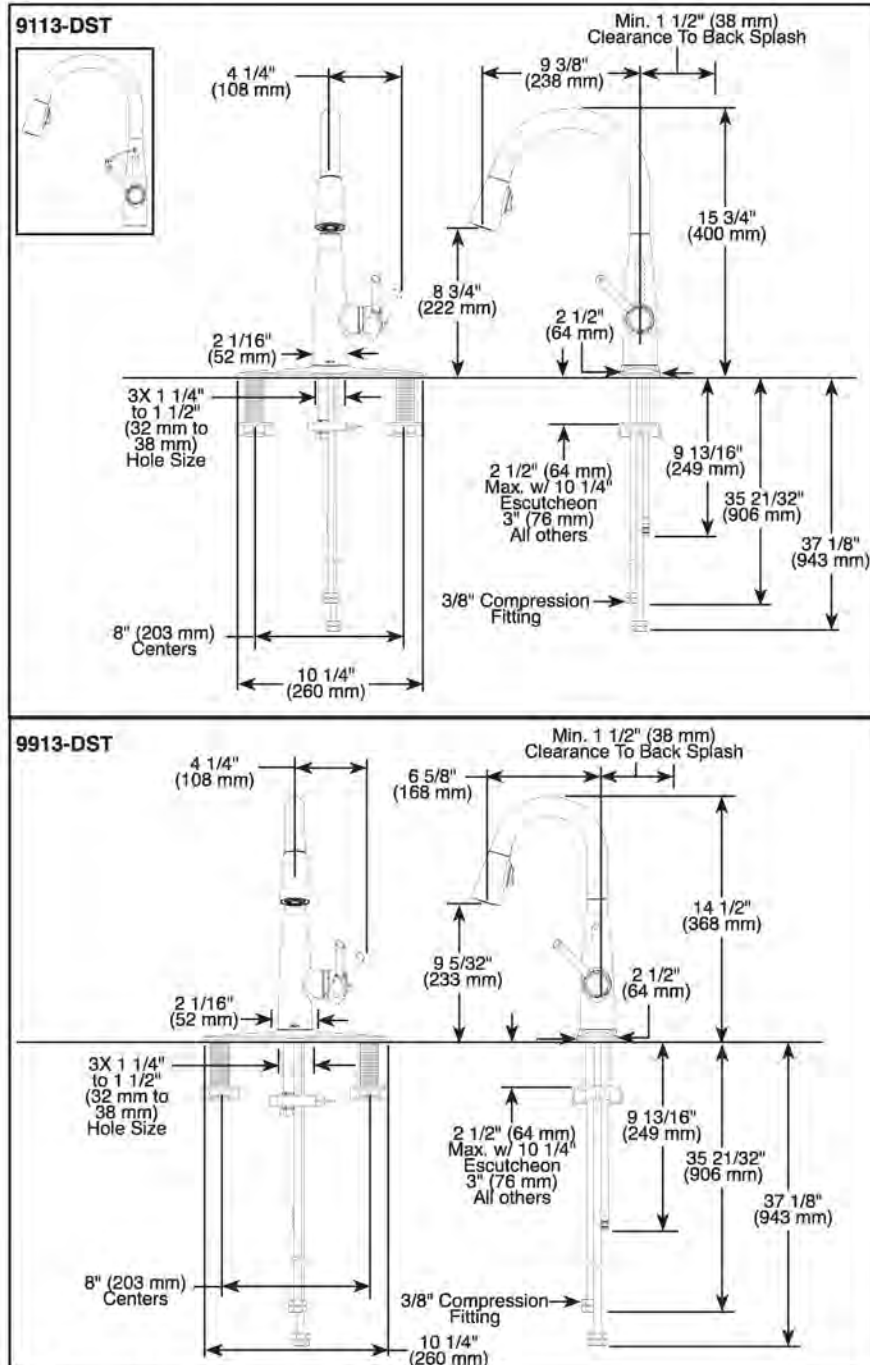

▲ Designate proper finish suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-K-9113-DST Rev. B



see what Delta can do™

KITCHEN FAUCETS

- Essa™ Collection
- Single Handle Pull-Down

FEATURES:

- DIAMOND Seal® Technology
- MagnaTite® Magnetic Docking
- Touch-Clean® Sprayhead

STANDARD SPECIFICATIONS:

- Maximum 1.8 gpm @ 60 psi, 6.8 L/min @ 414 kPa
- One or three hole mount (Escutcheon included with kitchen models. For prep models, order separately)
- Diamond coated ceramic cartridge
- 3/8" O.D. straight, staggered PEX supply lines
- Spout rotates 360°
- Red/Blue indicator markings
- Two-function wand; Aerated stream or spray
- Dual integral check valves in sprayer

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.6

Indicates compliance to ICC/ANSI A117.1


- Verified compliant with .25% weighted average Pb content regulations.

Delta Faucet Company

55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2019 Delta Faucet Company

Product Specification Sheet

B1206 Undermount Stainless Steel Single Bowl Laundry Sink

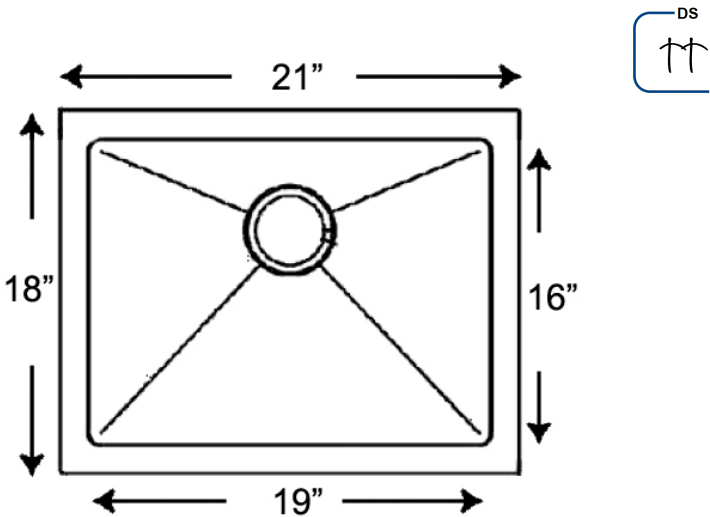

Colour Finish

Stainless Steel

Model No.

B1206

Description

- Dimensions: 21" x 18" x 12" Deep
- Minimum Cabinet Size: 23"
- 18 Gauge Type 304 Stainless Steel Drop In Sink
- Brushed Satin Finish
- Stone Guard undercoating over a rubber pad
- 3 1/2" drain opening
- Supplied with installation clip, template, and strainer
- Stainless Steel Grid Available
- cUPC certified
- Limited Lifetime Warranty

Available accessories

- BG1206 Grid
- Colander Strainer - Stainless Steel
- Drying Rack

MAIN LOCATION

BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9

CONTACT

Tel: 1(800) 930-0214
Fax: 1(866) 310-7580
Email: sales@bristolsinks.com




Product Specification Sheet



B1606 Stainless Undermount Sink with 20mm Radius Corners

KITCHEN SINK

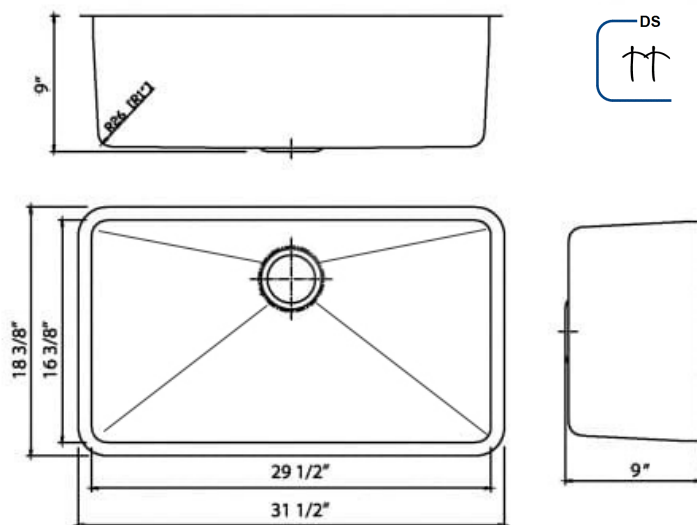

Colour Finish

Stainless Steel

Model No.

B1606

Description

- Single Bowl Undermount Sink with 20mil radius corners
- Outside dimensions: 31 1/2" x 18 3/8" x 9"
- Minimum Cabinet Size: 33"
- Stainless Steel Single Bowl Sink
- 16 Gauge Type 304 Stainless Steel
- Stone Guard undercoating over rubber pad
- 3 1/2" drain opening
- Supplied with installation clip, template and strainer
- CUPC certified

Available accessories

- BG1606 - Grid
- Colander Strainer - Stainless Steel
- Drying Rack

MAIN LOCATION

BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9

CONTACT

Tel: 1 (800) 930-0214
Fax: 1 (866) 310-7580
Email: sales@bristolsinks.com





Studio®
Under Counter Sinks
 VITREOUS CHINA



Studio® Under Counter Sinks

- ☐ **0614.000 Unglazed Rim**
- ☐ **0614.300 Glazed underside**

- Rectangular under counter mount sinks
- Made from vitreous china
- Unglazed rim
- Front overflow
- Supplied with mounting kit and template

Nominal Dimensions:

19-3/4" x 13-3/4"
 (502 x 350mm)

Bowl size:

18" (457mm) wide
 12" (305mm) front to back
 6-7/16" (164mm) deep

- ☐ **0618.000 Unglazed Rim**

Nominal Dimensions:

23-5/8" x 16-5/8"
 (600 x 422mm)

Bowl size:

21-1/16" (535mm) wide
 14" (356mm) front to back
 6-1/4" (159mm) deep

Compliance Certifications - Meets or Exceeds the Following Specifications:

- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series

To Be Specified:

- ☐ Color: ☐ White ☐ Bone ☐ Linen
- ☐ Faucet*:
- ☐ Faucet Finish:
- ☐ Supplies:
- ☐ 1-1/4" Trap:

* See faucet section for additional models available



BATHROOM SINKS THROUGHOUT

SEE REVERSE FOR ROUGHING-IN DIMENSIONS



**MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
 AND ICC ANSI A117.1 ACCESSIBLE AND USABLE
 BUILDINGS AND FACILITIES - CHECK LOCAL CODES.**

Install lavatory 864mm (34") from finished floor.


Lavatory installed 102mm (4") minimum from front edge
 of countertop provides 686mm (27") knee clearance area.

*American
Standard*




Studio® Under Counter Sinks VITREOUS CHINA



BARRIER FREE

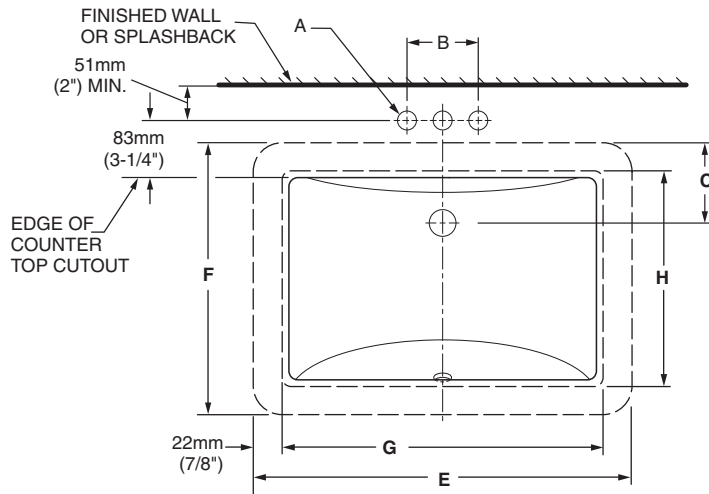

FITTING	A	B
CENTER-SET	1-1/16" (27mm)	4" (102mm)
SPREAD	1-1/4" (32mm)	8" (203mm)



REFER TO INSTRUCTIONS PROVIDED WITH KIT FOR ADDITIONAL INFORMATION

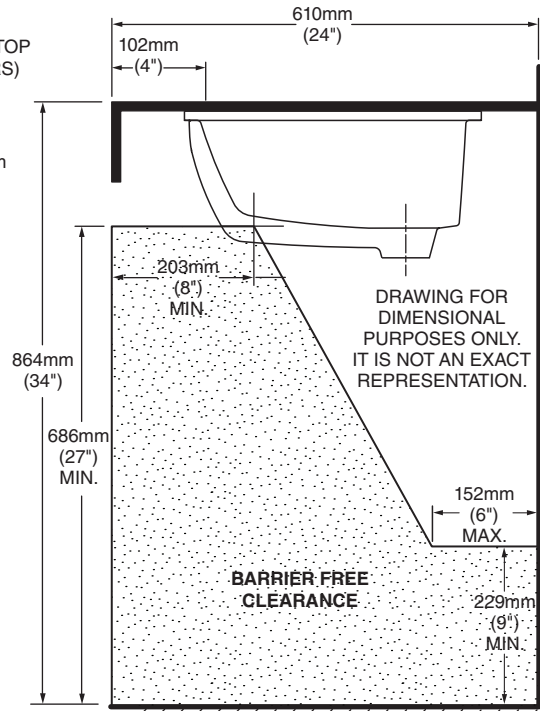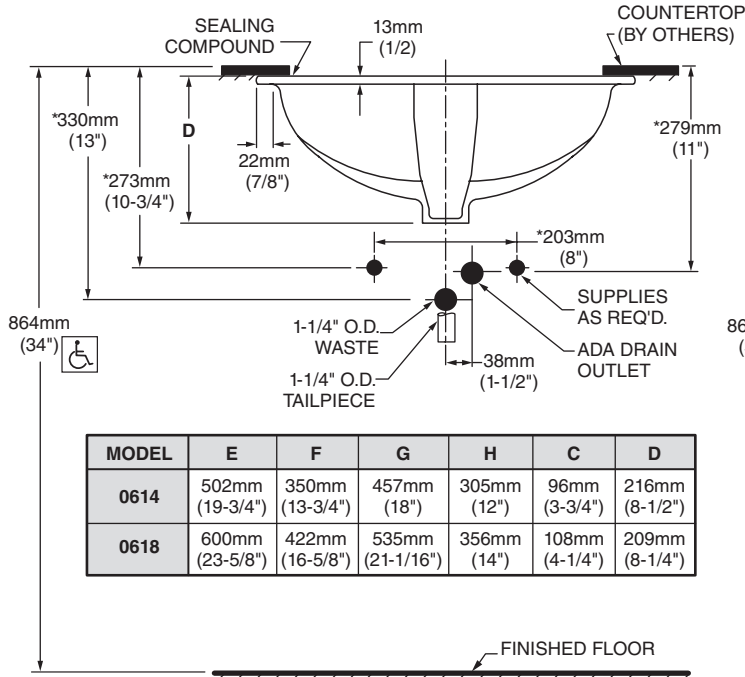

NOTES:

INSTALL PRODUCT ACCORDING TO THE INSTALLATION INSTRUCTIONS. COUNTERTOP MANUFACTURER OR CUTTER MUST USE CUTOUT TEMPLATE PROVIDED WITH PRODUCT OR A CURRENT ONE PROVIDED BY AMERICAN STANDARD. AMERICAN STANDARD IS NOT RESPONSIBLE FOR CUTOUT ERRORS WHEN THE INCORRECT TEMPLATE IS USED.

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P" TRAP ARE SUGGESTED.

▼ UNDERCOUNTER MOUNTING KIT SUPPLIED WITH SINK.

FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

Taymor®

PRODUCT SPECIFICATIONS




THE
PREMIER
LINE

VEGA
LEVERSET

SPECIFICATIONS



- INTERIOR LOCK SOLUTION FOR SINGLE AND MULTI-FAMILY RESIDENTIAL BUILDINGS
- UNIVERSAL 6-IN-1 LATCH: DRIVE IN, SQUARE MORTISE AND RADIUS CORNER WITH ADJUSTABLE BACKSET: 2-3/8" (60 mm) – 2-3/4" (70 mm)
- STANDARD BORE HOLES: 2-1/8" (54 mm)
- FITS STANDARD DOOR THICKNESS: 1-3/8" (35 mm) – 1-3/4" (45 mm)
- FULL LIP RADIUS CORNER STRIKE WITH ADJUSTABLE TAB STANDARD: 1-3/4" x 2-1/4" (45 mm x 57 mm)
- PUSH BUTTON AUTO-RELEASE ON PRIVACY FUNCTION

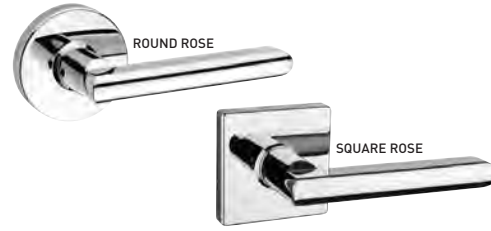


GRADE
3
ANSI GRADE 3



LIFETIME MECHANICAL & FINISH WARRANTY

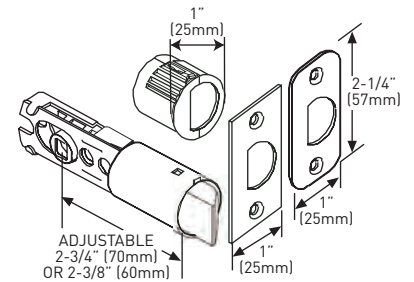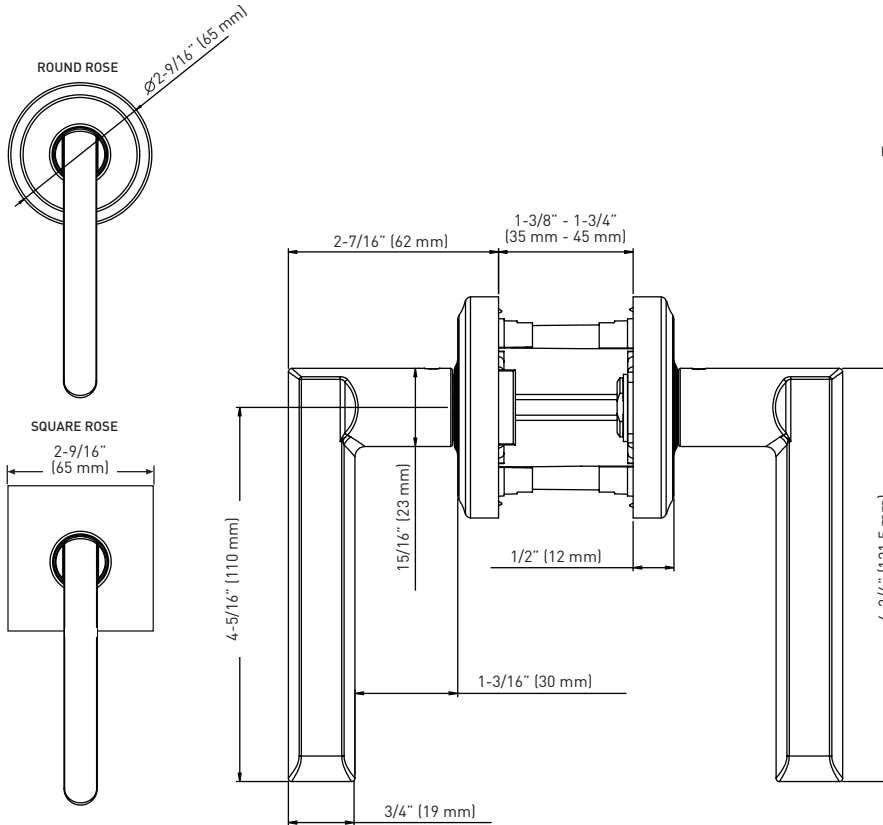

6-IN-1 PRIVACY/PASSAGE LATCH



FULL LIP RADIUS STRIKE

MEASUREMENTS SUBJECT TO A 3% VARIANCE

MEASUREMENTS ARE FOR REFERENCE ONLY. TAYMOR RESERVES THE RIGHT TO CHANGE THE PRODUCT SPECS WITHOUT NOTICE. FOR PRODUCT WARRANTY, PLEASE VISIT TAYMOR WEBSITE FOR DETAILS www.taymor.com

VEGA - SQUARE ROSE

BUILDER PACK

	PRIVACY	PASSAGE		DUMMY
SATIN NICKEL 15	30-D006724SN	30-D006734SN	-	30-674SN
MATTE BLACK 19	30-D006724BLK	30-D006734BLK	-	30-674BLK
POLISHED CHROME 26	30-D006724PC	30-D006734PC	-	30-674PC
SATIN CHROME 26D	30-D006724SC	30-D006734SC	-	30-674SC

CASE QTY 20

VEGA - ROUND ROSE

BUILDER PACK

	PRIVACY	PASSAGE	INSIDE TRIM	DUMMY
SATIN NICKEL 15	30-D006424SN	30-D006434SN	30-HL0064SN	30-644SN
MATTE BLACK 19	30-D006424BLK	30-D006434BLK	30-HL0064BLK	30-644BLK
POLISHED CHROME 26	30-D006424PC	30-D006434PC	30-HL0064PC	30-644PC
SATIN CHROME 26D	30-D006424SC	30-D006434SC	30-HL0064SC	30-644SC

CASE QTY 20



Taymor®

PRODUCT SPECIFICATIONS



ASHFORD

PROFESSIONAL SERIES® HANDLESET



MANCHESTER
INSIDE KNOB



CAPRI
INSIDE KNOB
FOR MATTE BLACK
FINISH ONLY

GRADE
3

ANSI GRADE 3



EXTENSION KIT AVAILABLE

Optional Extension Kit accommodates doors that are 2-1/4" thick



FULL KEYING SERVICES AVAILABLE

WR5 keyway, packaged in Keyed Different (KD)



SPECIFICATIONS

- › INCLUDES MANCHESTER KNOB (CAPRI KNOB FOR MATTE BLACK OPTION)
- › COMPATIBLE WITH BOTH PREMIER AND PROFESSIONAL SERIES® LOCKSETS
- › UNIVERSAL 6-IN-1 LATCH: DRIVE IN, SQUARE MORTISE AND RADIUS CORNER WITH ADJUSTABLE BACKSET: 2-3/8" (60 mm) – 2-3/4" (70 mm)
- › HIGH TENSILE STEEL ANTI-SAW DEADBOLT WITH 1" THROW
- › STANDARD CENTER TO CENTER BORE DISTANCE: 5-1/2" (140 mm)
- › STANDARD BORE HOLES: 2-1/8" (54 mm)
- › FITS STANDARD DOOR THICKNESS: 1-3/8" TO 1-3/4" (35 mm-45 mm)
- › 4 ADJUSTABLE MOUNTING POSITIONS
- › FULL LIP RADIUS CORNER SPRING LATCH STRIKE WITH ADJUSTABLE TAB
- › HIGH SECURITY DEADBOLT STRIKE
- › LIMITED LIFETIME MECHANICAL WARRANTY
- › 5 YEAR FINISH WARRANTY




RETAIL PACK	AGED BRONZE 10B+	SATIN NICKEL 15	ANTIQUE NICKEL 17A	MATTE BLACK 19	CASE PACK
INSIDE TRIM	MANCHESTER KNOB	MANCHESTER KNOB	MANCHESTER KNOB	CAPRI KNOB	
6-IN-1 ADJUSTABLE LATCH - KD	34-FV0477	34-FV0467	34-FV0457	34-FV0482	6

Taymor®




PROFESSIONAL SERIES® ASHFORD HANDLESET

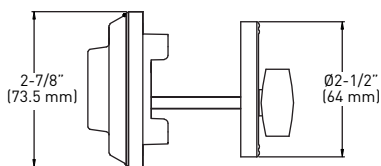


6-IN-1 ADJUSTABLE DEADBOLT LATCH

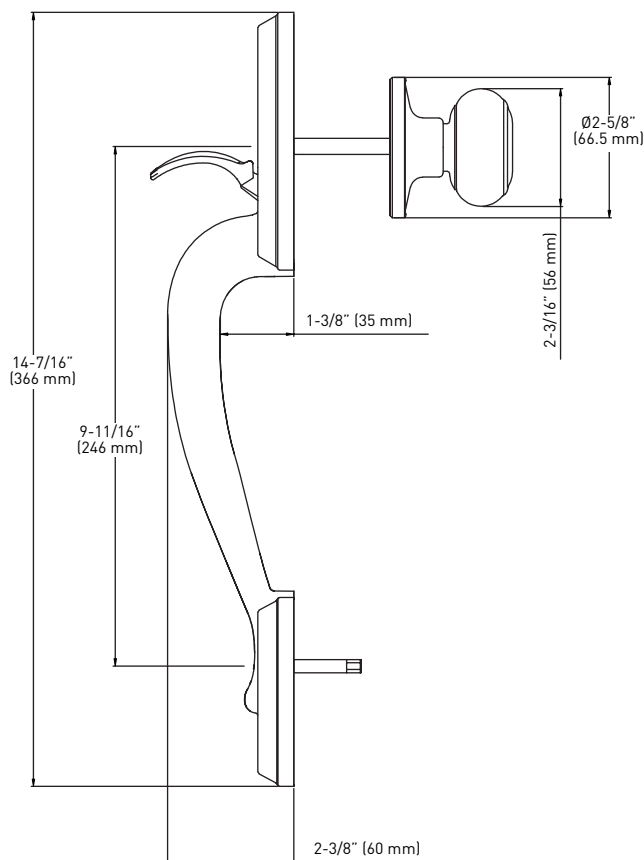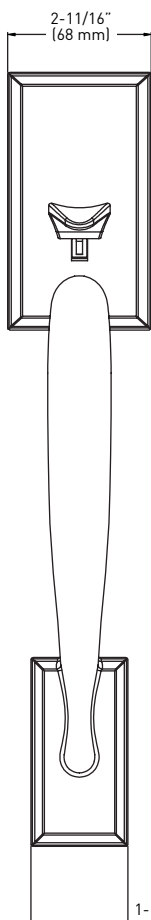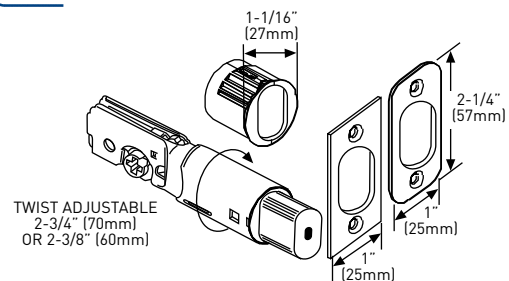

6-IN-1 FIXED HANDLESET LATCH

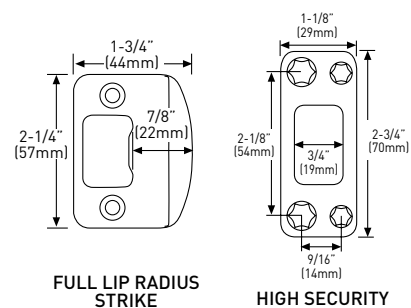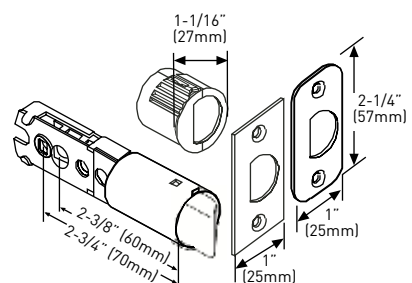

MANCHESTER
INSIDE KNOB



CAPRI
INSIDE KNOB

