

MONOGRAM 48" PROFESSIONAL
GAS RANGETOP WITH 6 BURNERS
AND GRIDDLE
ZGU486NDTSS (NATURAL GAS)



BURNER PERFORMANCE

Front Left Burner Element	23,000-BTU
Back Left Burner Element	18,000-BTU
Second From Left Front Burner Element	15,000-BTU
Second From Left Back Burner Element	15,000-BTU
Third From Left Front Burner Element	23,000-BTU
Third From Left Back Burner Element	18,000-BTU
Griddle	18,000-BTU

VERSATILE GAS BURNER CONFIGURATION

Delivering exceptional cooking flexibility, the two 23,000-BTU multi-ring brass burners and dual-stack burners offer a range of heat settings, from gentle simmer to intense flame

3-PIECE GRATES WITH REVERSIBLE WOK FEATURE

Designed to adapt to different cooking styles, these reversible grates are flat on one side and uniquely contoured on the other to perfectly fit round-bottom woks

RING-LIT KNOBS

Delivering a modern approach to accent lighting, the rings illuminate to indicate when a burner is in use

SOLID BRASS BLADES ON PRECISION MACHINED KNOBS

With an unmatched attention to detail, all knobs on the new Monogram Pro ranges and rangetops come with solid brass accents

SEAMLESS STAINLESS TOP FRAME

Meticulously crafted from one piece of stainless steel that covers the cooktop and control panel, this seamless and stylish surface is easy to clean and beautiful to look at

STAINLESS AND ALUMINUM-CLAD GRIDDLE INCLUDED

This versatile griddle delivers 18,000 BTUs of cooking power, allowing fast and consistent heating across the entire cooking surface

STAINLESS STEEL, NO-MARK GRIDDLE/GRILL COVERS INCLUDED

Stainless steel covers help to protect the rangetop and keep it looking pristine, and can also be used as a flat food-preparation surface when the rangetop is not in use

LP CONVERSION KIT INCLUDED

Designed to deliver a seamless conversion experience, this self-contained kit includes everything needed to convert a rangetop to liquid propane







SPECIFICATIONS

Overall Width	47 7/8" (121.6 cm)
Overall Depth	27 1/2" (69.8 cm)
Overall Height	8 1/2" (21.5 cm)
Volts/Hertz/Amperes	120V, 60Hz, 15A
Net Weight	171 lbs (77.6 kg)
Approx. Shipping Weight	227 lbs (103 kg)

ATTENTION ELECTRICIAN:
Rangetops must be supplied with 120V, 60Hz, and connected to an individual, properly grounded branch circuit protected by a 15 amp circuit breaker or time-delay fuse.

For more details refer to the installation instructions for this product.

OVERALL DIMENSIONS

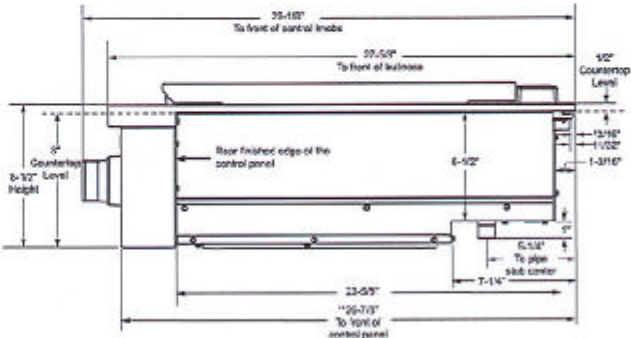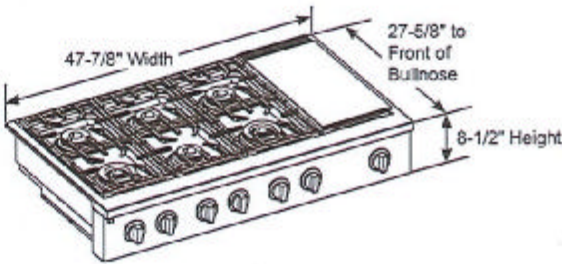

¹ Include the overhang of the rear trim when countertop continues behind the product. The overhang is decorative only. The weight of the rangetop is fully supported by the side trims.
^{**} Maximum countertop cutout depth from the back of the rear trim to the back edge of chamfer of the side of the control panel - typically, the maximum countertop cutout depth (front to back). Minimum countertop cutout depth is 25-1/4"


Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

For questions about your appliance, please call 1-800-626-2000.






DIMENSIONS AND INSTALLATION
INFORMATION (IN INCHES)

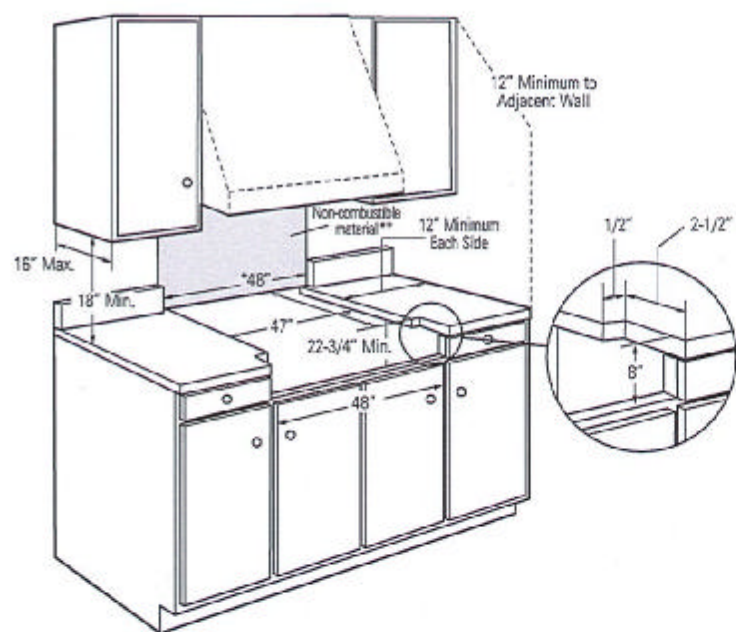

**As defined in the National Fuel Gas Code (ANSI Z223.1/CSA B149.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1/CSA 1.1 scope and are not certified by CSA. Clearances less than 12\"/>

UTILITY LOCATIONS

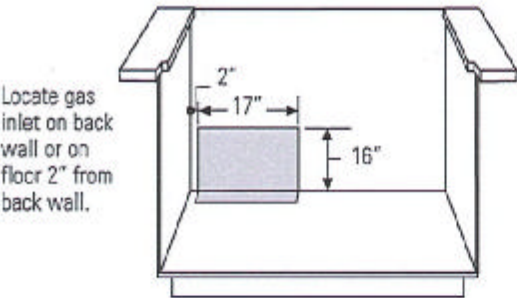

HELPFUL TIPS

PRODUCT DIMENSIONS AND
CLEARANCE

A 36\"/>

Clearances between range top and side wall must be at least 12\"/>

Allow 8\"/>

*The opening between a 4\"/>

**As defined in the National Fuel Gas Code (ANSI Z223.1/CSA B149.1, Current Edition). Clearances from non-combustible materials are not part of the ANSI Z21.1/CSA 1.1 scope and are not certified by CSA. Clearances less than 12\"/>

GAS PRESSURE REGULATOR

You must use the gas pressure regulator supplied with this range top. For proper operations the inlet pressure to the regulator should be as follows:

Natural Gas:

Minimum pressure: 6\"/>

Propane (LP) Gas:

Minimum pressure: 11\"/>

See installation instructions for more details



WARNING

A suitable overhead vent hood is required. A custom hood installation with exposed horizontal combustible surfaces must have an "auto-on" feature. Refer to hood installation instructions for specific hood clearances. The surface of the entire back wall above the countertop and below the hood must be covered with a non-combustible material such as metal, ceramic tile, brick, marble or other stone.






DIMENSIONS AND INSTALLATION
INFORMATION (IN INCHES)

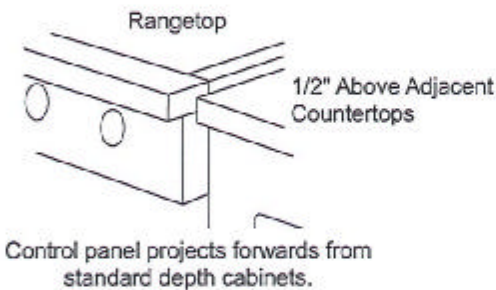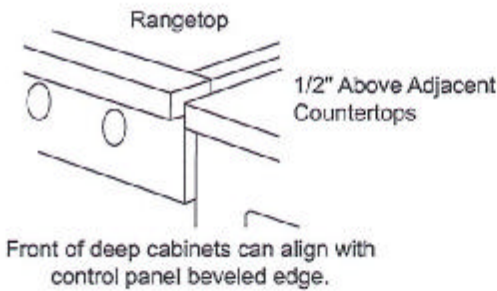

SIDE VIEW WITH A BACKSPLASH

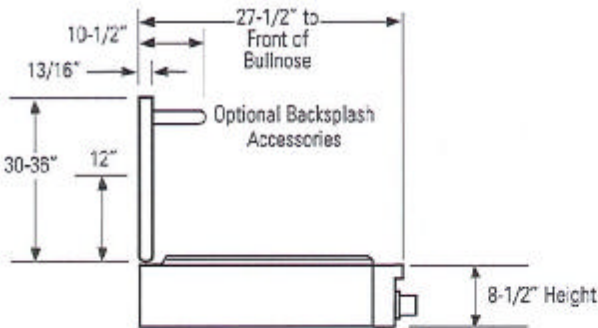

HELPFUL TIPS

OPTIONAL BACKSPLASH
ACCESSORIES

- The range top requires a 12" minimum clearance to a vertical combustible surface at the rear. A backsplash is required for installations with less than 12" clearance. The following backsplash accessories are available, or a custom, non-combustible backsplash can be used.
- Order one with a 36"-wide range backsplash:
- UX12BS36PSS-12"-height backsplash
- UXADBS36PSS-30"-36" adjustable-height backsplash with warming shelf

MONOGRAM 30" BUILT-IN
ADVANTIUM® 240
ZSB9231NSS



THE MONOGRAM MINIMALIST COLLECTION
Streamlined design and precisely machined metals create a contemporary yet functional aesthetic

5-IN-1-OVEN
Experience exceptional flexibility and cooking results with this innovative five-in-one oven. Advantium® Technology enhanced, it can be used as a convection oven, toaster oven, warming/proofing oven, precision cook oven, and microwave

POWERFUL PERFORMANCE
Oven-quality foods cook up to eight times faster than a conventional oven, with no preheating required

SPEEDCOOK TECHNOLOGY
Offering the ultimate in cooking speed and flexibility, the halogen-lighting system combines with microwave technology to Speedcook favorite foods to perfection in minutes, with no preheating

SPACIOUS INTERIOR
Generous, 1.7-cu.-ft oven space with a large 16" turntable allows for full rotation of a 9" x 13" casserole dish; plus the removable oven rack offers the convenience of multi-level cooking

PREPROGRAMMED RECIPES
Provide quick and easy programming of over 175 pre-set food selections and allows programming of up to 30 custom recipes

INSTALLATION FLEXIBILITY
Ovens can be installed in 30" wall cabinet and can also be installed undercounter

LCD CONTROLS
Allow you to adjust oven settings with little effort








SPECIFICATIONS

Overall Width	29 3/4" (75.6 cm)
Overall Height	20 1/4" (51.4 cm)
Overall Depth	23" (58.4 cm)
Oven Door Clearance	13 1/4" (33.7 cm)
Overall Oven Interior Capacity	1.7 cu. ft.
Oven Interior Dimensions (W x H x D)	20 1/16" x 8 1/2" x 17" (51 cm x 21.6 cm x 43.2 cm)
Minimum Cabinet Width	30" (76.2 cm)
Minimum Cabinet Depth	21 1/2" (54.6 cm)
Minimum Base Support	130 lbs (59 kg)
Cutout Width	25 1/4" (64.1 cm)
Cutout Height	17 1/2" (44.5 cm)
Cutout Depth	21 1/2" (54.6 cm) Min
Voltz/Hertz/Amps	240/208 VAC, 60 Hz, 30A
Conduit Length	46 1/2" (123.2 cm)
Electrical Rating	4.72 kW at 208V 6.3 kW at 240V
Total Amps	30" (76.2 cm)
Shipping Weight	87 lbs (39.5 kg)

ATTENTION ELECTRICIAN:

A 240/208V, 60Hz, 30 Amp circuit is required. An individual properly grounded branch circuit or circuit breaker is required. Hardware junction box is required for built-in product.

OVERALL DIMENSIONS

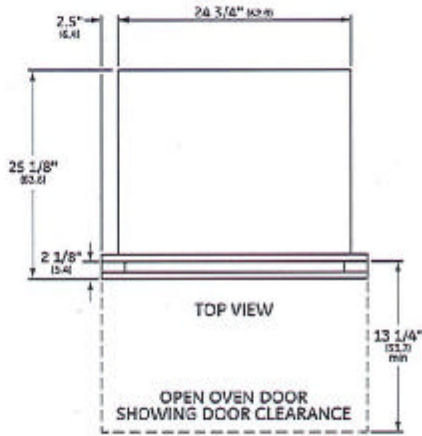
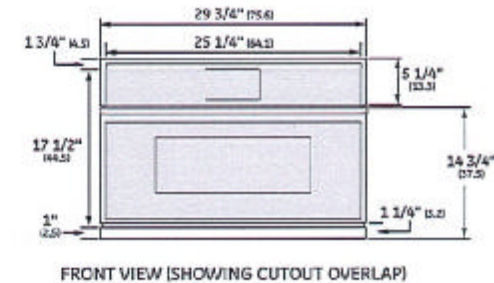


Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.





WALL INSTALLATION

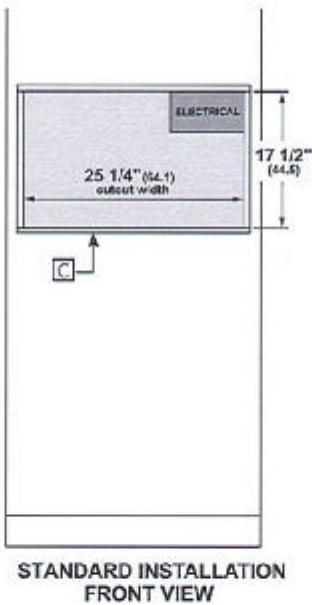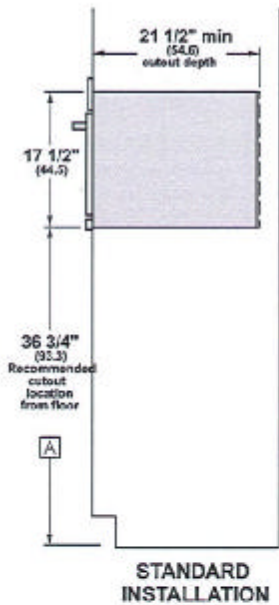

HELPFUL TIPS

- A Based on a user height of 5' 6" to 5' 10"
- B Junction box location (May also be located in adjacent cabinet.)
- C Platform must be able to support 130 lbs (59 kg)

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

For questions about your appliance, please call 1-800-626-2000.



MONOGRAM 30" BUILT-IN
SINGLE OVEN
ZTSX1DSSNSS



THE MONOGRAM MINIMALIST COLLECTION
Streamlined design and precisely machined metals create a contemporary yet functional aesthetic

LCD CONTROLS
Allow you to adjust oven settings with little effort

WIFI CONNECT
Perfectly in sync with a busy lifestyle, Alexa or Google Home can be used to control an array of oven functions from both inside and outside the home

VOICE CONTROL
Sleek handle-less design now benefits from the convenience of voice control. Once programmed, you can use your voice to open the oven door, preheat the oven and more, all without raising a finger

NO-PREHEAT AIR FRY
A must-have for health-conscious cooks, the No-Preheat Air Fry mode crisps food to crunchy perfection, without using oils or butter

PRECISION COOKING MODES
Master new recipes and perfectly execute favorite dishes using this ultra-smart system that automatically tracks cooking progress, modifies temperatures and adjusts cook times

SCAN-TO-COOK
Innovative and time saving, scan-to-cook technology ensures that packaged foods are always prepared correctly. A simple scan of the barcode with a smartphone delivers consistently, delicious results

TWIN CONVECTION WITH DIRECT AIR
Achieve beautifully cooked and delicious meals every time with this expertly designed, third heating element and fan combination

5.0 CUBIC FOOT CAPACITY
Easily accommodates even the largest meals

EXCLUSIVE SELF-CLEAN, (2 FULL-EXTENSION, 1 REGULAR) OVEN RACKS
Glide in and out smoothly on stainless steel ball bearings, and are designed to be left in the oven during the self-clean cycle

TEN-PASS BAKE ELEMENT
Covers more surface area for more even baking results

EIGHT-PASS BROIL ELEMENT
Provides complete coverage and even browning, even for large dishes

SELF-CLEAN WITH STEAM CLEAN OPTION
Gives you flexible options for thorough oven cleaning

PUSH-TO-OPEN DOOR
Handle-free, push-to-open door adds a touch of elegant simplicity and stylish convenience to your wall oven.

For questions about your appliance, please call 1-800-626-2000.





SPECIFICATIONS


Overall Width	29 3/4" (75.6 cm)
Overall Height	28 11/16" (72.6 cm)
Overall Depth Including Handle	24 11/16" (62.7cm)
Oven Door Clearance	20 9/16" (52.2 cm)
Overall Oven Interior Capacity	5.0 cu. ft. (141.6 liters)
Oven Interior Dimensions (W x H x D)	25" x 17 3/8" x 20 1/4" (63.5 x 44.1 x 51.4 cm)
Minimum Cabinet Width*	30" (76.2 cm)
Minimum Cabinet Depth*	24" (61.0 cm)
Minimum Base Support	220 lbs. (99 kg)
Cutout Width*	28 1/2" (72.4 cm) Min 28 5/8" (72.7 cm) Max
Cutout Height*	27 1/4" (69.2 cm) Min 27 5/16" (69.4 cm) Max
Cutout Depth*	25 1/2" (59.7 cm) Min
Volts/Hertz/Amps	240/208 V AC, 60 Hz, 20A
Conduit Length	48" (72" available special order: WB10T10390)
Electrical Rating	3.4 kW at 208V 4.5 kW at 240V
Shipping Weight	184 lbs. (84 kg)

* Additional space will be needed for flush installation.

ATTENTION ELECTRICIAN:

A 240/208V, 60Hz, 20 Amp circuit is required. An individual properly grounded branch circuit or circuit breaker is required. Hardware junction box is required for built-in product.

OVERALL DIMENSIONS

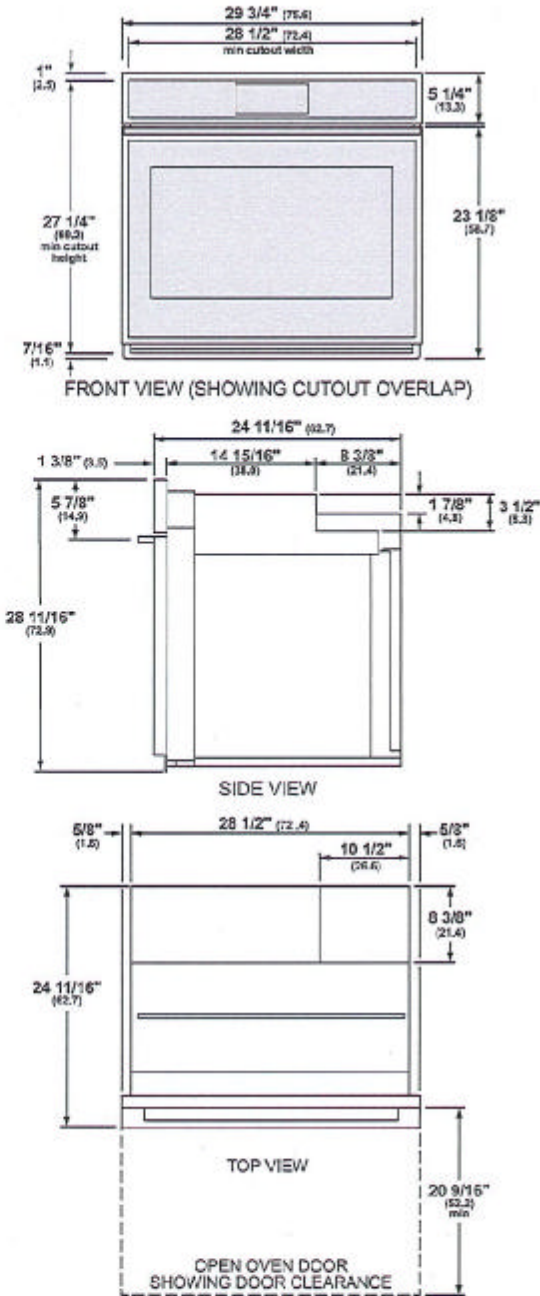


Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

For questions about your appliance, please call 1-800-626-2000.






WALL INSTALLATION

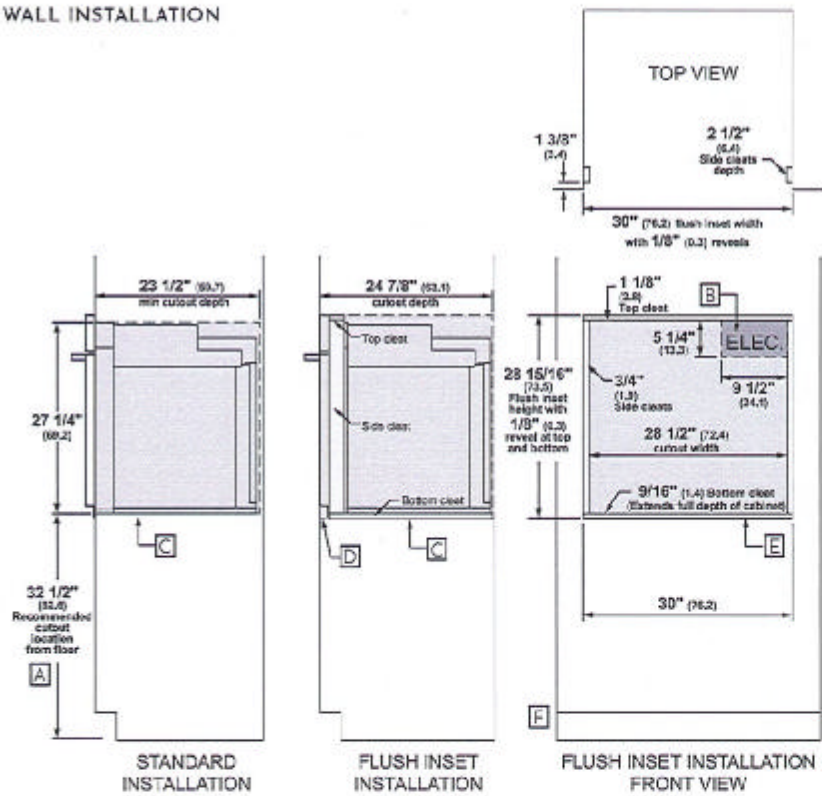

Allow 1/8" (0.3) clearances from side edges of oven door.

UNDERCOUNTER INSTALLATION

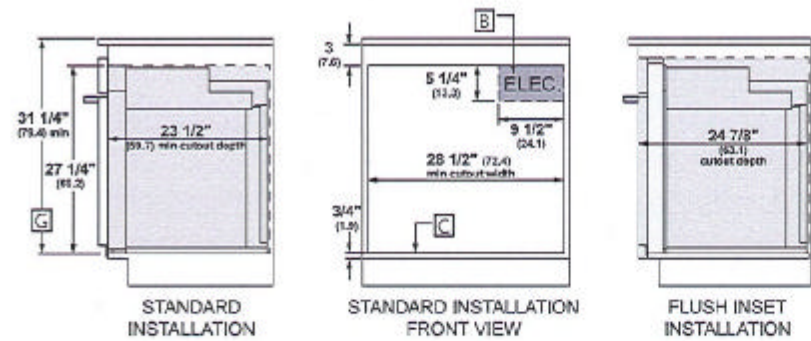

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

For questions about your appliance, please call 1-800-626-2000.


HELPFUL TIPS

- A Based on a user height of 5' 6" to 5' 10"
- B Junction box location (May also be located in adjacent cabinet.)
- C Platform must be able to support 220 lbs (99 kg)
- D Cabinet surfaces must be an appearance finished surface for flush installation.
- E Cleats may be visible and should be finished to match cabinetry.
- F If using optional flush install vent trim accessory ZX30VT1, please adjust cutout height to 28-5/8" and bottom cleat height to 1/4".
- G Minimum 31 1/4" from the top surface of the countertop to the top surface of the wall oven support platform when installed beneath a certified cooktop.






INSTALLATION WITH ADVANTUM
AND WARMING DRAWER

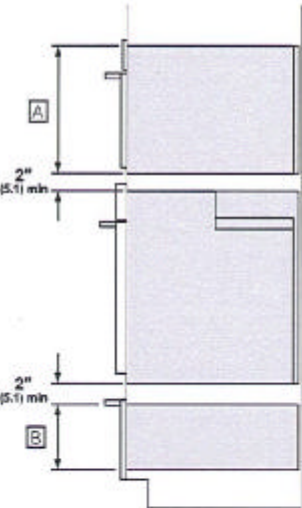


STANDARD INSTALLATION
SIDE VIEW

SIDE BY SIDE INSTALLATION

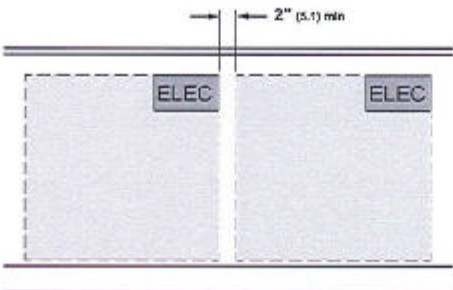


SIDE-BY-SIDE INSTALLATION
FRONT VIEW OF CUTOUTS

UNDER COOKTOP INSTALLATION

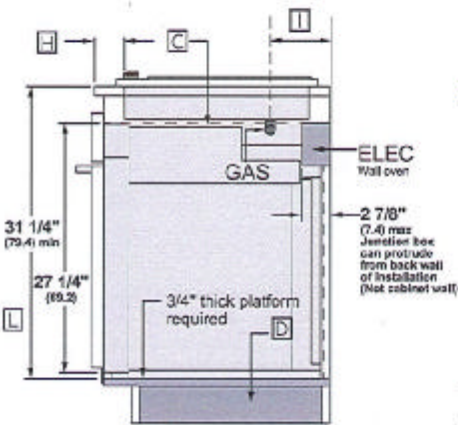

STANDARD INSTALLATION
SIDE VIEW

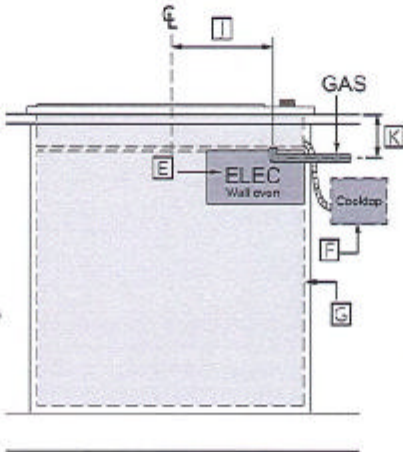

FRONT VIEW


HELPFUL TIPS

- A** Dimensions per Advantium or Microwave Oven requirements
- B** Dimension per Warming Drawer requirements
- C** Note this oven is only approved to be installed under specific models as labeled on this unit.
- D** Support platform made of 3/4" (1.9 cm) wood is required. Must be capable of supporting 220 lbs (99 kg). Support Platform base to be same height as toe kick.
- E** Junction box location for wall oven. (May also be located in adjacent cabinet).
- F** Gas regulator and electric connections for cooktops must be located in an adjacent accessible location to the right
- G** Top and/or side fillers may be necessary if unit is positioned between existing cabinets. Be sure they are attached securely, since they will anchor the oven in the cabinet.
- H** For flush oven installations, the cooktop cutout must be set back 2 1/2" (6.4cm) plus the cleat setback.
- I** Dimension varies based on model. Example: ZGU36 5 1/2" (14.0cm) from wall ZGU30 4 5/16" (11.0cm)
- J** Dimension varies based on model. Example: ZGU36 0" (centerline) ZGU30 12 1/16" (30.6cm) (centerline)
- K** Dimension varies based on model. Example: ZGU36 5 1/2" (14.0cm), requires use of 90° 1/2" FPT x 1/2" FL brass street elbow ZGU30 5" (12.7cm)
- L** Minimum 31 1/4" from the top surface of the countertop to the top surface of the wall oven support platform when installed beneath a certified cooktop.

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

For questions about your appliance, please call 1-800-626-2000.

MONOGRAM 42" BUILT-IN
SIDE-BY-SIDE REFRIGERATOR
ZISS420DNSS

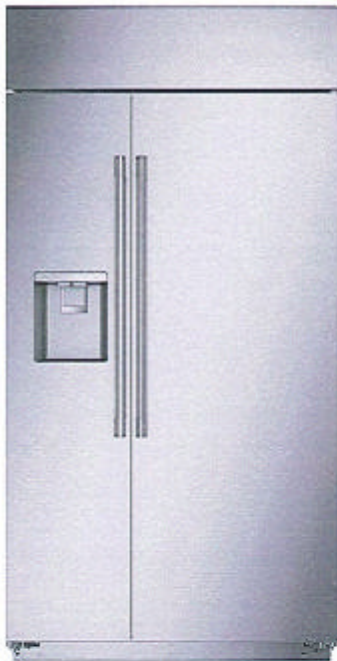

STATEMENT HANDLE

Model is shown with the Statement handle, which needs to be ordered separately. To order this handle use model number ZKSS2H2PNSS.



MINIMALIST HANDLE

Model is shown with the Minimalist handle, which needs to be ordered separately. To order this handle use model number ZKSS2H2CNSS.

When ordering this product, be sure to use the model number associated with the chosen handle.



Statement handle
ZKSS2H2PNSS



Minimalist handle
ZKSS2H2CNSS

ADVANCED TEMPERATURE MANAGEMENT
SYSTEM WITH MULTI-SHELF AIR TOWER
Provides even distribution of air throughout the refrigerator

CLIMATE-CONTROL DRAWER
Allows you to express-chill beverages, express-thaw meats and select specific temperatures for perishable foods

WIFI CONNECT
Enjoy the convenience and freedom of wirelessly controlling functions from your smartphone

LED LIGHTING
Light columns in the freezer and fresh food compartments extend the full length of the interior and LED lighting located inside the vegetable and climate-control drawers illuminate contents without compromising space

For questions about your appliance, please call 1-800-626-2000.

TRUE STAINLESS DISPENSER
Designed to accommodate glassware of all sizes, from pitchers to tumblers

GE® WATER FILTER
Has been moved from the fresh food compartment to the overhead cabinet, where it is discreetly out of sight

DELI DRAWER ON FULL-EXTENSION SLIDES
Keeps meats, cheeses and other everyday foods within easy reach

SEALED VEGETABLE DRAWER
Helps preserve the freshness of foods

ADJUSTABLE GLASS SHELVES
Easily accommodate party trays and platters

SABBATH MODE
Designed to disable functions in accordance with Sabbath-observing practices






SPECIFICATIONS

Overall Width	42" (106.7 cm)
Overall Height	84" (213.4 cm)
Overall Depth	25 3/4" (65.4 cm)
Door Clearance	26 9/16" (67.5 cm)
Cutout Width	41 1/2" (105.4 cm)
Cutout Height	83 1/2" - 84 1/2" (212.1 - 214.6 cm)
Cutout Depth	24" (61.0 cm)
Plumbing Requirements	1/4" OD copper tubing or GE SmartConnect kit
Shipping Weight	750 lb


ATTENTION ELECTRICIAN:

A 115 volt 60Hz, 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall.

OVERALL DIMENSIONS

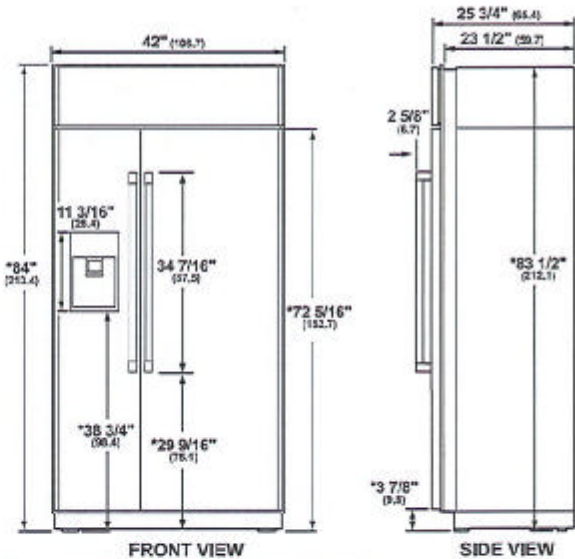

* Shipping height. Use leveling legs and wheels for maximum 1" height adjustment from shipping height.

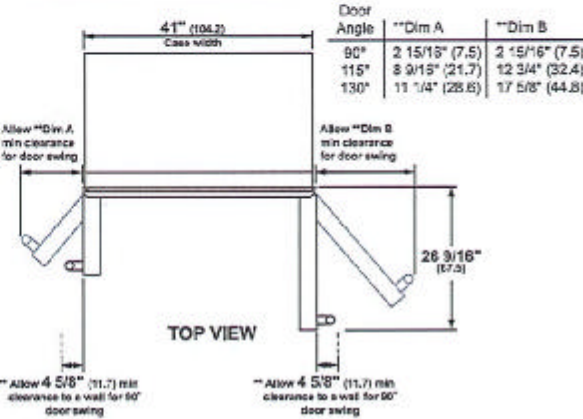

** These refrigerators are equipped with a 3-position door stop. The factory-set 115° door swing can be adjusted to 90° if clearances to adjacent cabinets or walls is restricted. Allow full 130° door swings for pan removal. If the 90° door stop position is used, pan access is maintained, but pan removal is restricted.


Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

For questions about your appliance, please call 1-800-696-2000.






STANDARD INSTALLATION

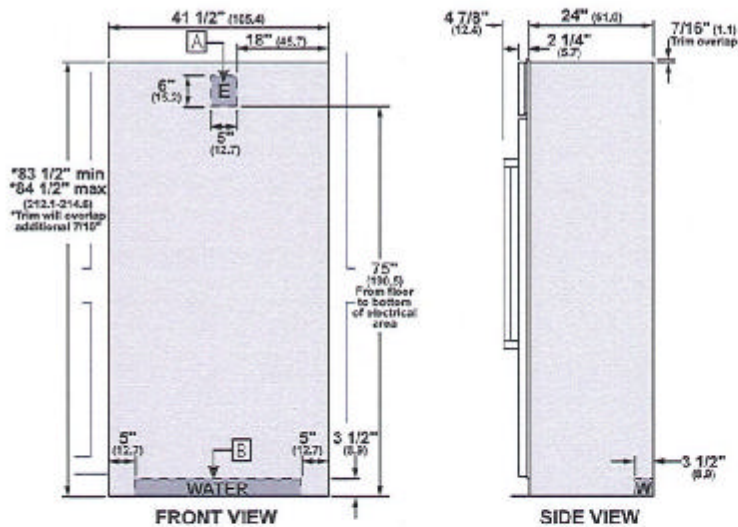

The refrigerator will project forward, slightly beyond adjacent cabinetry.

ANTI-TIP BRACKET

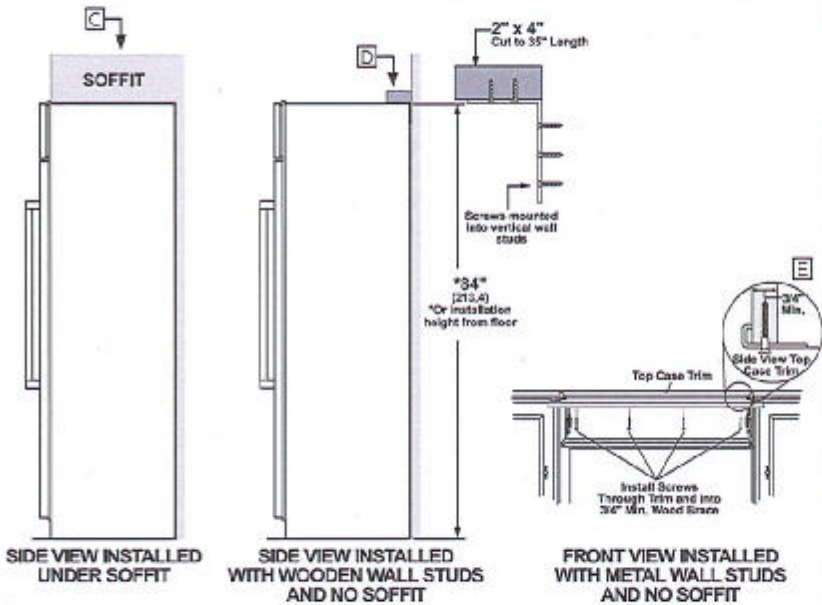

HELPFUL TIPS

- A Mounting the junction box in this location will also allow for front accessibility through access panel.
- B Water supply area.

WARNING:


The refrigerator is top heavy and must be secured to prevent the possibility of tipping forward. Failure to do so may result in death or serious injury.

The information below is for cabinet design only. When installing the anti-tip system you must use the product installation instructions. Determine your installation construction and required anti-tip configuration.

- C Installed Under Soffit
After installing unit into installation opening, raise grille panel and screw metal case sides to adjacent cabinet. When installed under a soffit, the soffit cannot exceed 24" deep. The top case trim overlaps the bottom of the soffit.
- D Wooden Wall Studs and No Soffit
 - Cut a 2" x 4" block and secure to brackets provided.
 - Secure brackets to back wall of opening at 84" or your installation height from the floor.
- E Metal Wall Studs and No Soffit
This method requires securely fastened cabinets on both sides and a 3/4" minimum wood brace above unit, with it's front surface 24" from back wall.
 - After installing unit into opening, raise grille panel and attach metal case top trim to 3/4" minimum wood brace.
 - The brace spanning the enclosure must be securely fastened to cabinets on both sides.See Installation Instructions for detailed instructions.



CUSTOM SIDE PANELS

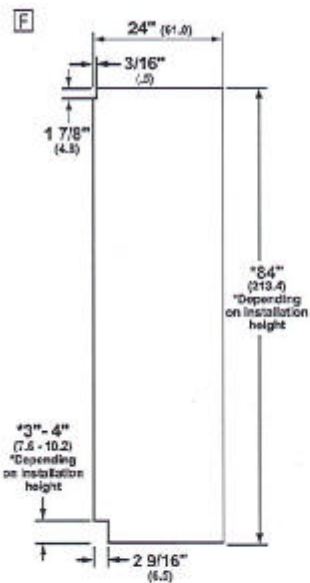

HELPFUL TIPS

F Side panels must be used whenever the sides of the refrigerator will be exposed. The 1/4" side panels will slip into the side case trim. Secure the panels to the refrigerator with stick-on hook and loop fastener strips. Order the side panels from the cabinet manufacturer.

24" Pocket Handle Dishwasher

500 Series – Stainless Steel SHPM65Z55N



SHPM65Z55N
Stainless Steel

Also available in:

- White SHPM65Z52N
- Black SHPM65Z56N

All-new AutoAir™ option automatically releases the door at the end of the cycle to let moisture escape and fresh air in for drier dishes.

Features & Benefits

44 dBA: dishwasher runs quietly so your kitchen conversations aren't interrupted.


The Flexible 3rd Rack with fold down sides adds 30% more* loading area, perfect for utensils and ramekins.

The AquaStop® leak protection system contains leaks through a precisely engineered system. If a leak occurs, the system contains it by shutting down operation and pumping out water. So you have the ultimate peace of mind whether you are away or at home.

General Properties	
Number of wash cycles	5
Number of options	5
dBA	44
Third rack	Flexible 3rd Rack
Rack adjustability	Rackmatic®
Tub material	Stainless Steel
Control type	Buttons
Concealed water heating element	Yes
Leak protection system	24/7 AquaStop®
Water softener	No
Five-level wash	Yes
ChildLock	No
Special features	InfoLight®, AutoAir™ Option

Efficiency	
Water usage per cycle	3.5
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption (kWh)	269
Total annual water consumption (g)	623.5

Capacity	
Number of place settings	16

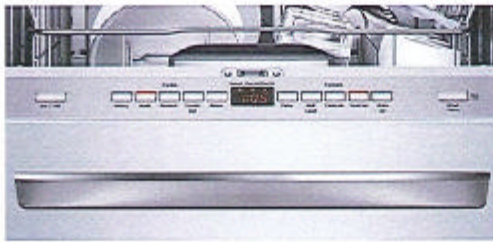

Technical Details	
Watts (W)	1440 W
Current (A)	12 Amps
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord length	67"
- Install length from corner of unit	45"
Minimum water pressure (lb/sin)	14
Length outlet hose (in)	79"

Dimensions & Weight	
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 23 3/4"
Required cutout size (HxWxD) (in)	33 7/8" x 23 5/8" x 24"
Adjustable feet	Yes
Net weight (lbs)	91 lbs

Accessories—Optional	
Junction Box	SMZPCJB1UC
Bosch Dishwasher Water Supply Hose	SMZSH002UC
Drain Hose Extension Kit	SGZ1010UC
Dishwasher Accessory Kit	SMZ5000
Anti-Tarnish Silverware Cassette	SMZ5002UC
Edge Protector	SMZEP001UC



*Compared to a Bosch dishwasher with 2 racks.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).
Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.
Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.
For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904
© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.








24" Pocket Handle Dishwasher

500 Series – Stainless Steel SHPM65Z55N



Installation Details

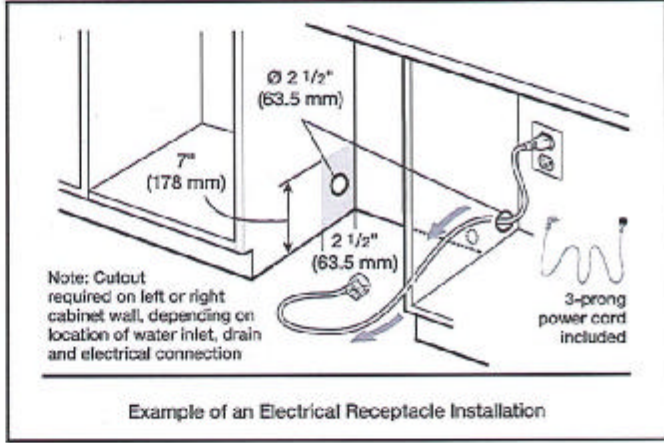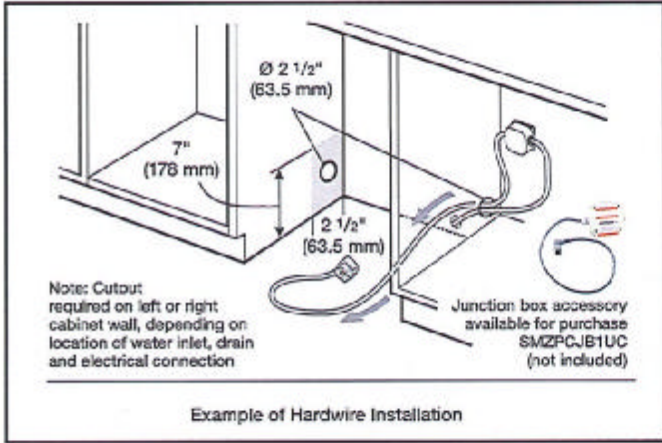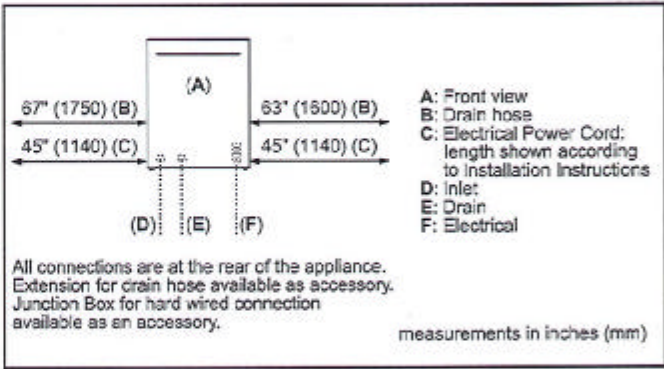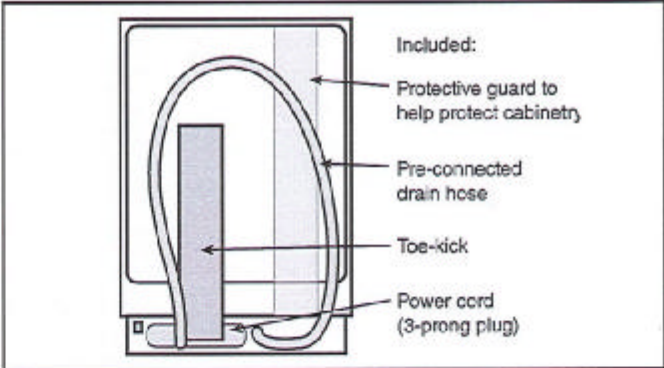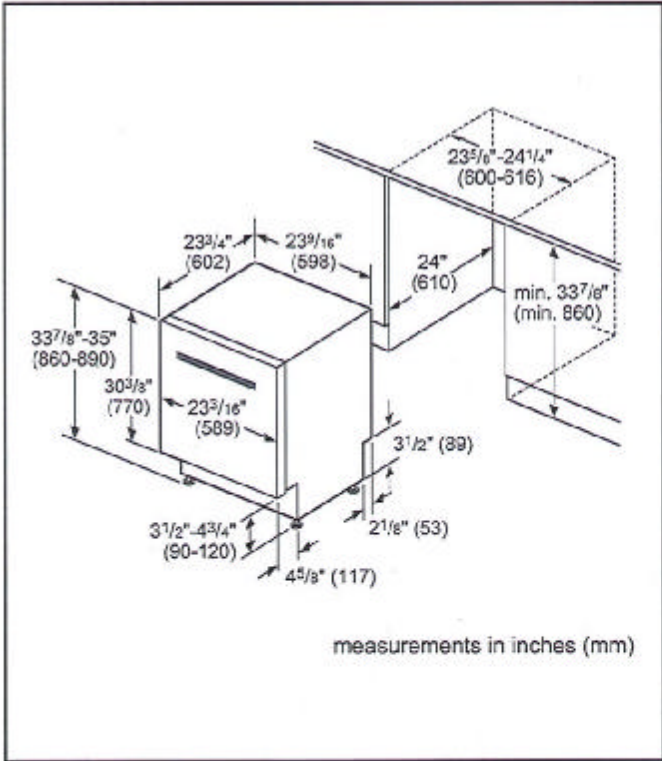

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.

24" Pocket Handle Dishwasher

500 Series – Stainless Steel SHPM65Z55N



Installation Details

Note: Plumbing installations will vary - refer to local codes. Drain hose included is 79" (201 cm) and can be extended to a maximum of 155 3/4" (396 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

Warranties: Please see Use & Care manual or Bosch website for statement of limited warranty.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904

© BSH Home Appliances Corporation. All rights reserved. Bosch is a registered trademark of Robert Bosch GmbH.



[Info >>](#)

KitchenAid: Save 600 on 3 qualifying appliances; Save \$800 on 4; Save \$1,200 when you buy 5 or more!

KitchenAid® (<https://www.canadianappliance.ca/KitchenAid-Appliances-Canada-B22/>) Authorized Dealer

KitchenAid KUB214KSB Under Counter Refrigeration, 24" Width, Stainless Steel colour

In Stock (Same/Next Day Delivery)

Save up to \$550 in multiple offers!



DS
DR



(https://www.canadianappliance.ca/product/KitchenAid_KURL314KSS_Under_Counter_Refrigeration_KitchenAid_KURL314KSS.html)

[FAQ](#)

- Rebates (https://www.canadianappliance.ca/product/KitchenAid_KUBL214KSB_Under_Counter_Refrigeration_KitchenAid_KUBL214KSB.html#L...)
- Warranty (https://www.canadianappliance.ca/product/KitchenAid_KUBL214KSB_Under_Counter_Refrigeration_KitchenAid_KUBL214KSB.html#...)
- Financing (https://www.canadianappliance.ca/product/KitchenAid_KUBL214KSB_Under_Counter_Refrigeration_KitchenAid_KUBL214KSB.html#...)
- Install (https://www.canadianappliance.ca/product/KitchenAid_KUBL214KSB_Under_Counter_Refrigeration_KitchenAid_KUBL214KSB.html#tab...)
- FAQ (https://www.canadianappliance.ca/product/KitchenAid_KUBL214KSB_Under_Counter_Refrigeration_KitchenAid_KUBL214KSB.html#tab-f...)

Specifications	
Dimensions	
Cabinet Width	23-7/8 in
Capacity	4.89 cu. ft.
Depth Closed Excluding Handles	23-5/8 in
Depth Closed Including Handles	26-7/16 in
Depth With Door Open 90 Degree	48.0 in
Height To Top Of Cabinet	34.15625 in
Height To Top Of Door Hinge	34-3/8 in
Width	23-7/8 in
Description	
Type of Refrigerator	Beverage Center
Controls	
Auto Defrost	Yes
Control Location	Interior
Control Lockout	Yes
Control Type	Light-Guided Capacitive Touch
Cooling On/Off	Yes
Door Ajar/Open Alarm	Yes
Ice Maker On/Off	No
Max Cool/Fast Cool	No
Number of Temperature Controlled Zones	2
Water Filter Indicator/Reset	No
Exterior	
Cabinet Color	Black
Cabinet Finish	Textured
Door Color	Stainless Steel
Handle Location	Vertical
Handle Material	Metal
Handle Type	Reach-Through Handle
Reversible Door	No
Window	Yes
Details	
Interior Light	LED
Liner Finish	Plastic
Number of Racks	2
Number of Shelves	2
Rack Front Material	Wood
Shelf Description	1 Fixed Full Depth Shelf, 1 Fixed Half Depth Shelf
Zone 1 Temperature Range	33F to 40F
Zone 2 Capacity	14 Bottles
Zone 2 Temperature Range	42F to 64F
Certifications	
CEE Tier	Not Rated
Energy Star® Qualified	No
Prop 65	CALIFORNIA RESIDENTS ONLY - WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov.
Electrical	
Amps	15
Volts	115

Complete Suite



\$3,899

Description & Features

Specs

Manuals

Video

Reviews

Rebates
Warranty

Warranty

Financing

Install

FAQ

The Miele website uses cookies in order to make the use of our web pages more user-friendly. If you continue without changing your browser settings, you agree to the use of cookies during your session.
[More information](#)



CVA 7845

Built-in coffee machine with fresh water connection
Perfectly combinable design with CoffeeSelect + AutoDescale for highest demands.

- Large touch display with movement sensor – M Touch + MotionRead
- Individual coffee enjoyment with 3 bean containers – CoffeeSelect ①
- Perfect care – fully automatic with AutoDescale and AutoClean ①
- Perfectly positioned: thanks to the patented CupSensor ①
- 2 coffees at once at the touch of a button – OneTouch for Two ①



Price: \$ 7,499.00** [Add to Cart](#)

** Excludes all applicable taxes and delivery charges

[Find a retailer](#)

Product details - CVA 7845

Model and design		-
Built-in bean-to-cup coffee machine		•
VitelLine		•
ArtLine		•
Colour	Stainless steel/CleanSteel	
Convenience features		-
AromaticSystemFresh		•
CoffeeSelect		•
OneTouch preparation		•
OneTouch for Two preparation		• ①
DoubleShot		•
Programmable User profiles	10	
Aroma-friendly conical grinder		•
Selectable grinder setting		•
Programmable amount of coffee		•
Programmable amount of water		•
Programmable water temperature		•
Amount of milk can be programmed		•
Programmable amount of milk froth		•
Pre-brewing programmable		•
Beverages		-
Beverage portion size in ml	20-300	
Ristretto, single		• ①
Ristretto, double		• ①
Espresso, single		• ①
Espresso, double		• ①
Coffee, single		• ①

DS
Dr

Coffee, double	• ①
Long coffee, single	• ①
Long coffee, double	• ①
Cappuccino, single	• ①
Cappuccino, double	• ①
Latte macchiato, single	• ①
Latte macchiato, double	• ①
Hot milk, single	• ①
Hot milk, double	• ①
Milk froth, single	• ①
Milk froth, double	• ①
Espresso macchiato, single	• ①
Espresso macchiato, double	• ①
Cappuccino Italiano, single	• ①
Cappuccino Italiano, double	• ①
Flat white, single	• ①
Flat white, double	• ①
Café au lait, single	• ①
Café au lait, double	• ①
Café latte, single	• ①
Café latte, double	• ①
Café Americano, single	• ①
Café Americano, double	• ①
Long black, single	• ①
Long black, double	• ①
Warm water, single	•
Warm water, double	•
Hot water, single	•
Hot water, double	•
Black tea, single	• ①
Black tea, double	• ①
Herbal tea, single	• ①
Herbal tea, double	• ①
Fruit tea, single	• ①
Fruit tea, double	• ①
Green tea, single	• ①
Green tea, double	• ①
White tea, single	• ①
White tea, double	• ①
Japanese tea, single	• ①
Japanese tea, double	• ①
Chai latte, single	• ①
Chai latte, double	• ①
Coffee jug	•
Teapot	•

User convenience

Networking with Miele@home	• ①
Display	M Touch
MotionReact: light comes on when movement is detected	•
MotionReact: display comes on when movement is detected	•
CupSensor	•
Height adjustment of spout in in.(cm)	1 5/8 (4) 6 1/2 (17)
PerformanceMode	•
EasyClick milk container	• ①
ComfortDoor	•
Concealed door handle	•
BrilliantLight	• ①
Brew unit lighting	•
Language Options	•
MyMiele	•
Help function	•
Number of bean types	3
Number of bean containers	3
	300



Capacity of each bean container in g	/
	150
	/
	150
Total bean container capacity in g	600
Removable bean containers	*
Capacity of water container in l	2.7
Milk container capacity in l	1
Capacity of waste container in capsules	17
Drip tray capacity in l	1.6
Easily accessible containers	*
Time of day display	*
Time synchronization	*
Date display	*
Programmable switch-on time	*
Programmable switch-off time	*
Programmable standby time	*
Individual settings	*
Efficiency and sustainability	
Energy-saving eco-mode selectable	*
Power consumption in standby mode in W	1.0
Power consumption in networked standby in W	1.4
Time until automatic switch-off in min	20
Time until automatic switch to standby in min	20
Time until automatic switch to networked standby in min	20
Cleaning convenience	
Stainless-steel front with CleanSteel finish	*
AutoDescale	*
Manual descaling	*
AutoClean	*
Automatic rinsing of milk line with water from the water container	* ①
Convenient cleaning programmes	*
Automatic rinsing function	*
ComfortClean	* ①
Removable milk pipework	*
Removable brew unit	*
Programmable water hardness	*
Safety	
System lock	*
Technical data	
Niche width in in.(mm)	22 1/8 (560)
	-
	22 3/8 (568)
	17 3/4 (450)
Niche height in in.(mm)	-
	17 7/8 (452)
Niche depth in in.(mm)	21 3/4 (550)
Appliance width in in.(mm)	23 1/2 (595)
Appliance height in in.(mm)	16 (455)
Appliance depth in in.(mm)	18 7/8 (478)
Depth with door open in in.(cm)	42 5/8 (108.0)
Total rated load in kW	1.3
Voltage in V	120
Fuse rating in A	15
Number of phases	1
Length of electrical cable in ft.(m)	6 (2.0)
Standard accessories	
Glass milk container	*
Descaling cartridge	*
AutoCleaner	*



Installation diagrams

[Downloads](#)

** Excludes all applicable taxes and delivery charges

Subject to technical changes; no liability accepted for the accuracy of the information given!


¹ Patent: EP 2705763 B1, US 20140308033B A1

² Patent: EP 2454877 B1

³ Additional digital offer from Miele & Cie. KG. All smart applications are made possible with the Miele@home system. The range of functions can vary depending on the model and the country.

⁴ Additional digital offer from Miele & Cie. KG. All smart applications are made possible with the Miele@home system. The range of functions can vary depending on the model and the country.

The Miele website uses cookies in order to make the use of our web pages more user-friendly. If you continue without changing your browser settings, you agree to the use of cookies during your session.
[More information](#)



ESW 7010 AM

Handleless Gourmet warming drawer, 24-inch width and 5 5/8-inch height for preheating dishes, keeping food warm and slow roasting.

- The ultimate in enjoyment – Slow Roasting ⓘ
- Always at the right temperature – 4 operating modes ⓘ
- Convenient and easy – Touch control ⓘ and Miele@home ⓘ
- Push2open ⓘ – opening the drawer couldn't be easier
- Better safe than sorry – timer function ⓘ with automatic switch-off



Price: \$ 2,849.00*

* Excludes all applicable taxes and delivery charges

[Find a retailer](#)

Product details - ESW 7010 AM

Model and design		-
Gourmet warming drawer	• ⓘ	
VitroLine	•	
ArtLine	•	
Handleless	•	
Colour	Graphite grey	
Convenience features		-
Pre-heating crockery	• ⓘ	
Keeping food warm	• ⓘ	
Perfect cooking results at low temperature	• ⓘ	
Operating modes		-
Cup warming	• ⓘ	
Plate warming	• ⓘ	
Keeping food warm	• ⓘ	
Low temperature cooking	• ⓘ	
User convenience		-
Networking with Miele@home	• ⓘ	
Capacity	6 place settings	
Push2open mechanism	•	
Fully telescopic runners for easy loading and unloading	•	
Timers	•	
Control panel with text	•	
Timer function	•	
Stop programming	• ⓘ	
Sabbath programme	•	



Cleaning convenience		-
Flush control panel		•
Safety		-
Cool front		•
Anti-slip mat		• ①
Safety switch-off		• ①
Technical data		-
Temperature in °F (°C)	105-185 (40-85)	
Appliance width in in.(mm)	23 1/2 (595)	
Appliance height in in.(mm)	5 5/8 (141)	
Appliance depth in in.(mm)	22 1/2 (570)	
Useable interior height in in.(mm)	3 1/4 (80)	
Total rated load in kW	1	
Voltage in V	120	
Frequency in Hz	60	
Fuse rating in A	16	
Number of phases	1	
Cable length in ft.(m)	6 (2.0)	
Standard accessories		-
Anti-slip mat	1	

Installation diagrams

[Downloads](#)

* Excludes all applicable taxes and delivery charges

Subject to technical changes; no liability accepted for the accuracy of the information given!

- 1 Additional digital offer from Miele & Cie. KG. AI smart applications are made possible with the Miele@home system. The range of functions can vary depending on the model and the country.
- 2 Additional digital offer from Miele & Cie. KG. AI smart applications are made possible with the Miele@home system. The range of functions can vary depending on the model and the country.



HOME APPLIANCES
LG LAUNDRY

Single Unit LG WashTower™ with Center Control™
4.5 cu. ft. Front Load Washer and 7.4 cu. ft. Dryer

KEY FEATURES

Ultra Large Capacity 4.5 cu.ft. Washer and 7.4 cu.ft. Dryer
Single Unit WashTower™ Design
Built-In Intelligence - AI Fabric Sensors/Smart Learner/Smart Pairing™
Advanced Washing & Drying - TurboWash™ 360°/Allergiene™ wash cycle/
TurboSteam™
ThinQ® Technology / Proactive Customer Care
Tempered Glass Door

SMART APPLIANCE

LG ThinQ®

works with the Google Assistant

works with alexa

Enjoy new ways to control your home with LG smart appliances

- Use the ThinQ® app to start the laundry while you're out
- Get alerts when the cycle is finished
- With Smart Pairing™, the washer can tell the dryer to select a compatible drying cycle



AVAILABLE COLORS

WHITE

BLACK STEEL



PRODUCT FEATURES

SUMMARY	Washer	Dryer
Type	Front Load Washer	Front Load Dryer
Capacity (cu. ft.)	4.5 cu. ft.	7.4 cu. ft.
Color	Black Steel (B), White (W)	
APPEARANCE	Washer	Dryer
Hard Buttons		Yes
Touch Buttons		Yes
Full Touch Electronic Control Panel with LED Display		Yes
Unified Center Control		Yes
Reversible Door	No	
ENERGY	Washer	Dryer
ENERGY STAR® Qualified		Yes
CEE Tier	Tier 2	-
IMEF	2.92	-
NWF	2.9	-
CEF	-	Electric: 3.94 Gas: 3.49
PROGRAMS	Washer	Dryer
No. of Programs	6	6
	Normal, Bedding, Delicates, Heavy Duty, Speed Wash, Downloaded	Normal, Bedding, Delicates, Heavy Duty, Speed Wash, Downloaded
OPTIONS	Washer	Dryer
No. of Options	10	9
	TurboWash®, Steam, Extra Rinse, Pre-wash, Sanitary, Tub Clean, Drum Light, Child Lock, Signal, Wi-Fi / Remote Start	Wrinkle Care, TurboSteam™, Reduce Static, Energy Saver, Steam Fresh®, Drum Light®, Child Lock®, Signal®, Wi-Fi / Remote Start®
DETAILS	Washer	Dryer
No. of Wash/Rinse Temps	5	-
Wash/Rinse Temps	Hot, Warm/Hot, Warm, Cold/Warm, Cold	-
No. of Spin Speeds	5	-
Spin Speeds	High/Medium/High/Medium/Low, No Spin	-
Max RPM	1300	-
Water Levels	Load Sensing	-
No. of Soil Levels	5	-
Temperature Settings	-	High, Medium/High, Medium, Low/Medium, Low

Drying Levels	-	Very, More, Normal, Less, Damp
Manual Dry Times	-	60 min., 50 min., 40 min., 30 min., 20 min.
FABRIC CARE FEATURES	Washer	Dryer
AI DD	Yes	-
TurboWash™ 360° Technology	Yes	-
Steam Technology	Yes	-
Allergiene™ Cycle	Yes	-
Sanitary Cycle	Yes	-
SenseClean™ System	Yes	-
AI Dry	-	Yes
Sensor Dry	-	Yes
Precise Temperature Control with Variable Heater	-	Yes
Steam Technology	-	Yes (TurboSteam™)
CONVENIENCE FEATURES	Washer	Dryer
TrueBalance™ Anti-Vibration System	Yes	-
	Prewash, Main Wash (with liquid detergent cup), Bleach, Fabric Softener	-
4 Tray Dispenser		-
LoDecibel™ Quiet Operation	Yes	-
End of Cycle Signal	Yes	-
LoadSense	Yes	-
Child Lock	Yes	-
Auto Suds Removal	Yes	-
Leveling Legs	Yes	-
Easy Loading Tilt™	4 Adjustable Legs	-
Drum Light	Yes	-
Remaining Time Display/Status Indicator(s)	Yes	-
3 Minute Installation Check	-	Yes
LoDecibel™ Quiet Operation	-	Yes
End of Cycle Signal	-	Yes
Drum Light	-	Yes
FlowSense™ Duct Clogging Indicator	-	Yes
Wrinkle Care Option	-	Yes
Child Lock	-	Yes
Venting Option	-	Electric: 3 Way Venting / Gas: 2 Way Venting
4 Adjustable Legs	-	Yes
Remaining Time Display/Status Indicator(s)	-	Yes

ThinQ® TECHNOLOGY	Washer	Dryer
SmartDiagnosis™ (v3.0)		Yes
Wi-Fi		Yes
Remote Start and Cycle Monitor		Yes
Energy Monitoring		Yes
Tub Clean Coach	Yes	-
MOTOR AND AGITATOR	Washer	Dryer
Motor Type	Inverter Direct Drive Motor	-
Axis	Horizontal	-
MATERIALS AND FINISHES	Washer	Dryer
NeveRust™ Stainless Steel Drum	Yes	-
Cabinet	PCM	-
Control Panel	Plastic	-
Top Plate	Painted	-
NeveRust™ Stainless Steel Drum	-	Yes
Tub Rear	-	Painted
CERTIFICATION	Washer	Dryer
AAHA	Yes	-
POWER SOURCE	Washer	Dryer
Ratings	UL Listed	-
Electrical Requirements	120V, 10 Amps	-
Type	Electric	-
Ratings	-	CSA Listed
	-	120V, 15 Amps (Gas)
Electrical Requirements	-	240V 30 Amps (Electric)
Type	-	Gas / Electric
BTU Rating	-	10,000 Feet
LP Conversion Kit	-	383EEL3000D
Side Venting Kit	-	383EEL3001B
DIMENSIONS	Washer	Dryer
Product (WxHxD)	27" x 74 3/8" x 30 3/8"	
Depth with Door Open	55" D with door open	
Carton (WxHxD)	30 1/16" x 79 11/32" x 32"	
Weight: (Product/Carton)	Electric: (326 lb / 361 lb) Gas: (325 lb / 364 lb)	
LIMITED WARRANTY	Washer	Dryer
Parts and Labor	1 Year	1 Year
Direct Drive Motor	10 Years	-
Drum	3 Years	3 Years
UPC CODES		
WKEX200HBA (Black Steel)	048231228486	
WKEX201HBA (Black Steel)	048231229254	
WKEX200HWA (White)	048231228462	
WKEX201HWA (White)	048231229261	

© 2020 LG Electronics USA, Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. All other product and brand names are trademarks or registered trademarks of their respective owners. Design, features and specifications are subject to change without notice. Non-metric weights and measurements are approximate. Some features may require Internet access. Content and services may vary by product and are subject to change without notice. 10/19/20

DS
DR