



Product Specification Sheet

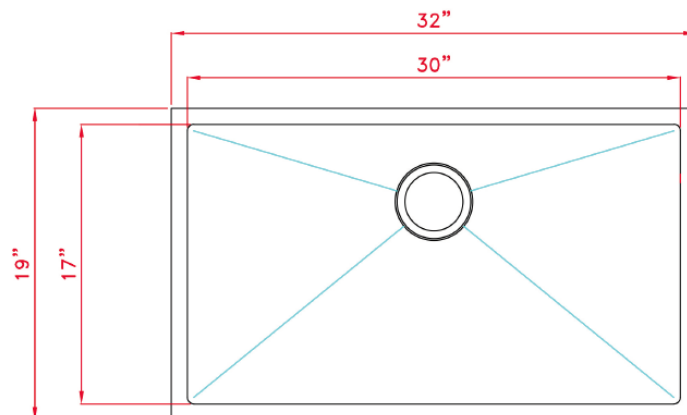

B926 Undermount Sink with 15mil Radius Corners

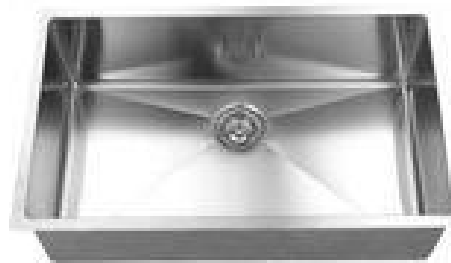

Colour Finish
Stainless Steel

Model No.
B926

Description

- Single Bowl Undermount Sink with 15mil radius corners
- Outside dimensions: 32" x 19" x 10"
- Minimum Cabinet Size: 33"
- Stainless Steel Single Bowl Sink
- 16 Gauge Type 304 Stainless Steel
- Stone Guard undercoating over rubber pad
- 3 1/2" drain opening
- Supplied with installation clip, template and strainer
- cUPC certified

Available accessories

- BG926 - Stainless Steel Grid
- Colander Strainer - Stainless Steel
- Zero Radius Basket
- Drying Rack

**MAIN LOCATION**

BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9

CONTACT

Tel: 1 (800) 930-0214
Fax: 1 (866) 310-7580
Email: sales@bristolsinks.com



Incognito 57 56-59 x 56 ¾ in. 8mm Sliding Tub Door for Alcove Instal

Model number:


139354

Dimensions: 56.75"

Installation:

Material:

STANDARD

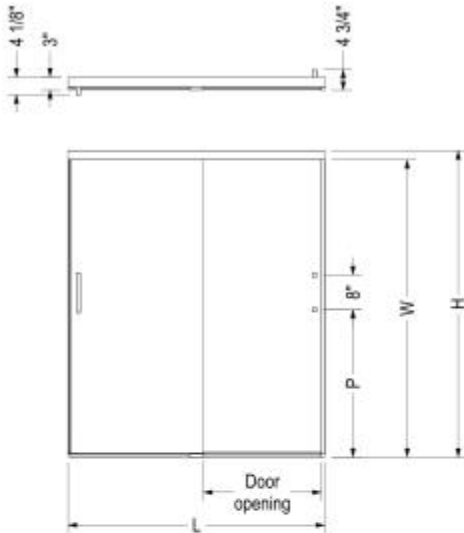

Code	Description	H	W	L Adjustable	Door Opening	P	Wall adjustment
139349	Incognito 6mm 70 1/2" x 44 - 47"	70 1/2"	68 3/8"	44" - 47"	17 1/8" - 21 1/8"	33 7/8"	1/2"
139350	Incognito 6mm 70 1/2" x 56 - 59"	70 1/2"	68 3/8"	56" - 59"	23 1/8" - 27 1/8"	33 7/8"	1/2"
139351	Incognito 6mm 56 3/4" x 56 - 59"	56 3/4"	54 5/8"	56" - 59"	23 1/8" - 27 1/8"	18 7/8"	1/2"
139352	Incognito 8mm 70 1/2" x 44 - 47"	70 1/2"	68 3/8"	44" - 47"	17 1/8" - 21 1/8"	33 7/8"	1/2"
139353	Incognito 8mm 70 1/2" x 56 - 59"	70 1/2"	68 3/8"	56" - 59"	23 1/8" - 27 1/8"	33 7/8"	1/2"
139354	Incognito 8mm 56 3/4" x 56 - 59"	56 3/4"	54 5/8"	56" - 59"	23 1/8" - 27 1/8"	18 7/8"	1/2"

All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Dimensions

56 ¾ in.
(1441 mm)

Glass Thickness

3/8 in.

Weight

120 lbs - 53.57 kg

Frame Type

Frameless

Door Adjustment

Frameless

Minimum Door Access

24"

Maximum Door Access

24"

Project:

Contractor:

Representative:

Date:

Tel:

Notes:



Kitchen / Sink Faucets / Pull-Down



ESSA®

Single Handle Pull-Down Kitchen Faucet In Arctic Stainless

MODEL#: 9113-AR-DST

★★★★★ 4.7 (359) [Write a review](#) [Ask a question](#)

Arctic Stainless

Standard Finishes



List Price*:



PRODUCT FEATURES

DOCUMENTS & SPECS

REVIEWS

Q&A

PART LIST

Delta® MagnaTite® Docking uses a powerful integrated magnet to pull your faucet spray wand precisely into place and hold it there so it stays docked when not in use. Delta® faucets with DIAMOND™ Seal Technology perform like new for life with a patented design which reduces leak points, is less hassle to install and lasts twice as long as the industry standard*. Kitchen faucets with Touch-Clean® Spray Holes allow you to easily wipe away calcium and lime build-up with the touch of a finger. You can install with confidence, knowing that Delta faucets are backed by our Lifetime Limited Warranty. *Industry standard is based on ASME A112.18.1 of 500,000 cycles.

- MagnaTite® Docking uses a powerful integrated magnet to snap your faucet spray wand precisely into place and hold it there so it stays docked when not in use and doesn’t droop over time
- Soft, rubber Touch-Clean spray holes allow you to easily wipe away calcium and lime build-up with the touch of a finger
- DIAMOND Seal Technology is less hassle to install and helps your faucet perform like new for life, reducing leak points and lasting twice as long as the industry standard
- Everything you need is together in one convenient box, including integrated InnoFlex PEX supply lines
- 1 or 3-hole 8" installation
- ADA Compliant
- The high-arc, gooseneck design swivels 360 degrees with a 20-in. retractable hose for added convenience during everyday kitchen tasks





SCB316 | ALITO Collection



Features

- Wall mount range hood
- 6" round duct adapter
- Non-stick aluminum fan blades
- 3 speed push button control
- 2 LED lights (2 x 1.4W, 4000K)
- Quick release stainless steel baffle filters
- Standard chimney fits up to 9 ft. ceiling
- Plug-in connection

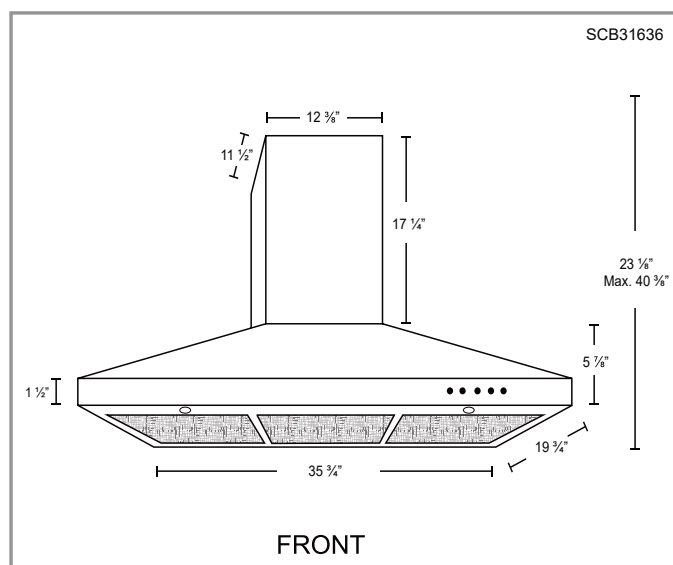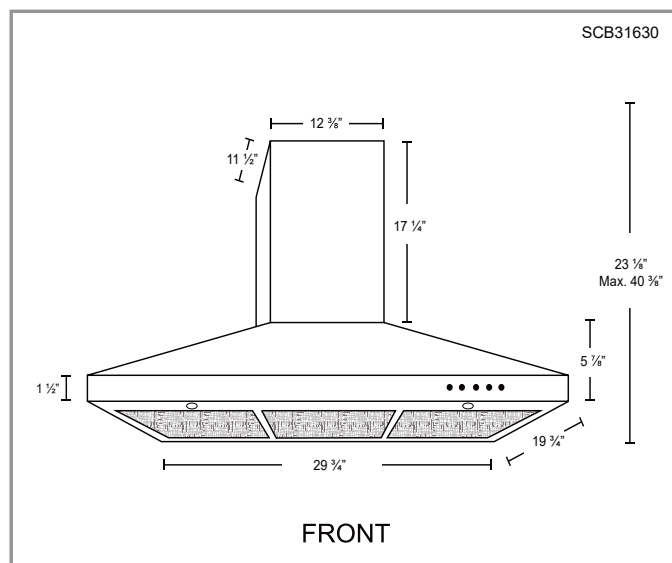

Options

- Finishes: Stainless Steel, Matte Black
- Chimney Flues:
 - B3.CH16 - short (7'-8' ceilings)
 - B3.CH22 - standard (8'-9' ceilings)
 - B3.CH32 - extended (9'-11' ceilings)
- Widths: 30", 36"

Specifications

- | | | |
|--------------------------------------|--------------------------------|---|
| ▪ Air Flow Volume: 300 CFM | ▪ Current: 2.5 Amps | ▪ Finishes: Stainless Steel, Matte Black |
| ▪ Electrical Connection: 120 V/60 Hz | ▪ Fan Speed: 1350 RPM | ▪ Ducting: 6" Round |
| ▪ Power Consumption: 300 Watts | ▪ Fan Type: Centrifugal Blower | ▪ Noise Level: Min. 2 Sones
Max. 4 Sones |

