



# SC722/SCB722

## Pro Collection | Wall Mount

Designed with an emphasis on the beauty of simplicity, the straightforward design of this model blends seamlessly with a modern kitchen environment. Features 650 CFM of drawing power, LED lights at the front of the machine, and fitted with a time-delay OFF feature up to nine minutes.

Where To Buy \∵

**Features** 

Green Features

**Specifications** 

**Options** 

**Parts** 



Air Flow Volume:	650 CFM
Electrical Connection:	120V/60Hz
Power Consumption:	240 Watts
Current:	2 Amps
Fan Speed:	1599 RPM
Fan Type:	Centrifugal Blower
Finishes:	Stainless Steel
Ducting:	6" Round
Dimensions:	Width: 24" / 30" / 36" Height: 44 1/2" Depth: 19 3/4"
Noise Level	Min. 2 Sones Max. 7 Sones

## Subscribe to Our Newsletter

### 36" Counter-Depth 4-Door Refrigerator

800 Series - Stainless Steel B36CL80SNS



PWY2-309



**B36CL80SNS** Stainless Steel

Introducing the
revolutionary, new
FarmFresh System™,
with four freshness
technologies designed
to work together to keep
your food fresher, longer.
Enjoy less food waste, new
innovative features and
more thoughtful design.

#### **Features & Benefits**

VitaFreshPro™ provides pre-programmed freshness settings to optimize temperature and humidity to keep meat, fish, and produce fresher, longer.

Interior Water Dispenser is thoughtfully placed inside for refreshing water at the touch of a button or a push of a nozzle.

FlexBar™ utilizes typically unused space in the upper refrigerator cavity.

General Properties	
Full 72" height and true counter depth for built-in appearance	Yes
Lighting	Recessed LED light bars
Number of compressors/ evaporators	2 / 2
Defrost process refrigerator section	Frost-free
Number of shelves – refrigerator	5
Adjustable shelves – refrigerator	4 half-width
Shelf material – refrigerator	Tempered glass
Type of shelves – refrigerator	Frameless split shelves with metal trim
Flexible storage bar	FlexBar™
Gallon storage bins	3
Humidity control compartments	2
Full width temp. & humidity controlled drawer	VitaFreshPro™
Ice maker	Yes
Water filter	UltraClarityPro™
Internal water dispenser	Yes
Touch control panel	Yes
AirFresh® filter	Yes
FreshProtect™ ethylene filter	Yes
MultiAirFlow™	Yes
Stainless steel back wall	Yes
Defrost process freezer section	Automatic
Number of drawers – freezer	3
Wi-Fi enabled	Yes, Home Connect™ app

Capacity	
Total capacity (cu. ft.)	20.5
Refrigerator capacity (cu. ft.)	14.5
Freezer capacity (cu. ft.)	6
Technical Details	
Current (A)	15 A
Volts (V)	115 V
Frequency (Hz)	60 Hz
Power cord length (in.)	91
Plug type	120V-3 prong
Dimensions & Weight	
Appliance dimensions with hinges, handles and doors (H x W x D) (in.)	72"* x 35 5/8" x 31 1/8"
Appliance dimensions without hinges and doors (H x W x D) (in.)	71 1/2" x 35 5/8" : 24"**
Appliance dimensions with hinges and doors, no handles (H x W x D) (in.)	72"* x 35 5/8" x 28 3/4"
Required cutout size (H x W x D) (in.)	72" x 36" x 25"
Net weight (lbs)	350 lbs
Efficiency	
Energy consumption (kWh/yr)	568
ENERGY STAR® qualified	Yes – Tier 1
Accessories	
UltraClarityPro™ Water Fi FreshProtect™ Ethylene Fi	









FreshProtect™ Ethylene Filter Refill: BOFRSRF

FlexBar™ Bottle Holder: BOFLEXBOTL

FlexBar™ Shallow Shelf: BOFLEXSMSH

FlexBar™ Deep Shelf: BOFLEXLGSH

FlexBar™ Egg Tray: BOFLEXEGG



Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

<sup>\*</sup>When leveling legs are fully extended, add 5/8" to overall height, total 72 5/8".

<sup>\*\*</sup>The cutout depth of 25" includes the required 1" airflow. The electrical covers on the back of unit do not require additional depth.


## 36" Counter-Depth 4-Door Refrigerator


800 Series - Stainless Steel B36CL80SNS



PWY2-309

#### **Installation Details**

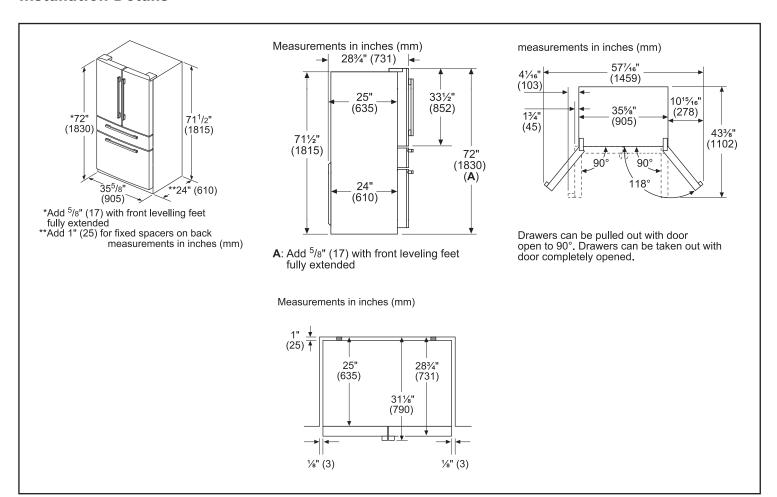

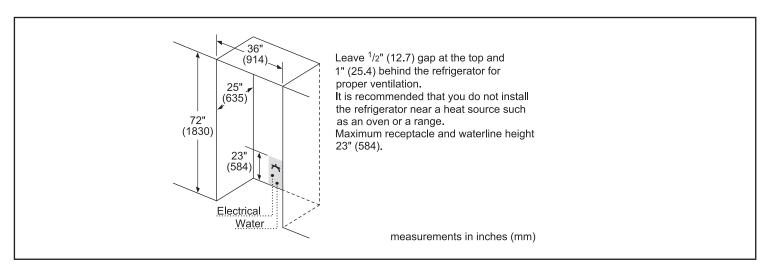

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

## 36" Industrial Style Dual Fuel Range

800 Series - Stainless Steel HDS8655C



PWY2-309



#### **HDS8655C** Stainless Steel

Also available in:

Black HDS8645C Stainless Steel

First 36" Bosch range with six burners offering more flexibility in the way you cook.

#### **Features & Benefits**

Powerful 18,000 BTU double ring burner speeds cooking time.

Genuine European Convection for even cooking results on multiple racks.

Dishwasher safe grates for easy cleaning.

A full extension telescopic rack rail offers easy access to the oven cavity.

Dampened hinges softly and quietly guide the door shut.

General Properties	
Cooking modes	Bake, Convection Bake, Broil, Convection Broil, Convection Roast, Pizza, Proof, Multi-rack Genuine European Convection, Sabbath Mode, Temperature Probe
Cleaning type	Catalytic clean
Type of grate	Cast iron
Knob material	Metal
Interior light	1
Kitchen timer	Yes
Drawer type	Not available
Sealed burners	Yes
Oven Performance	
Bake / broil element	1,700 / 2,900 W
watts (W)	1,100 / 2,000 11
watts (W)  Convection element watts (W)	2,500 W
Convection element	
Convection element watts (W)	
Convection element watts (W)  Burner Performance	2,500 W
Convection element watts (W)  Burner Performance  Total cooktop burners  Total cooktop (NG / LP)	2,500 W
Convection element watts (W)  Burner Performance  Total cooktop burners  Total cooktop (NG / LP)  BTU  Power of front left	2,500 W 6 63,000 / 63,000
Convection element watts (W)  Burner Performance  Total cooktop burners  Total cooktop (NG / LP) BTU  Power of front left burner (NG / LP) BTU  Power of back left	2,500 W 6 63,000 / 63,000 18,000 / 18,000
Convection element watts (W)  Burner Performance  Total cooktop burners  Total cooktop (NG / LP) BTU  Power of front left burner (NG / LP) BTU  Power of back left burner (NG / LP) BTU  Power of back center	2,500 W 6 63,000 / 63,000 18,000 / 18,000 5,000 / 5,000
Convection element watts (W)  Burner Performance  Total cooktop burners  Total cooktop (NG / LP) BTU  Power of front left burner (NG / LP) BTU  Power of back left burner (NG / LP) BTU  Power of back center burner (NG / LP) BTU  Power of front center	2,500 W  6  63,000 / 63,000  18,000 / 18,000  5,000 / 5,000  10,000 / 10,000

Technical Details	
Circuit breaker (A)	20 A
Volts (V)	208V / 240V
Frequency (Hz)	60 Hz
Power cord length (in.)	59"
Plug type	4 prong , NEMA 14-50
Energy source	Mixed Electric / Gas
Gas type	Natural gas 14.9 mbar (USA) [7" WC]
Alternative gas type	LP 27.4 mbar (USA) [11" WC]
Dimensions & Weight	
Overall appliance dimensions (HxWxD)(in.)	36" x 35 15/16"" x 24 15/16" (26 1/2" with bull nose)
Required cutout size (HxWxD)(in.)	36" x 36" x 25"
Adjustable range height (in.)	35 19/32" Min. 36 39/64" Max.
Oven cavity size (cu. ft.)	3.7
Overall oven interior dimensions (HxWxD)(in.)	15 1/32" x 28 7/16" x 17 9/16"
Usable oven interior dimensions (HxWxD)(in.)	14 9/16" x 26 15/16" x 16 1/8"
Net weight (lbs)	219 lbs
Accessories-Included	
Use and care manual, insi LP conversion kit, 1 stand 1 telescopic rack	tallation guide, dard rack,



Accessories: To purchase Bosch accessories, cleaners & parts please call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST), Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


## 36" Industrial Dual Fuel Range


800 Series - Stainless Steel HDS8655C




PWY2-309

#### **Installation Details**

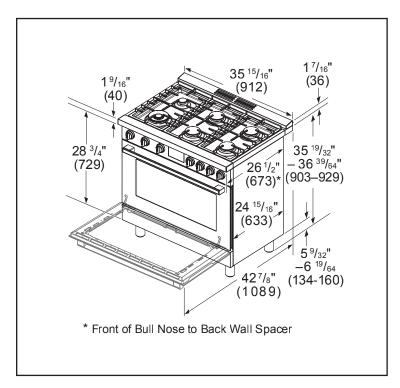

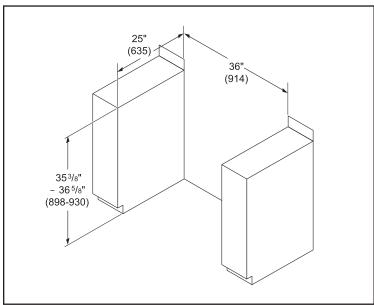

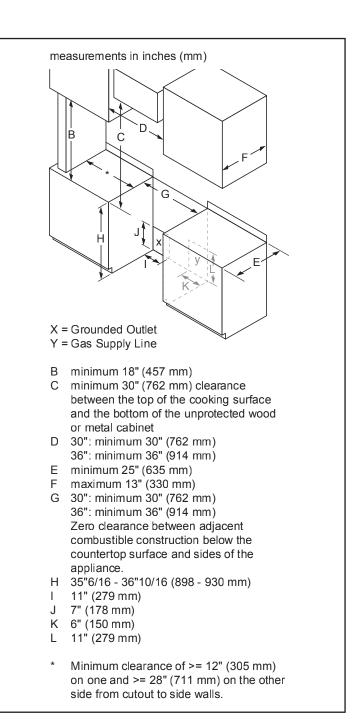

Accessories: To purchase Bosch accessories, cleaners & parts please call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

**Notes:** All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

### 30" Speed Combination Oven

500 Series - Stainless Steel HBL5754UC



PWY2-309



**HBL5754UC** Stainless Steel

The Bosch Combination
Wall Oven combines your
favorite tools into one
appliance. The lower oven
is a convection oven,
roaster, warming drawer
and more.

#### **Features & Benefits**

The upper speed oven functions as a microwave and convection oven so you have flexible cooking options.

Convection Pro combines a third heating element with a back fan for even browning and time savings by using multiple racks at one time.

General Pro	perties	
Speed oven modes – upper oven	Butter, Softe 10 Sensor C 9 SpeedChe Warm, Froze	uto Defrost, Melt en Ice Cream, Pizza), look Programs, f° Programs, Keep en Foods Defrost, Broil (fan + broil),
Oven modes – lower oven	Roast, Warm Convection Broil, Conve Convection	Broil (Hi & Low), n, Proof Dough, Bake, Convection ction Roast, Pizza, Multi-Rack, Conversion, Sabbath
Cleaning typ lower oven	e –	Self Clean
Telescopic r	ack	1
Illumination upper & low		LED / Halogen
Interior light upper & low		1/2
Oven Perfor	mance	
Max. microw upper oven	ave power –	1,000 W
Microwave p	ower levels	10
Bake / broil upper oven	element –	600 / 1,750 W
Convection upper oven	element –	1,700 W
Bake elemer lower oven	nt (4-pass) –	2,400 W
Broil elemen lower oven	it (12-pass) –	3,800 W
Technical De	etails	
Watts at 240	) / 208 V	9,600 / 8,400 W
Circuit breal	ker	40 A
Volts		240 / 208 V
Frequency		60 Hz
Power cord	length	60"
Plug type		Fixed Connection, No Plug
Energy source	20	Electric

Dimensions & Weight	
Overall appliance dimensions (HxWxD)	49" x 29 <b>3/4</b> " x 24 <b>1/2</b> "
Required cutout size - Standard (HxWxD)	48 <b>5/8</b> " x 28 <b>1/2</b> " x 23 <b>1/2</b> "
Required cutout size – Flush (HxWxD)	49 <b>1/8</b> " x 30" x 24 <b>1/2</b> "
Oven cavity size – upper & lower oven	1.6 / 4.6 cu. ft.
Overall upper oven interior dimensions (HxWxD)	9 7/8" x 16 1/2" x 16 1/2"
Turntable – metal max. cookware – upper	12 3/4" dia.
Turntable – ceramic tray max. cookware – upper	12 1/2" dia.
Rack – rectangular max. cookware – upper	15" x 12"
Overall lower oven interior dimensions (HxWxD)	17 <b>13/16</b> " × 24 <b>1/8</b> " × 18"
Usable lower oven interior dimensions (HxWxD)	12 5/16" x 23 <b>1/4</b> " x 15 <b>1/4</b> "
Net weight	272 lbs
Assessanias Included	

#### Accessories - Included

Upper Oven: Metal Turntable, Square Rack, Ceramic Cooking Trav

Lower Oven: 2 Standard Oven Racks

#### Accessories - Optional



**HEZTR301** 30" Telescopic Rack



**00449757** Broiler Pan





Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


## **30" Speed Combination Oven**


500 Series - Stainless Steel HBL5754UC



PWY2-309

#### **Installation Details**

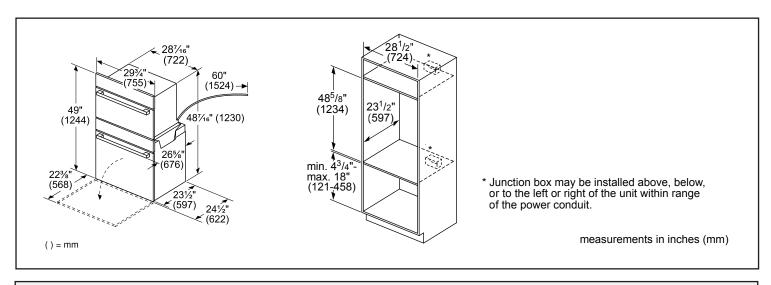

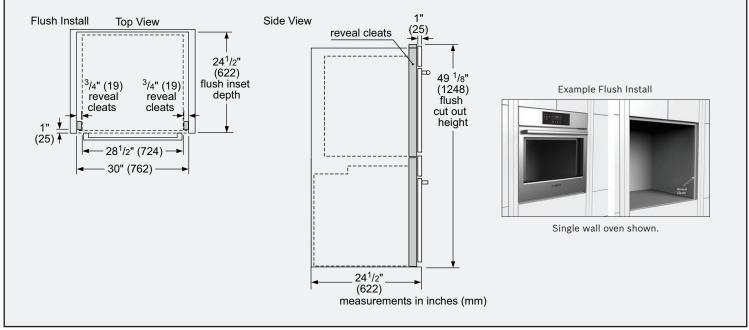

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


## **30" Speed Combination Oven**

500 Series - Stainless Steel HBL5754UC



PWY2-309

#### **Installation Details**

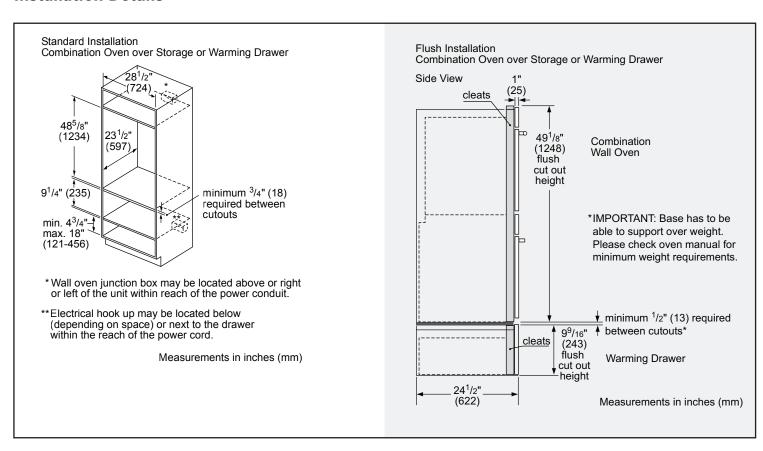

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

### 24" Recessed Handle Dishwasher

100 Series - Stainless Steel SHE3AR75UC



PWY2-309



#### SHE3AR75UC Stainless Steel

Also available in:

White SHE3AR72UC Black SHE3AR76UC

Bosch dishwashers incorporate 18 unique sound-reducing technologies, to make Bosch the quietest dishwasher brand in North America.<sup>1</sup>

#### **Features & Benefits**

50 dBA: Quietest dishwasher brand in North America.<sup>1</sup>

Height adjustment upper rack.

Stainless steel tall tub with polypropylene bottom delivers durability.

Sanitize option eliminates bacteria and enhances drying results.

24/7 Overflow Protection System® helps prevent water leaks.

General Properties	
Number of wash cycles	6
Number of options	2
dBA	50
Drying system	PureDry®
Third rack	No
Rack adjustability	Manual
Tub material	Stainless steel/ polypropylene
Control type	Buttons
Concealed water heating element	Yes
Leak protection system	24/7 Overflow Protection
NSF®-certified² sanitize option	Yes
Water softener	No
Five-level wash	Yes
ChildLock	Yes
Special features	50 dBA, 24/7 Overflow Protection, Anti-fingerprint, Detergent Tray
Efficiency	
Water usage per cycle	3.2
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy	269

water usage per cycle	3.2
Energy efficiency class	Tier 1
ENERGY STAR® qualified	Yes
Total annual energy consumption (kWh)	269
Total annual water consumption (g)	688
	1.0







Capacity	
Number of place settings	14
Technical Details	
Watts (W)	1400 W
Current (A)	12 Amps
Volts (V)	120 V
Frequency (Hz)	60 Hz
Power cord full length	67"
Power cord install length from edge of unit when facing the door (in) <sup>3</sup>	Left – 45" Right – 50"
Minimum water pressure (lb/sin)	15
Length outlet hose (in)	90 1/2"
<b>Dimensions &amp; Weight</b>	
Overall appliance dimensions (HxWxD) (in)	33 7/8" x 23 9/16" x 22 9/16"
dimensions (HxWxD)	
dimensions (HxWxD) (in)  Required cutout size	x 22 9/16"
dimensions (HxWxD) (in)  Required cutout size (HxWxD) (in)	x 22 9/16" 33 7/8" x 24" x 24"
dimensions (HxWxD) (in)  Required cutout size (HxWxD) (in)  Adjustable feet	x 22 9/16"  33 7/8" x 24" x 24"  Yes
dimensions (HxWxD) (in)  Required cutout size (HxWxD) (in)  Adjustable feet  Net weight (lbs)	x 22 9/16"  33 7/8" x 24" x 24"  Yes
dimensions (HxWxD) (in)  Required cutout size (HxWxD) (in)  Adjustable feet  Net weight (lbs)  Accessories—Optional	x 22 9/16"  33 7/8" x 24" x 24"  Yes 69 lbs
dimensions (HxWxD) (in)  Required cutout size (HxWxD) (in)  Adjustable feet  Net weight (Ibs)  Accessories—Optional  Junction Box  Dishwasher Drain Hose	x 22 9/16"  33 7/8" x 24" x 24"  Yes 69 lbs  SMZPCJB1UC
dimensions (HxWxD) (in)  Required cutout size (HxWxD) (in)  Adjustable feet  Net weight (Ibs)  Accessories—Optional  Junction Box  Dishwasher Drain Hose Extension 76 3/4"  Dishwasher Accessory	x 22 9/16"  33 7/8" x 24" x 24"  Yes 69 lbs  SMZPCJB1UC SGZ1010UC





<sup>&</sup>lt;sup>2</sup>Certification to NSF/ANSI Standard 184 for residential dishwashers.



Cord Clip Install Kit

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.

<sup>&</sup>lt;sup>3</sup>September 2020 running production change to remove adhesive routing clips for power cord. These clips and the edge protector are now included in the dishwasher accessory kit # SMZEPCC1UC.

For more information on our entire line of products, go to www.bosch-home.com/us or call 1-800-944-2904


### 24" Recessed Handle Dishwasher


100 Series - Stainless Steel SHE3AR75UC





PWY2-309


#### **Installation Details**

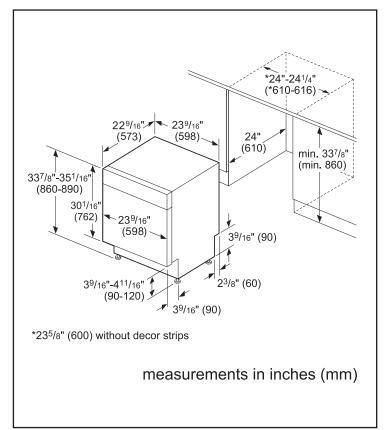

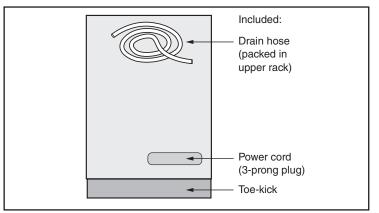

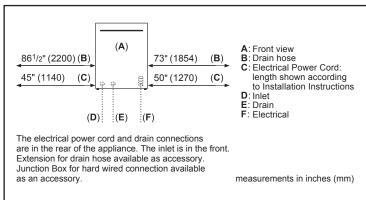

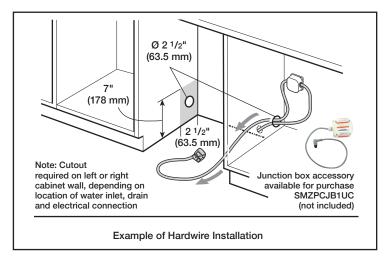

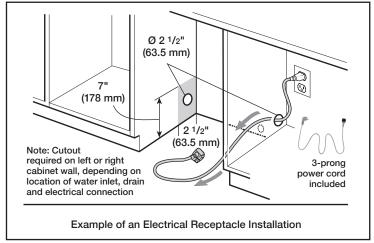

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.


### 24" Recessed Handle Dishwasher


100 Series - Stainless Steel SHE3AR75UC



PWY2-309

#### **Installation Details**





Note: Plumbing installations will vary - refer to local codes. Drain hose included is  $90\,^{1}/^{2}$ " (230 cm) and can be extended to a maximum of  $168\,^{1}/^{2}$ " (428 cm).

Always use the approved drain hose extension kit (SGZ1010UC).

Ensure a portion of the drain hose is raised between min. 33" (84 cm) and max. 43" (110 cm) above the cabinet floor.

Accessories: To purchase Bosch accessories, cleaners & parts please visit www.bosch-home.com/us/store or call 1-800-944-2904 (Mon to Fri 5 am to 6 pm PST, Sat 6 am to 3 pm PST).

Notes: All height, width and depth dimensions are shown in inches. BSH reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cutout.