


## REVIEWED

By Eva Onufrak at 2:13 pm, Jun 26, 2023

Building Code Reviewed

Signature

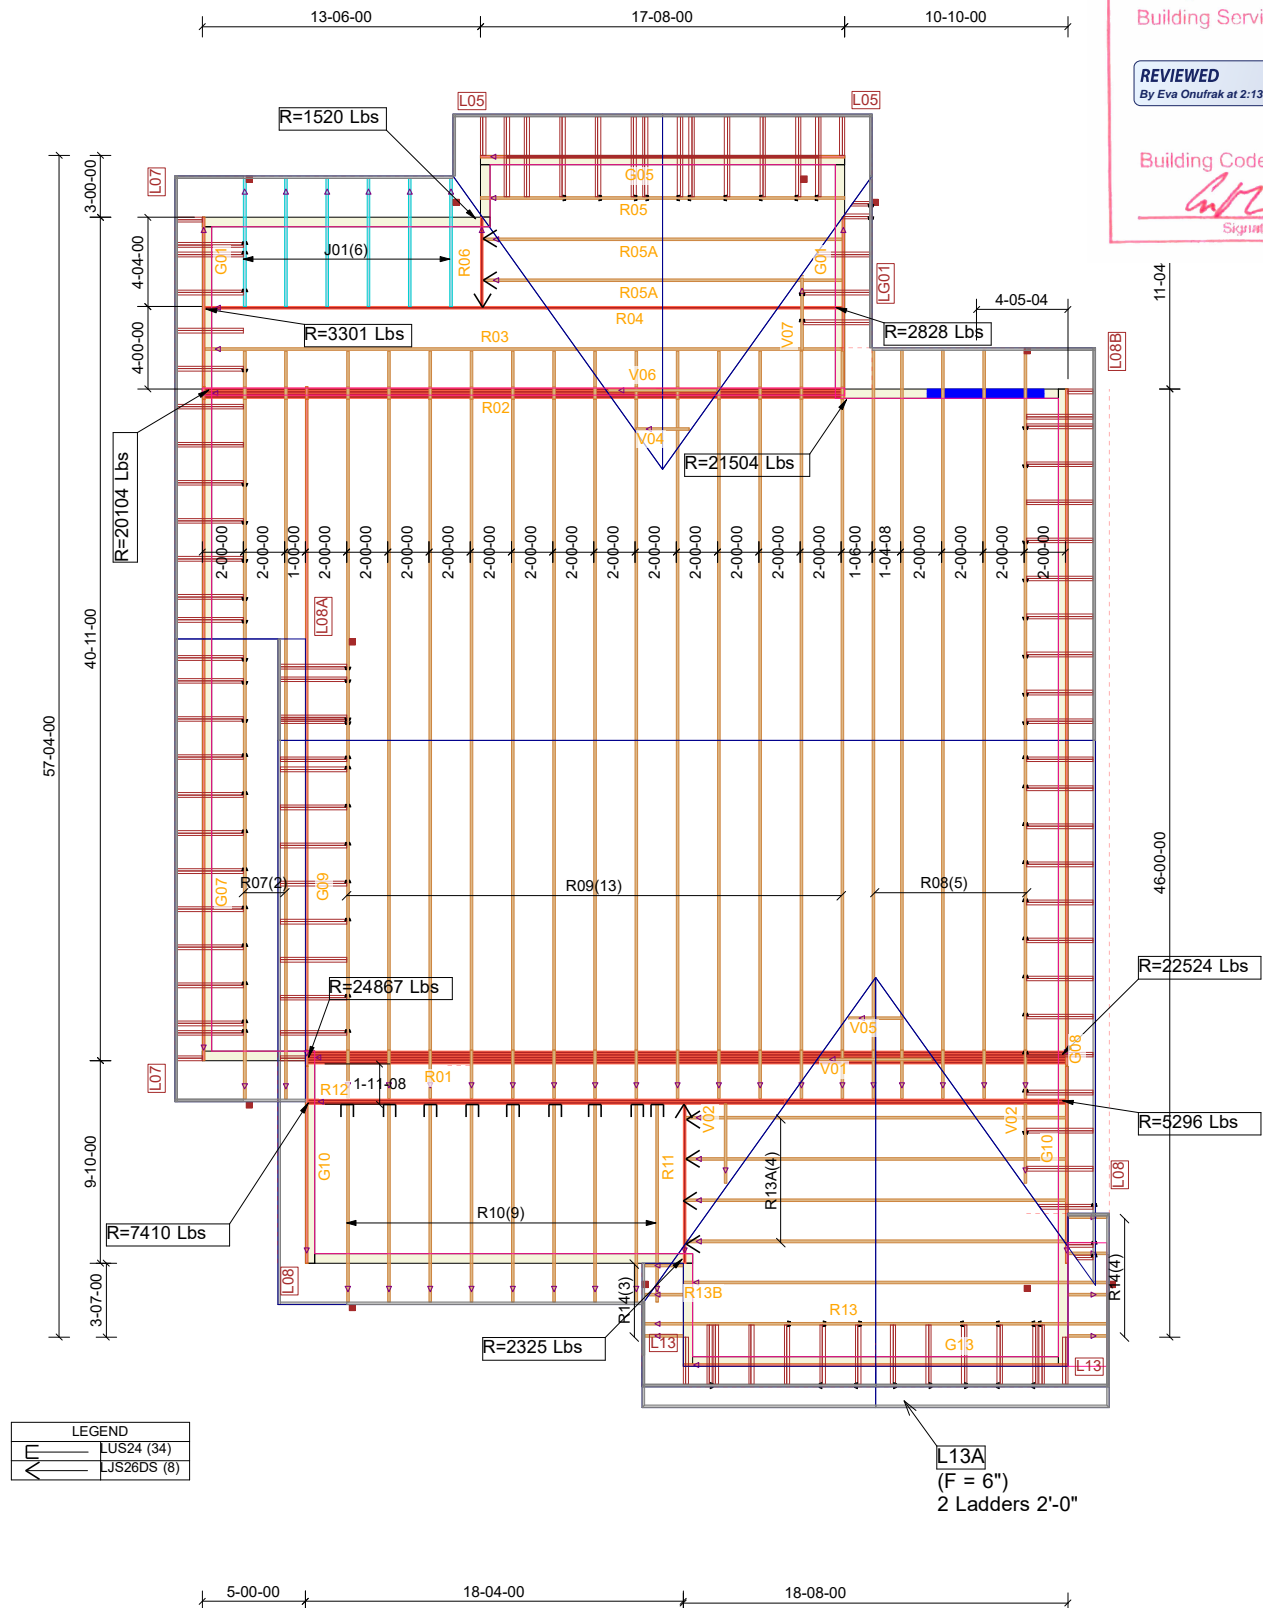

## TYPICAL OTTAWA DESIGN LOADS

Member	Load Type	PT 9	PT 4	PSL
Top Chord	Snow	37.1	50	
	Dead	3	5-10	
Bot Chord	Live	0	10	
	Dead	7	7	

TYPICAL SPACING = 24.0 IN C/C

## THIS DESIGN COMPLIES WITH:

- PART 4 OR 9 OF OBC 2012 Reg. 332/12
- CSA 086-09
- CCMC ACCEPTANCE 11996-L, 0319-L, 13270-L
- TPIC 2011

(REFER TO INDIVIDUAL TRUSS DRAWINGS FOR SPECIFIC LOADS &amp; SPACING)

## HURRICANE AND SEISMIC TIES:

- ANY TIES SPECIFIED ON THIS LAYOUT FOR UPLIFT OR SEISMIC CONNECTIONS MUST BE REVIEWED AND APPROVED BY THE BUILDING DESIGNER/ENGINEER, AS STATED IN THE TPIC 2011. THE TRANSFER OF THESE LOADS TO THE ENTIRE STRUCTURE BELOW HAS NOT BEEN ANALYZED.



JOB:

PNEWD-9  
PHOENIX HOMES  
NEWINGTON C-2022  
DVE PH-3 LOT 91  
2nd Floor Roof Framing

DATE:

6/6/2023