SC(B)519 | ALITO Collection





Wall Mount

Strong and sturdy with attractive lines and an imposing frame, the SC(B)519 is fitted with a time-delay OFF feature up to nine minutes, a 550 CFM fan, two bright front mounted LED lights and a digital three-speed push button control panel.

Green Features



3 Speed Push Button Control Panel



Long-Lasting LED Lights



Time-Delay OFF Feature




Grease Cup



| Model | Colour | Ducting | Filters | Size | CFM |
|----------|-----------------|---------|---------|------|-----|
| | | C" | D-41- | 2011 | |
| 20031330 | Jean ness seech | | Darrie | 30 | |
| SCB51936 | Stainless Steel | 6" | Baffle | 36" | 550 |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |

REQUIRES MAKE UP AIR



Café[™] 30" Five in One Oven with 240V Advantium® Technology

CSB923P4NW2 / CSB923P2NS1 / CSB923P3ND1





ALSO AVAILABLE IN

CSB923P2NS1 Stainless Steel with Brushed Stainless handle



CSB923P3ND1 Matte Black with Brushed Stainless handle

FEATURES & BENEFITS

Unmatched versatility to unleash your imagination - Enjoy a whole new level of cooking flexibility with a single oven that can be used in five different ways. Use it as a Convection Oven, Microwave, Toaster Oven, Warming/Proofing Oven, and Precision Cook Oven with Advantium Technology.

Cook smarter, not longer - Achieve oven-quality results in a fraction of the time as halogen light, microwave energy and True European Convection work together to provide the exact amount and type of heat your food needs, precisely when it needs it

Say goodbye to rubbery leftovers - Achieve crispy results at microwave speed with more than 20 reheat programs that make leftovers taste like new

The perfect marriage of quality and speed - Eliminate the need for preheating and cook your favorite foods two- to four-times faster than a conventional oven

Healthy meals without the fuss - Fresh vegetables and rice are perfectly prepared with a steam cook option that simplifies the entire process

Create a look that matches your personal style - Select any combination of premium finishes and hardware options to create a stunning look customized to any owner's taste

Clean-up has never been easier - Keep your oven looking like new at all times with steam clean

The perfect fit you've always dreamed of - When you're updating your kitchen, attention to detail is a priority. That's why Café Advantium wall ovens are guaranteed for an exact fit for an easy and seamless replacement.

APPEARANCE

| Color Appearance | Matte White |
|------------------|----------------|
| Handle | Café Pro Style |


| FEATURES | |
|---------------------------|---|
| Cooking Modes | Precision Cook; Crisp Reheat; Convection; Microwave; Proof, Warm |
| Style | Built-In |
| Control Type | 7" Full Color LCD Touch Control |
| Interior Oven Light | Yes |
| Oven Interior | Stainless Steel |
| Microwave Watts (IEC-705) | 950 |
| Turntable Size | 16 |
| Control Features | Add 30 Sec; Over 175 Programmed Menu Selections |
| Cooking Technology | 5 in 1 Oven with 240V Advantium |
| Grill Pan | Yes |
| Rack Type | Wire Oven Rack |

CAPACITY

| Total Capacity (cubic feet) | 1.7 |
|-----------------------------|-----|
| Total Capacity (Cabic ICCt) | 1.7 |

| POWER / RATINGS | | |
|-------------------------------|----------------------|--|
| Electrical Input - 240V Watts | 6300 | |
| Voltage (MIN) | 208 | |
| Voltage (MAX) | 240 | |
| Volts/Hertz | 240V; 60Hz | |
| Amps 240V/208V | 30 | |
| Broiler Wattage | 2400W | |
| WEIGHTS & DIMENSIONS | | |
| Approximate Shipping Weight | 92 | |
| Cavity (W x H x D) | 20-1/16 x 8-1/2 x 17 | |
| Height (Front) | 20-1/8 | |
| Net Weight | 82 | |
| Overall Height | 20-1/8 | |
| Overall Width | 29-3/4 | |
| Overall Depth | 21-1/2 | |
| Cabinet Width | 30 | |

| ACCESSORIES | |
|----------------|------------------------------|
| Metal Oven Pan | Yes - Precision Cooking Tray |



Café[™] 30" Five in One Oven with 240V Advantium® Technology

CSB923P4NW2 / CSB923P2NS1 / CSB923P3ND1



Junction box location (240-volt models only)

Construct Solid Bottom MIN. 3/8" Plywood Supported by 2 x 4 or 1 x 2 Runners, all Four Sides.

(Must Support 150 lbs.)

Required

utout location 36-3/4" minimum from floo

WARRANTY

| Porto warranty | Limited 1-year entire appliance Limited 5-year magnetron tube |
|----------------|---|
| Parts warranty | Littlited 5-year magnetron tube |
| Labor warranty | Limited 1-year entire appliance |
| Warranty notes | See written warranty for full details |


DIMENSIONS AND INSTALLATION INFORMATION

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

Note: 2" minimum between cutouts when installed above warming drawer or single wall oven.

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

the bottom trim piece for applicable installations.

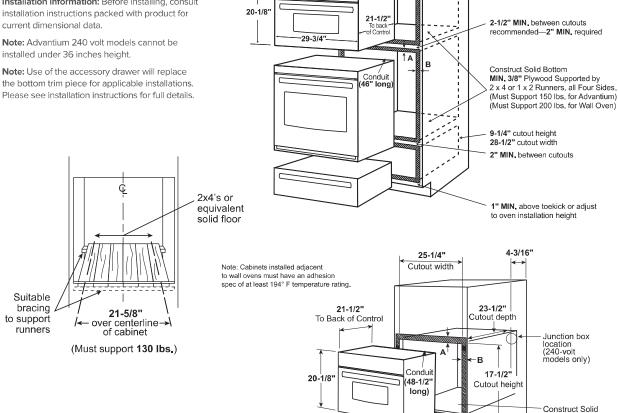

29-3/4"_

cabinet width

Cabinet width

A= Allow 1" overlap of oven over bottom edge of cutout, and allow 2-3/4" overlap at top edge of cutout.

B= Allow 3/4" - 2-1/8" for overlap of oven over side edges of cutout.

Café[™] 30" Five in One Oven with 240V Advantium® Technology

CSB923P4NW2-/ CSB923P2NS1 / CSB923P3ND1-

DIMENSIONS AND INSTALLATION INFORMATION

Preparation with an Accessory Drawer

Prepare the opening: The Advantium 240V can be installed in combination with other GE/Monogram appliances. Always follow each product's Installation Instructions to compete the installation.

Single oven installation: Order a 30" wide single oven cabinet or cut the opening in a wall to the dimensions shown.

- * For existing cutouts, a maximum width of 28-1/2" is acceptable. If the opening is slightly wider, secure a furring strip on each side of the cutout for securing the oven.
- Always maintain 36-3/4" minimum height from the floor to the cutout in any single or combined installation.
- Allow 3/4" to 2-1/8" case trim overlap on the sides and 1" overlap on the bottom of the opening for all models. The amount of overlap on the sides depends on the actual cutout width. Allow 2-1/4" case trim overlap on the top.
- Oven overlaps will conceal cut edges on all sides of the opening.

When installed over a single oven or a warming drawer, allow at least 2" between the two openings. This separation will provide clearance for bottom overlap of the Advantium 240V and the other appliance overlaps. Construct a solid oven floor of 3/8" min. thick plywood supported by 2 x 4 or 2 x 2 runners on all sides.

- the support must be level and rigidly mounted, flush with the bottom edge of the cutout.
- * For existing cutouts, a maximum width of 28-1/2" is acceptable. If the opening is slightly wider, secure a furring strip on each side of the cutout for securing the oven.

Note: Additional clearances between the cutouts may be required. Check to be sure the oven supports above the Warming Drawer location do not obstruct the required interior depth and height. See Warming Drawer installation instructions for details.


Installation Over a Wall Oven and Warming Drawer:

* For existing cutouts, a maximum width of 28-1/2" is acceptable. If the opening is slightly wider, secure a furring strip on each side of the cutout for securing the oven.


Note: Additional clearances between the cutouts may be required. Check to be sure the oven supports above the Warming Drawer location do not obstruct the required interior depth and height. See Warming Drawer installation instructions for details

Caution: For personal safety, the mounting surface must be capable of supporting the cabinet load, in addition to the added weight of this approximate 80-pound oven and 30-pound drawer, plus additional oven loads of up to 50 pounds or a total weight of 160 pounds.






Installation over Warming Drawer:



Installation over a Wall Oven and Warming Drawer:





CXWS0H0PMBZ Brushed Bronze 1 handle (standard on Matte White)



CXWS0H0PMSS Brushed Stainless 1 handle (standard on Matte Black)



CXWS0H0PMBT Brushed Black 1 handle



CXWS0H0PMCU Brushed Copper 1 handle

Café[™] 30" Slide-In Front Control Dual-Fuel Convection Range with Warming Drawer

C2S900P4MW2 / C2S900P3MD1 / C2S900P2MS1





ALSO AVAILABLE IN

C2S900P2MS1 Stainless Steel with Brushed Stainless handles and knobs

C2S900P4MW2

C2S900P4MW2 Matte White with Brushed Bronze handles and knobs







FEATURES & BENEFITS

Expansive six-burner cooktop helps you entertain with ease - Entertaining for large groups is easy with the industry's first six burner, edge-to-edge cooktop that can accommodate cookware of all sizes and a cast-iron integrated griddle that provides enough room to perfectly flip crab cakes, arepas and other crowd favorites.

Enjoy total control in the kitchen and beyond - Control your oven with your smart device or simply your voice using WiFi Connect

An attractive appearance at all times - Every detail of your kitchen is designed to delight, thanks to a sleek backlit glass touch control panel that visually disappears when not in use and wakes up when prompted

Share favorite creations with your favorite people - Create an unforgettable dinner, using a 21K tri-ring burner to do everything from searing scallops to simmering a lemon caper white wine sauce and a 15K power boil burner to boil water quickly for al dente angel hair pasta

Treat yourself to the best of both worlds - Get the precision you need to pull off a multi-course dinner party with Dual Fuel, which boasts a gas-powered cooktop for precise heat control and electric True European Convection with Precise Air in the oven for even baking results.

Never scrub, smooth-glide racks - Easily remove heavy dishes with a roller rack that is specially designed to glide smoothly and stay in the oven during the self-clean cycle, so you never have to handle cumbersome racks again

Create a look that matches your personal style - Select any combination of premium finishes and hardware options to create a stunning look customized to any owner's taste

Prepare foods to perfect doneness - Get roasts and meats just right with a temperature probe that lets you monitor progress without opening the oven door $\frac{1}{2}$

APPEARANCE

| THE RESIDENCE TO BE | |
|----------------------------|--|
| Cooktop Burner Grate Color | Matte Black |
| Installation | Power Cord Not Included |
| Oven Door Features | Big Clear View Oven Window |
| Handle | Professional Style; Customizable; Consumer Removable |
| Handle Design | Café |
| Handle Design | Café |

FFATURES

| FEATURES | |
|-------------------------------|--|
| Configuration | Range with Warming Drawer |
| Cooking Technology | Convection |
| Cooking System | True European Precise Air Reversing |
| Oven Cleaning Type | Self-Clean with Steam Clean Option |
| Burner - Left Front | 21,000 BTU Tri-ring Burner |
| Burner - Left Rear | 5,000 BTU Precise Simmer |
| Burner - Right Front | 15,000 BTU |
| Burner - Right Rear | 12,000 BTU |
| Burner - Center | 9,500 BTU Front / 9,500 BTU Rear |
| Cooktop Burner Type | Sealed |
| Cooktop Surface | Deep Recessed; Porcelain-Enamel; Gray |
| Dishwasher Safe Knobs | Yes |
| Control Location | Front controls |
| Control Type | Backlit; Glass Touch |
| Valves (Degree of Turn) | 270 |
| Oven Control Features | Audible Preheat Signal; Automatic Oven Timer (Time Bake); Auto Oven Shut-Off; Auto Self Clean; Certified Sabbath Mode; Chef Connect; Control Lock Capability; Delay Bake Option (Time Bake); Delay Clean Option; Digipad Numeric Entry; Electronic Clock and Timer, Front Controls; In-Oven Broiling; Temperature Probe; Self-Clean Cool Down Time Display |
| Oven Cooking Modes | Convection Bake; Convection Roast |
| Oven Features | 8-Pass Broil Element |
| Cooktop Burner Grate Features | Heavy-Cast Edge-to-Edge Grates |
| Cooktop Burner Grate Material | Cast-Iron |
| Cleaning Time | Variable with Delay Clean Option |
| Self-Clean Oven Door Lock | Automatic |
| Oven Rack Features | 2 Self-Clean Oven Racks; 1 Roller Rack; 6 Rack Positions |
| Fuel Type | 240V Electric and Natural Gas |
| Ignition System | Electronic w/Auto Reignition |
| Leveling System | 4 Leveling Legs |
| Style | Commercial |
| Oven Interior | 1 Incandescent; Hidden Bake; Black |
| Connected Capabilities | Amazon Alexa; The Google Assistant; IFTTT; Nest; Drop; Innit; DiGiorno |

CAPACITY


Total Capacity (cubic feet) 5.7 cu ft

ACCESSORIES

| Grates | Included Center Grate |
|-------------------|---|
| Grill | Optional; Integrated Cast Iron; JXCGRILL1 |
| LP Conversion Kit | Included |
| Trim Kit | Optional; JXFILLR1DD |
| Griddle | Included; Integrated Cast Iron |

WEIGHTS & DIMENSIONS

| Cabinet Opening | 30 in |
|---|----------------------|
| Depth with Door Open | 47-1/2 in |
| Approximate Shipping Weight | 244 lb |
| Net Weight | 224 lb |
| Height to Top of Rear Vent Trim | 37-3/8 in |
| Overall Height | 37-3/8 in |
| Height to Cooking Surface (in.) | 36-1/4 +/- 1/4 |
| Overall Width | 29-7/8 in |
| Cabinet Width | 30 in |
| Overall Depth | 29-1/2 in |
| Depth Without Handle | 26-7/8 in |
| Oven Interior Dimensions (W x H x D) (in.) | 24 x 19-7/8 x 20-5/8 |



Café[™] 30" Slide-In Front Control Dual-Fuel Convection Range with Warming Drawer

C2S900P4MW2 / C2S900P3MD1 / C2S900P2MS1



| POWER / RATINGS | |
|---|--|
| Amp Rating at 208V | 30 |
| Amp Rating at 240V | 30 |
| Bake/Broil Wattage - Main Oven | 2850/4000W |
| Convection Wattage | 2500W |
| Top Burner BTU Rating - LP (000's BTU's) | (1) 18.0 Tri-Ring; (1) 15.0; (1) 12.0; (2) 9.5; (1) 5.0 |
| Top Burner BTU Rating - Nat. Gas (000's BTU's) | (1) 21.0 Tri-Ring; (1) 15.0; (1) 12.0; (2) 9.5; (1) 5.0; |
| Volts/Hertz/Amps | 208/240V; 60Hz; 30A |
| Power Connection | Power Cord - Not Included |
| | |


| WARRANTY | | |
|----------------|---------------------------------|--|
| Parts warranty | Limited 1-year entire appliance | |
| abor warranty | Limited 1-year entire appliance | |


DIMENSIONS

Electrical Requirements: 240v/208v; 60Hz, 30A

Installation information: Before installing, consult installation instructions packed with product for current dimensional data.

For all installations, install the required rear trim to back of range with 4 screws provided.







CXFCGHKPMBZ Brushed Bronze 2 handles; 6 knobs



CXFCGHKPMSS Brushed Stainless 2 handles; 6 knobs



CXFCGHKPMBT Brushed Black 2 handles; 6 knobs



CXFCGHKPMCU Brushed Copper 2 handles; 6 knobs

Café[™] Stainless Interior Built-In Dishwasher with Hidden Controls

CDT875P4NW2 / CDT875P3ND1 / CDT875P2NST





ALSO AVAILABLE IN



CDT875P3ND1 Matte Black with Brushed Stainless handles

CDT875P4NW2 Matte White with Brushed Bronze handles





FEATURES & BENEFITS

Ultra Wash & Dry Plus – Expect precision cleaning and superior dryness on fine china, dinnerware and even dishwasher-safe plastics, with exceptional features like Variable-Pressure Jets and Dual-Convection Ultra Dry

Loading Flexibility – Clean up quickly after hosting any event with a dishwasher that accommodates large items – like charcuterie platters – and dishwasher-safe plastics, like storage containers, conveniently in the lower rack

Status Center – Continue conversations without interruption and easily know when extra dinnerware is available via an LCD screen that displays the dishwasher cycle status

 $\label{eq:continuity} \mbox{Adjustable Upper Racks} - \mbox{You'll have room for your finest stemware and space for tall bakeware with a rack that can be moved two inches up or down, creating ultimate loading flexibility}$

WiFi – Always have clean dishes ready for surprise guests with WiFi Connect, which lets you operate your dishwasher from your smartphone. Track and automatically reorder detergent and rinse aid with just the tap of an app

Create a look that matches your personal style – Select any combination of premium finishes and hardware options to create a stunning look customized to any owner's taste

APPEARANCE

| THE RESIDENCE TO SE | |
|--|---|
| Door Style Long Door with Top Controls | |
| Installation | Side Installation or Top Installation Included; Built-Up Floor Capable; Flush Cabinet Installation |
| Door Appearance | Full-length flat door |

FEATURES

| FEATURES | |
|-----------------------------|--|
| Style | Built-In |
| Tub and Door Liner | Stainless Steel |
| Tub Type | Tall Tub |
| Control Type | Cap Touch Controls; 12 Touchpads |
| Dishwasher Control Features | Cycle Countdown with LCD Status Center on door; Multi function display; Last Cycle Memory; Audible End-of-Cycle Signal |
| Wash System | 3-Level; 800 Series |
| Wash System Features | Variable Speed Dual Pumps and Motors; Automatic Temperature Control; Drain Pump; Hard Food Disposer with removable filter; Reversing Quad Blade Lower Wash Arm; Quad Blade Middle Wash Arm; Deep Clean Silverware Jets; Side Jets; 90+ Spray Jet Wash System; Hidden Heater; Automatic HotStart; Bottle Jets (4) |
| Sensor | Clean Sensor |
| Wash Arms | 3 Wash Levels; Lower- Reversing Quad Blade; Middle - Quad Blade; Bottle Jets; Jets - Variable Pressure; Deep Clean Silverware Jets |
| Water Filtration System | 100% Filtration with Hard Food Disposer and Removable Filter |
| Dispenser | Rinse Aid with Indicator and Adjustment; Electronic Low Rinse Aid Sensor |
| Number of Cycles | 5 |
| Dishwasher Cycles | Auto; Pots; Normal; China; Express |
| Number of Options | 10 |
| Dishwasher Options | Delay Start 1-12 Hr.; Hi-Temp Wash; Presoak + Sanitize (NSF Certified); Heated Dry Off; Normal Dry; Dual Convection Ultra Dry; Wash Zone Upper Only; Wash Zone Lower Only; Start/ Reset; Bottle Wash; Lock Controls |
| Rack Features | 2 Utility Shelves with Stem Safe and Chop-stick slots - Upper Ball-Tipped Tines; Adjustable Upper Rack; 3-Piece Silverware Basket with Cell Covers; Full Extension Slides - Upper |
| Racking Material | Nylon |
| Rack Color | Black Pearl |
| Number of Place Settings | Up to 16 |
| Upper Rack | Premium Height Adjustable; Ball-Tip Tines; 2 Stem Safe Shelves; Chop stick slots; 1/2 fixed tines, 1/2 fold down tines Fixed tines with Bottle Jets; 1 Rack handle |
| Lower Rack | Ball-Tip Tines; 1/2 fixed tines, 1/2 fold down tines |
| Additional Protection | Active Flood Protection |
| Dishwasher Drying Features | Dual Convection Ultra Dry; Ultra/Normal/Off; Fan Assist Dry |
| Floor Protection | Leak Pan w/ Sensor; Active Flood Protection |
| Leveling System | 3 Leveling Legs |
| Latch | Pull with Handle |
| Showroom Power Mode | Yes |
| WiFi Connect | Built-In |
| Exterior Style | Traditional |
| Racking System | Full 3rd Rack |
| | |

ECONOMICAL/QUIET

| zeenemen genz | |
|-----------------|---|
| Quiet Package | 39 dBA |
| Quiet Features | Quiet Water Valve; Sealed Toe Kick; Tub Collar Trim |
| Motor Type | Variable Speed |
| Outer Wrap | Full-wrap Blanket; Bitumen |
| Door Insulation | Insulation: Mastic |

| WEIGHTS & DIMENSIONS | |
|--|-----------|
| Cabinet Width | 24 in |
| Approximate Shipping Weight | 137 lb |
| Net Weight | 124 lb |
| Overall Height | 34 in |
| Height w/ Legs Retracted - Minimum Height | 33-3/8 in |
| Height w/Legs Extended - Maximum Height | 34-5/8 in |
| Overall Depth | 24 in |
| Overall Width | 23-3/4 in |



Café[™] Stainless Interior Built-In Dishwasher with Hidden Controls

CDT875P4NW2 / CDT875P3ND1 / CDT875P2NS1




| TECHNICAL DETAILS | |
|---------------------|--|
| Calrod Heater Watts | 400/1200 |
| Power Connection | Optional cord kit (GPFCORD - WX09X70910, WX09X70911) |
| Volts/Hertz/Amps | 120 V; 60 Hz; 10.2 A |

| WARRANTY | |
|----------------|---------------------------------------|
| Parts warranty | Limited 1-year entire appliance |
| Labor warranty | Limited 1-year entire appliance |
| Warranty notes | See written warranty for full details |

DIMENSIONS

24" Typical 29-7/8" 29-7/8" 4" (toekick)

INSTALLATION DIMENSIONS





Brushed Bronze CXADTH1PMBZ (Standard on Matte White)



Brushed Stainless CXADTH1PMSS (Standard on Matte Black and Stainless steel)



Brushed Black CXADTH1PMBT



Brushed Copper CXADTH1PMCU

Café[™] 5.7 Cu. Ft. Built-In Dual-Drawer Refrigerator

CDEOGRP3ND1/CDE06RP2NS1





ALSO AVAILABLE IN

CDE06RP2NS1 Stainless Steel with Brushed Stainless handle and knobs

CDE06RP3ND1 Matte Black with Brushed Stainless handles





FEATURES & BENEFITS

Impress your guests every time you open the drawers with an attractive stainless steel interior that is also easy to clean.

Never let grabbing a quick snack interrupt your conversations, thanks to **soft-close drawers** that slide quietly closed.

Favorite wines are always perfectly chilled and ready to serve with a large **5.7 cu. ft. capacity** that easily holds upright bottles.

Keep all your fresh foods and drinks organized with an **adjustable divider** that maximizes flexibility and storage capacity in both drawers.

Fresh vegetables and craft beers are always stored in their ideal climate, thanks to an **exact temperature control** that chills items between 34° and 45° F.

Sharable foods are easy to find and easy to serve with **LED lighting** that provides clear, bright light throughout the drawers.

APPEARANCE

| Exterior design | Flat doors |
|-----------------|------------|
| Handle design | Café |

FEATURES

| I LATI CICLO | |
|---------------------|---------------|
| Control Type | Electronic |
| Interior Lighting | LED |
| Leveling System | Leveling Legs |
| Defrost Type | Auto |
| Defrost Water Drain | Yes |
| Sabbath Mode | Yes |
| Sort Capacity | 5.7 |


CAPACITY

Total Capacity (cubic feet)

| WEIGHTS & DIMENSIONS |
|----------------------|
| |

5.7 cu ft

| WEIGHTS & DIMENSIONS | |
|-----------------------------|-----------|
| Approximate Shipping Weight | 135 lb |
| Net Weight | 126 lb |
| Depth Without Handle | 23 3/4 in |
| Overall Depth | 26 in |
| Overall Height | 33 7/8 in |
| Overall Width | 23 7/8 in |
| | |
| | |



Café[™] 5.7 Cu. Ft. Built-In Dual-Drawer Refrigerator


CDE06RP3ND1 / CDE06RP2NS1



WARRANTY

| Parts warranty | Limited 1-year entire appliance | |
|----------------|---------------------------------------|--|
| Labor warranty | Limited 1-year entire appliance | |
| Warranty notes | See written warranty for full details | |

DIMENSIONS

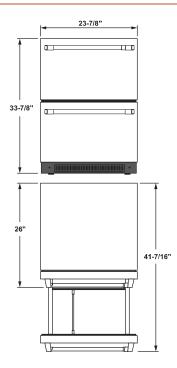







CXQD2H2PNBT Brushed Black 2 handles



CXQD2N2PNCU Brushed Copper 2 handles

Café[™] Energy Star[®] 23.1 Cu. Ft. Counter-Depth French-Door Refrigerator

CWE23SP4MW2 / CWE23SP2MS1 / CWE23SP3MD1





ALSO AVAILABLE IN

CWE23SP2MS1 Stainless Steel with Brushed Stainless handles



CWE23SP3MD1

CWE23SP4MW2 Matte White with Brushed Bronze handles











FEATURES & BENEFITS

Create a built-in look with counter-depth design that fits flush with surrounding cabinetry.

Enjoy a cleaner appliance appearance with **internal water dispenser.**

Always have plenty of ice ready whenever you need it with a factoryinstalled icemaker.

Keep key ingredients fresh and within sight with a full-width, electronic, temperature-controlled drawer that uses an LED colored lighting system. Food remains fresh longer with $\textbf{TwinChill}^{\texttt{m}}$ evaporators that accurately

maintain and control separate freezer and refrigerator environments. Display groceries like a gallery with **showcase LED lighting** positioned

throughout the interior to spotlight your favorite foods and containers. Eliminate the guesswork of temperature setting with $\mbox{in-the-door controls}$ with a easily-adjustable digital temperature display.

Protect your family and guests with an advanced water filtration system that uses RPWFE replacement filters to remove 98% of pharmaceuticals

from ice and water*.

'Removes 98% of ibuprofen, atenolol, fluoxetine, progesterone and trimethoprim.

These pharmaceuticals are not necessarily in all users' water.

| APPEARANCE | | |
|----------------------|---------------------|--|
| Counter-depth design | Yes | |
| Exterior design | Flat doors | |
| Handle design | GE Café | |
| Hidden door hinge(s) | Yes | |
| Textured steel case | Case only—Dark gray | |

FEATURES

| TEAT UKES | |
|-------------------------------|--|
| Configuration | French door |
| WiFi connect | Built-in |
| Connected capabilities | Amazon Alexa; The Google Assistant; IFTTT |
| Temperature management system | TwinChill™ evaporators |
| Defrost type | Frost Guard |
| Control type | Internal electronic digital temperature display |
| Dispenser | Internal water |
| Dispenser features | Door alarm; Internal dispenser |
| Icemaker | Factory-installed |
| Water filtration | Advanced filtration system (RPWFE); Removes pharmaceuticals; Water filter indicator light |
| Filter location | Left wall |
| Fresh food cabinet drawers | 3 total; 2 adjustable humidity drawers; 1 full-width, adjustable temperature with LED light |
| Fresh food cabinet shelves | 5 total—glass with silver trim; 4 split adjustable; 1 full-width; 3 spill proof; 1 Quick Space shelf |
| Fresh food door bins | 6 total (4 adjustable with gallon storage) |
| Fresh food door features | Dairy compartment; Drop down tray |
| Fresh food features | Showcase LED lighting (7); Deli pan |
| Freezer storage baskets | 2 full-width (with ice bucket) |
| Freezer features | Interior lighting—showcase LED (2) |
| Exterior style | Counter-depth |
| Leveling system | 2 front leveling legs |
| Performance features | Easily removable door gaskets; Sabbath Mode capable |
| | |

| CHINCIII | |
|-----------------------------|--------------|
| Total capacity (cubic feet) | 23.1 cu. ft. |
| Fresh food capacity | 15.9 cu. ft. |
| Freezer capacity | 7.2 cu. ft. |

| WEIGHTS & DIMENSIONS | |
|---|------------|
| Overall depth | 31-1/4 in. |
| Overall height | 69-7/8 in. |
| Overall width | 35-3/4 in. |
| Case depth without door | 24-3/8 in. |
| Depth with door open 90° | 43-3/8 in. |
| Depth without handle | 28-3/4 in. |
| Height to top of case | 69 in. |
| Width with door open 90° including handle | 44-3/4 in. |
| Approximate shipping weight | 363 lb. |
| Net weight | 333 lb. |



Café[™] Energy Star® 23.1 Cu. Ft. Counter-Depth French-Door Refrigerator




CWE23SP4MW2 / CWE23SP2MS1 / CWE23SP3MD1

WARRANTY

| Parts warranty | Limited 1-year entire appliance; Limited 5-year sealed refrigerating system |
|----------------|---|
| | Limited 1-year entire appliance; Limited 5-year sealed |
| Labor warranty | refrigerating system |
| Warranty notes | See written warranty for full details |

DIMENSIONS



| Height to top of door (in.) A | 70-1/2 |
|---|--------|
| Height to top of hinge (in.) B | 69-7/8 |
| Height to top of case (in.) C | 69 |
| Case depth without door (in.) D | 24-3/8 |
| Case depth less door handle (in.) E | 28-3/4 |
| Case depth with door handle (in.) F | 31-1/4 |
| Depth with fresh food door open 90° (in.) G | 43-3/8 |
| Width (in.) H | 35-3/4 |
| Width with door open 90° with door handle (in.) I | 44-3/4 |
| Width with doors open fully (in.) J | 61-5/8 |
| Min distance between side of case and wall, in either direction, to allow doors to open fully (in.) K | 13-1/8 |
| Depth with FZ door completely open (w/o handle) (in.) X | 44-1/4 |
| Depth with FZ door completely open (w/ handle) (in) Y | 46-3/4 |



CXLB3H3PMBZ Brushed Bronze 3 handles (Standard on Matte White)



CXLB3H3PMSS Brushed Stainless 3 handles (Standard on Matte Black and Stainless Steel)



CXLB3H3PMBT Brushed Black 3 handles



CXLB3H3PMCU Brushed Copper 3 handles