

DV3 LOT 80 - HOODFAN SCB31630 MATTE BLACK

SCB316 | ALITO Collection



Wall Mount

We’ve learned that sometimes the best way to anticipate the needs and desires of your market is to listen to the men and women who install your product. Inspired by our most popular model, the SC300, we have designed an install-friendly hood that makes all the “what if’s” of installation a non-issue. Keeping the pyramid shape, we expanded the chimney flue (duct cover) just wide enough to conceal off-centre ducting. Bringing our lights to the front of the hood provides greater ambience in the most used cooking area and also avoids drawing attention towards any imperfections from the backsplash. We also slanted our baffle filters to maximize air and grease collection. The SCB316 has every kind of installer in mind.

Green Features



3 Speed Push Button Control Panel



Long-Lasting LED Lights



Grease Cup



Model	Colour	Ducting	Filters	Size	CFM
SCB31630SS	Stainless Steel	6"	Baffle	30"	300
SCB31636SS	Stainless Steel	6"	Baffle	36"	300
SCB31630MB	Matte Black	6"	Baffle	30"	300
SCB31636MB	Matte Black	6"	Baffle	36"	300

DV3 LOT 80 - PRIMARY ENSUITE

## Ariosia 6032 Acrylic Freestanding Bathtub

Model number:	106266-000-001-100
---------------	--------------------

Dimensions: 60.25" x 32" x 28" Installation: FreeStanding

Material: Acrylic



Standard Features:
• Acrylic surface resistant to stains
• 2-piece bathtub for an easy installation
• Available in white, thunder gray, sterling silver or black color to complement any bathroom decor
• Available in an Above-the-Floor Rough (AFR) configuration for easier drain, waste and overflow installation
• Compatible with MAAX F2 Drain connector to save time and money on installation
• MAAX innovative leveling legs for easy installation
Product characteristics:
• Deck Space for Faucet
• 1 Tub - 2 Pieces
• Above-the-Floor Rough - AFR

### Standard Colors:



### Certifications

MAAX products adhere to one or more of the following certifications:



MAAX


Ariosa 6032 Acrylic Freestanding Bathtub


Model number:	106266-000-001-100		
---------------	--------------------	--	--

Dimensions: 60.25" x 32" x 28"

Installation: FreeStanding

Material: Acrylic

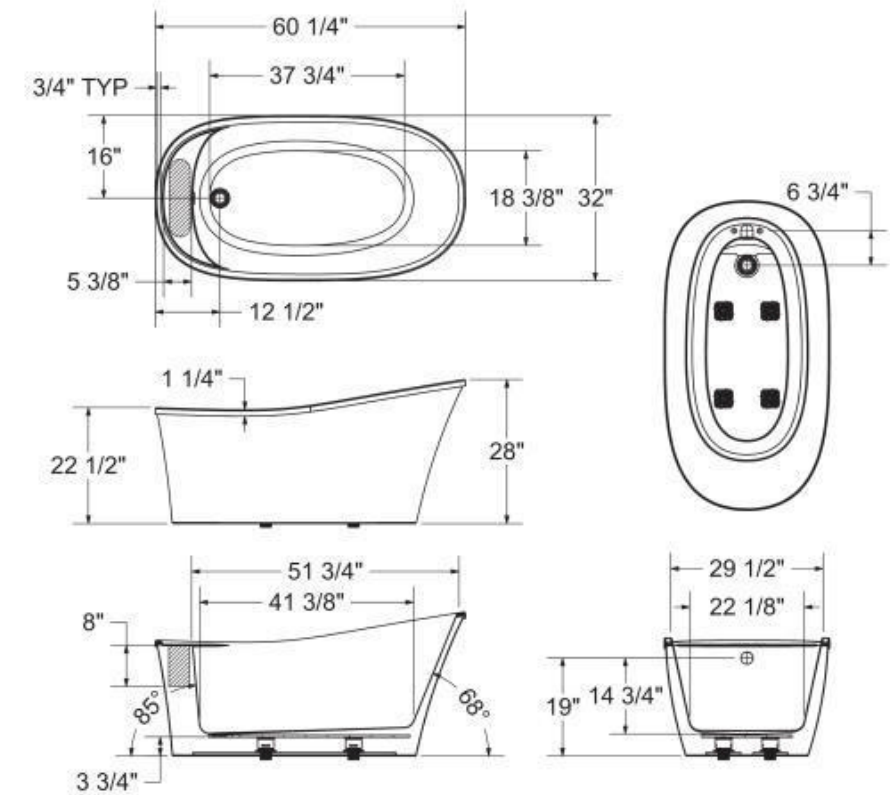

(): Recommended facet area of 15" (L) x 4" (W).  
Depth recommended for straight pipes 8".  
All dimensions are approximate. Structure measurements must be verified against the unit to ensure proper fit.

Dimensions
60 1/4 x 32 x 28 In. (1530 x 813 x 711 mm)
Water Capacity
46 gallons - 173 liters
Weight
77 lbs - 35 kg
Bathing Well
41 1/2 In. x 22 1/4 In. (1051 mm x 562 mm)
Deep Sump Height
14.75 In. - 375 mm
Deck Width
5.375 In. - 137 mm
Drain location:
End

Project:

Contractor:

Representative:

Date:

Tel:

Notes:

MAAX

DS  
J. H


DV3 LOT 80 - KITCHEN FAUCET - MATTE BLACK



KITCHEN FAUCETS

- ☐ Keele™ Pull-Down Kitchen Faucet
- ☐ Single Handle Deck Mount
- ☐ MagnaTite® Magnetic Docking

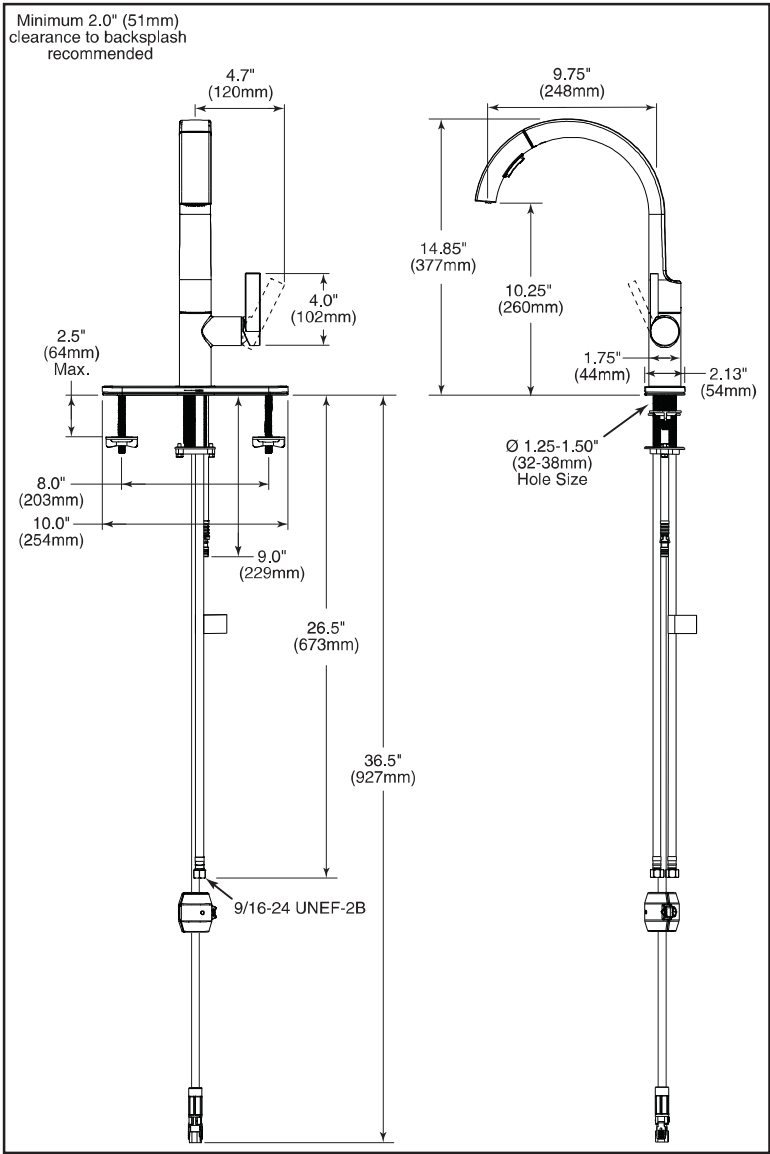

SUBMITTED MODEL NO.: \_\_\_\_\_  
SPECIFIC FEATURES: \_\_\_\_\_



STANDARD SPECIFICATIONS:

- Single handle kitchen faucet
- One or three hole mount (RP63209 Escutcheon optional, not included)
- 8" centres with optional 10" long escutcheon (ordered separately)
- 14.85" (377 mm) high, 9.75" (248 mm) spout length, swings 360°
- Pull-down spout operates in an aerated or spray mode via an easy push toggle button
- MagnaTite® magnetic docking
- Touch-Clean® spray head
- Quick Snap® hose installation
- Dual integral check valves
- Spout is connected to valve body with a 59" (150 cm) long hose
- Ceramic cartridge
- Standard with 3/8" compression
- Maximum flow rate 1.8 gpm @ 60 PSI, 6.8 L/min @ 414 kPa
- Maximum flow rate 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
-  Verified compliant with 0.25% weighted average Pb content regulations
-  Indicates compliance to ICC/ANSI A117.1

WARRANTY


- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

▲ Designate Proper Finish Suffix

Delta Faucet reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.

**Delta Faucet Company**  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
55 E. 111th Street, Indianapolis, IN 46280  
© 2023 Delta Faucet Company




**DSP-K-940LF, Rev. A**



DV3 LOT 80 - JACK & JILL, BEDROOM #2 ENSUITE, PRIMARY ENSUITE, BEDROOM #4 ENSUITE SHOWER FIXTURES - MATTE BLACK



Submitted Model No.: \_\_\_\_\_  
Specific Features: \_\_\_\_\_

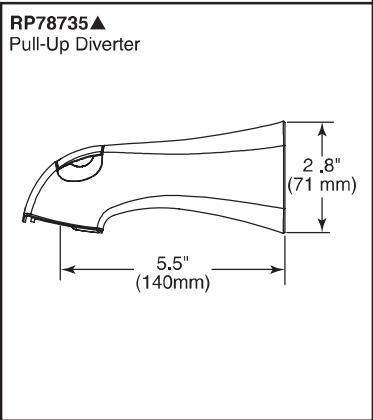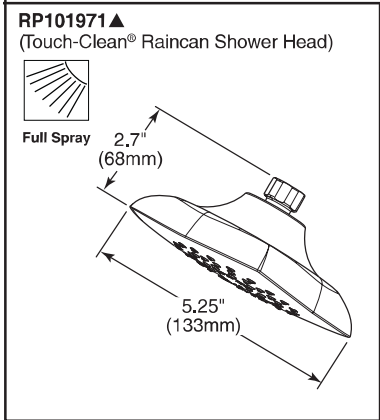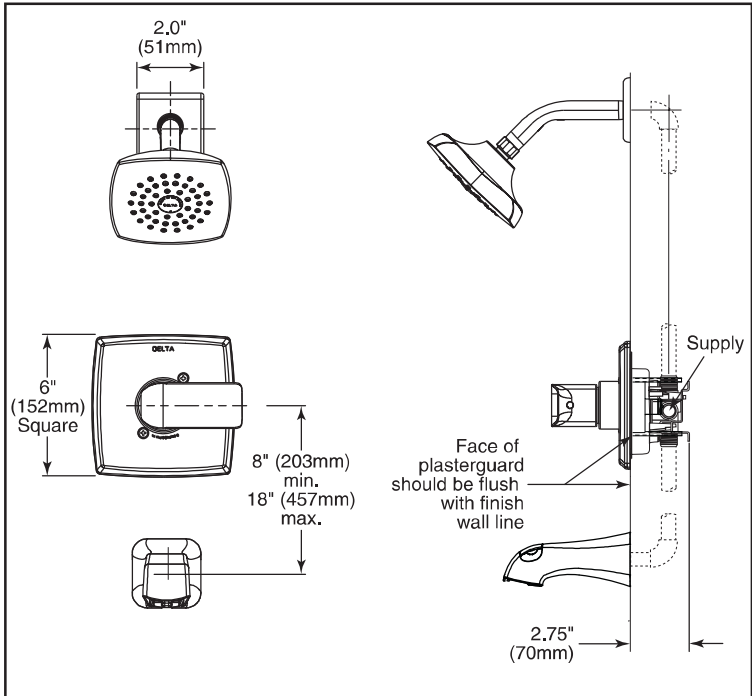

see what Delta can do™

## TUB AND SHOWER FAUCET TRIM

- Kitano™ Bath Collection
- Valve Only (T14063)
- Shower Only (T14263)
- Tub/Shower (T14463 & T14463-LHD)

### STANDARD SPECIFICATIONS:

- Monitor® 14 Series pressure balanced bath single handle mixing valve trim
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Back-to-back installation capability
- Solid brass forged body
- Temperature only controlled with handle
- Red/blue temperature indicators
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation
- All parts replaceable from the front of the valve
- “-LHD” models indicate less showerhead
- Maximum 2.0 gpm @ 80 psi (7.6 L/min @ 550 kPa)

### WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.




### COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- EPA WaterSense®
- Indicates compliance to ICC/ANSI A117.1

▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.  
DSP-B-T14063, REV.C


**Delta Faucet Company**  
55 E. 111th Street, Indianapolis, IN 46280  
350 South Edgeware Road, St. Thomas, CN N5P 4L1  
© 2020 Delta Faucet Company



DV3 LOT 80 - PRIMARY ENSUITE TUB FAUCET - MATTE BLACK



Submitted Model No.: \_\_\_\_\_  
Specific Features: \_\_\_\_\_

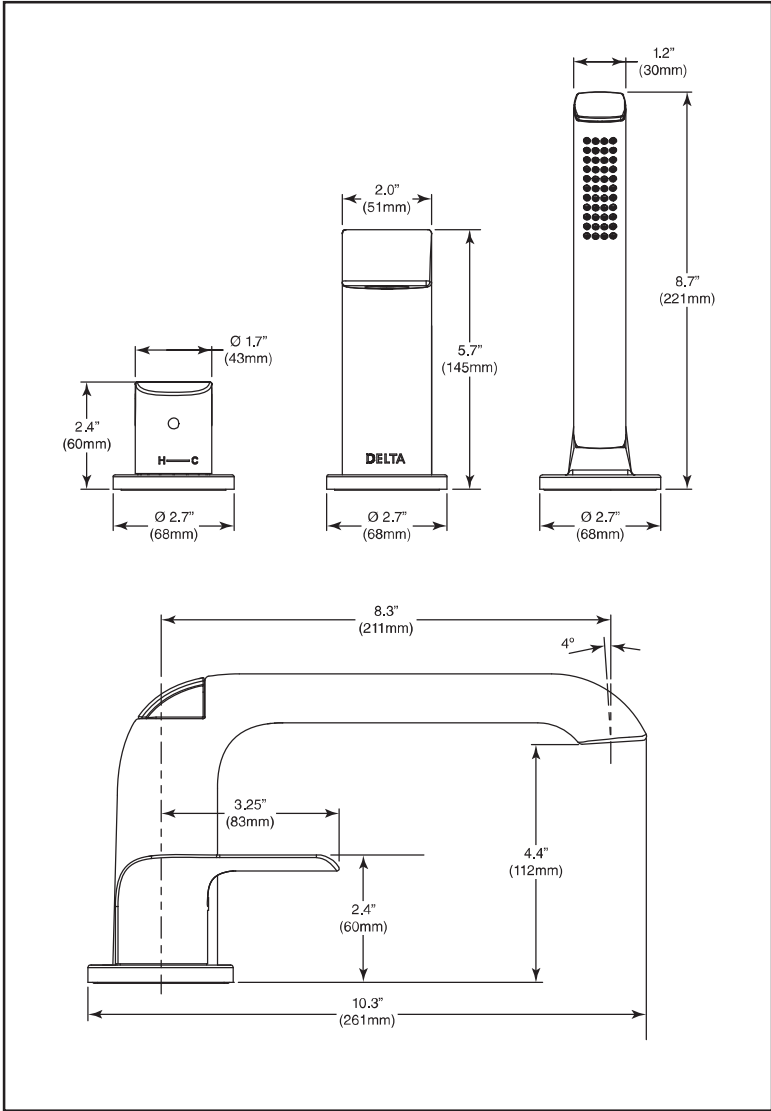

▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.deltafaucet.com](http://www.deltafaucet.com) for finish options and product availability.  
DSP-B-T3763, Rev. A



BATHROOM FAUCETS

- Kitano™ Bath Collection
- Single Handle Roman Tub Faucet with Hand Shower
- Three Hole Installation

STANDARD SPECIFICATIONS:

- Hand Shower maximum flow rate 1.75gpm @ 80psi, 6.6 L/min @ 550kPa
- Trim only for single handle Roman Tub Faucet with Hand Shower
- Hand Shower includes double check valves for backflow prevention
- Temperature only controlled with handle
- Hot/cold indicator
- Rough-in Kit must be ordered to complete installation:
  - R3707 for flexible rough-in
  - R3707-MF for flexible PEX cold expansion rough-in
  - R3707-PX for flexible PEX crimp rough-in
  - R3716 for fixed rough-in
  - R3716-MF for fixed PEX cold expansion rough-in
  - R3716-PX for fixed PEX crimp rough-inThere are separate specification sheets on each rough-in kit, if more detail is required

WARRANTY


- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®
-  Indicates compliance to ICC/ANSI A117.1

Delta Faucet Company  
55 E. 111th Street, Indianapolis, IN 46280  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
© 2020 Delta Faucet Company






DV3 LOT 80 - BEDROOM #2 ENSUITE, BEDROOM #4 ENSUITE, JACK & JILL, PRIMARY ENSUITE AND POWDER ROOM VANITY FAUCETS - MATTE BLACK



SUBMITTED MODEL NO.: \_\_\_\_\_  
SPECIFIC FEATURES: \_\_\_\_\_

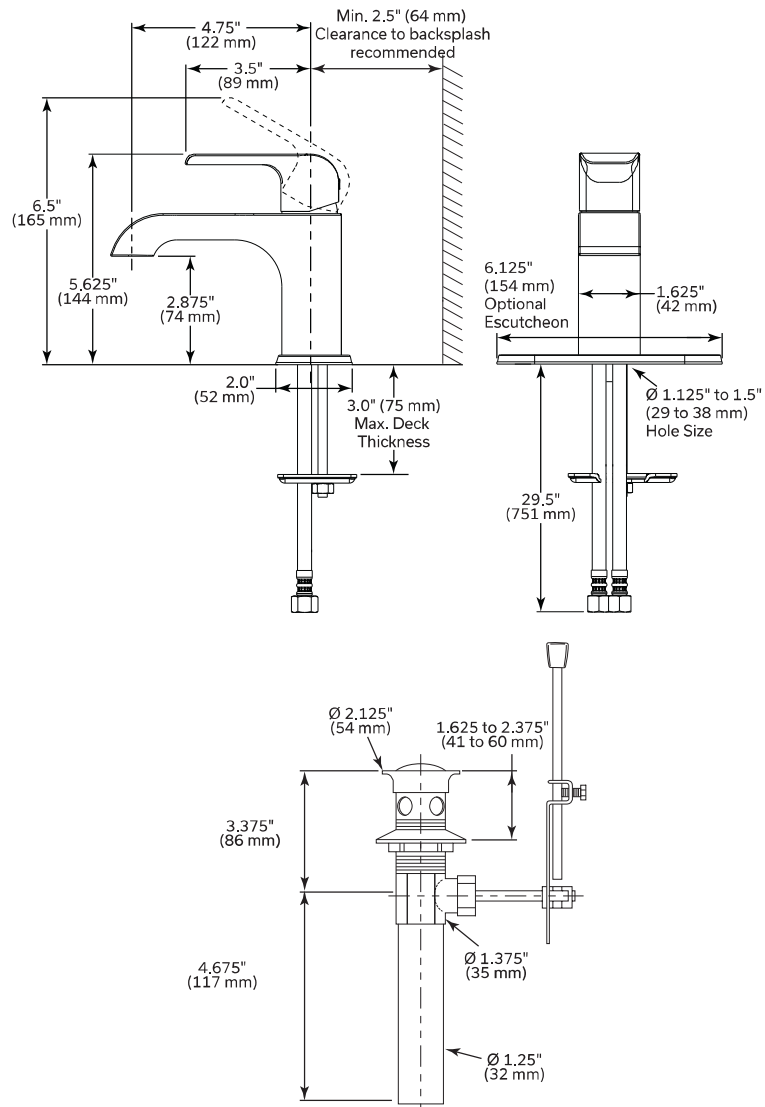


LAVATORY FAUCETS

- ☐ Kitano™ Collection
- ☐ Single Handle Deck Mount

- STANDARD SPECIFICATIONS:**
- Max flow rate 1.2 gpm (4.5 L/min) (Aerated pressure compensating)
  - Standard single hole mount or three hole mount with optional - 6.125" (154 mm) Escutcheon (sold seperately)
  - Poly-braided supply lines
  - 3.0" (75 mm) max. deck thickness
  - Ceramic cartridge
  - Hot-Cold indicator
  - Metal lever handle
  - Solid brass body
  - 29.5" (751 mm) long flexible supply lines with 9/16" supply fittings
  - Rigid Spout
  - Models have 50/50 drain with pop-up type fitting with plated flange and stopper
  - "-LPU" models are supplied less the 50/50 drain with pop-up type fitting with plated flange and stopper

- OPTIONAL ACCESSORIES (sold seperately)**
- RP100784▲ - 6-1/8" (154 mm) escutcheon
  - 33W576▲ - push pop-up with overflow holes



- COMPLIES WITH**
- ASME A112.18.1 / CSA B125.1
  - EPA WaterSense®
  - Verified compliant with 0.25% weighted average Pb content regulations
  -  Indicates compliance to ICC/ANSI A117.1

▲ Designate Proper Finish Suffix  
WaterSense® is a registered trademark of the U.S. Environmental Protection Agency  
**NOTICE** Dimensions are for reference only. Measurements may vary ± 0.25" (6 mm)

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. See current full-line price book or [www.deltafaucet.ca](http://www.deltafaucet.ca) for finish options and product availability.

**Delta Faucet Company**  
350 South Edgeware Road, St. Thomas, ON N5P 4L1  
55 E. 111th Street, Indianapolis, IN 46280  
© 2021 Delta Faucet Company

**DSP-L-563LF, Rev. B**

