


WTR4 LOT 141 - BAR SINK B1614



Product Specification Sheet

B1614 Stainless Steel Single Bowl 16 Gauge

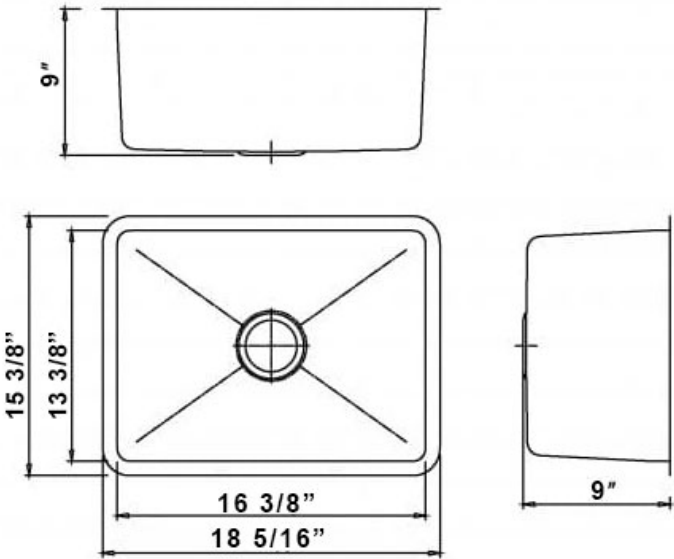

Colour Finish
Stainless Steel

Model No.
B1614

- Description
- Double Bowl Stainless Steel Sink 16 Gauge
 - Outside dimensions: 18 5/16" x 15 3/8" x 9"
 - Minimum Cabinet Size: 20"
 - Stainless Steel Single Bowl Sink
 - 16 Gauge Type 304 Stainless Steel
 - Stone Guard undercoating over rubber pad
 - 3 1/2" drain opening
 - Supplied with installation clip, template and strainer
 - CUPC certified

Available accessories

- BG1614 - Stainless Steel Grid
- Colander Strainer - Stainless Steel
- Drying Rack



MAIN LOCATION

BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9


CONTACT

Tel: 1(800) 930-0214
Fax: 1(866) 310-7580
Email: sales@bristolsinks.com

Product Specification Sheet



B1927 Undermount Double Sink with 15mil Radius Corners

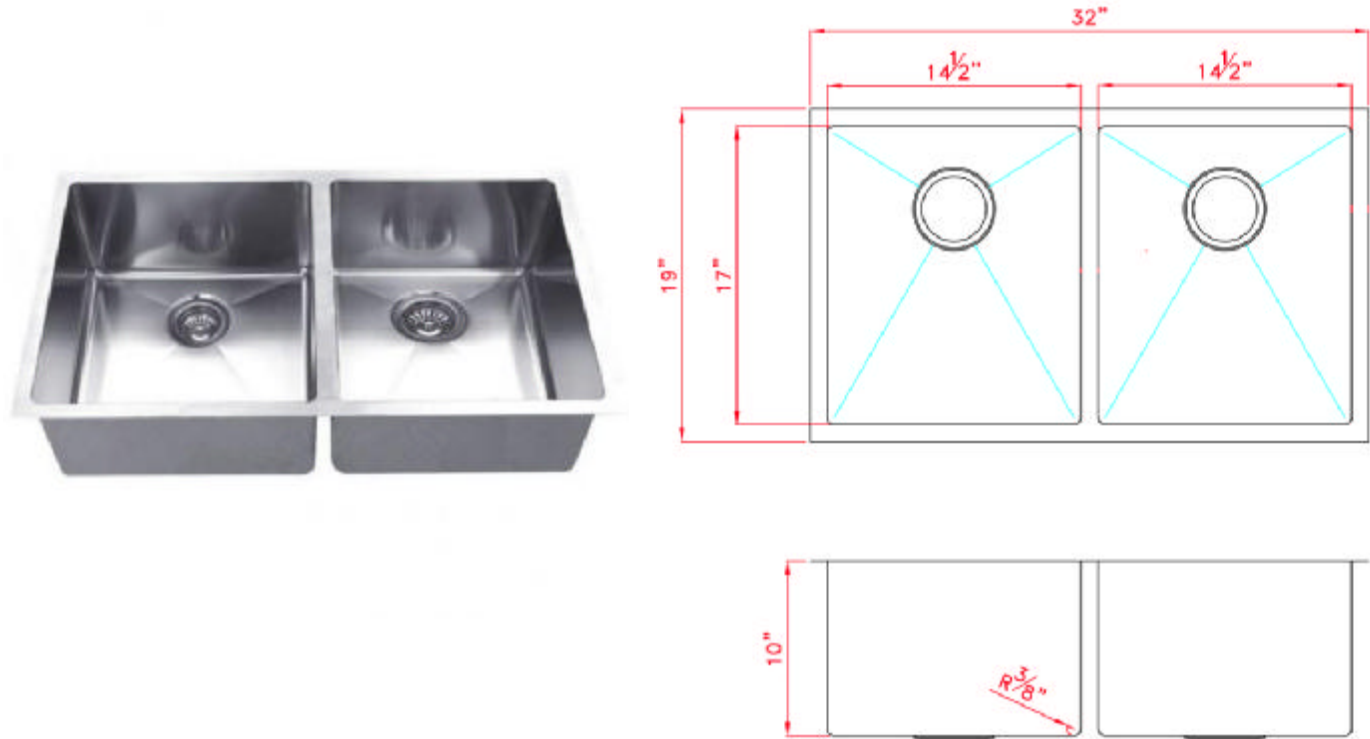

Colour Finish
Stainless Steel

Model No.
B1927

- Description
- Double Bowl Undermount Sink with 15mil radius corners
 - Outside dimensions: 32" x 19" x 10"
 - Minimum Cabinet Size: 33"
 - Stainless Steel Double Bowl Sink
 - 16 Gauge Type 304 Stainless Steel
 - Stone Guard undercoating over rubber pad
 - 3 1/2" drain opening
 - Supplied with installation clip, template and strainer
 - cUPC certified

Available accessories

- BG1927 - Stainless Steel Grid
- Colander Strainer - Stainless Steel
- Zero Radius Basket
- Drying Rack



MAIN LOCATION

BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9


CONTACT

Tel: 1(800) 930-0214
Fax: 1(866) 310-7580
Email: sales@bristolsinks.com



Product Specification Sheet

B1206 Undermount Stainless Steel Single Bowl Laundry Sink

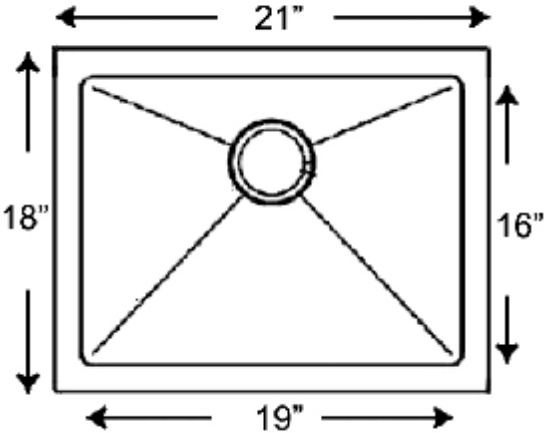

Colour Finish
Stainless Steel

Model No.
B1206

- Description
- Dimensions: 21" x 18" x 12" Deep
 - Minimum Cabinet Size: 23"
 - 18 Gauge Type 304 Stainless Steel Drop In Sink
 - Brushed Satin Finish
 - Stone Guard undercoating over a rubber pad
 - 3 1/2" drain opening
 - Supplied with installation clip, template, and strainer
 - Stainless Steel Grid Available
 - cUPC certified
 - Limited Lifetime Warranty

- Available accessories
- BG1206 Grid
 - Colander Strainer - Stainless Steel
 - Drying Rack



MAIN LOCATION


BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9

CONTACT

Tel: 1(800) 930-0214
Fax: 1(866) 310-7580
Email: sales@bristolsinks.com



BATHROOM FAUCETS

- Portage™ Bath Collection
- Valve Only (T14071)
- Shower Only (T14271)
- Tub/Shower (T14471)

Submitted Model No.: _____




Specific Features: _____

STANDARD SPECIFICATIONS:

- Monitor® 14 Series pressure balanced bath single handle mixing valve trim
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Back-to-back installation capability.
- Temperature only controlled with handle
- Red/blue temperature indicators
- Field adjustable to limit Stop
- 120° maximum handle rotation.
- All parts replaceable from the front of the valve.
- Maximum 1.75gpm @80psi (6.6L/min@ 550kpa)
- Tub port maximum flow rate 6.0gpm @ 60psi with R10000-UNBX
- ½" C.W.T slip-on spout

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

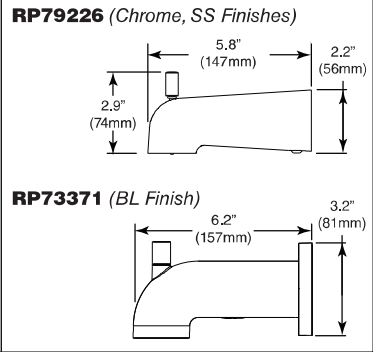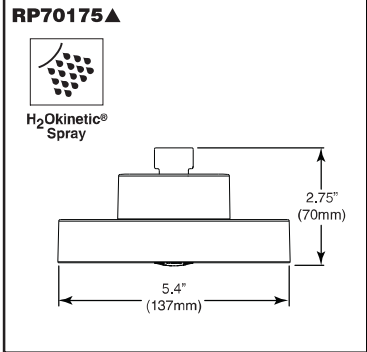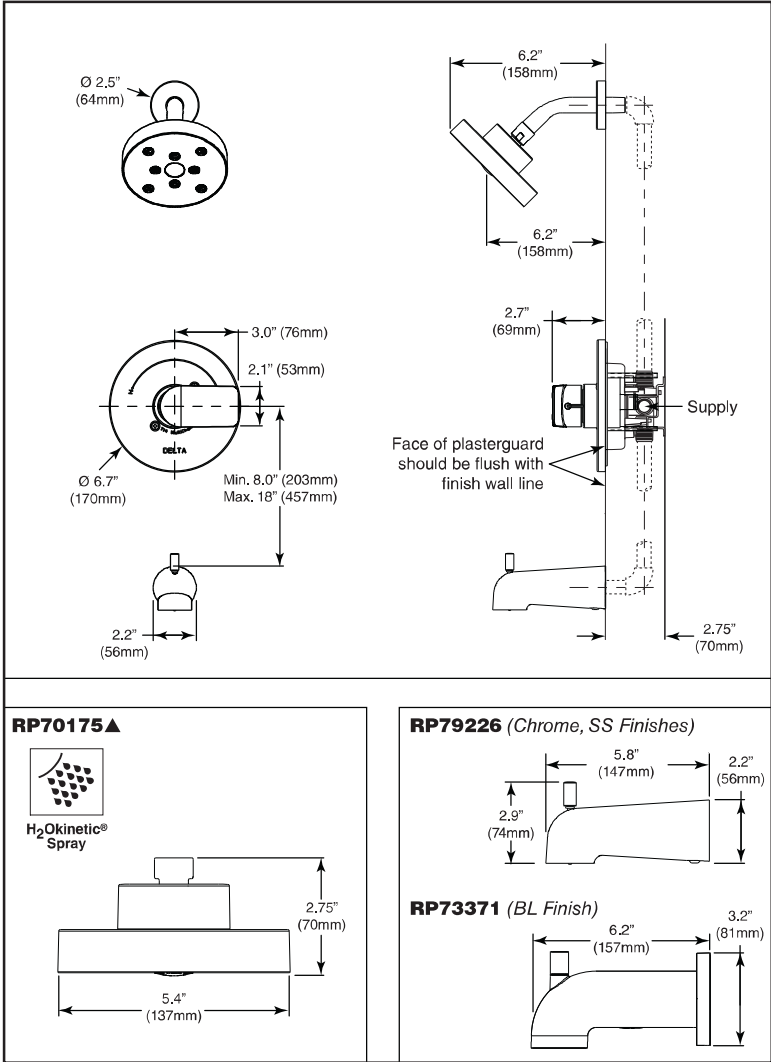


COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- EPA WaterSense®
- Indicates compliance to ICC/ANSI A117.1


▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-T14071, Rev. A



Submitted Model No.: _____
Specific Features: _____

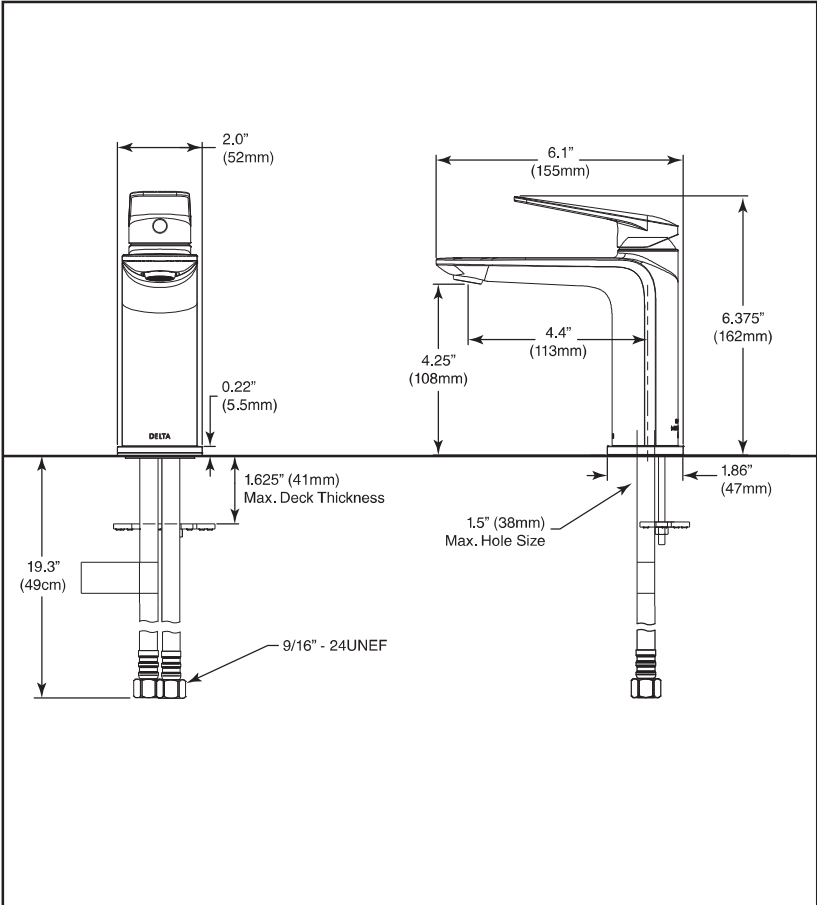

BATHROOM FAUCETS

- Portage™ Bath Family
- Single Handle Deck Mount

STANDARD SPECIFICATIONS:

- **571LF-▲-LPU** - Max flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa (Aerated pressure compensating)
- **571LF-▲-LPU-1.0** - Max flow rate 1.0 gpm @ 60 psi, 3.8 L/min @ 414 kPa (Aerated pressure compensating)
- **571LF-▲-LPU-0.5** - Max flow rate 0.5 gpm @ 60 psi, 1.9 L/min @ 414 kPa (Aerated pressure compensating)
- Standard single hole mount or three hole mount with optional - 6 inch (152mm) Escutcheon (sold separately)
- 1 5/8 inch (41mm) max. deck thickness
- Ceramic cartridge
- Red/blue indicator markings
- Metal lever handle
- Solid brass body
- 19 inch (483mm) long flexible supply lines with 3/8 inch supply fittings
- Rigid Spout
- Less pop-up, no pop-up hole

OPTIONAL ACCESSORIES:
(sold separately)

- RP101342▲ - 6 inch (152mm) Escutcheon
- 72173▲ - push pop-up with overflow
- 33W576▲ - push pop-up with overflow holes

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.



COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense®, applies to 571LF-▲-LPU 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa models only.
- Verified compliant with 0.25% weighted average Pb content regulations
- Indicates compliance to ICC/ANSI A117.1

▲ Designate Proper Finish Suffix


Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.
DSP-L-571LF-LPU, Rev. B

Delta Faucet Company
55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2020 Delta Faucet Company



No de modèle soumis : _____

Caractéristiques spécifiques : _____

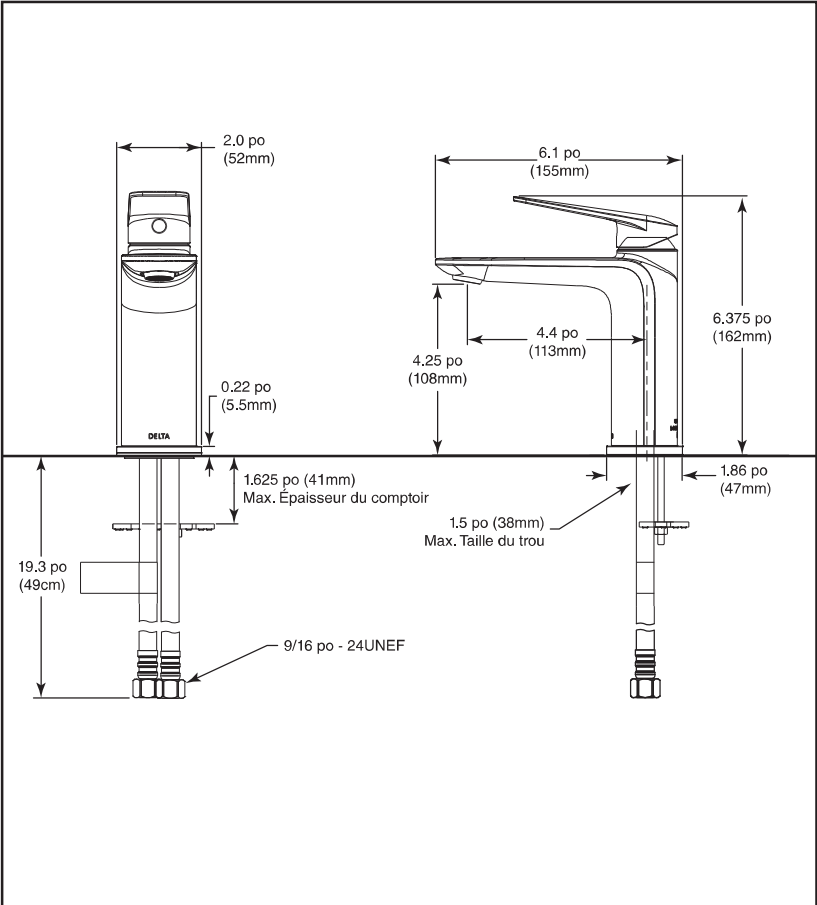

▲ Désigner le suffixe de finition approprié

Delta Faucet Company se réserve le droit (1) de modifier les spécifications et les matériaux, et (2) de modifier ou d'abandonner les modèles, sans préavis ni obligation. Les dimensions sont fournies à titre indicatif seulement. Voir le catalogue de prix actuel ou www.deltafaucet.com pour les options de finition et la disponibilité des produits.

DSP-L-571LF-LPUF, Rev. B



voyez ce que Delta peut faire™

ROBINETS DE SALLE DE BAIN

- Famille de produits de bain Portage^{MC}
- Mitigeur monté sur comptoir

SPÉCIFICATIONS STANDARD :

- **571LF-▲-LPU** - Débit maximum 1,2 gal/min à 60 lb/po2, 4,5 L/min à 414 kPa (compensation de pression aérée)
- **571LF-▲-LPU-1.0** - Débit maximum 1,0 gal/min à 60 lb/po2, 3,8 L/min à 414 kPa (compensation de pression aérée)
- **571LF-▲-LPU-0.5** - Débit maximum 0,5 gal/min à 60 lb/po2, 1,9 L/min à 414 kPa (compensation de pression aérée)
- Montage standard à un trou ou à trois trous avec écusson en option de 6 po (152 mm) (vendu individuellement)
- Épaisseur du comptoir max. 1-5/8 po (41 mm)
- Cartouche en céramique
- Marqueurs indicateurs rouges / bleus
- Manette à levier métallique
- Corps en laiton massif
- Tuyaux d'alimentation flexibles de 19 po (483 mm) de longueur avec raccords d'alimentation de 3/8 po
- Bec rigide
- Sans bonde mécanique, sans trou de bonde mécanique

ACCESSOIRES EN OPTION :

(vendus individuellement)

- RP101342▲ - Écusson de 6 po (152 mm)
- 72173▲ - bonde mécanique poussoir avec trop-plein
- 33W576▲ - bonde mécanique poussoir avec trous de débordement

GARANTIE :



- Pièces et finition - Garantie à vie limitée ; ou pour les acheteurs commerciaux, la période de garantie est de dix 10 ans pour les applications résidentielles multifamiliales (appartements et condominiums) et cinq 5 ans pour toutes les autres utilisations commerciales, dans chaque cas, à compter de la date d'achat.
- Composantes électroniques et piles (le cas échéant) - 5 ans à compter de la date d'achat ; ou pour les acheteurs commerciaux, 1 an à compter de la date d'achat. Aucune garantie n'est fournie sur les batteries.



CONFORME À :

- ASME A112.18.1 / CSA B125.1
- EPA WaterSense^{MD}, s'applique uniquement aux modèles 571LF-▲-LPU 1,2 gpm à 60 psi, 4,5 L / min à 414 kPa..
- Vérifié conforme avec les règlements sur la teneur moyenne pondérée en Pb de 0,25%
-  Indique la conformité à ICC/ANSI A117.1

Delta Faucet Company
55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2020 Delta Faucet Company

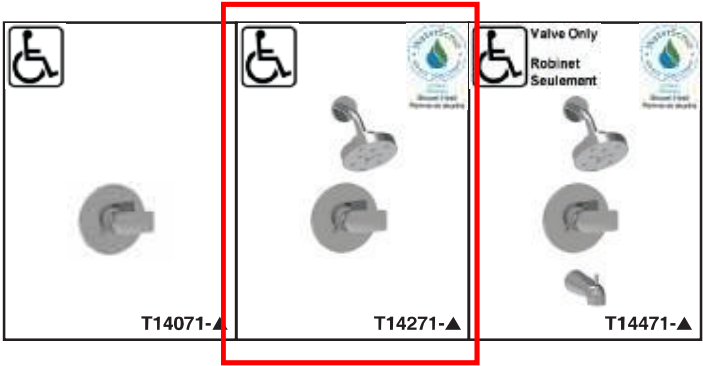

BATHROOM FAUCETS

- Portage™ Bath Collection
- Valve Only (T14071)
- Shower Only (T14271)
- Tub/Shower (T14471)


Submitted Model No.:
Specific Features:

STANDARD SPECIFICATIONS:

- Monitor® 14 Series pressure balanced bath single handle mixing valve trim
- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Back-to-back installation capability.
- Temperature only controlled with handle
- Red/blue temperature indicators
- Field adjustable to limit Stop
- 120° maximum handle rotation.
- All parts replaceable from the front of the valve.
- Maximum 1.75gpm @80psi (6.6L/min@ 550kpa)
- Tub port maximum flow rate 6.0gpm @ 60psi with R10000-UNBX
- ½" C.W.T slip-on spout

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

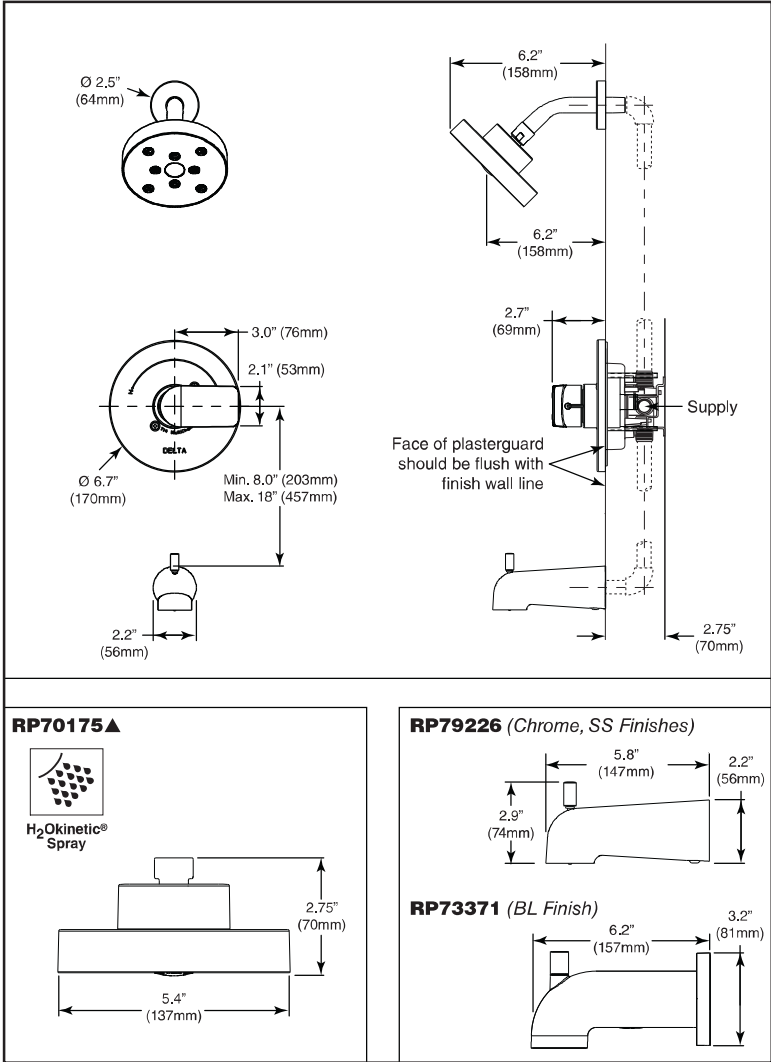

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASSE 1016
- EPA WaterSense®
- Indicates compliance to ICC/ANSI A117.1

▲ Designate Proper Finish Suffix

Delta Faucet Company reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-T14071, Rev. A

Delta Faucet Company
55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2020 Delta Faucet Company