

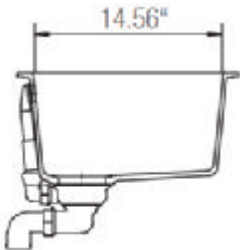


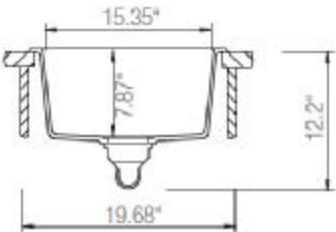


Product Specification Sheet

Virtuo Granite Sinks - Single Bowl
B306 - B307 - B308 - B328 - B335

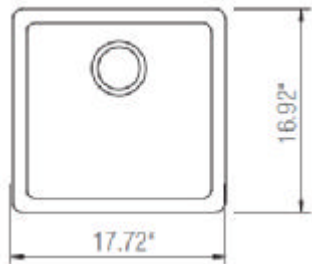

Colour Finish	Model No.	Description
Pearl Back	B306	<ul style="list-style-type: none">Undermount granite single bowl sink17-¾ x16-7/8" x 7-¾" Deep80% quartz Content3 1/2" drain openingSupplied with installation clips, template & strainersCUPC certified
Coffee Brown	B307	
Slate Grey	B308	
Asphalt	B328	
Stone Taupe	B335	

- Available accessories
- Matching Strainer
 - Drying Rack
 - BG306/307/308/328/335 - Stainless Steel Grid



MAIN LOCATION

BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9

CONTACT

Tel: 1(800) 930-0214
Fax: 1(866) 310-7580
Email: sales@bristolsinks.com


WTR4 LOT 133 - BUTLER'S PANTRY SINK FAUCET - 940LF-BL



KITCHEN FAUCETS

- ☐ Keele™ Pull-Down Kitchen Faucet
- ☐ Single Handle Deck Mount
- ☐ MagnaTite® Magnetic Docking

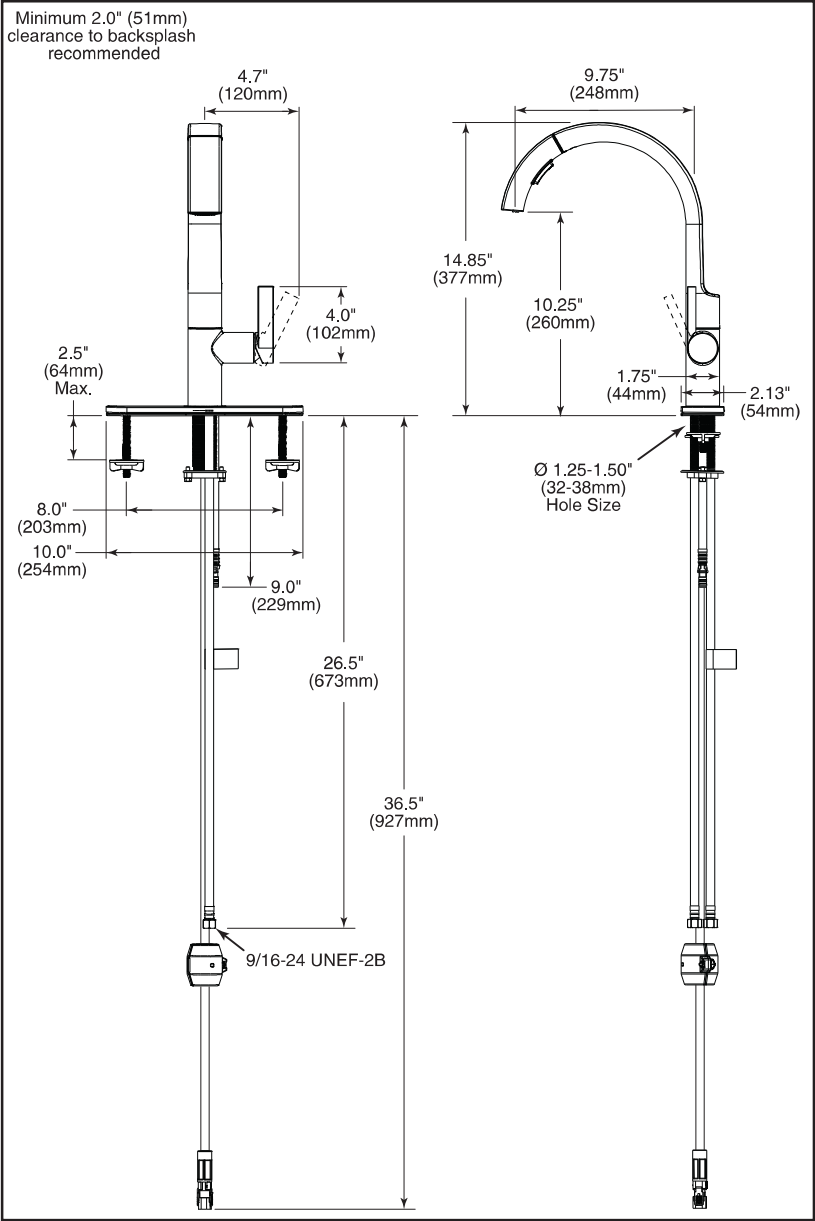

SUBMITTED MODEL NO.: _____
SPECIFIC FEATURES: _____




STANDARD SPECIFICATIONS:

- Single handle kitchen faucet
- One or three hole mount (RP63209 Escutcheon optional, not included)
- 8" centres with optional 10" long escutcheon (ordered separately)
- 14.85" (377 mm) high, 9.75" (248 mm) spout length, swings 360°
- Pull-down spout operates in an aerated or spray mode via an easy push toggle button
- MagnaTite magnetic docking
- Touch-Clean spray head
- Quick Snap hose installation
- Dual integral check valves
- Spout is connected to valve body with a 59" (150 cm) long hose
- Ceramic cartridge
- Standard with 3/8" compression
- Maximum flow rate 1.8 gpm @ 60 PSI, 6.8 L/min @ 414 kPa
- Maximum flow rate 1.50 gpm @ 60 psi, 5.7 L/min @ 414 kPa

COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
-  Verified compliant with 0.25% weighted average Pb content regulations
-  Indicates compliance to ICC/ANSI A117.1



WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.

▲ Designate Proper Finish Suffix

Delta Faucet reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

Delta Faucet Company
350 South Edgeware Road, St. Thomas, ON N5P 4L1
55 E. 111th Street, Indianapolis, IN 46280
© 2023 Delta Faucet Company

DSP-K-940LF, Rev. A

I F&>AF #% Ž534;@7F : 3D6I 3D7 8AD5GFEA? B3@7> 3BB>;3@57E



Modern Metal Pull - 873

This modern right-angled Richelieu pull gives a distinguished look to any interior décor and enhances the style of your kitchen and bathroom cabinets.

Product # BP873304900

Type Appliance pulls

Center to Center 305 mm

Finish Matte Black

Length - Overall Dimensions 324 mm

Width - Overall Dimensions 19 mm

Screw/Nail M6 (Included)

TECHNICAL SPECIFICATIONS

Product #	BP873304900
Pulls and Knobs Style	Modern
Material	Zamak
Base Diameter	10 mm
Color Group	Black Group
Finish Number	900
Suggested Price	From \$100.00 to \$200.00
Projection - Overall Dimensions	58 mm

DISCLAIMER

Although our black finish is achieved through a rigorous process, it may show signs of normal usage faster than other finishes.

I F&>AF #% Ž: AA683@;@E7DF %& 4J \$# %&

BX215 - INSERT RANGE HOOD

The BX215 features a convenient underside three-speed control. It remains hidden at eye level, enabling seamless cabinet arrangement for a timeless aesthetic. Efficient mesh filters purify the air, complemented by bright halogen bulbs for ample illumination.

Green Features



Long- lasting
LED lights



3 Speed Slide
Control Panel



Grease Cup

CycloneTM




28"



34"

Features


- Insert range hood
- 6" round duct adapter
- Non- stick Aluminium fan blades
- 3 speed slide control
- Quick-release Aluminium Mesh
- 2 halogen light bulbs (2 x 25W E26)
- Plug-in connection

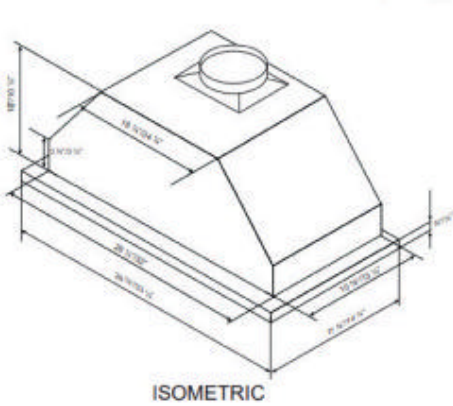

ISOMETRIC

Specifications

- Air Flow Volume: 550 CFM
- Electrical Connection: 120 V/60 Hz
- Power Consumption: 300 Watts
- Current: 2.5 Amps
- Fan Speed: 1599 RPM
- Fan Type: Centrifugal Blower
- Finishes: Stainless Steel
- Ducting: 6" Round
- Noise Level: Min. 2 Sones Max. 6 Sones

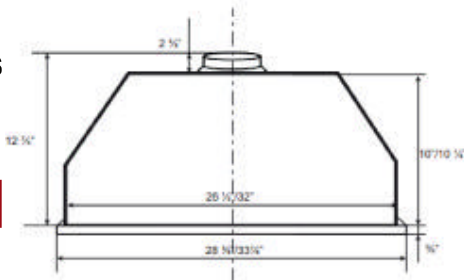


FRONT


Options

- Filters: Aluminium Mesh Filters
- Widths: 28", 34"
- Finish: Stainless Steel


Model	Colour	Ducting	Filters	Size	CFM	Fits Cabinet
BX21528	Stainless Steel	6"	Mesh	28"	550	30"
BX21534	Stainless Steel	6"	Mesh	34"	550	36"



WT4 LOT 135 - PRIMARY ENSUITE VANITY FAUCETS 571-BL? PU-DST

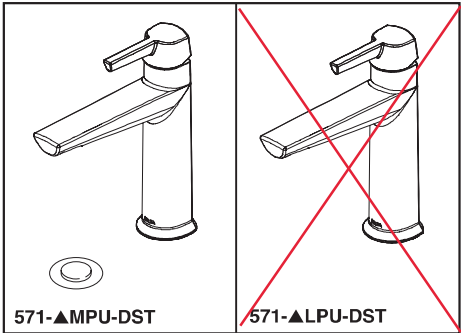

Submitted Model No.:
Specific Features:

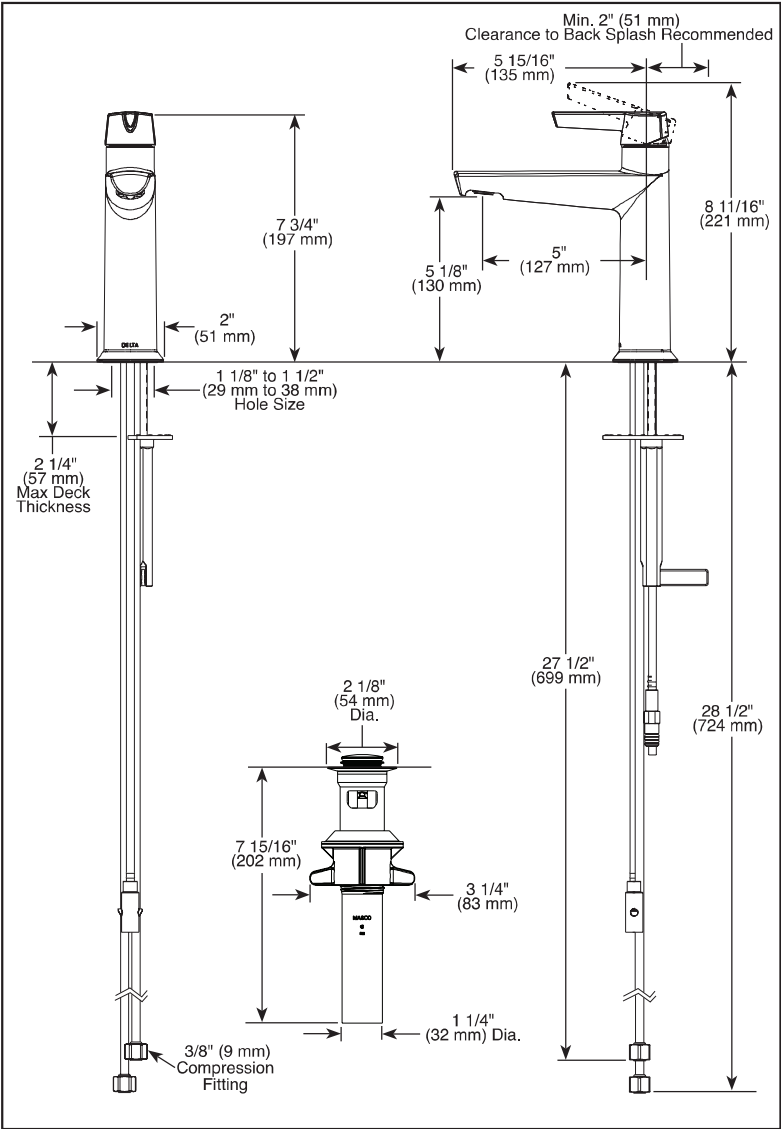

▲ Designate Proper Finish Suffix

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-L-571-MPU-DST Rev. B



see what Delta can do™

BATHROOM FAUCET

- Galeon™ Bath Collection
- Single Handle Deck Mount

FEATURES:

- Lumicoat™ Finish (-PR models only)
- Lumicoat™ Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

STANDARD SPECIFICATIONS:

- Max. flow rate 1.2 gpm @ 60 psi, 4.5 L/min @ 414 kPa
- One hole mount
- Diamond coated ceramic cartridge
- 1/4" O.D. straight, staggered PEX supply tubes
- Models have metal drain with pop-up type fitting with plated flange and stopper, no lift rod hole
- "LPU" models less pop-up drain, no lift rod hole
- Optional red/blue indicator ring provided with model

WARRANTY


- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1 - Valve control only
- EPA WaterSense®




Delta Faucet Company
55 E. 111th Street, Indianapolis, IN 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2021 Delta Faucet Company





I F&>AF #% ŽBD,? 3DK 7@EG;F7E AI 7D8,JFGD7F#&\$) ŠZ4>

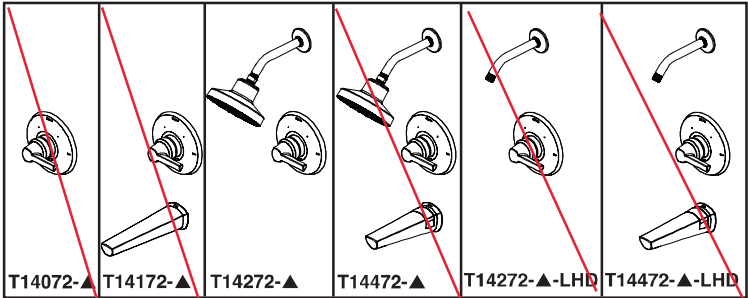

Submitted Model No.:
Specific Features:

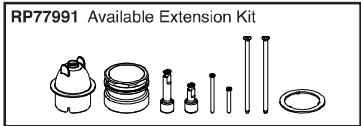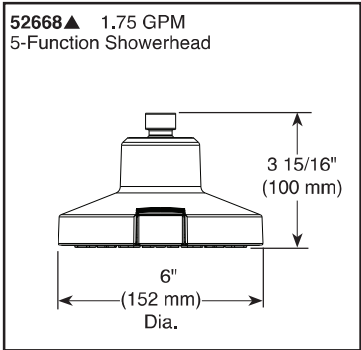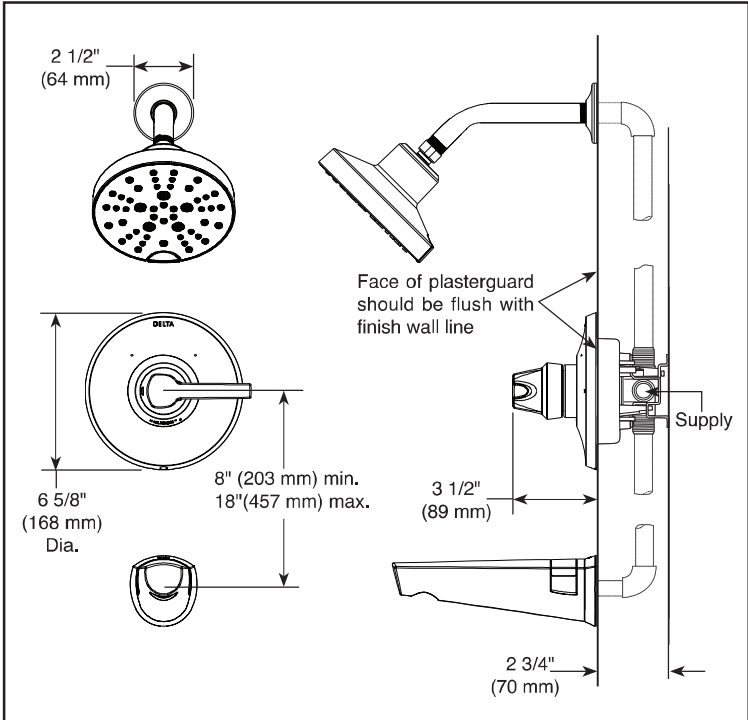

▲ Designate proper finish suffix

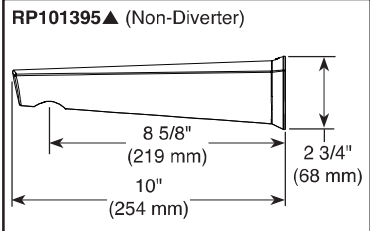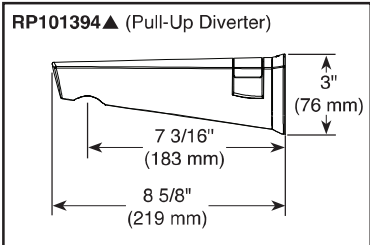

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.
DSP-B-T14072 Rev. B



see what Delta can do™

TUB AND SHOWER FAUCET TRIM

- Galeon™ Bath Collection
- Valve Only (T14072)
- Tub Only (T14172)
- Shower Only (T14272)
- Tub/Shower (T14472)

FEATURES:

- Monitor® 14 Series pressure balanced single handle bath mixing valve trim
- Lumicoat™ Finish (-PR models only)
- Lumicoat™ Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

STANDARD SPECIFICATIONS:

- Maintains a balanced pressure of hot and cold water even when a valve is turned on or off elsewhere in the system
- For use with MultiChoice® Universal rough valve body (R10000 Series)
- Temperature only controlled with handle
- Field adjustable to limit handle rotation into hot water zone
- 120° maximum handle rotation
- All parts replaceable from the front of the valve
- Max. flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Tub port maximum flow rate 6.0 gpm @ 60 psi with R10000-UNBX
- Shower arm overall horizontal length = 5 1/2" (138 mm), including threaded ends
- Stem extension kit RP77991 can be ordered to allow for an additional 1 3/4" wall thickness. RP77991 ships with chrome escutcheon screws. For special finishes also order RP12630 escutcheon screws in desired finish
- Thread-on tub spout connection

WARRANTY


- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1 - Valve control only
- EPA WaterSense® - Applies to T14272, T14472, & 52668 only

Delta Faucet Company
55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, Ontario Canada N5P 4L1
© 2021 Delta Faucet Company




WT4 LOT 135 - PRIMARY ENSUITE ROMAN TUB TRIM T4771-BL

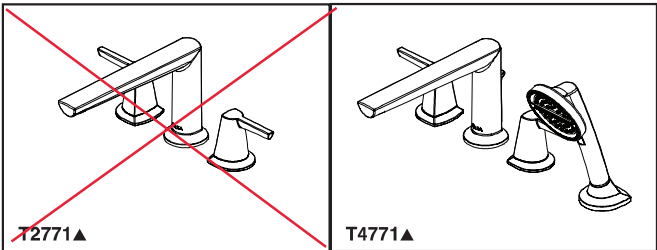

Submitted Model No.: _____

Specific Features: _____

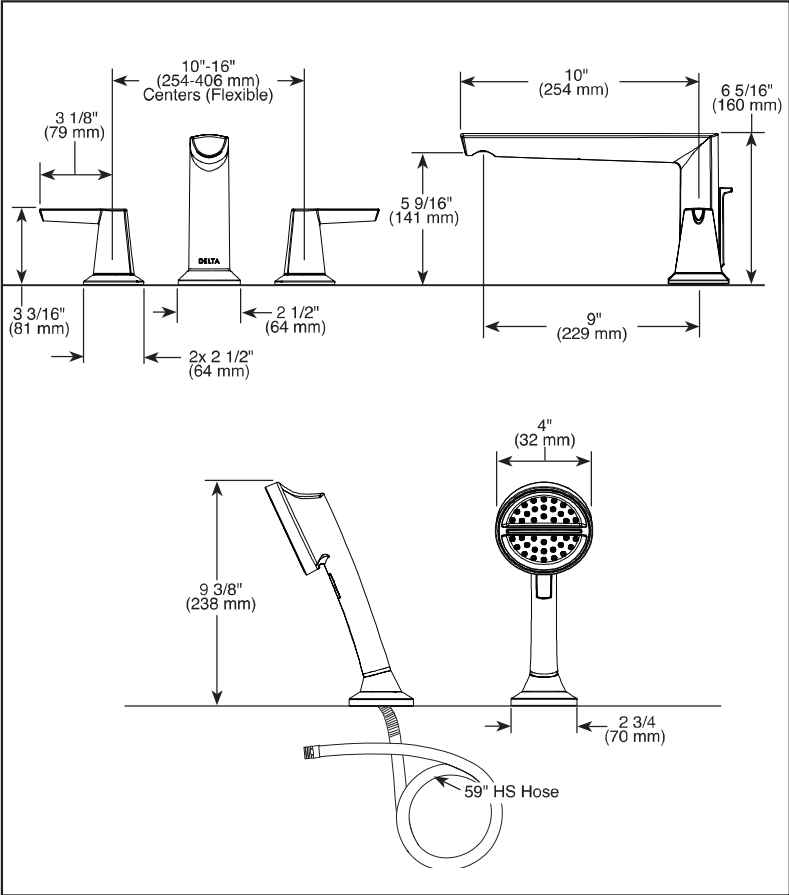

▲ Designate proper finish suffix



see what Delta can do™

ROMAN
TUB/WHIRLPOOL
FAUCET TRIM

- Galeon™ Bath Collection
- Three Hole Installation (T2771 Series)
- Four Hole Installation (T4771 Series)

FEATURES:

- Lumicoat™ Finish (-PR models only)
- Lumicoat™ Finishes easily wipe clean without cleaners and chemicals on the products most commonly touched areas

STANDARD SPECIFICATIONS:

- Temperature and volume controlled with handles
- Rough-In kit must also be ordered to complete installation
 - R4707 for four hole
 - R2700 or R2707 for three hole
 - RP23601 for three hole 10" fixed installationThere are separate specification sheets on each rough-in kit if more details are required.
- Hand shower includes certified double check valves for backflow prevention (T4771)
- Hand shower max flow rate 1.75 gpm @ 80 psi, 6.6 L/min @ 550 kPa
- Hot/cold indicators

WARRANTY

- Parts and Finish - Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date of purchase.
- Electronic Parts and Batteries (if applicable) - 5 years from the date of purchase; or for commercial purchasers, 1 year from the date of purchase. No warranty is provided on batteries.




COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- Indicates compliance to ICC/ANSI A117.1 - Valve control only
- EPA WaterSense® - Applies to T4771▲ only

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.deltafaucet.com for finish options and product availability.

DSP-B-T2771 Rev. B


Delta Faucet Company
55 E. 111th Street, Indianapolis, Indiana 46280
350 South Edgeware Road, St. Thomas, ON N5P 4L1
© 2021 Delta Faucet Company





Product Specification Sheet

B608 Porcelain Vanity Bowl

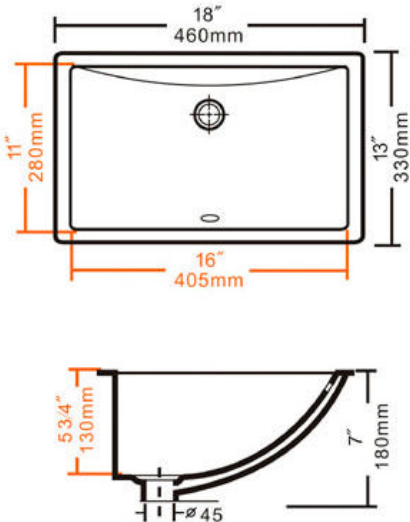


Colour Finish
Porcelain

Model No.
B608

- Description
- White Undermount Porcelain Sink
 - Outside Dimensions 18" x 13" x 7"
 - Inside Dimensions 16" x 11" x 5-3/4"
 - Minimum Cabinet Size: 20"
 - True Vitreous China
 - Cardboard Template Included
 - Mounting Clips Included
 - Limited Lifetime Warranty
 - cUPC Certified

Available accessories

- Pop Up Drain – No Overflow (Brushed Finish)
- Pop Up Drain – No Overflow (Chrome Finish)
- Pop Up Drain – Overflow (Brushed Finish)
- Pop Up Drain – Overflow (Chrome Finish)



MAIN LOCATION

BRISTOL SINKS
56 Firestone Blvd
London, Ontario
N5W 6E6

WESTERN LOCATION

BRISTOL SINKS
964 72nd Avenue NE
Calgary, Alberta
T2E 8V9

CONTACT

Tel: 1(800) 930-0214
Fax: 1(866) 310-7580
Email: sales@bristolsinks.com